
SKYLITE CLEAN



VISIT USGME.COM TO ORDER SAMPLES

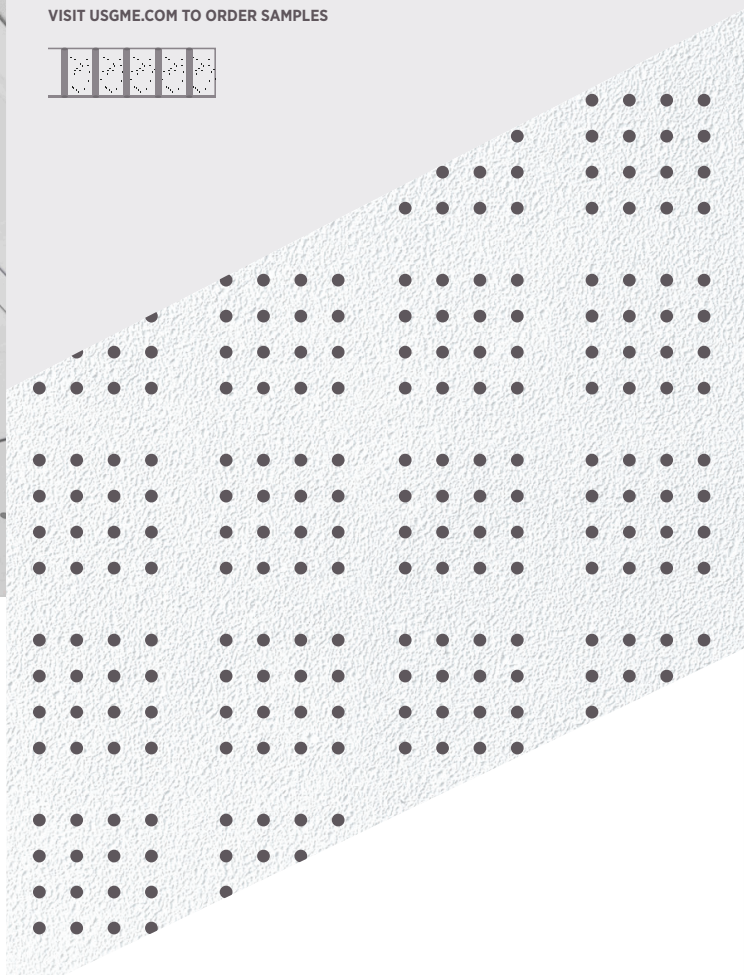

FEATURES & BENEFITS

- Special R6 wetfleted laminated with vinyl face.
- Made with Firecode™ base materials to meet life safety codes.
- Balanced Acoustics. High-NRC and High-CAC.
- Excellent combination of noise reduction (up to NRC-0.85) and sound attenuation (up to CAC-38).
- Classified HRC panels (High Recycled Content) as greater than 50%.
- Recommended to be used with AXCE grid (gasketed tee flanges) for laboratories areas.
- Washable, scrubbable resistance.
- High humidity resistant; is also anti-mold and resists mildew growth.
- Ideal solutions for healthcare facilities.

APPLICATIONS

- Laboratories
- Educational facilities
- Food preparation
- Hydro-therapy rooms
- Laundry areas

Absorption Coefficient

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
15mm	0.30	**0.30**	**0.40**	**0.70**	**0.95**	0.65	**0.60**
19mm	0.50	**0.65**	**0.85**	**1.0**	**0.90**	0.65	**0.85**

** Calculated to ASTM C 423-01*

USG ME
INNOVATIVE SOLUTIONS. EVERYTIME.

SKYLITE CLEAN

EN 13964 : 2014 + A1 : 2007



HIGH SOUND ABSORPTION | CEILING ATTENUATION CLASS | FIRECODE | HIGH RECYCLED CONTENT | HEALTHCARE APPLICATION

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
			NRC	CAC					<	$
SQ	SKC665-R6 SKC225-R6	600*600*15 610*610*15	0.60	38	80%			52%	Low	$$$$
	SKC625-R6 SKC245-R6	600*1200*15 610*1220*15	0.60	38	80%			52%	Low	$$$$
	SKC669-R6 SKC229-R6	600*600*19 610*610*19	0.85	31	80%			52%	Low	$$$$
	SKC629-R6 SKC249-R6	600*1200*19 610*1220*19	0.85	31	80%			52%	Low	$$$$

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

GRID PROFILE OPTIONS

DX/DXL SQ Edge	AXCE SQ Edge
	

SPECIFICATION DETAILS

Skylite Clean Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: X,
Pattern: A

Substrate and Surface Finish
Mineral fiber substrates laminated with embossed vinyl-faced membrane

Thickness
15mm, 19mm

Size
600 x 600mm, 610 x 610mm,
600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square

Weight
15mm [5.25 kg/m², Firecode®]
19mm [6.65 kg/m², Firecode®]

Noise Reduction Coefficient [NRC]
[0.60] [0.85]*

Ceiling Attenuation Class [CAC]
[31 - 38 dB]

Mold Prevention Application as per ASTM D3273
Rate 10

Humidity Resistance
Maximum 95% RH / 40°C

Light Reflectance Coefficient [LR]
[0.80]

Color
White similar to RAL 9003

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per ASTM E119
3hrs Time-Rated Assembly [D218]

Thermal Conductivity
λ = 0.05 W/m°K

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion

Formaldehyde Classification
Class E1 as per EN717-1

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

Notice:
As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to **usgme.com** for the updated products information document.

©2022 Factory of USG Middle East LTD. Co.
All rights reserved.

USG ME
INNOVATIVE SOLUTIONS. EVERYTIME.

PLADIS - Complexe Futuris Logistic Lotissement Ennouala Lot N°2 Dépôt A3 Boulevard My Ismaïl- Casablanca
Tel: (212) 5 22 34 44 59 // (212) 5 22 34 44 62
Zi Gzenaya 341- Tanger , Tel: (+212) 5 31 43 65 10 Email: contact@pladis.ma Site Web : www.pladis.ma