SKYROCK®

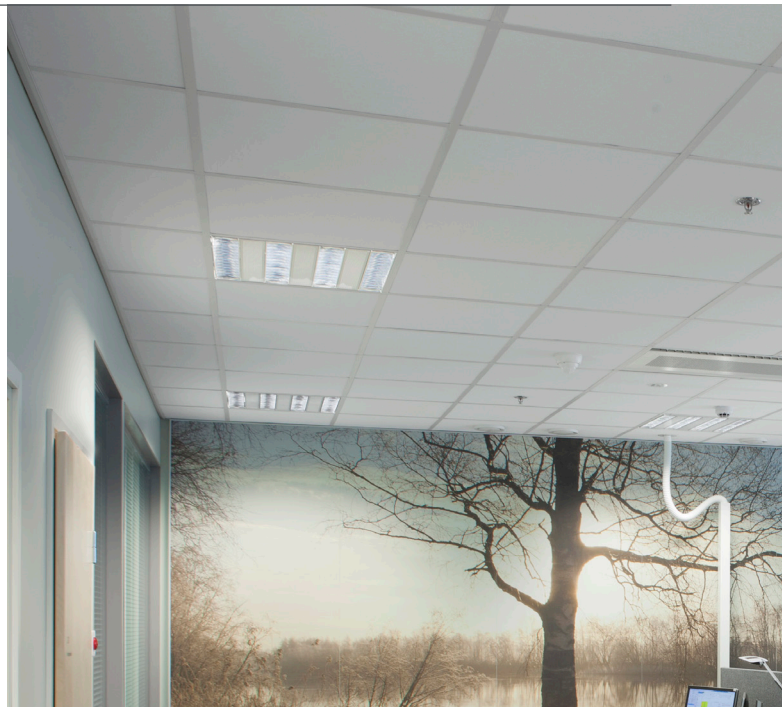
TECHNICAL DATASHEET

SHADES

Gypsum Tile

VISIT USGME.COM TO ORDER SAMPLES





FEATURES & BENEFITS

- Laminated Gypsum Ceiling with washable vinyl facing for easy maintenance.
- Available in plain facings with smooth appearance.
- High resistance to mold and mildew, scoring a 10 (highest) when tested in accordance with ASTM D3273.
- Ultra-high humidity resistant; sag resistance ensures durability in standard or extreme environmental conditions.
- Standard produced with aluminium foil backing which acts as a vapor barrier and resists breathing so panel stays cleaner longer.
- Scrub resistant. Dirt marks are easy to remove.
- Durable, scuff, and scratch resistant for longer life.
- Suitable for areas with high humidity.
- Economical and easy to trim and install.
- Demountable and designed to be installed on the DONN® Brand ceiling suspensions.
- Available in a concealed edge design, specifically produced to elevate the overall space appearance.

APPLICATIONS

- Laboratories
- Commercial retails
- Restrooms and wet areas
- Department stores
- Kitchen, dietary and laundry

SKYROCK®

SHADES

PRODUCT CERTIFIED FOR ENVIRONMENTAL PRODUCT DECLARATION






CEILING ATTENUATION CLASS

HEALTHCARE APPLICATION

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
			CAC						
SQ	LG-S6609 LG-S2209	600*600*9.5 610*610*9.5	35	84%			4%	Low	$
	LG-S662 LG-S222	600*600*12.5 610*610*12.5	40	84%			4%	Low	$
	LG-S622 LG-S242	600*1200*12.5 610*1220*12.5	40	84%			4%	Low	$$
SL	LG-SR662 LG-SR222	600*600*12.5 610*610*12.5	40	84%			4%	Low	$$
	LG-SR622 LG-SR242	600*1200*12.5 610*1220*12.5	40	84%			4%	Low	$$
FL	LG-SRF662 LG-SRF222	600*600*12.5 610*610*12.5	40	84%			4%	Low	$$
	LG-SRF622 LG-SRF242	600*1200*12.5 610*1220*12.5	40	84%			4%	Low	$$
Concealed	LG-SDC662 LG-SDC622	600*600*12.5 600*1200*12.5	40	84%			4%	Low	$$$

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge	DX/DXL Concealed
				

SPECIFICATION DETAILS

Shades Gypsum Ceiling Tile meets specifications in accordance with ASTM E1264

Materials Classification

Type: XX,

Pattern: E, G

Substrate and Surface Finish

Gypsum ceiling panel laminated with vinyl-faced

Thickness

9.5mm, 12.5mm

Size

600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim

Square, Reveal [SL, FL], Concealed [Reveal]

Weight

9.5mm [7.1 kg/m^2],

12.5mm [9.4 kg/m^2]

Ceiling Attenuation Class [CAC]

[35-40 dB]

Hygiene

Laminate PVC prevents the growth of mold and mildew. Scoring a 10 (highest) when tested in accordance with ASTM D3273.

Humidity Resistance

Maximum 95% RH / 40°C

Light Reflectance Coefficient [LR]

0.84

Color

White similar to RAL 9003

Surface Burning Characteristics per ASTM E 84

Class A

Thermal Resistance

12.5mm [**R** 0.45]

Washability / Scrubbability as per ASTM D4828 & D2486

Exceeds 1000 Wash/Scrub Cycles without surface break or the extent of abrasion

Formaldehyde Classification

Class E1 as per EN717-1

PLADIS - Complexe Futuris Logistic Lotissement Ennouala Lot N°2 Dépôt A3 Boulevard My Ismaïl- Casablanca
Tel: (212) 5 22 34 44 59 // (212) 5 22 34 44 62
Zi Gzenaya 341- Tanger , Tel: (+212) 5 31 43 65 10 Email: contact@pladis.ma Site Web : www.pladis.ma

Disclaimer: Information contained in this document is subject to change without prior notice due to our ongoing product development. We recommend referring to the website **usgme.com** for the most up-to-date and accurate product information.
©2023 **Factory of USG Middle East LTD. Co.** All rights reserved.