THE CEILINGS MAGAZINE




2024/2025
V1
WWW.USGME.COM

USG ME
INNOVATIVE SOLUTIONS. EVERYTIME.

A TIMELESS CEILING COLLECTION

At the top of design possibilities, USG ME presents a spiritual range of ceiling solutions. Our product line, spanning acoustical panels, specialty designs, integrated ceilings, and suspension systems, envisions flexible design, effortless installation, and stellar performance. We aim to bring visions to life while reducing the building industry's environmental impact.

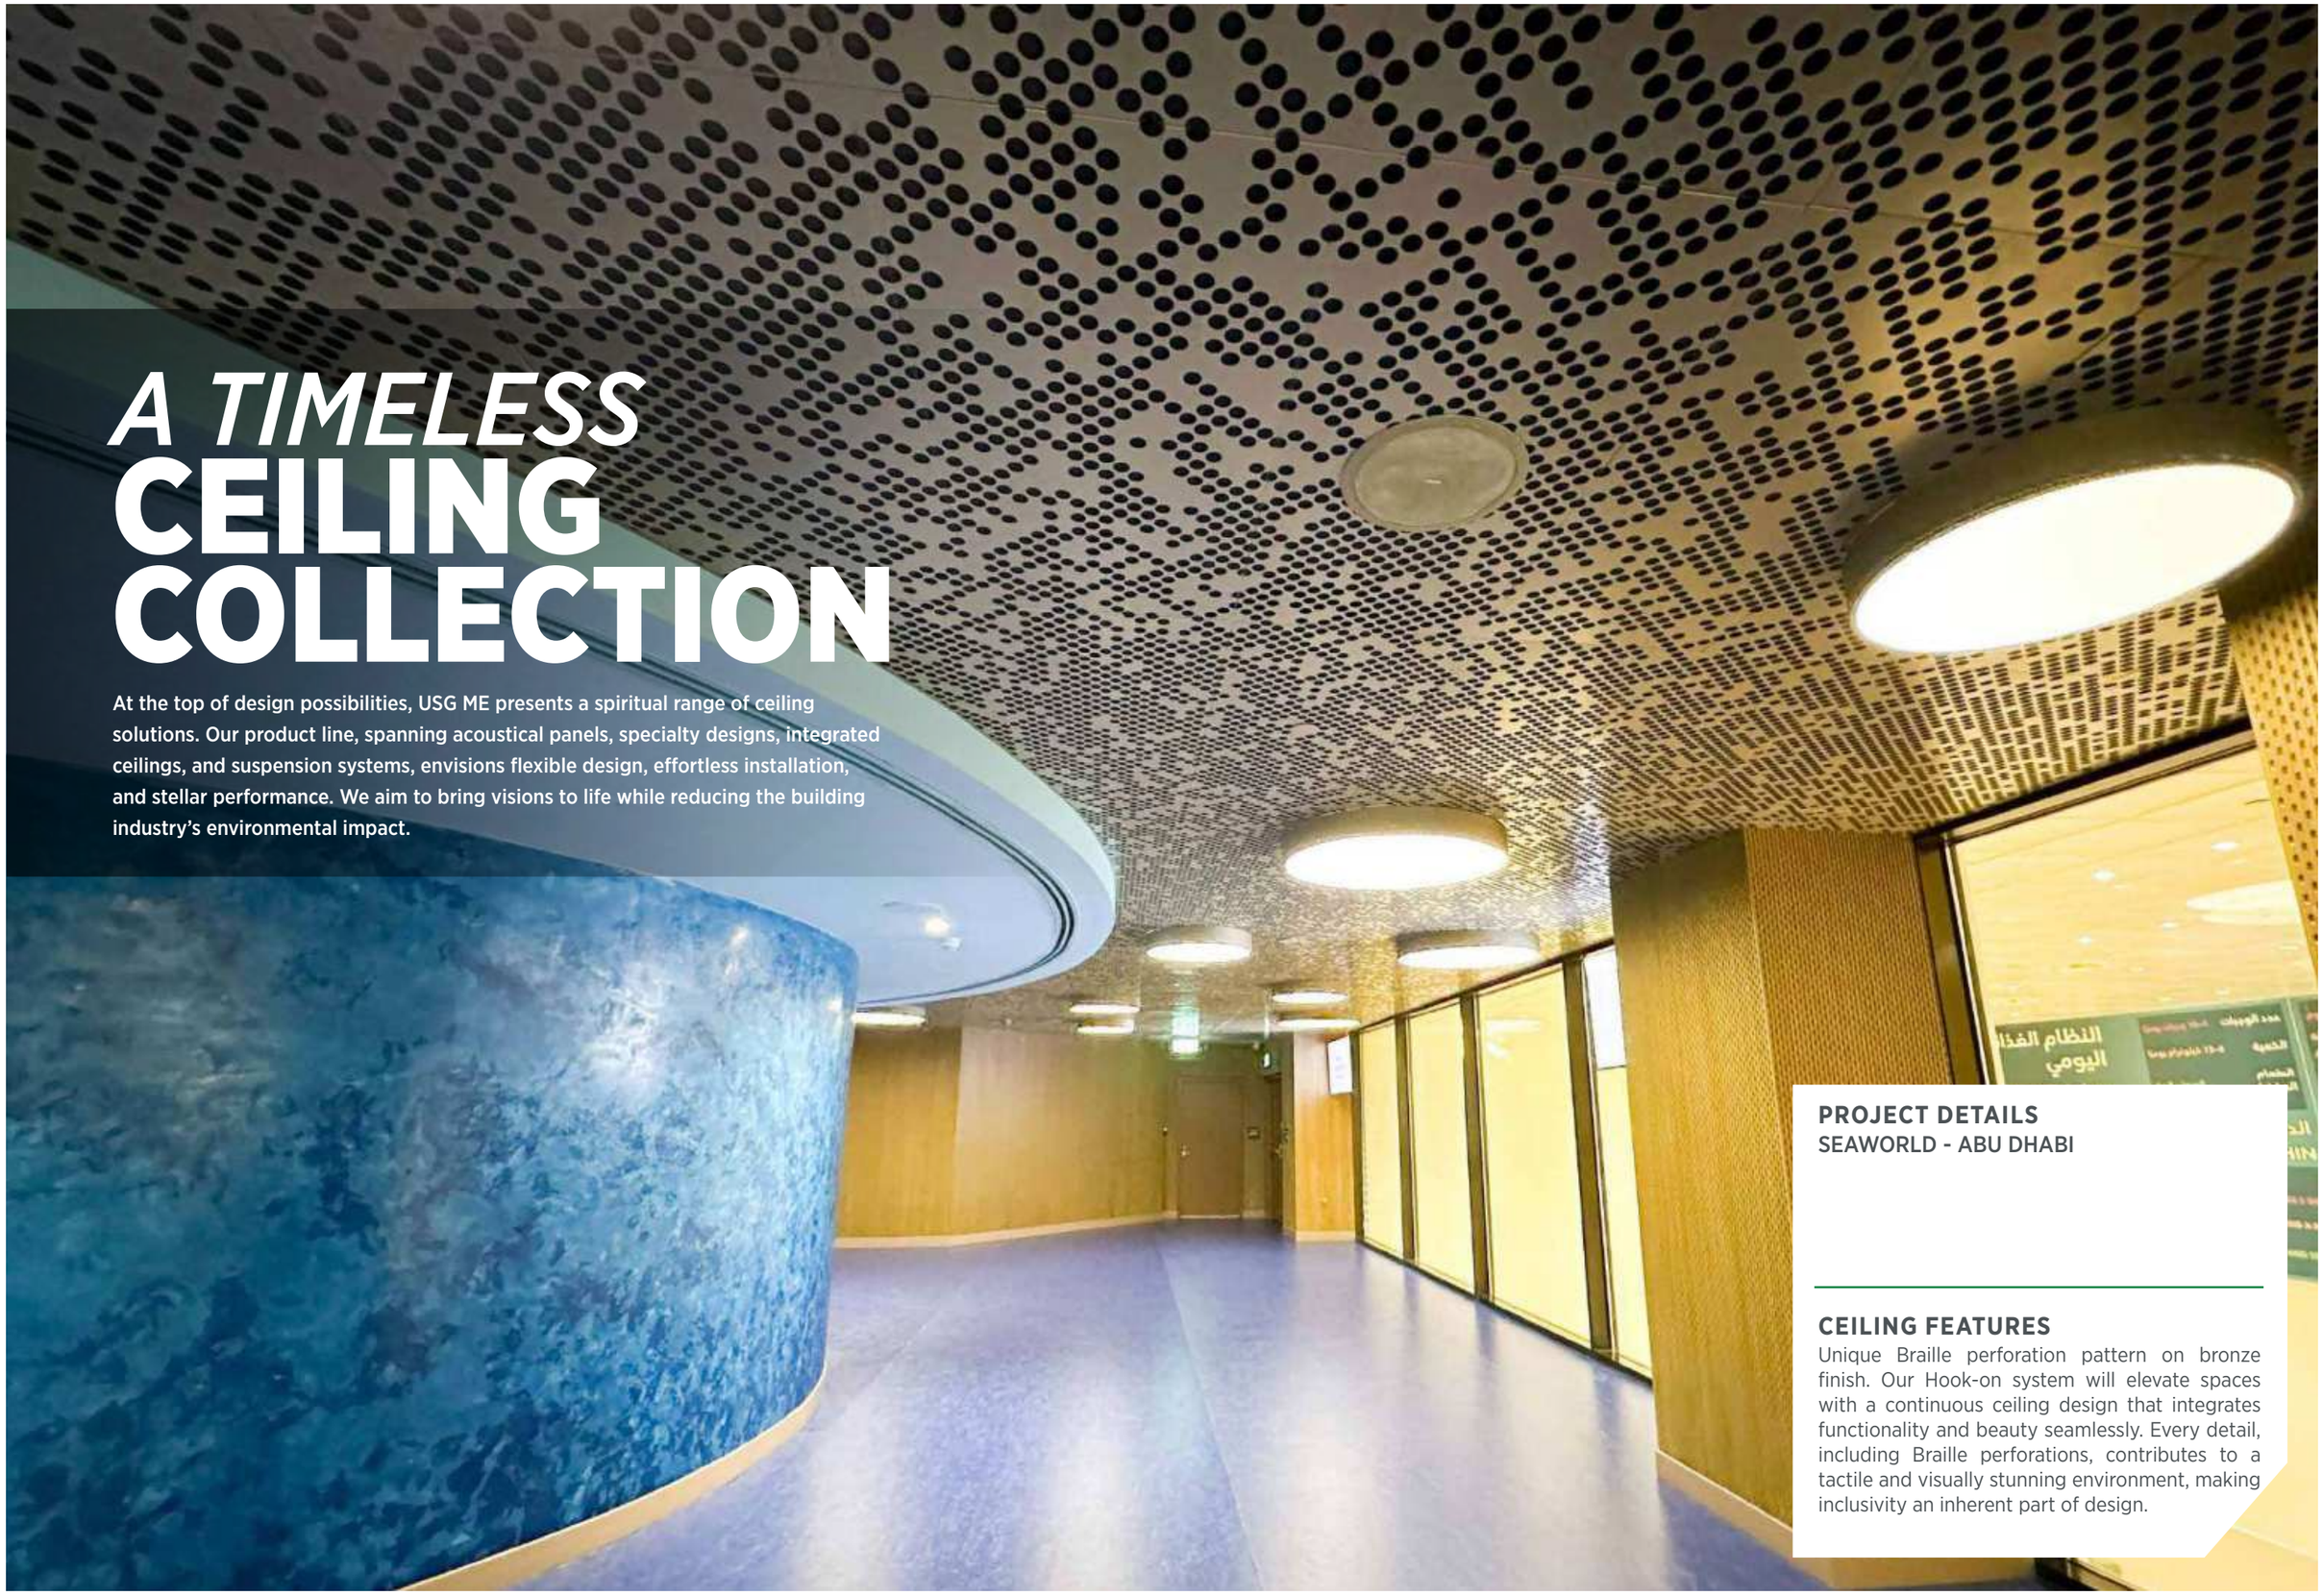

PROJECT DETAILS

SEAWORLD - ABU DHABI

CEILING FEATURES

Unique Braille perforation pattern on bronze finish. Our Hook-on system will elevate spaces with a continuous ceiling design that integrates functionality and beauty seamlessly. Every detail, including Braille perforations, contributes to a tactile and visually stunning environment, making inclusivity an inherent part of design.

TABLE OF CONTENTS

BAFFLES P.16

01

02

CANOPIES P.38

MONOLITHIC CEILING P.54

03

HEALTHCARE CEILINGS P.70

04

05

METAL SPECIALTY CEILINGS P.96

06

WOOD WOOL P.140

SOFT FIBER CEILING P.148

07

FEATURING ZIAD MALEK - GENERAL MANAGER **TALK ABOUT USG ME CEILING INNOVATION** P.11

COLORS, FINISHES AND PERFORATION PATTERNS P.306

08

PERFORATED GYPSUM CEILING P.174

HIGH NRC MINERAL FIBER CEILING P.208

09

COMMERCIAL SPACES MINERAL FIBER P.234

10

MONOLITHIC CEILING PROJECT SHOWCASE P.60

GRIDS AND SUSPENSIONS P.250

11

SUSTAINABILITY ACOUSTICAL PERFORMANCE **FIRE RESISTANCE** AND MORE... P.286

CEILING ASSETS P.284

12

PACKAGING P.314

13

WARRANTY AND MAINTENANCE P.330

14

WHERE EVERY CEILING TELLS A STORY OF:

ELEGANCE
WELLNESS
SUSTAINABILITY
SAFETY
RESONANCE



> Discover a world where ceilings transcend conventional boundaries, representing a narrative of elegance, innovation, and purpose, creating spaces that speak volumes and redefine the spirit of architectural design.

Welcome to the magazine of innovative design and timeless elegance by USG Middle East. Our catalogue is more than a collection of ceilings; it's a gallery of stories, waiting to be discovered. Each page invites you into a land where elegance seamlessly meet functionality, redefining architectural excellence. Find our Wellness collection, tailored for healing spaces. Immerse yourself in sustainability, where eco-friendly design seamlessly blends with brilliance. Safety takes the spotlight, seamlessly fusing safety and style, catering to interior designers and contractors. Elegance captures diverse specialty styles, weaving a visual narrative that speaks to architects and fit-out contractors. We introduce ceilings that redefine performance.

Browse through our Ceilings Magazine, which tells stories of innovation, well-being, sustainability, safety, and performance, emanating from the heart of the Middle East, where USG Middle East is located in the vibrant landscape of the Kingdom of Saudi Arabia, your gateway to global accessibility.

SAUDI MADE TO THE WORLD: BROADEST SELECTION OF CEILING SOLUTIONS



SAUDI MADE

Our ceilings are proudly made in Saudi, ensuring superior expertise, reliability, and local commitment for every space's exceptional transformation.

USG ME: INNOVATION IN ARCHITECTURE DESIGNS STARTS HERE

Our mission is to deliver innovation that helps you work smarter, do more, and build better.



USG Middle East has been dedicated to transforming architecture and construction for over four decades, pushing boundaries in ceiling design and acoustics.
We are proud to lead a team that is shaping not just ceilings but also the future of design and functionality.

In the dynamic time of ceiling design, USG Middle East stands out as a catalyst for progress and innovation. With a legacy steeped in high commitment, USG ME has revolutionized spaces and empowered professionals to work smarter and build better. For over 40 years, USG ME has been at the forefront of acoustic panel and specialty ceiling innovation, distinguishing itself as an industry leader. Our diverse portfolio, spanning Specialty Ceilings, Acoustical Drywall Ceilings, Wood Wool Ceilings, Soft Fiber Ceilings, Mineral Fiber Ceilings, and Gypsum Ceiling Tiles, reflects a dedication to promote project excellence. Beyond surface solutions, we offer versatile and reliable suspension systems, including standard, fire-rated, and seismically-rated options.

Throughout construction history, USG ME has left an indelible mark, pushing design and acoustics options. Our products have become essential tools for architects and builders, promoting the creation of safer, more beautiful, and environmentally responsible spaces.

As you flip into the pages of this magazine, we unravel the stories behind

USG ME's profound contributions to the industry. Together, we will explore the innovations shaping the modern world of architecture and construction, with USG ME leading the way toward a brighter, more sustainable future.

COLLABORATION



TWOFOUR54
Abu Dhabi



"The construction industry involves multiple stakeholders, from owners, architects, manufacturers, and suppliers of building materials to the contractors and applicators of those materials on the job site. Thus, collaboration is critical to improving the way buildings are constructed.
At USG Middle East, we work with our partners, project stakeholders, and other businesses to share best practices and find new ways to advance performance. It is about using the best resources available and engaging the right people to help support our customers and their businesses. From opening new doors to nurturing new ideas, collaboration is vital to guarantee our customers access to the best and most innovative solutions available today, tomorrow, and well into the future.
- *Ziad Malek, USG ME General Manager.*

USG ME'S IMPACT ON ARCHITECTS AND BUILDERS



SEA WORLD
ABU-DHABI

Our contribution to this visionary project in the heart of Yas Island, Abu Dhabi, is a groundbreaking achievement that stands tall - the SeaWorld Abu Dhabi project is nothing short of remarkable. From the robust Securock® Glass Mat Sheathing Wallboard to the Sheetrock® Wall Lining, every element has been precisely chosen for its quality and durability.

The Shaftwall System's Horizontal 2hrs fire rating ensures structural integrity, while Celebretto® Torsion Spring and Celebretto® Hook On Island add an elegant finish. Completing the range, Shades Gypsum Ceiling Tiles offer both form and function. This project embodies a testament to our commitment to excellence in every endeavor.



COCA COLA ARENA
DUBAI

The Coca-Cola Arena, a crown jewel of the Middle East, stands as a testament to Dubai's global entertainment aspirations. With a capacity of 17,000, it's the region's largest indoor arena, setting Dubai apart as a prime destination for world-class entertainment. This fully air-conditioned venue, managed by ASM Global and an asset of Dubai Holding Entertainment, offers a year-round calendar of events.

Its adaptable design features our Halcyon Ceiling System, Ecoblock Perforated Gypsum Board, and Soundblock® Perforated Gypsum Tiles. The arena's innovative automated seating configuration accommodates events of all scales, solidifying Dubai's status on the global events map.

THE PALACE HOTEL, DUBAI

Experience elevated everyday living at The Palace Hotel by Emaar Properties, an award-winning residence featuring branded canal-facing residence. Situated on the Creek Promenade, residents relish seamless access to 5-star services and world-class amenities. USG Middle East is proud to have contributed to this prestigious project by supplying a comprehensive range of high-quality finished systems, including Multiwall Impact Board, Monolithic Acoustical Ceiling (MAC) – Ensemble®, Shaftwall Partition System, Twin Framing Drywall, Wall Lining, Skyrock® Drywall Partitions and Drywall Ceilings, along with Shades Gypsum Ceiling Tiles, enhancing both form and function in this architectural masterpiece.

ONE ZABEEL, DUBAI

Celebretto® Crossing Baffles, selected by the esteemed project consultant Nikken Sekkei, grace One Za'abeel, an iconic addition to Dubai's skyline. This mixed-use marvel, featuring offices, hotels, residences, and retail spaces, strategically stands at the city center's gateway from Dubai Airport. Twin towers linked by "The Link" and low-rise structures exemplify its unique design, setting it apart in elegance. More than an address, One Za'abeel embodies the epitome of urban living, offering unmatched experiences in one of the world's most dynamic cities. It promises to be a lasting legacy, seamlessly integrating the best in living, working, and leisure for Dubai's discerning urbanites.



ROXY CINEMA, DUBAI HILLS
DUBAI

The sound quality reaches new heights with a Twin Framing Drywall Partition boasting an impressive 74 dB STC. Sheetrock® Wall Lining and Sheetrock® Drywall Ceiling contribute to the venue's acoustical excellence. The Sheetrock® Ceiling Mass Barrier further enhances soundproofing, ensuring a truly immersive movie experience. Completing the group, Halcyon™ Ceiling Tiles adds both trendy appeal and acoustic performance. Together, these products create a cinematic environment that's unrivaled, setting a new standard for movie-watching pleasure.

The Mohammed bin Rashid Al Maktoum Solar Park's Innovation Centre is a global beacon of innovation in the energy and water sectors, an iconic Dubai landmark. It offers a pioneering learning experience in clean and renewable energy. Visitors explore cutting-edge clean energy tech through interactive exhibits, hologram shows, and autonomous bus rides. The Centre also delves into DEWA's history, highlighting over 35 interactive displays. It houses the DEWA Museum and water desalination plants and illuminates solar radiation properties. Noteworthy achievements include a LEED® platinum rating and the prestigious Done By Youth seal. The project features a Securock® Wallboard System for External Cladding and Ecoblock Perforated Gypsum Board.



DEWA SOLAR INNOVATION CENTRE
DUBAI

WWW.USGME.COM

VISIT USG MIDDLE EAST'S WEBSITE FOR NEW SYSTEM DESIGNS, SOLUTIONS, AND THE LATEST PRODUCT OFFERINGS.
NOW YOU CAN PLAN AND VISUALIZE YOUR PROJECT, GET A QUOTE, AND PLACE YOUR SAMPLE ORDER THROUGH USGME.COM

Visit USG Middle East's social media and digital platforms to stay updated on all our solutions and designs. Follow us on:

SEE US ON LINKEDIN
/usgme

FOLLOW US ON X
/usg_me

FIND US ON FACEBOOK
/usgme

SEE US ON YOUTUBE
/USG Middle East

FOLLOW US ON INSTAGRAM
/usg_me

MESSAGE US ON WHATSAPP
/+966 92 003 5672





01



THE BAFFLE CEILING STORY

Celebrating stylish and acoustic innovation, by revealing the blend of form and function in USG ME baffle ceilings


Our Celebretto® Paraline Metal Baffles, Skynest® Wood Wool Baffles, and Louna™ Soft Fiber Baffles redefine spatial elegance. Picture the sleek lines of Paraline Metal Baffles, a contemporary statement in varied shapes and finishes. Feel the warmth of nature with Skynest® Wood Wool Baffles, manufactured from premium wood materials, available diverse shapes and colors. Louna™ Soft Fiber Baffles combine acoustics and elegance, providing functionality in various shapes and finishes. Beyond style, our innovative suspension systems ensure a seamless installation, saving time while guaranteeing durability. Raise your spaces with design possibilities at USG Middle East.





CELEBRETTO®

1. PARALINE BAFFLES
2. CROSSING BAFFLES
3. QUADRA CELL

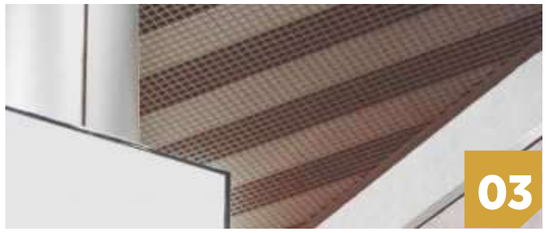

CEILINGS FEATURES

The name “Celebretto” stands as a testament to innovation and elegance. USG ME’s Celebretto® Specialty Metal Ceiling collection offers a trio of remarkable solutions, each with a distinctive personality, designed to promote interior spaces to new heights of sophistication. Let’s explore the trio.



SKYNEST®

4. WOOD WOOL BAFFLE

CEILING FEATURES

Inspired by one of the earth’s most sustainable materials, wood wool, Skynest® Baffles bring a touch of nature indoors while enhancing acoustic comfort with their unique characteristics, applications, and the transformative impact they bring to interior spaces. From serene office environments to dynamic communal areas, Skynest® Baffles stands as a symbol of how nature and design can come together to create spaces that inspire, calm, and captivate.




SOFT FIBER

5. LOUNA™ BAFFLE

CEILING FEATURES

An elegant acoustic solution from stonewool for any space creates spacing in ceiling designs. Louna™ Baffle is a vertical hanging acoustic board with encapsulated edges made from soft fiber substrate with monolithic visual reduces installation time.

CELEBRETTO®
PARALINE BAFFLES

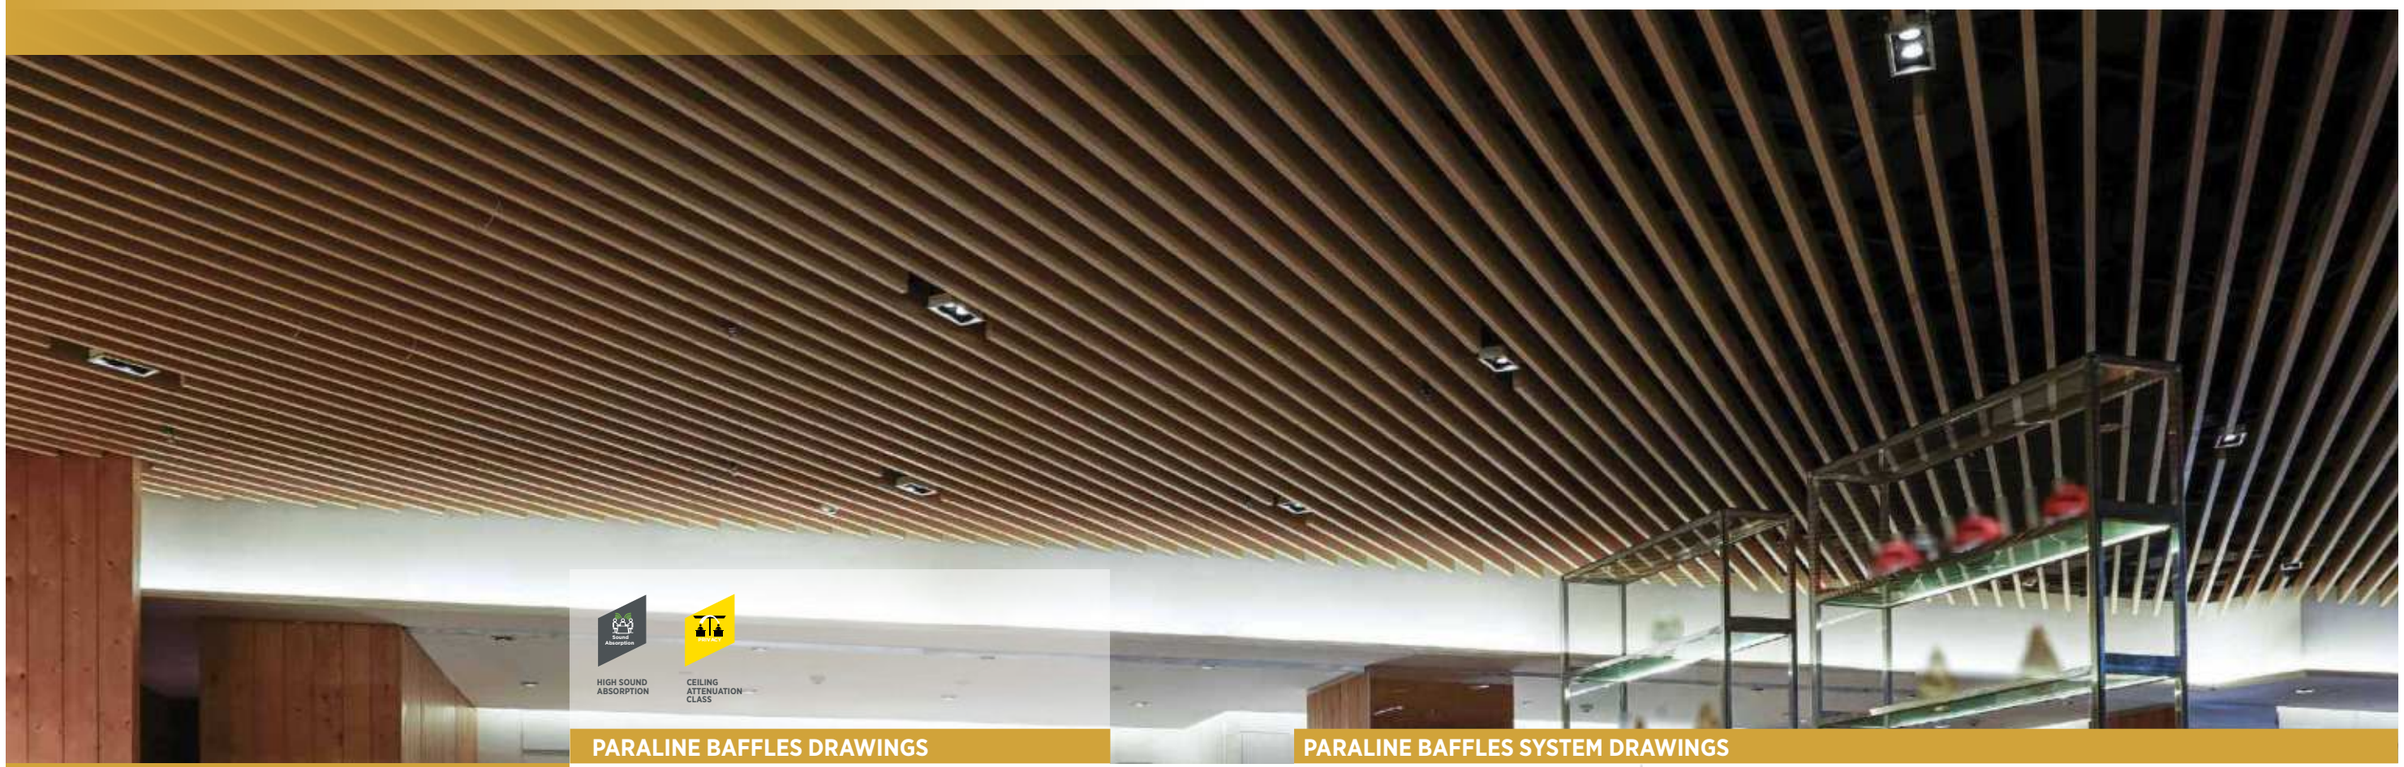

HIGH SOUND ABSORPTION

CEILING ATTENUATION CLASS

FEATURES AND BENEFITS

- Paraline baffles are metal baffles with easy access to an enclosed plenum.
- Available in various system sizes with different baffles, dimensions, and finishes per a project's requirements.
- A unique modern look that fits any interior design concept.
- Available with an optional closing strip.
- Available in plain and perforated patterns for acoustic performance.
- Unique design - metal baffle integrated with linear strip ceiling to improve the space's look and acoustic performance.
- It can be installed directly onto the existing ceiling or with a hanging suspension system.

APPLICATIONS

- Entertainment
- Lobbies
- Restaurants
- Offices
- Transportation

PARALINE BAFFLES DRAWINGS



AVAILABLE COLOR




Explore the complete range of colors, finishes, and perforation patterns on pages 306-310 for detailed insights.

SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
A1 Pattern Fully Perforated**	0.25	**0.50**	**1.0**	**1.0**	**1.0**	1.0	**0.85**

* *Calculated to ASTM C 423-01*
** *Acoustic Fleece and 38mm Soft Fiber Infill*

PARALINE BAFFLES SYSTEM DRAWINGS

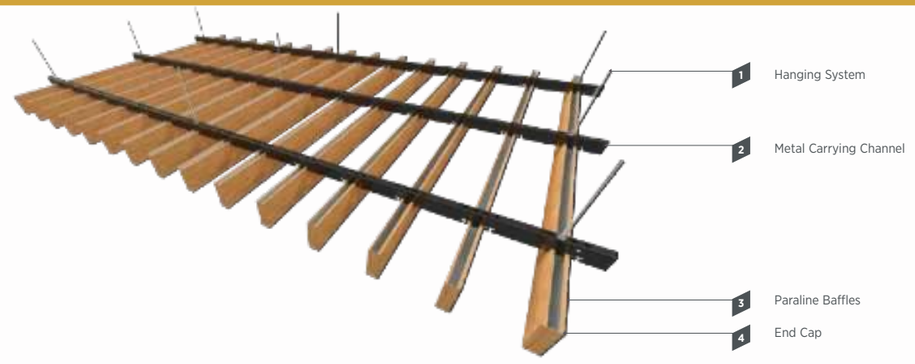




SYSTEM COMPONENTS



Paraline Baffle & End Cap



Carrying Channel



Connecting Splices & Tightening Piece



Hanging System



Closing Strip *(Baffle with closing strip option)*



C-Channel Bracket *(Baffle with closing strip option)*





PARALINE BAFFLE METAL CEILING ACOUSTICAL PERFORMANCE

USG Middle East supplies metal ceiling panels with a range of acoustical performance to meet the needs of all kinds of projects. A variety of sound-absorbing backing options are available. Consult with the USG Middle East technical team for further guidance.

PATTERN	OPEN AREA%	CELEBRETTO® METAL CEILING INFILL OPTIONS	CAC	NRC
A1	20%	Paraline Baffles with 38mm Soft Fiber infill	-	0.85

• A1 Pattern: Diagonal Pattern, Hole Size Dia 1.8mm

INFILL OPTIONS*

	Without Infill	With Acoustic Fleece	With Acoustic Fleece and Infill
STANDARD WITH PLAIN BORDER			
OPTIONAL FULLY PERFORATED			

* Additional backer options available for NRC and CAC enhanced total acoustical performance

SYSTEM SPECIFICATION

Material Classification
Galvanized Steel: Type V
Aluminium: Type VII
Stainless Steel: Type VI
Pattern: A, C, G

Thickness
Powder coat finish: 0.6mm–1.4mm
Wooden finish: 0.6mm

Baffle Width
30mm, 40mm, 50mm, 80mm, 100mm, 150mm

Baffle Height
50mm, 80mm, 100mm, 150mm, 200mm

Baffle Length
Up to 2400mm Baffle Spacing (clear gap) Min 30mm


Light Reflectance Coefficient [LR]
Based on the finish color and perforation pattern, LR up to 0.82

Color
Standard colors are RAL 9016, RAL 9006 and RAL 9010. Other RAL colors are available upon request

Surface Burning Characteristics per ASTM E 84
Class A

Additional Information

- Recommended spacing is to be equal to the height of the baffle
- Thickness depends on panel sizes and project requirements
- Consult USG Middle East technical team for other panel widths

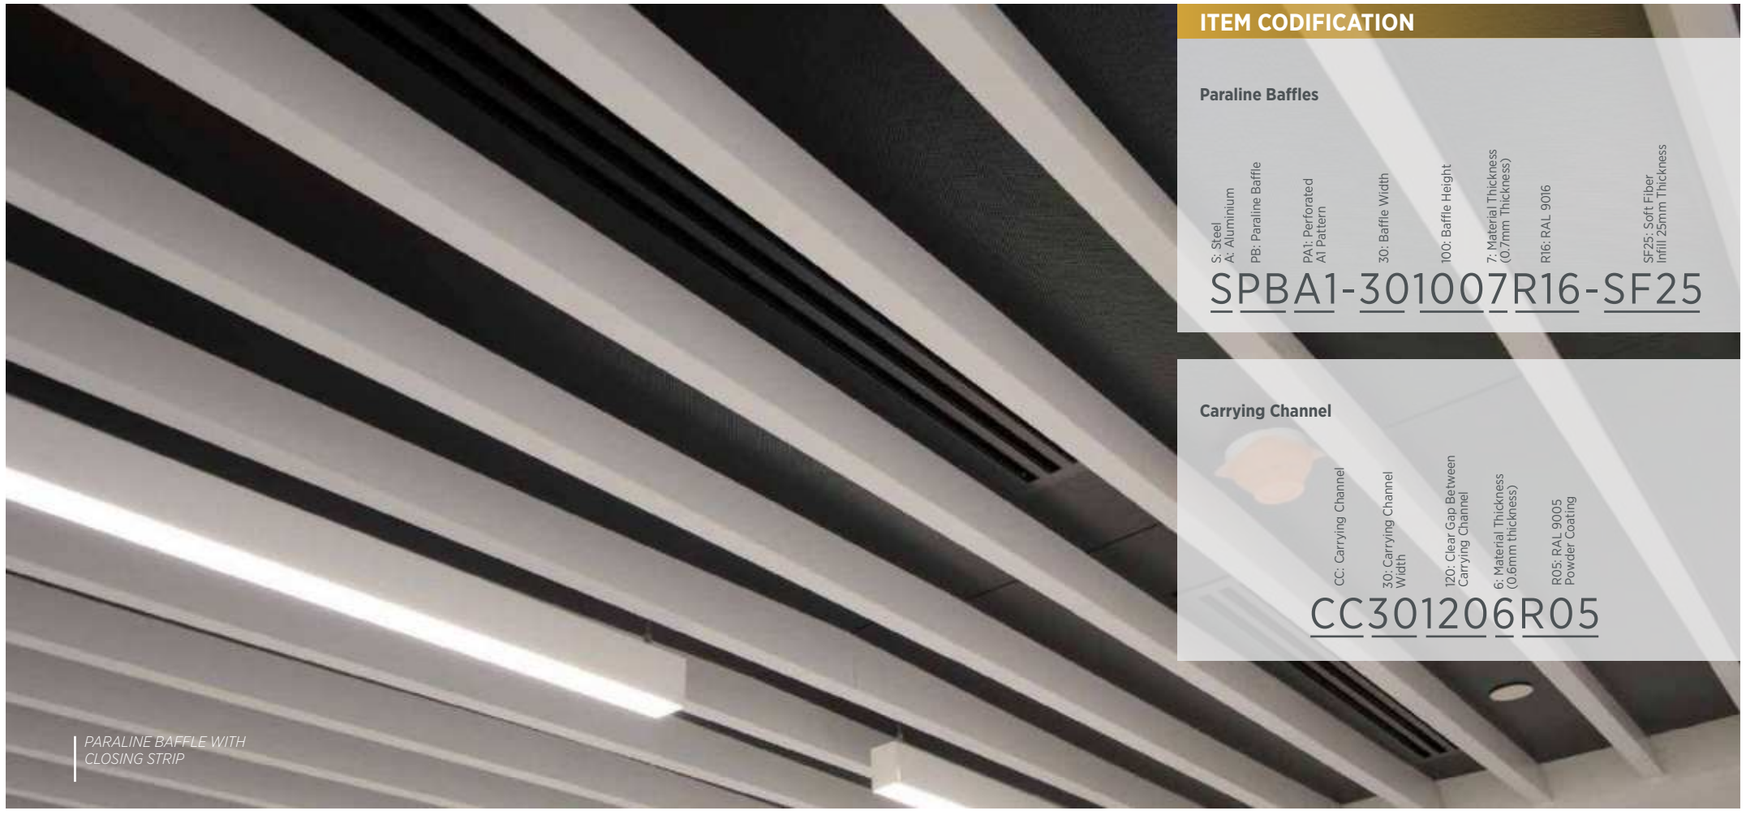

PARALINE BAFFLE WITH CLOSING STRIP

ITEM CODIFICATION

Paraline Baffles

S: Steel A: Aluminium	PB: Paraline Baffle	PA1: Perforated A1 Pattern	30: Baffle Width	100: Baffle Height	7: Material Thickness (0.7mm Thickness)	R16: RAL 9016	SF25: Soft Fiber Infill 25mm Thickness
S	PB	PA1	30	100	7	R16	SF25

SPBA1-301007R16-SF25


Carrying Channel

CC: Carrying Channel	30: Carrying Channel Width	120: Clear Gap Between Carrying Channel	6: Material Thickness (0.6mm thickness)	R05: RAL 9005 Powder Coating
CC	30	120	6	R05

CC301206R05

02

CELEBRETTO®
CROSSING BAFFLES

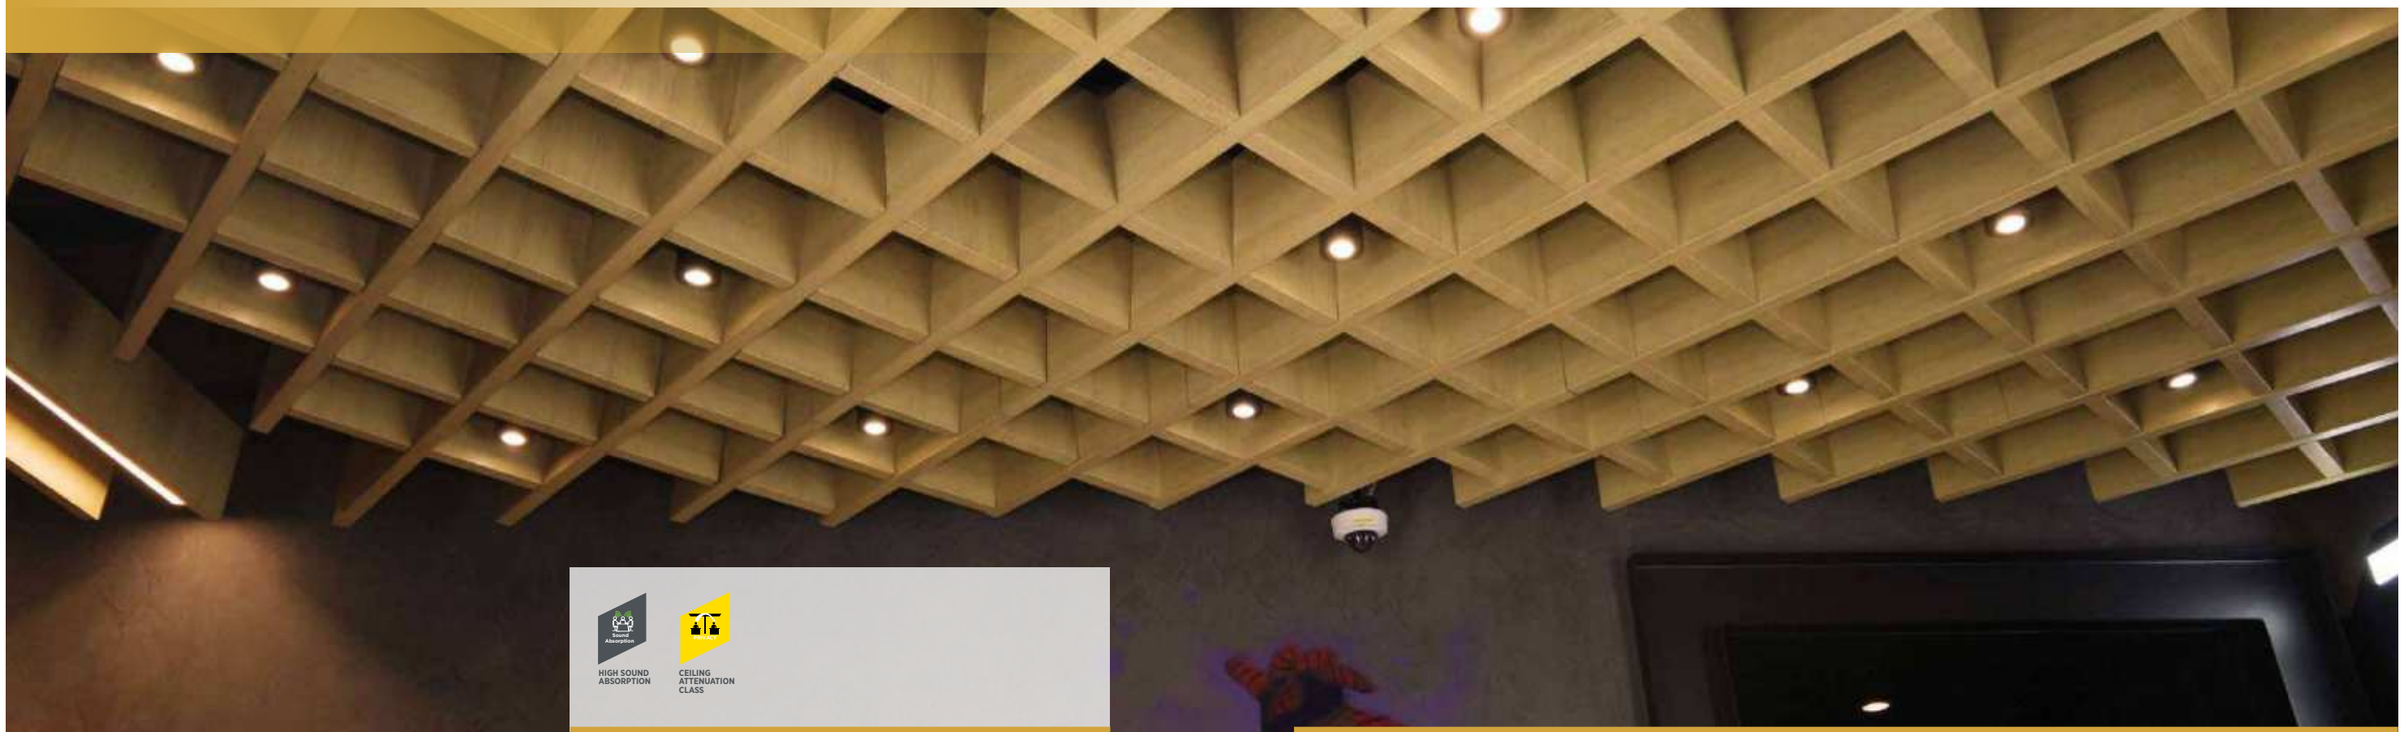

HIGH SOUND ABSORPTION

CEILING ATTENUATION CLASS

FEATURES AND BENEFITS

- Available in a wide range of system sizes with different baffles, dimensions, and finishes, as per a project's requirements.
- A unique modern look that fits any interior design concept.
- Available in plain and perforated patterns for acoustic performance.
- Unique design - metal baffle integrated with metal lay-in ceiling or mineral fiber ceiling to improve the space's aesthetic and acoustic performance.

APPLICATIONS

- Airports
- Business & residential towers
- Hotels
- Entertainment hallways
- Restaurants

CROSSING BAFFLES DRAWINGS



AVAILABLE COLOR


Explore the complete range of colors, finishes, and perforation patterns on pages 306-310 for detailed insights.

SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
A1 Pattern Fully Perforated**	0.25	**0.50**	**1.0**	**1.0**	**1.0**	1.0	**0.85**

** Calculated to ASTM C 423-01*
*** Acoustic Fleece and 38mm Soft Fiber Infill*

CROSSING BAFFLES SYSTEM DRAWINGS

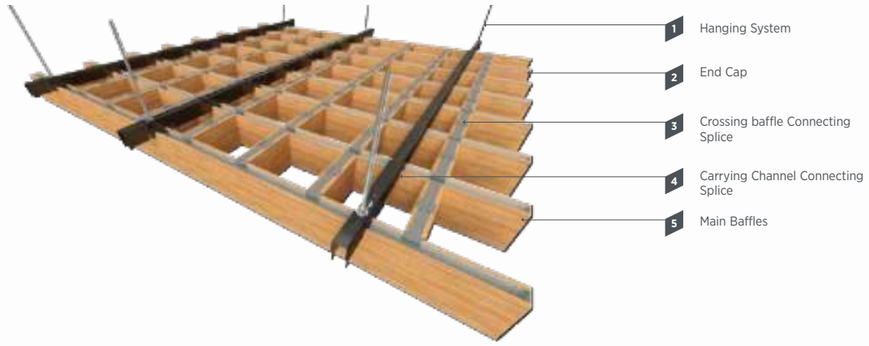



SYSTEM COMPONENTS



Main Baffle



Baffle End Cap



Baffle Connecting Splice



Crossing Baffle with Suspension



Carrying Channel



Hanging System





CROSSING BAFFLE METAL CEILING ACOUSTICAL PERFORMANCE

USG Middle East supplies metal ceiling panels with a range of acoustical performance to meet the needs of all kinds of projects. A variety of sound-absorbing backing options are available. Consult with the USG Middle East technical team for further guidance.

PATTERN	OPEN AREA%	CELEBRETTO® METAL CEILING INFILL OPTIONS	CAC	NRC
A1	20%	Paraline Baffles with 38mm Soft Fiber infill	-	0.85

• A1 Pattern: Diagonal Pattern, Hole Size Dia 1.8mm

INFILL OPTIONS*

	Without Infill	With Acoustic Fleece	With Acoustic Fleece and Infill
STANDARD WITH PLAIN BORDER			
OPTIONAL FULLY PERFORATED			

* Additional backer options available for NRC and CAC enhanced total acoustical performance

SYSTEM SPECIFICATION

Material Classification
Galvanized Steel: Type V
Aluminium: Type VII
Stainless Steel: Type VI
Pattern: A, C, G

Thickness
Powder coat finish: 0.6mm – 1.4mm
Wooden finish: 0.6mm

Baffle Width
30mm, 40mm, 50mm, 80mm, 100mm, 150mm

Baffle Height
50mm, 80mm, 100mm, 150mm, 200mm

Baffle Length
Up to 2400mm


Baffle Spacing (clear gap)
Min 30mm

Light Reflectance Coefficient [LR]
Based on the finish color and perforation pattern, LR up to 0.82

Color
Standard: RAL 9016, RAL 9006 and RAL9010. Other RAL colors are available upon request

Surface Burning Characteristics per ASTM E 84
Class A

Additional Information
- Recommended spacing is to be equal to the height of the baffle
- Thickness depends on panel sizes and project requirements
- Consult USG Middle East technical team for other panel widths

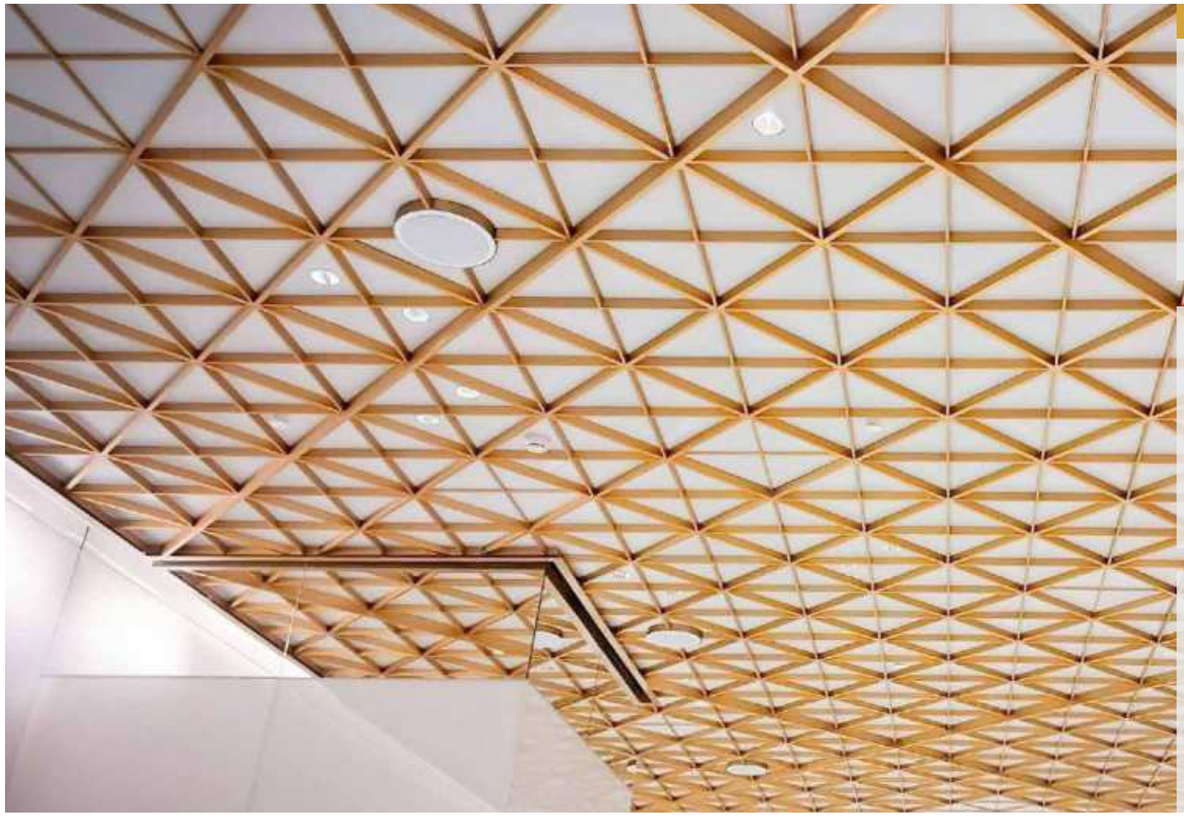

ITEM CODIFICATION

Main Baffle

S: Steel
A: Aluminium
CBM: Crossing Baffle Main
40: Baffle Width
200: Baffle Height
7: Material Thickness (0.7mm Thickness)
WF4: Wood Finish WF4

SCBM-402007WF4

Crossing Baffle

S: Steel
A: Aluminium
CBC: Crossing Baffle Cross
40: Baffle Width
200: Baffle Height
300: Baffle Length
7: Material Thickness (0.7mm Thickness)
WF4:Wood Finish WF4


SCBC-4020030007WF4

Carrying Channel

CC: Carrying Channel
40: Carrying Channel Width
300: Clear Gap Between Carrying Channel
6: Material Thickness (0.6mm thickness)
R05: RAL 9005

CC403006R05

CELEBRETTO®
QUADRA CELL

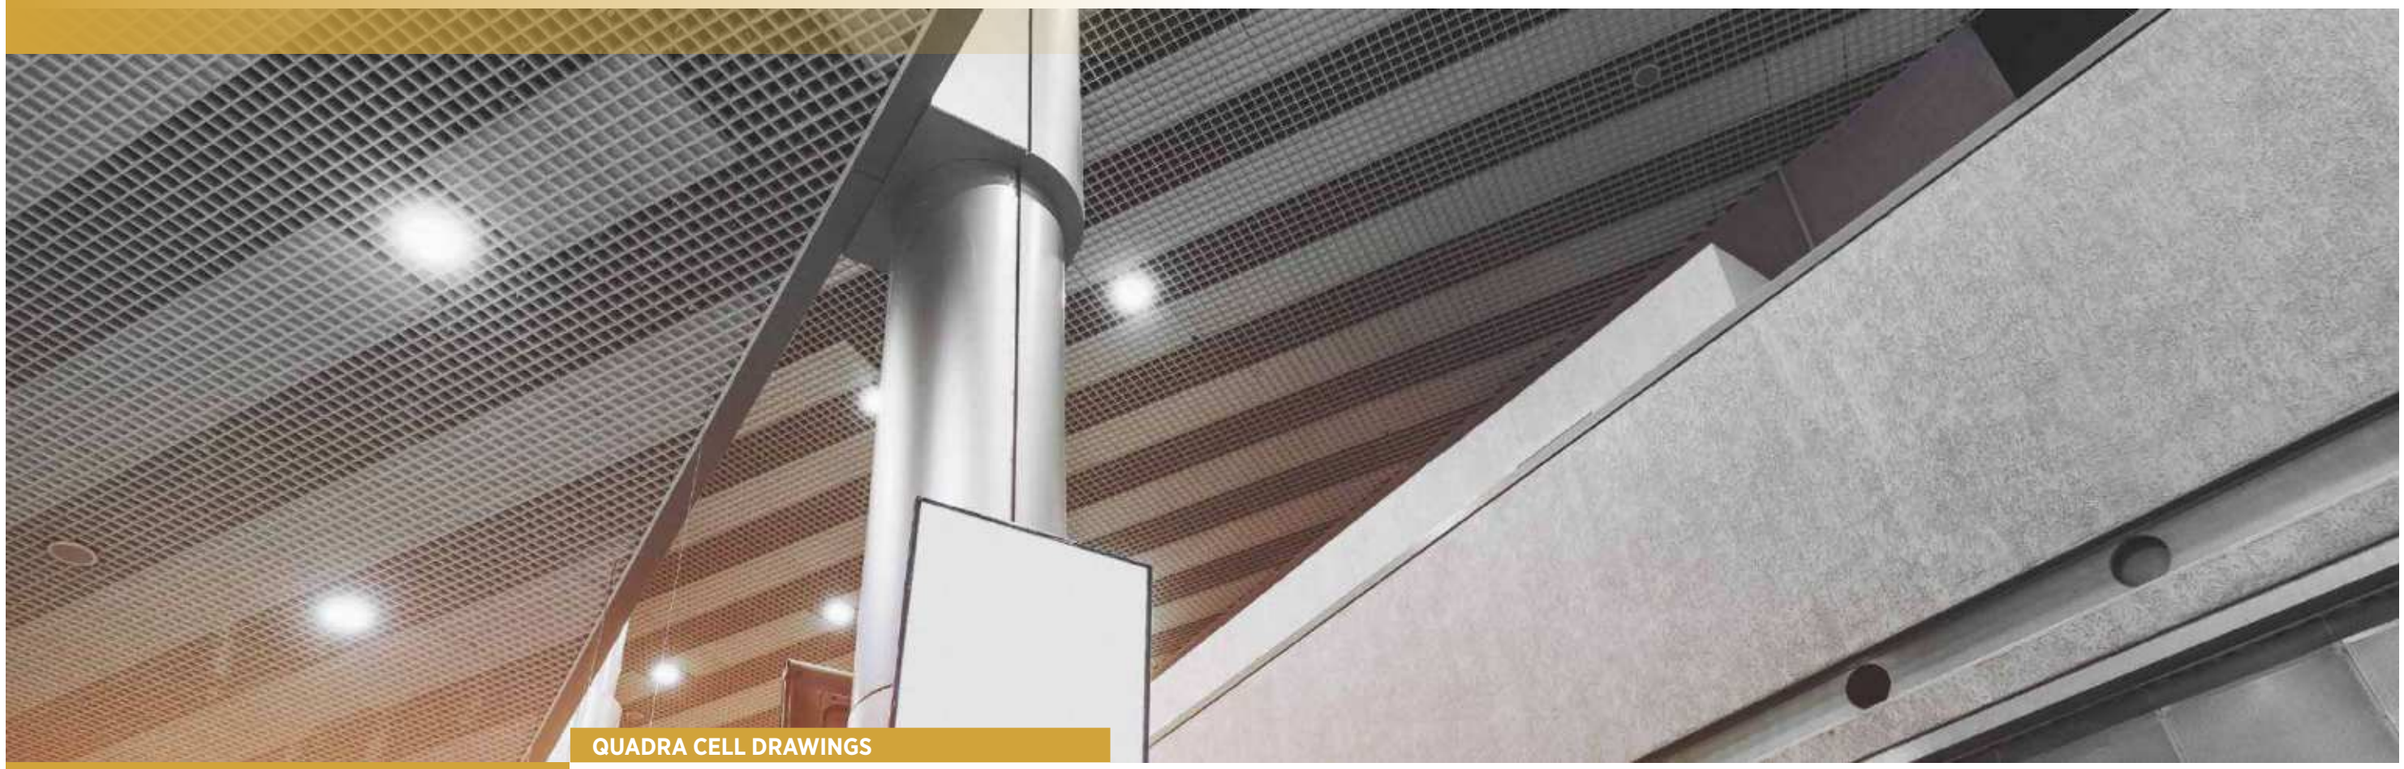


FEATURES AND BENEFITS

- Available in two main designs: T15 Lay-on ceiling and trackless ceiling systems.
- Economical grade ceiling solution that meets all commercial design concepts.
- Easy integration with MEP services.
- Quick installation.
- Accessible ceiling panel for the T15 Lay-on.
- Wide variety of modules and sizes.
- Available in Y (pyramid) and U shape designs.

APPLICATIONS

- Airports
- Entertainment
- Restaurants
- Retail
- Shopping malls
- Electrical rooms

QUADRA CELL DRAWINGS

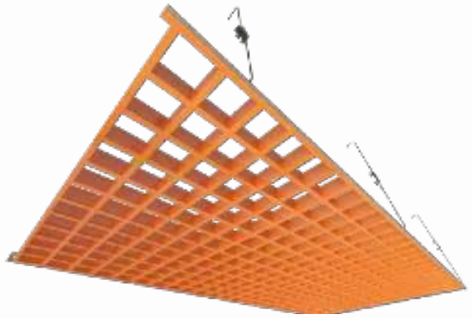

AVAILABLE COLOR

Explore the complete range of colors and finishes patterns on pages 306-310 for detailed insights.

SYSTEM SPECIFICATION

Material Classification
Aluminium: Type VII
Pattern: G
Thickness
Powder coat finish: 0.4-0.5mm
Pre-painted aluminium: 0.4mm
Wooden finish: 0.6mm
Panel Size (Lay-on system)
600x600mm
Module Sizes
50x50mm, 75x75mm, 100x100mm, 150x150mm, 200mmx200mm
Module Height
U Shape: 50mm
Y Shape (Pyramid): 60mm
Exposed Module Width
U Shape: 15mm
Y Shape (Pyramid): 10mm
Surface Burning Characteristics per ASTM E 84
Class A

ACOUSTIC PERFORMANCE

USG Middle East supplies metal ceiling panels with a range of acoustical performance to meet the needs of all kinds of projects. A variety of sound-absorbing backing options are available. Consult USG Middle East technical team for further guidance.

SYSTEM COMPONENTS

U SHAPE T15 LAY-ON SYSTEM COMPONENTS



T15 Main Profile



T15 Deputy Profile



T15 Lay-On Perimeter Profile




Suspension Accessories
Rod Hanger,
Butterfly Clips




Suspension System
Main Tee 3600mm, Cross Tee 1200mm, Cross Tee 600mm,
Perimeter Wall Angle


U SHAPE T15 LAY-ON SYSTEM CONFIGURATIONS

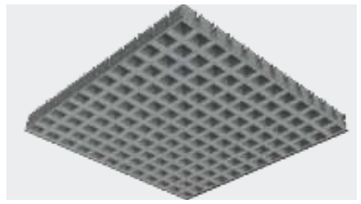


50x50mm

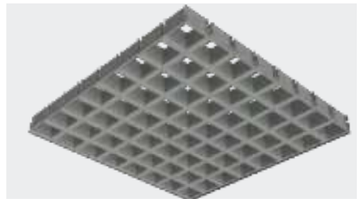


75x75mm

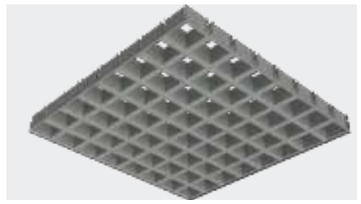

100x100mm

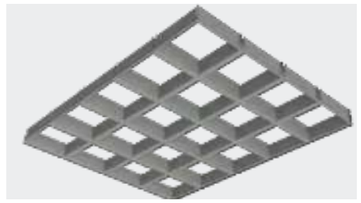

150x150mm

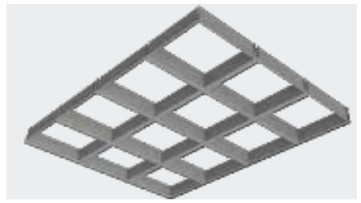

200x200mm

LIMITATION
1. T15 Lay-on profile is 15 x 50mm (WxH).

SYSTEM COMPONENTS

TRACKLESS SYSTEM COMPONENTS



Main Profile




Deputy Profile




T15 Lay-On Perimeter Profile




Suspension Accessories
Rod Hanger,
Butterfly Clips

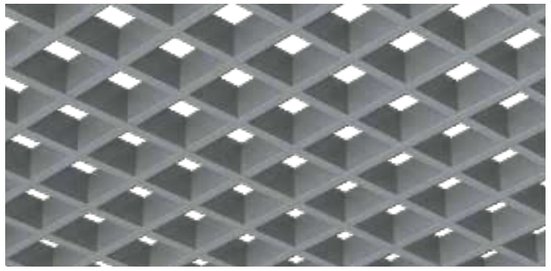


TRACKLESS SYSTEM CONFIGURATIONS

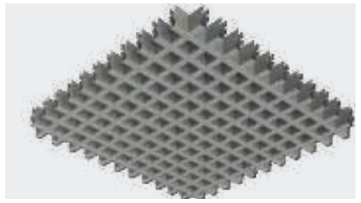


U-Shape 50x50mm

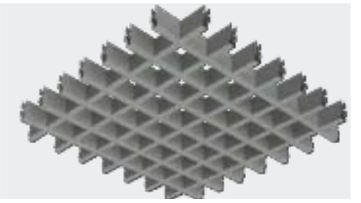


U-Shape 75x75mm

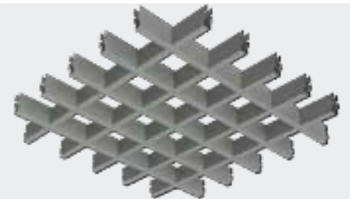


U-Shape 100x100mm

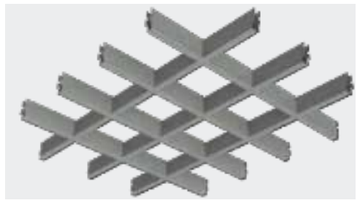

U-Shape 150x150mm

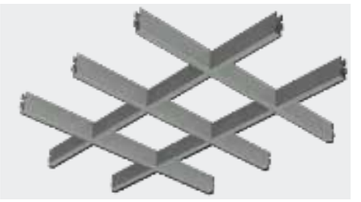

U-Shape 200x200mm

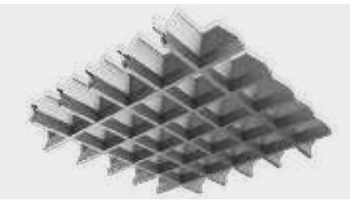

Y-Shape (Pyramid)
75x75mm, 100x100mm,
150mmx150mm & 200x200mm

LIMITATION
1. U shape Trackless profile is 15 x 50mm (WxH).
2. Y shape (Pyramid) Trackless profile is 10 x 60mm (WxH).
3. The Trackless System accessibility is limited after installation. If accessibility is a priority, please consider using the Lay-On System or consult USG Middle East technical team for other options.

SKYNEST®
WOOD WOOL BAFFLES



HIGH SOUND ABSORPTION

CERTIFIED FOR THE PROGRAMME FOR THE ENDORSEMENT OF FOREST CERTIFICATION

CONFORMITÉ EUROPÉENNE

CERTIFIED FOR FSC

FEATURES AND BENEFITS

- Skynest® acoustic baffles are made of a durable and nature-friendly material of top-quality wood wool and cement.
- Certified for FSC and the Programme for the Endorsement of Forest Certification (PEFC).
- This product offers the widest variety of design solutions by combining fire safety with good acoustic and heat insulation properties.
- Can achieve various required sound absorption parameters. The extended sound absorption coefficient can reach up to 0.65 NRC.
- It not only provides sound insulation but also absorbs excess moisture in rooms. Does not change shape or warp in high-humidity rooms.

APPLICATIONS

- Public and office premises
- Recording studios, radio and TV studios
- Schools and kindergartens
- Concert halls, theaters, cinemas
- Industrial and production premises
- Restaurant

WOOD WOOL BAFFLES DRAWINGS



AVAILABLE COLOR



SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
25mm	0.60	**0.60**	**0.55**	**0.65**	**0.85**	0.95	**0.65**

* *Calculated to ASTM C 423-01*

SUSPENSION SYSTEM

It consists of a stainless-steel screw eye hook dropping from the soffit that is fixed on the tiles through helicoidal rotation. Screw hook accessories are adjustable to suit different plenum heights. The Screw hook is designed to hold the tile weight of a floated ceiling safely.

Materials Classification

Stainless Steel 1.5mm screw diameter with a breaking force of 2.10 KN with an eye diameter of 12mm and a total height of 40mm.

Product Specs

Suspension Rope with Cable Gripper & Hook 1.5mm wire diameter.

ASTM & Code Standards

Stainless Steel Wire: ASTM A 580/A 580M, Type 304, nonmagnetic. Design load requirements as per ASTM C635.



SKYNEST™ WOOD WOOL BAFFLE

SYSTEM SPECIFICATION

Skynest® Wood Wool Acoustical Ceiling meets the specifications in accordance with EN 13964.

Material Classification
Type: XIV
Pattern: L

Benefits
The panels are suitable for use in premises with a wide range of temperatures and air humidity and provide pleasing value. With original surface texture, there is an unlimited choice of colors. Due to the natural ingredients, the panels ensure a comfortable micro-climate, typical of premises constructed from wood.

Substrate and Surface Finish
Wood Wool substrate finished with factory applied paint finish

Wood Wool
1mm, 1.5mm, 3mm*

Panel Thickness
25mm

Edge Detail Trim
Square blade

Weight
1mm Wood Wool:
25mm: 10.5 kg/m²
1.5mm Wood Wool:
25mm: 9.8 kg/m²

Noise Reduction Coefficient [NRC]
[0.60] [0.65]

Color
Natural, white, black, grey, or painted according to RAL color chart.

Reaction to Fire as per EN 13501-1
1mm Wood Wool: A2-s1, d0
1.5mm Wood Wool: B-s1, d0

Thermal conductivity
λ = 0.066 W/mK

Maintenance
Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with warm water and wipe surface

Additional Information
- USG Middle East's Skynest® Wood Wool Baffles are flat. However, they will exhibit an inherent deflection, which may be more apparent as the proximity to adjacent surfaces is reduced. This deflection should be no more than 5mm. Local environmental conditions may increase this variance.
- Take care to minimize movement due to airflow within a space.

** 3mm Wood Wool are available upon request, refer to our technical department for more information.*



Superfine
1 mm Wood Wool Strand Width




Fine
1.5 mm Wood Wool Strand Width




Regular
3 mm Wood Wool Strand Width

SYSTEMS CONFIGURATIONS*


Straight

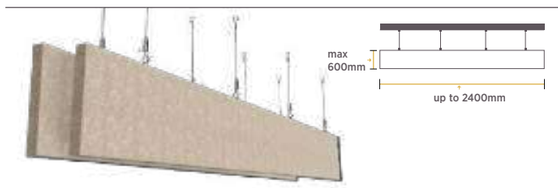


Wavy

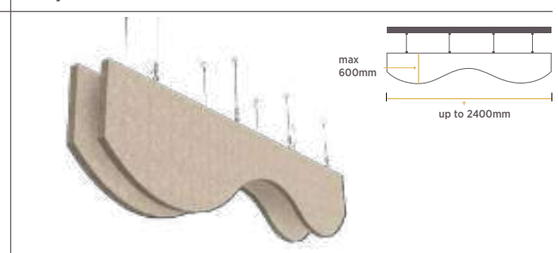


Concave

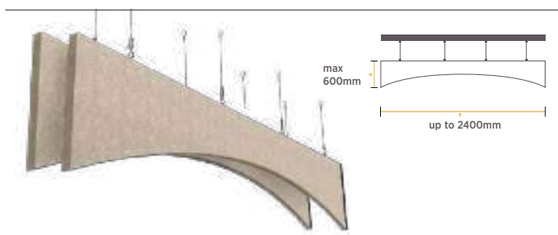

Convex

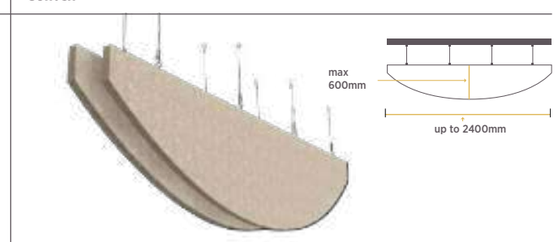

Zigzag

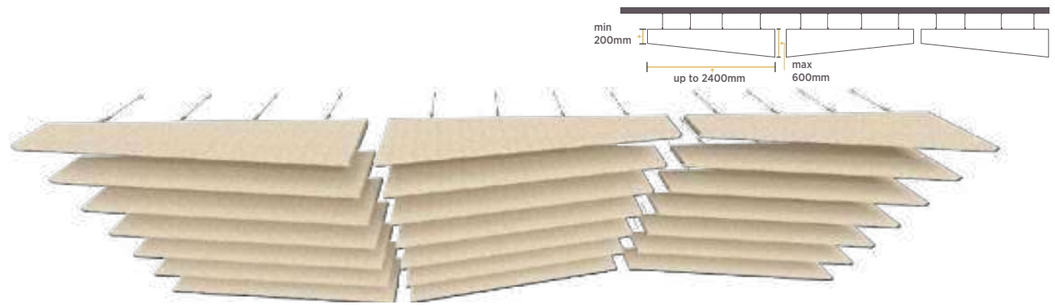

** Refer to USG Middle East technical team for the size limitation and suspension accessories. Other configurations are available upon request.*






05

SOFT FIBER

LOUNA™ BAFFLE

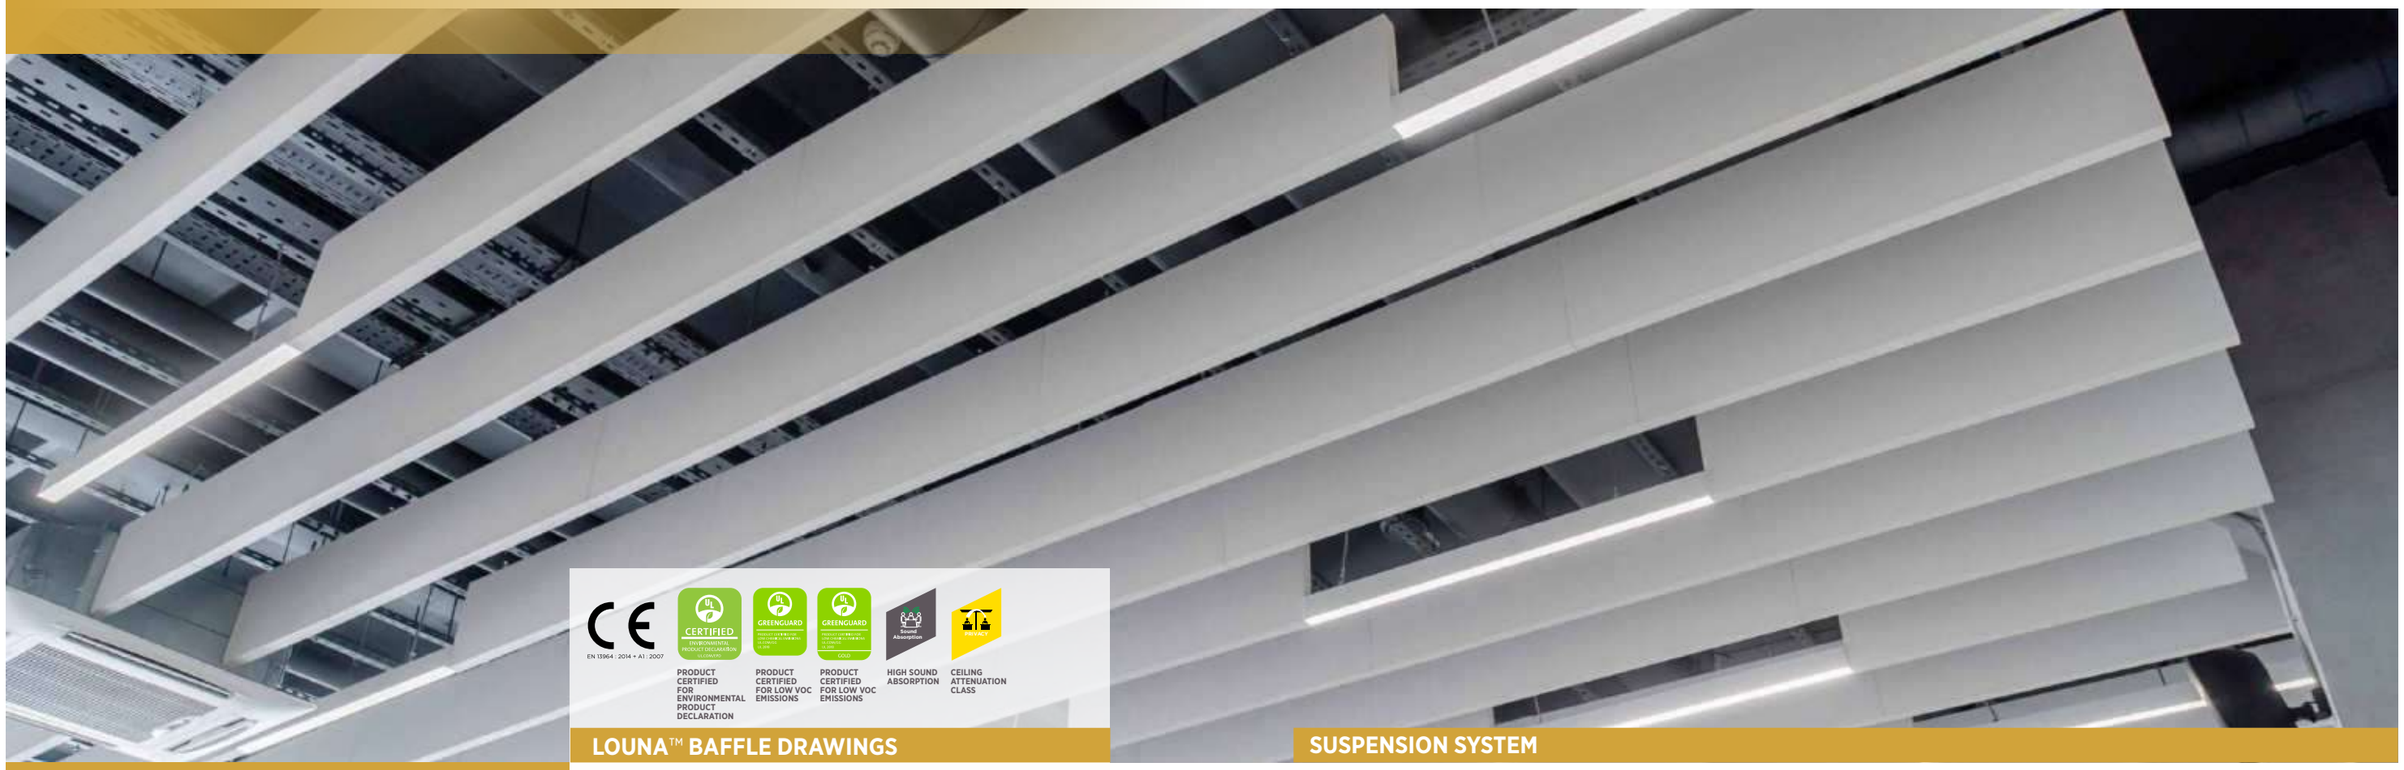

PRODUCT CERTIFIED FOR ENVIRONMENTAL PRODUCT DECLARATION | PRODUCT CERTIFIED FOR LOW VOC EMISSIONS | PRODUCT CERTIFIED FOR LOW VOC EMISSIONS | HIGH SOUND ABSORPTION | CEILING ATTENUATION CLASS


FEATURES AND BENEFITS

- An elegant acoustic solution made from soft fiber for any space
- Creates spacing in ceiling designs.
- Louna™ Baffle is a vertical hanging acoustic board with encapsulated edges.
- Improved acoustic properties at exposed workplaces with NRC values of up to 0.70 (depending on baffle spacing from each other).
- Can accommodate existing elements such as lighting and air conditioning.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Allows chilled beams or thermal mass heating to function as intended.
- Available in custom sizes and colors upon request.


APPLICATIONS

- Hotels
- Leisure centers
- Restaurants and cafes
- Open-plan areas
- Transportation (airports, bus terminals and train stations)
- Convention halls and concourses

LOUNA™ BAFFLE DRAWINGS



AVAILABLE COLOR



Explore the complete range of color options pages 172-173.

SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
1800x300x40mm	0.20	**0.30**	**0.65**	**0.90**	**0.85**	0.80	**0.70**

* *Calculated to ASTM C 423-01*

SUSPENSION SYSTEM

It consists of a stainless-steel String dropping from the soffit and a Spiral Anchor (Spring) that is fixed on the tiles through helicoidal rotation. The String is adjustable to suit different plenum heights. The Spring is designed to safely hold the tile weight of a floated ceiling.

Materials Classification
Stainless Steel 1.5mm wire diameter with breaking force of 2.10 KN.

Product Specs
Suspension Rope with Cable Gripper & Hook dia 1.5mm.

Spiral Anchor
dia 22mm.

ASTM & Code Standards
Stainless Steel Wire: ASTM A 580/A 580M, Type 304, nonmagnetic. Design load requirements as per ASTM C635.



Louna™ Baffle Edge



SYSTEM COMPONENTS




Baffle Panel



Baffle Spiral Hook dia 22mm




Cable Gripper with Hook and Wire Rope 1.5mm



Connecting Guiding Pin (optional)



(Option 2) Donn® Grid Suspension System



Main T Clip 25mm

SYSTEM SPECIFICATION

Louna™ Baffle Ceiling meets the specifications in accordance with ASTM E1264.

Materials Classification
Type: XX,
Pattern: G

Substrate and Surface Finish
Soft fiber substrate laminated with pre-painted fiberglass scrim and back fiberglass tissue

Thickness
40mm, 50mm

Size
200 x 600mm, 200 x 1200mm 200 x 1800mm, 200 x 2400mm, 300 x 600mm, 300 x 1200mm, 300 x 1800mm, 300 x 2400mm, 600 x 600mm, 600 x 1200mm, 600 x 1800mm, 600 x 2400mm

Edge Detail Trim
Square blade

Density
140-150 kg/m^3

Noise Reduction Coefficient [NRC]
up to 0.70 depending on baffle thickness and spacing

Light Reflectance Coefficient [LR]
0.88

VOC Class
Greenguard & Greenguard Gold

Fixing
Steel String dropping from the soffit and a Spiral Anchor (Spring) that is fixed on the baffle through helicoidal rotation. The String is adjustable to suit different plenum heights. The Spring is designed to safely hold the tile weight of a floated ceiling.

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth

Color
Standard White. Other colors are available upon request

Surface Burning Characteristics as per ASTM E84
Class A

EN 13501-1 Class of Reaction to Fire Performance
A1

Thermal Conductivity
λ = 0.036 W/m°K

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5| MR Credit 6 IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IE Credit 9


Maintenance
Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with warm water and wipe surface.

Additional Information


- USG Middle East's Louna™ Baffles are flat. However, they will exhibit an inherent deflection, which may be more apparent as the proximity to adjacent surfaces is reduced. This deflection should be no more than 5mm. Local environmental conditions may increase this variance.
- Take care to minimize movement due to airflow within a space.
- Custom sizes rather than the system configuration table. Shape and color options are available upon request. Consult USG Middle East technical team.

SYSTEMS CONFIGURATIONS*


Straight

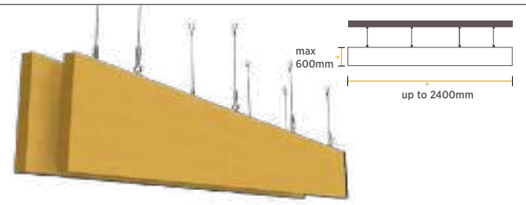


Wavy

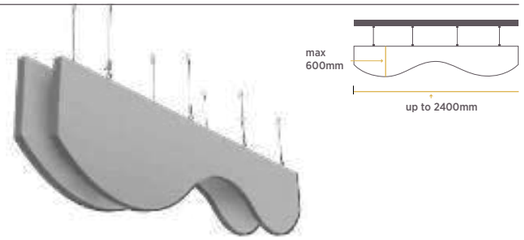

Concave

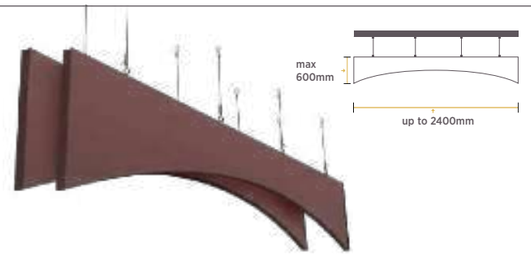

Convex

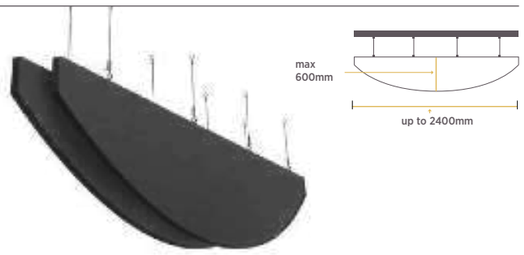

Zigzag



** Refer to USG Middle East technical team for the size limitation and suspension accessories. Other configurations are available upon request.*



02

ELEVATING SPACES



STORY OF CANOPIES CEILING & DESIGN POSSIBILITIES

Experience the beauty and functionality in USG ME's Canopy Ceilings, where design meet purpose with style and acoustics.

Imagine a canvas of possibilities as you review our Metal, Wood Wool, and Soft Fiber options. These canopies, available in various shapes, finishes, and sizes, redefine space dynamics. Produced for interior designers, our collection mixes function with performance.

Moreover, we continuously innovate with new canopy suspension systems, ensuring seamless installations that save time and enhance the transformative power of your designs. At USG Middle East, we're not just shaping ceilings; we're shaping immersive stories within your spaces.



CELEBRETTO®
1. METAL CANOPIES

CEILINGS FEATURES

Within USG ME's Celebretto® Specialty Metal Ceiling collection, you'll discover extraordinary solutions, each boasting a unique character produced to elevate interior spaces to unparalleled beauty. Review these remarkable metal ceiling canopies designed to elevate ceilings to a new space of distinction and style.



SKYNEST®
2. WOOD WOOL CANOPIES

CEILING FEATURES

Our canopy Wood Wool Ceilings bring the essence of nature indoors. Offered to enhance acoustic comfort and improve interior aesthetics, these ceilings symbolize innovation and sustainability.



SOFT FIBER
3. HALCYON™ CANOPIES

CEILING FEATURES

An elegant acoustic solution enhances any space's ambiance. These hanging acoustic canopies feature encapsulated edges, offering a seamless and refined addition to ceiling designs. With a soft fiber substrate and a monolithic visual, Halcyon Canopies provide superior acoustic performance and simplify installation, saving valuable time and effort.

CELEBRETTO®
METAL CANOPIES



HIGH SOUND ABSORPTION

CEILING ATTENUATION CLASS

FEATURES AND BENEFITS

- Decorative floating elements, which can be configured to various shapes and sizes.
- Exceptional sound absorption with NRC values up to 0.90.
- Wide range of colors and finishes.
- Ideal for providing both visual accents and acoustical control.
- Easy to install.

APPLICATIONS

- Open-plenum areas
- Convention halls and concourses
- Reception and lobby areas
- Offices with indirect lighting
- Media rooms
- Libraries
- Restaurants
- Retail
- Hospitality

METAL CANOPIES DRAWINGS




AVAILABLE COLOR



Explore the complete range of colors, finishes, and perforation patterns on pages 306-310 for detailed insights.

METAL CANOPIES SYSTEM DRAWINGS

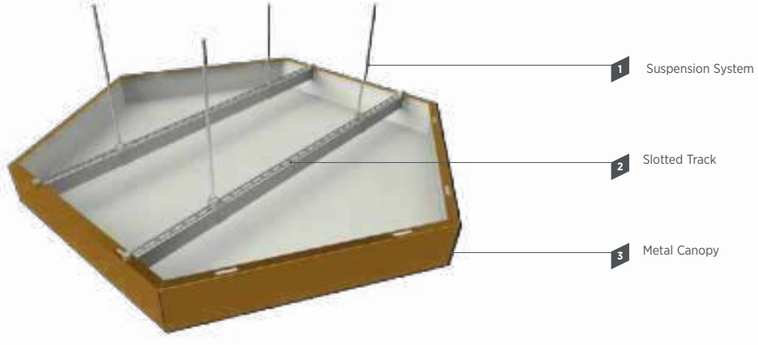




SYSTEM COMPONENTS



Metal Canopy




Slotted Track





Suspension System

SYSTEM SPECIFICATION

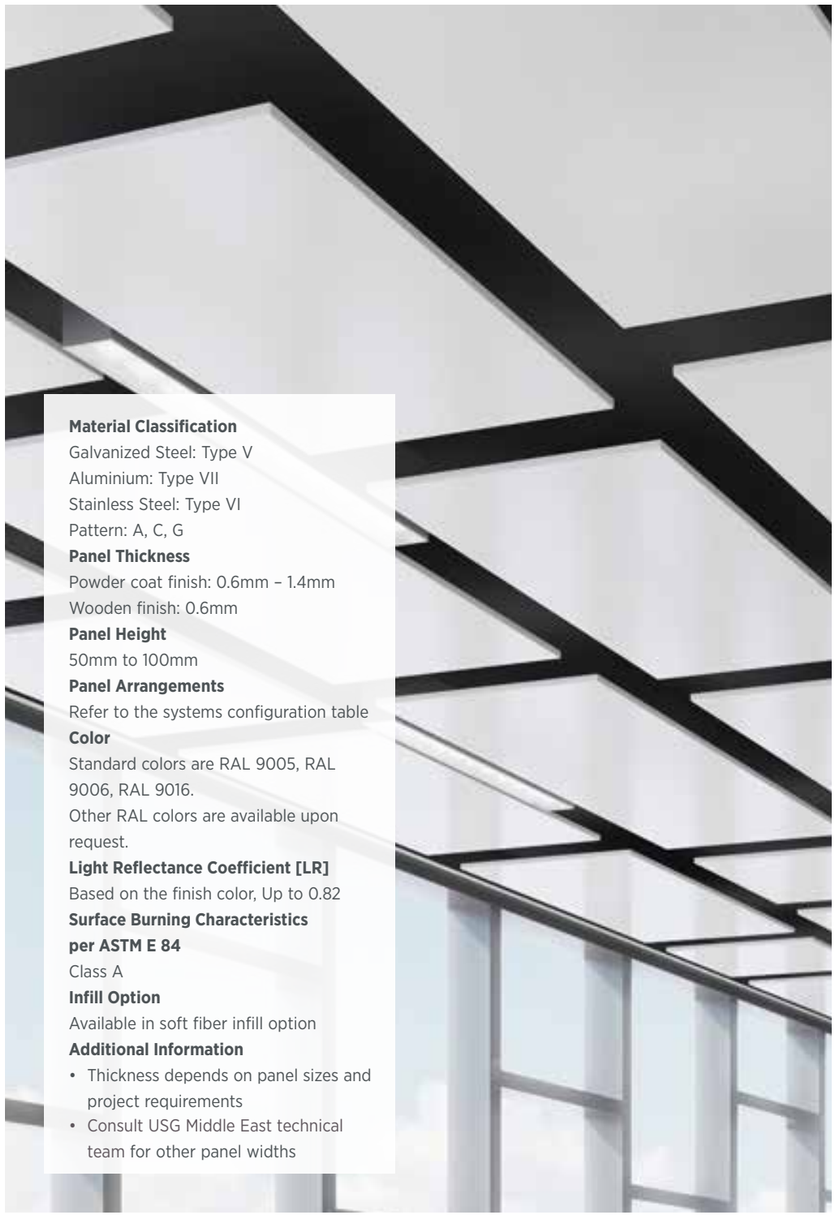




Material Classification
Galvanized Steel: Type V
Aluminium: Type VII
Stainless Steel: Type VI
Pattern: A, C, G
Panel Thickness
Powder coat finish: 0.6mm – 1.4mm
Wooden finish: 0.6mm
Panel Height
50mm to 100mm
Panel Arrangements
Refer to the systems configuration table
Color
Standard colors are RAL 9005, RAL 9006, RAL 9016.
Other RAL colors are available upon request.
Light Reflectance Coefficient [LR]
Based on the finish color, Up to 0.82
Surface Burning Characteristics per ASTM E 84
Class A
Infill Option
Available in soft fiber infill option
Additional Information
- Thickness depends on panel sizes and project requirements
- Consult USG Middle East technical team for other panel widths



INFILL OPTIONS*

Plain	Acoustic Fleece	Acoustic Fleece and Soft Fiber	Acoustic Fleece and Mineral Fiber
			

** Additional backer options available for NRC and CAC enhanced total acoustical performance*

SYSTEMS CONFIGURATIONS*

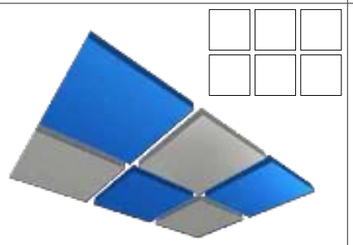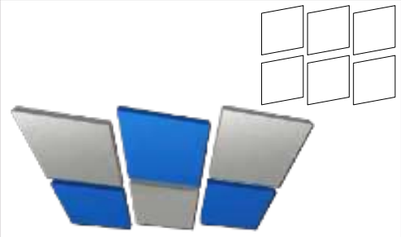Square	Parallelogram	Rectangle
		

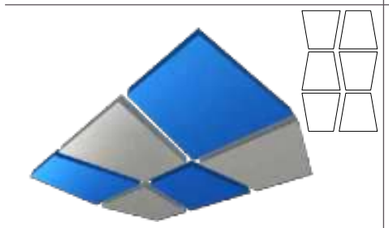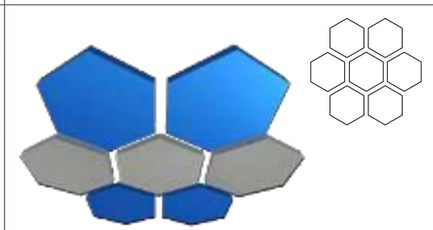Trapezoid	Hexagon
	

** Refer to USG Middle East technical team for size limitation and suspension accessories. Other configurations are available upon request.*




ITEM CODIFICATION

A: Aluminium
S: Steel
SS: Stainless Steel
CPY: Canopy
150: Canopy Height
Hex: Hexagonal Shape
1000: Canopy Diameter
14: Material Thickness (1.4mm Thickness)
R1035: RAL 1035

ACPY150-HEX-100014R1035

02

SKYNEST®
WOOD WOOL CANOPIES

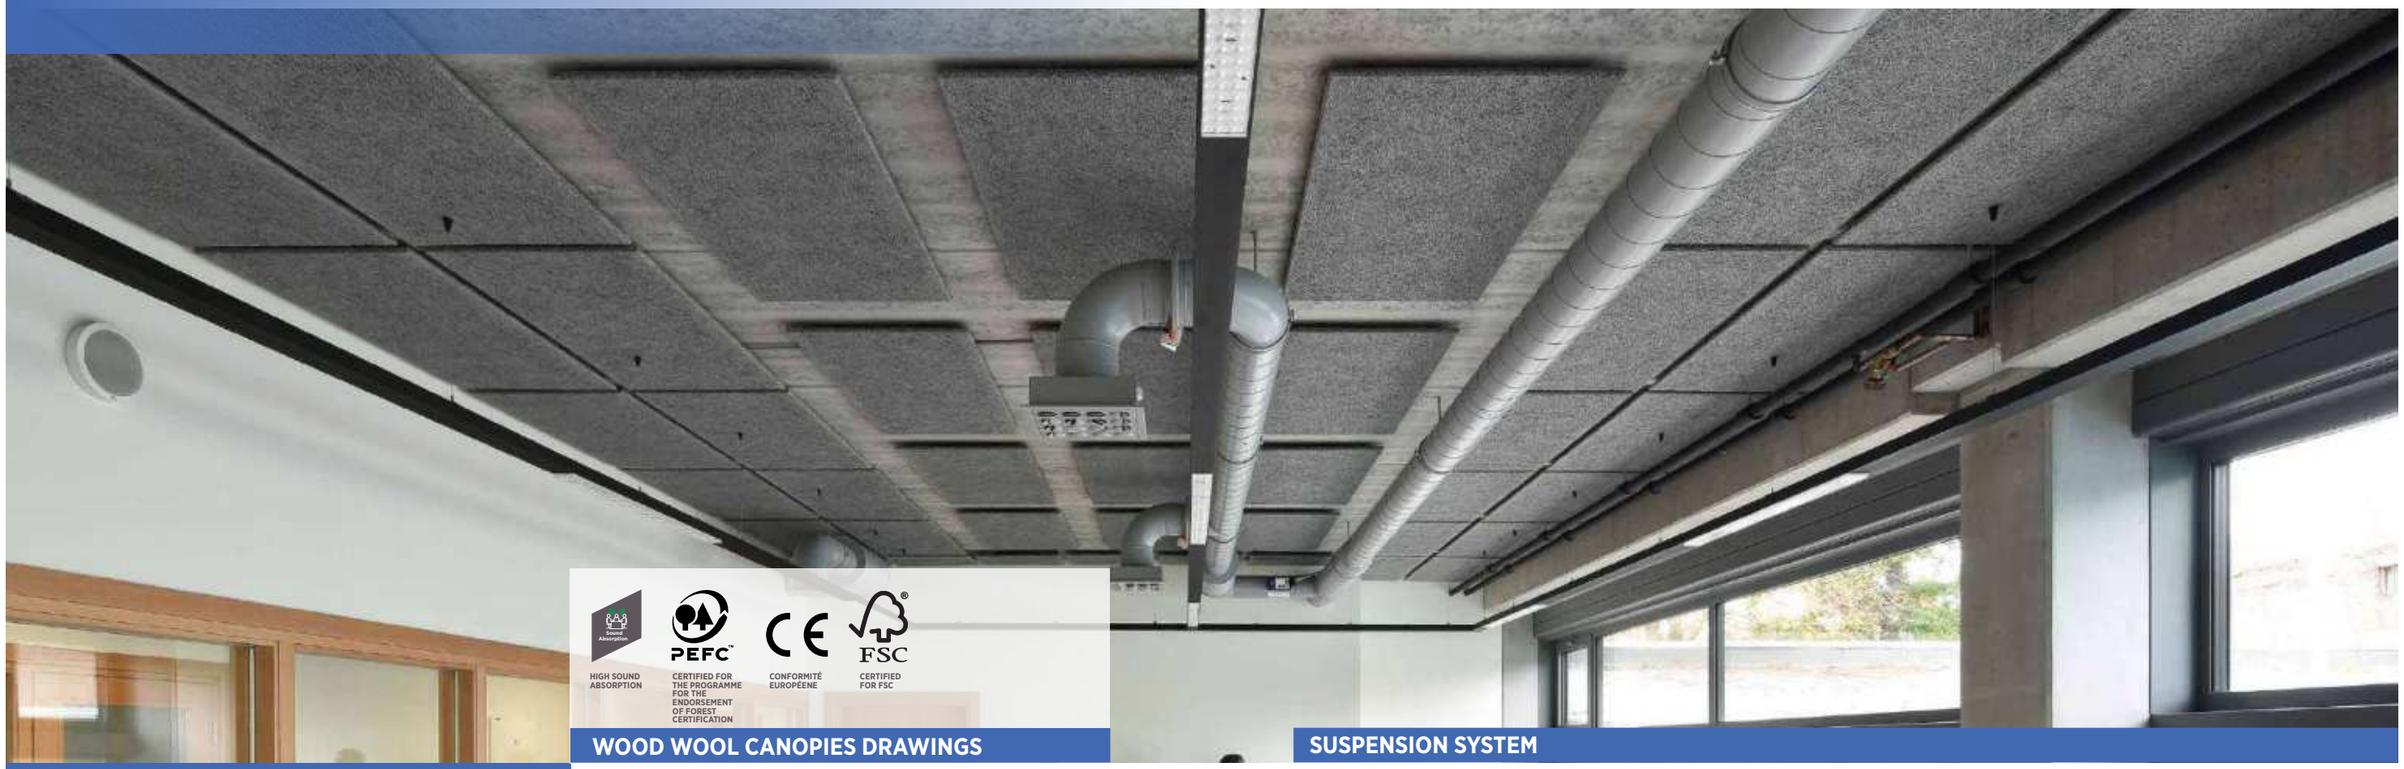

FEATURES AND BENEFITS

- Skynest® acoustic canopies are a durable and environmentally friendly material made of top-quality wood wool and cement.
- Certified for FSC and the Programme for the Endorsement of Forest Certification (PEFC).
- This product offers the widest variety of design solutions by combining fire safety with good acoustic and heat insulation properties.
- Can achieve various required sound absorption parameters. The extended sound absorption coefficient can reach up to 1.0 NRC with insulation.
- It not only provides sound insulation but also absorbs excess moisture in rooms. Does not change shape or warp in high-humidity rooms.
- They feature endless shapes, system configurations, and layouts, allowing designers to have freedom in design.


APPLICATIONS

- Public and office premises
- Recording studios, radio and TV studios
- Schools and kindergartens
- Concert halls, theaters, cinemas
- Industrial and production premises
- Restaurants

WOOD WOOL CANOPIES DRAWINGS



AVAILABLE COLOR



SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
25mm	0.60	**0.60**	**0.55**	**0.65**	**0.85**	0.95	**0.65**

** Calculated to ASTM C 423-01*

SUSPENSION SYSTEM

It consists of a stainless-steel screw eye hook dropping from the soffit that is fixed on the tiles through helicoidal rotation. Screw hook accessories are adjustable to suit different plenum heights. The Screw hook is designed to safely hold the tile weight of a floated ceiling.

Materials Classification

Stainless Steel 1.5mm screw diameter with breaking force of 2.10 KN with eye diameter of 12mm and total height of 40mm.

Product Specs

Suspension Rope with Cable Gripper & Hook 1.5mm wire diameter.

ASTM & Code Standards

Stainless Steel Wire: ASTM A 580/A 580M, Type 304, nonmagnetic. Design load requirements as per ASTM C635.



02

SKYNEST™ WOOD WOOL CANOPIES

SYSTEM SPECIFICATION

Skynest® Wood Wool Acoustical Ceiling meets the specifications in accordance with EN 13964.

Material Classification
Type: XIV
Pattern: L

Benefits
The panels are suitable for use in premises with a wide range of temperatures and air humidity and provide pleasing value. With original surface texture, there is an unlimited choice of colors. Due to the natural ingredients, the panels ensure a comfortable micro-climate, typical of premises constructed from wood.

Substrate and Surface Finish
Wood Wool substrate finished with factory applied paint finish

Wood Wool
1mm, 1.5mm, 3mm*

Panel Thickness
25mm

Edge Detail Trim
Square blade

Weight
1mm Wood Wool:
25mm: 10.5 kg/m²
1.5mm Wood Wool:
25mm: 9.8 kg/m²

Noise Reduction Coefficient [NRC]
[0.60] [0.65] [1.0]

Color
Natural, white, black, grey, or painted according to RAL color chart.

Reaction to Fire as per EN 13501-1
1mm Wood Wool: A2-s1, d0
1.5mm Wood Wool: B-s1, d0

Thermal conductivity
λ = 0.066 W/mK

Maintenance
Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with warm water and wipe surface

Additional Information

- USG Middle East's Skynest® Wood Wool Canopies are flat. However, they will exhibit an inherent deflection, which may be more apparent as the proximity to adjacent surfaces is reduced. This deflection should be no more than 5mm. Local environmental conditions may increase this variance.
- Panels must be ordered in multiples of two.
- Take care to minimize movement due to airflow within a space.
- Available in different shapes & configurations.

** 3mm Wood Wool are available upon request, refer to our technical department for more information*




Superfine
1 mm Wood Wool Strand Width



Fine
1.5 mm Wood Wool Strand Width




Regular
3 mm Wood Wool Strand Width

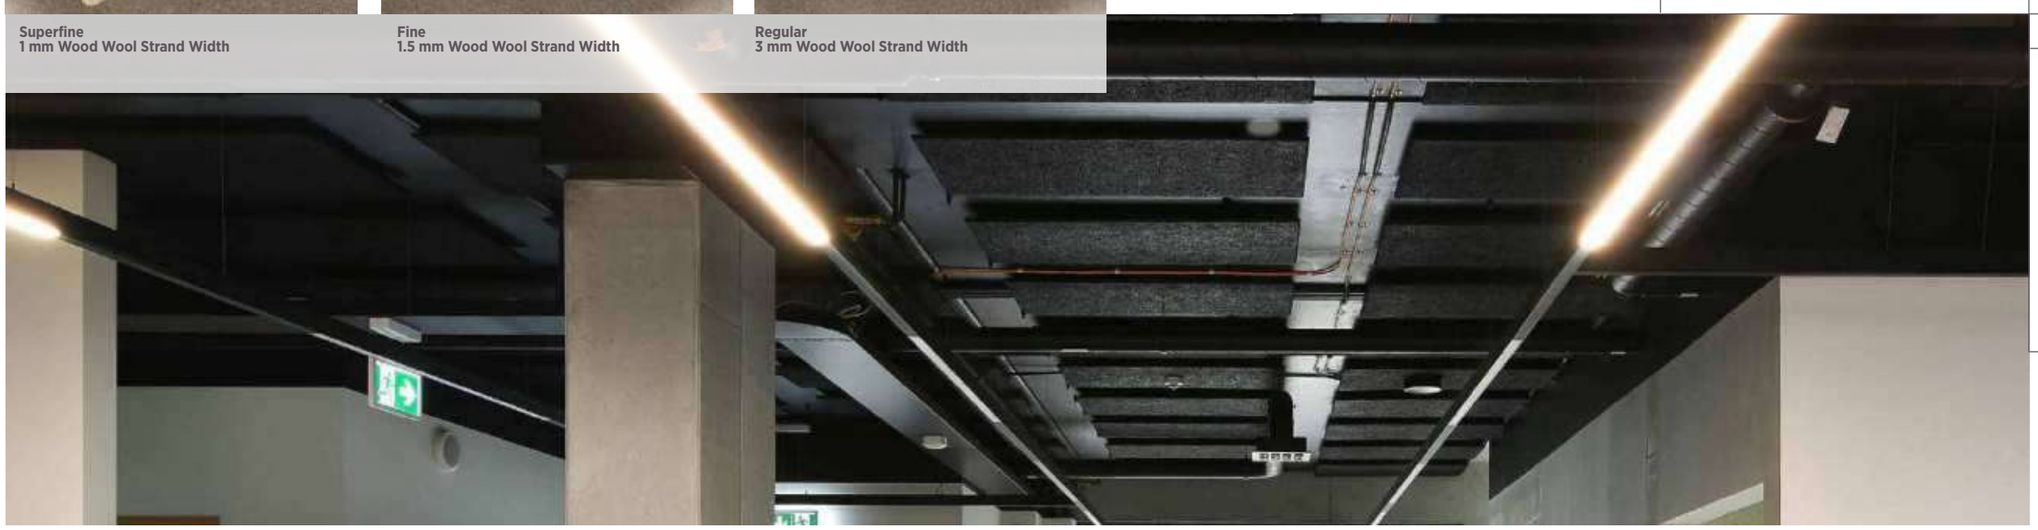


SYSTEMS CONFIGURATIONS*


Square

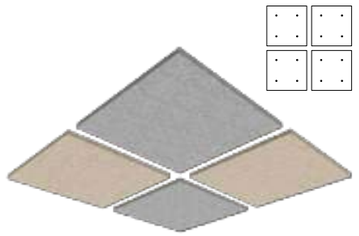


Parallelogram




Rectangle

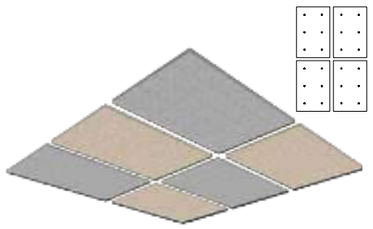


Trapezoid

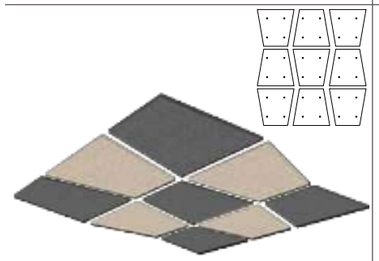


Hexagon

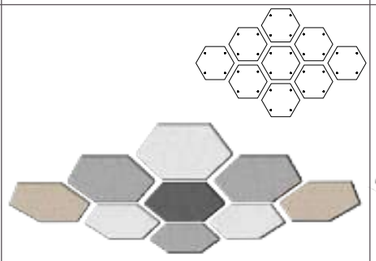


Triangle

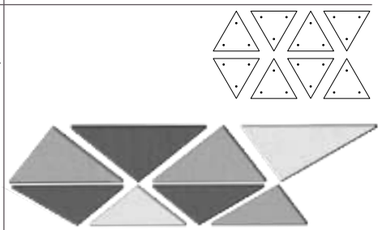


Concave

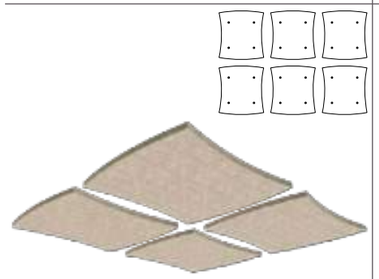


Convex

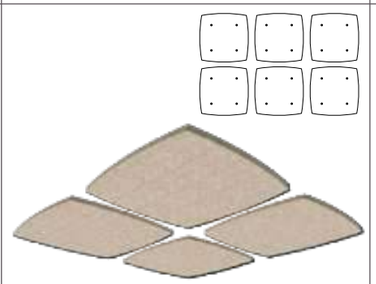

Circle

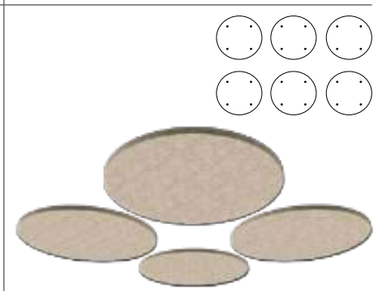

Trapezoid

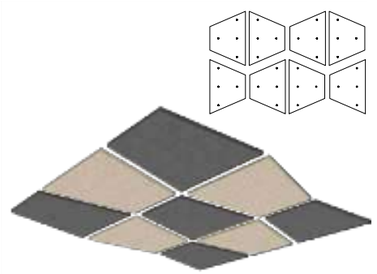


** Maximum width is 600mm. Refer to USG Middle East technical team for size limitation and suspension accessories. Other configurations are available upon request.*

03

SOFT FIBER

HALCYON™ CANOPIES

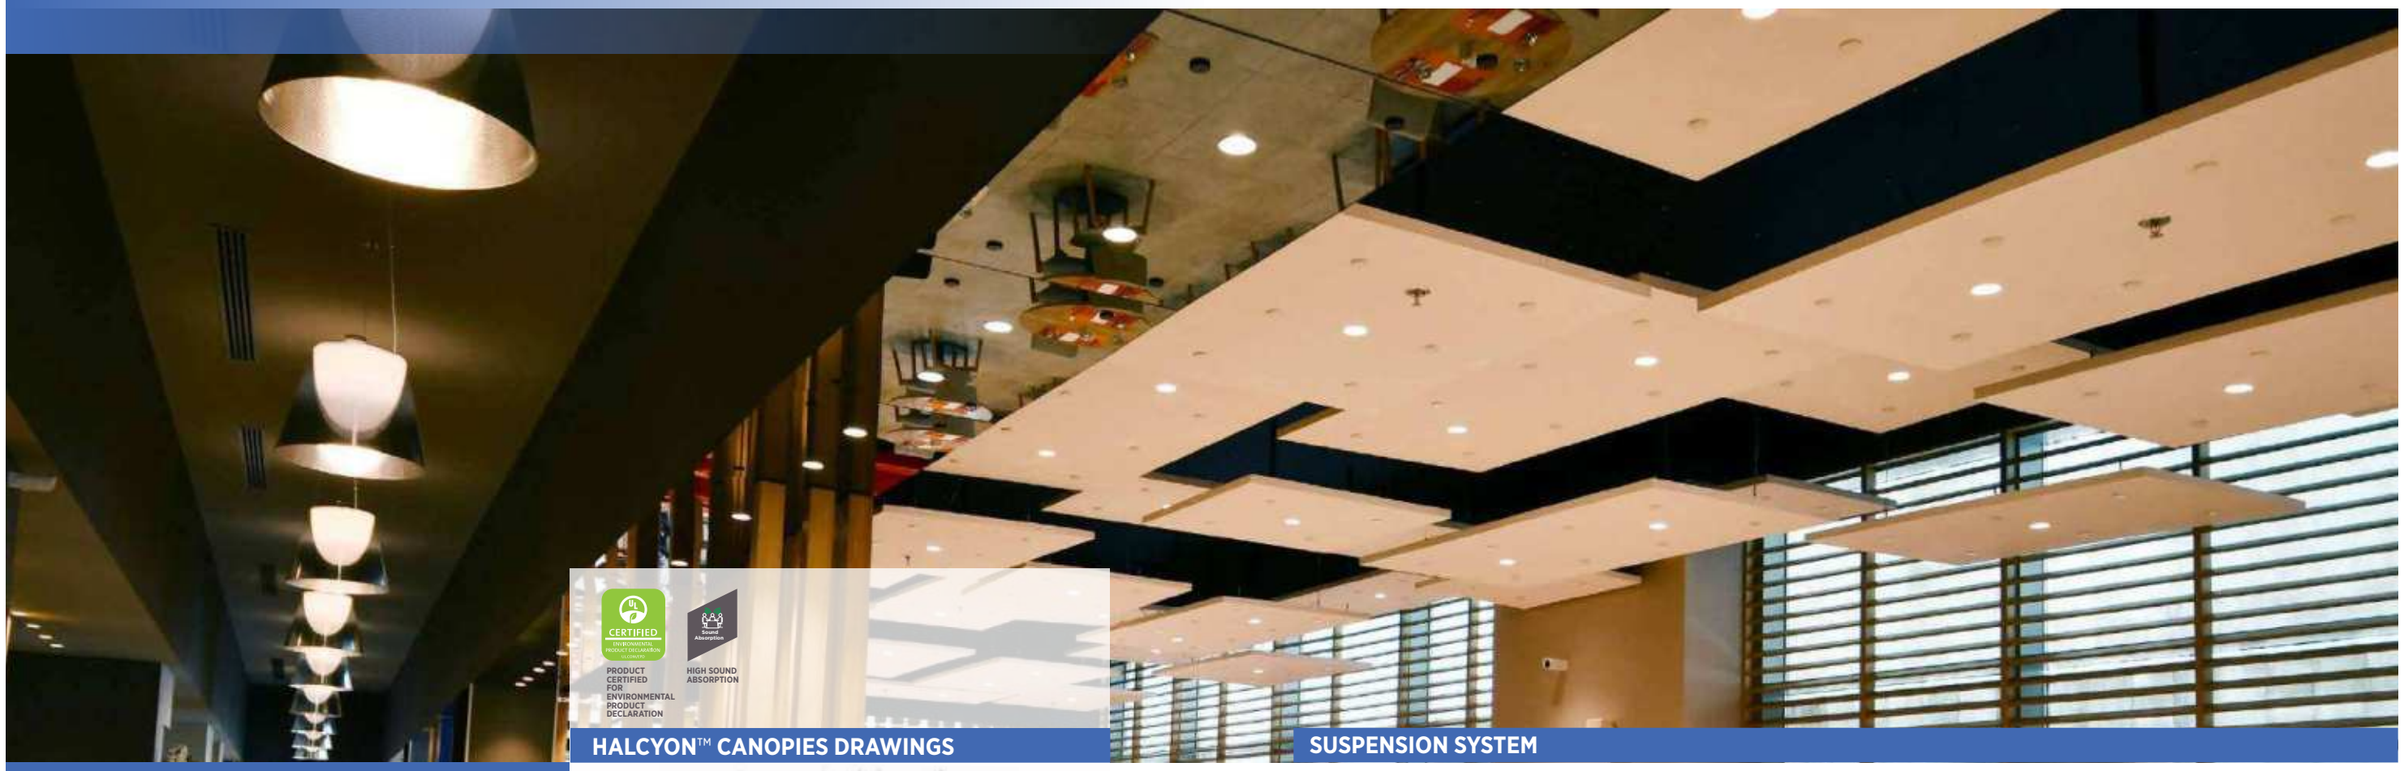

PRODUCT CERTIFIED FOR ENVIRONMENTAL PRODUCT DECLARATION

HIGH SOUND ABSORPTION

FEATURES AND BENEFITS

- Glasswool substrate with monolithic visual reduces installation time.
- Available in flat and curved system configurations.
- Exceptional Sound Absorption with NRC values up to 1.0.
- High Light Reflectance (LR-0.88) reduces light fixture and energy use.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Washable & scrubbable finish.
- Ideal for providing both visual accents and acoustical control.
- Easy to install.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold, and mildew.

APPLICATIONS


- Open-plenum areas
- Convention halls and concourses
- Reception and lobby areas
- Offices with indirect lighting
- Media rooms
- Libraries
- Restaurants
- Retail
- Hospitality

HALCYON™ CANOPIES DRAWINGS


FLAT SYSTEM



CURVED SYSTEM

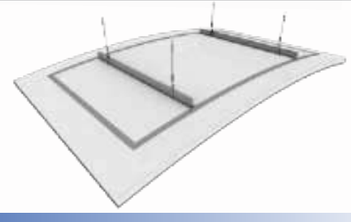

AVAILABLE COLOR



Explore the complete range of color options pages 172-173.

SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
40mm	0.60	**0.90**	**1.0**	**1.0**	**1.0**	1.0	**1.0**

* *Calculated to ASTM C 423-01*

SUSPENSION SYSTEM

It consists of a stainless-steel String dropping from the soffit and a Spiral Anchor (Spring) that is fixed on the tiles through helicoidal rotation. The String is adjustable to suit different plenum heights. The Spring is designed to safely hold the tile weight of a floated ceiling.

Materials Classification

Stainless Steel 1.5mm wire diameter with breaking force of 2.10 KN.

Product Specs

Suspension Rope with Cable Gripper & Hook dia 1.5mm.

Spiral Anchor

dia 38mm.

ASTM & Code Standards

Stainless Steel Wire: ASTM A 580/A 580M, Type 304, nonmagnetic. Design load requirements as per ASTM C635.



SYSTEM COMPONENTS




Canopy Panel



Spiral Hook dia 38mm




Cable Gripper with Hook and Wire Rope 1.5mm



Connecting Guiding Pin (optional)



(Option 2) Donn® Grid Suspension System



Main T Clip 25mm

SYSTEM SPECIFICATION

Halcyon™ Canopies Acoustical Ceiling meets the specifications in accordance with ASTM E1264.

Materials Classification
Type XII, Form 2,
Pattern E & G

Substrate and Surface Finish
Glasswool substrate laminated with factory applied painted fiberglass scrim and back fiberglass tissue

Thickness
Standard: 40mm, other thicknesses are available upon request

Panel Arrangements
Refer to the systems configurations table

Edge Detail Trim
Square encapsulated

Weight
40mm [5.6 kg/m²]

Noise Reduction Coefficient [NRC]
[1.0]

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth

Humidity Resistance
Maximum 99% RH / 40°C

Light Reflectance Coefficient [LR]
Based on the finish color, up to 0.88

Color
Standard White similar to RAL 9016.
Other colors are available upon request

Surface Burning Characteristics as per ASTM E84
Class A

EN 13501-1 Class of Reaction to Fire Performance
A2-s1,d0

Recycled Content
40%

Thermal Conductivity
λ = 0.034 W/m°K

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request













Maintenance
The panel can be cleaned easily with a soft brush or vacuum. To clean the panel, use a clean, white cloth. Use warm water or a mild detergent and wipe the panel surface.

Additional Information

- USG Middle East's Halcyon™ Canopies are flat. However, they will exhibit an inherent deflection, which may be more apparent as the proximity to adjacent surfaces is reduced. This deflection should be no more than 5mm. Local environmental conditions may increase this variance.
- Take care to minimize movement due to airflow within a space.
- Panels must be ordered in multiples of two.
- Custom sizes rather than the system configuration table. Shape and color options are available upon request. Consult USG Middle East technical team.



SYSTEMS CONFIGURATIONS*

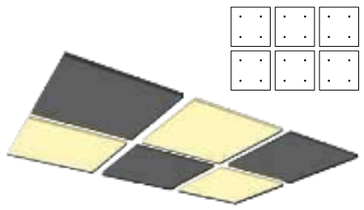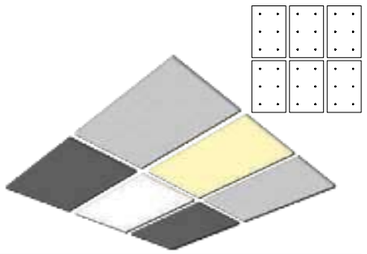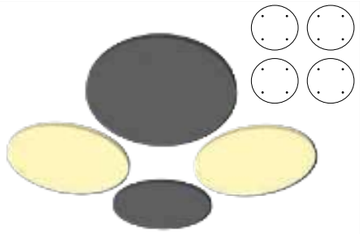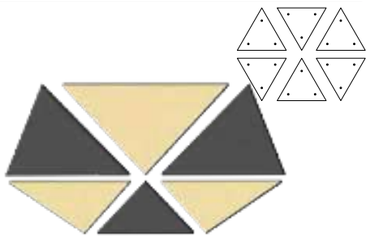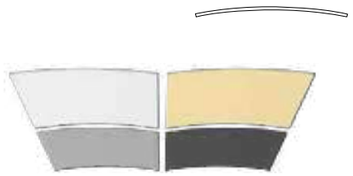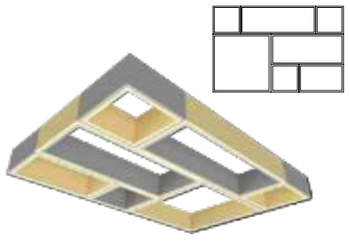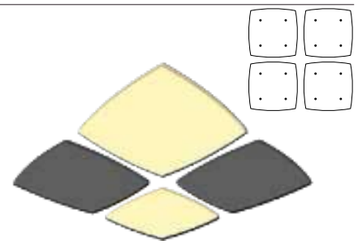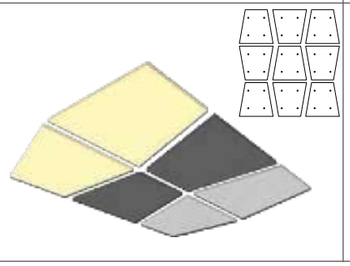Square	Parallelogram	Rectangle
		
Circle	Hexagon	Triangle
		
Arc Concave	Arc Convex	Cloud
		
Box	Curved Concave	Curved Convex
		
Trapezoid 1	Trapezoid 2	
		

** Refer to USG Middle East technical team for the size limitation and suspension accessories. Other shapes are available upon request.*



03

SEAMLESS SOUNDSCAPE

MONOLITHIC CEILINGS REDEFINING SOUND AND DESIGN

Create tranquil spaces with Monolithic Acoustical Ceilings by USG Middle East.

Uncover the Monolithic Acoustical Ceilings - an architectural design looks great and makes your space sound amazing. These ceilings don't just stand; they absorb sound, transforming spaces into calm retreats. With diverse options, architects can curate spaces that reflect their vision. But that's not all—we offer more than just ceilings. We provide a complete toolkit for delivering architecturally stunning and acoustically superior environments, from specialized jointing compounds to acoustical transparent finish options. Boost your designs with USG Middle East, where every detail resonates with style and acoustic finesse.

Il Primo Tower Dubai




ACOUSTICAL DRYWALL CEILING

1. MONOLITHIC ACOUSTICAL CEILING (MAC)-ENSEMBLE™ / PROJECT SHOWCASE

CEILINGS FEATURES

USG ME's Monolithic Acoustical Ceiling (MAC) - ENSEMBLE™ seamlessly mirrors plasterboard classy while delivering outstanding acoustical performance up to 0.90 NRC. Installation mimics standard plasterboard systems. Engineered from high-quality gypsum, MAC's ensures top-tier acoustics.

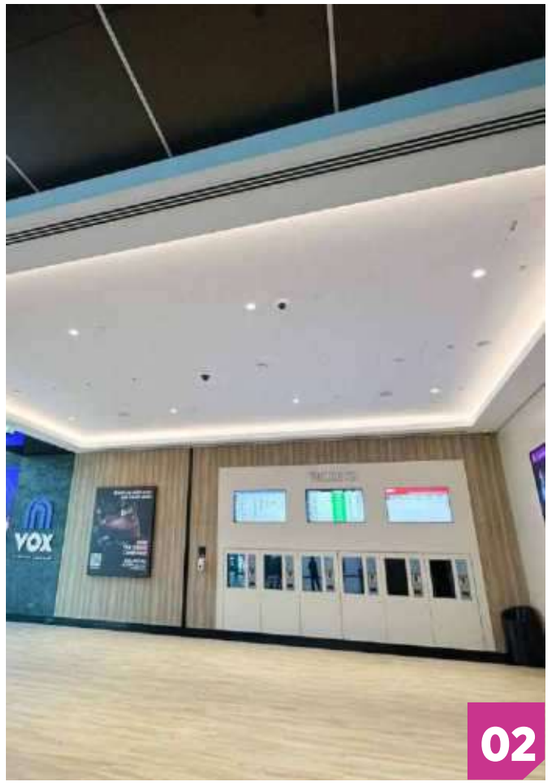

ACOUSTICAL DRYWALL CEILING

2. MONOSILENT MONOLITHIC ACOUSTICAL CEILING / PROJECT SHOWCASE

CEILING FEATURES

Monosilent Ceilings redefine acoustic excellence—lightweight, non-combustible, delivering high acoustic performance up to 0.95 NRC. This seamless ceiling system boasts an acoustical spray-applied paint finish, merging functionality with style for spaces that inspire tranquility and advance architectural appearance.

DRYWALL CEILING

MONOLITHIC ACOUSTICAL CEILING (MAC)-ENSEMBLE™



FEATURES AND BENEFITS

- Seamless plasterboard has a fine texture and actual acoustical performance of up to 0.90 NRC.
- Special acoustical perforated Monolithic Acoustical Ceiling (MAC) board to optimize sound performance.
- Class 1 surface burning as per BS 476, Part 7.
- Fire propagation index, I = 5.0 as per BS 476, Part 6.
- VOC <0.1 mg/m²/hr as per ASTM D5116.
- High light-reflective finish (LR-0.85 for white finish) reduces fixture & energy use.
- Acoustically transparent spray-applied finish.

APPLICATIONS

- Lobbies
- Commercial offices
- Atriums
- Museums
- Executive/board rooms
- Conference rooms
- Corridors

MAC CEILING DRAWINGS



AVAILABLE COLOR

White

Custom PANTONE® Color *

**Check with our technical team for lead time delivery*

MAC CEILING DESCRIPTION

USG ME Monolithic Acoustical Ceiling (MAC) offers a seamless plasterboard with a fine texture and acoustical performance of up to 0.90 NRC. Installation is similar to standard plasterboard and plasterboard suspension systems. USG ME Monolithic Acoustical Ceilings (MAC) are highly engineered and made of gypsum, performing like acoustical ceiling panels.




01

MONOLITHIC ACOUSTICAL CEILING (MAC)-ENSEMBLE™

SYSTEM COMPONENTS

- Monolithic Acoustical Ceiling (MAC) Board 12.5mm-thick, 1200mm-wide, and 2400mm in length, with tapered edges.
- USG ME Monosilent Compound.
- USG ME MAC Plaster Spray Applied Finish.
- 50mm-thick 40kg/m³ Stonewool or 90mm-thick 14kg/m³ glasswool.
- USG Middle East drywall ceiling suspension system.
- USG Middle East jointing and tape solution.

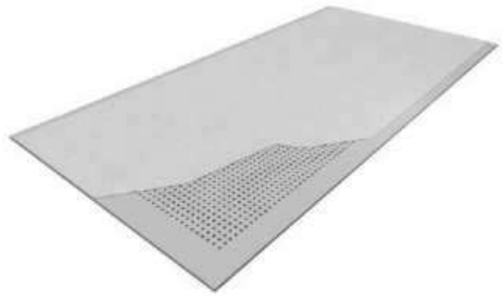

SYSTEM SPECIFICATION


		Monolithic Acoustical Ceiling (MAC)
Specification	**Weight**	≈ 9kg/m²
	Board Size	1200 x 2400 x 12.5mm
	Final Thickness	16mm
	Acoustic Rating*	Up to NRC 0.90
	Light Reflectance	0.85 for white finish
	Fire Hazard Properties	Fire propagation index, I = 5.0 (BS 476 Part 6) Surface spread of flame = Class 1 (BS 476 Part 7)
	Final Finish	MAC Plaster Spray Applied Finish Standard white or black. Other RAL colors are available upon request Seamless and spray-applied fine texture with low VOC-emitting material
	Framing	USG ME Suspension System
	Insulation	Glasswool 90mm-thick 14kg/m³ or Stonewool 50mm-thick 40kg/m³
	Fastener	25mm Type “S” Needle Point Screws
	Joint Tape	USG Sheetrock® Brand Paper Joint Tape
	Joint Compound	USG ME Monosilent Compound
Acoustic Performance**	**0.90 NRC**	Insulation: Stonewool 50mm thick, 40kg/m³ 100mm Suspension mounting from plenum
	0.90 NRC	Insulation: Glasswool 90mm thick, 14kg/m³ 100mm Suspension mounting from plenum
	0.70 NRC	No Insulation, 200mm Suspension mounting from plenum
	0.60 NRC	No Insulation, 400mm Suspension mounting from plenum

** NRC values for panels with factory applied acoustical backer*

*** Additional acoustical backer options available for enhanced total acoustics NRC and CAC performance*

LIMITATION

1. For interior ceilings only.
2. Not for use in areas subject to continuous high heat and/or humid conditions.
3. Not for use in plenums with differential pressure and not for use in return-air plenums.
4. Return air ducts shall be installed according to ASHRAE standards and guidelines.
5. In order to ensure installed performance, component substitutions are not permitted.

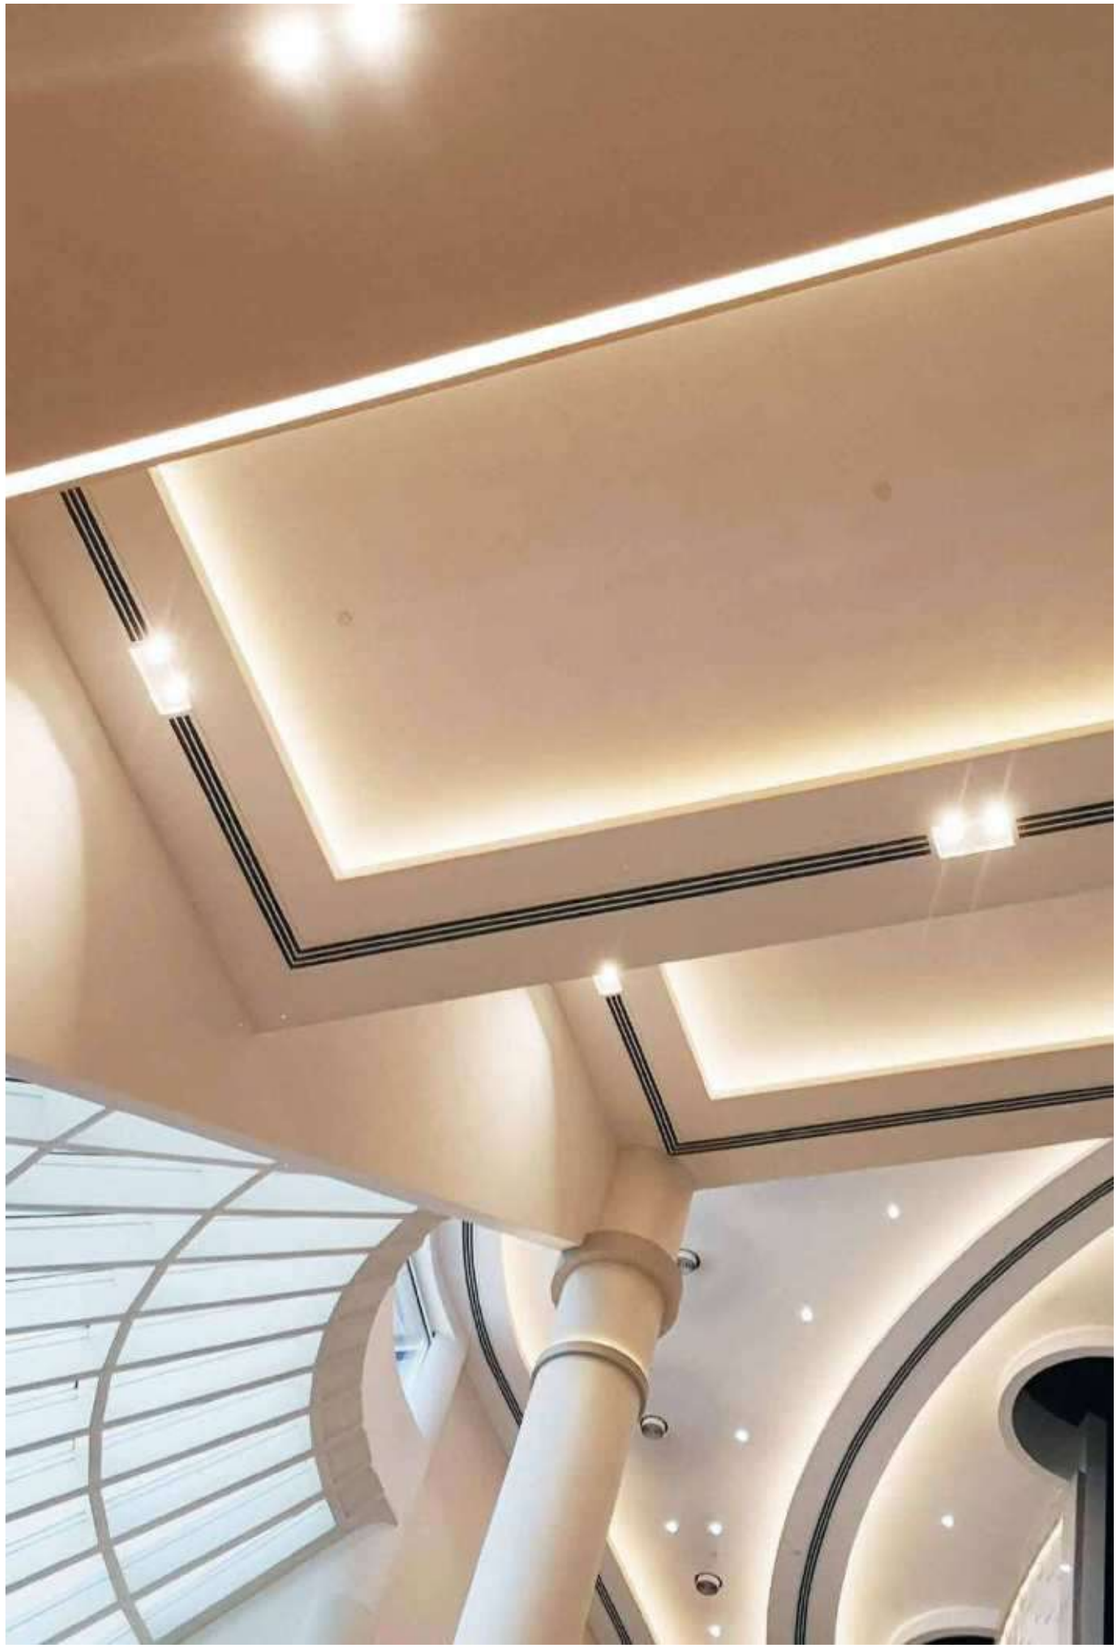

01

MONOLITHIC ACOUSTICAL CEILING (MAC)-ENSEMBLE™

PROJECT SHOWCASE


THE PALACE HOTEL - DUBAI


DEVELOPER
EMAAR PROPERTIES

CONTRACTOR
INNOVO GROUP

SUBCONTRACTOR
ROMEO INTERIORS

ARCHITECT
GODWIN AUSTEN JOHNSON

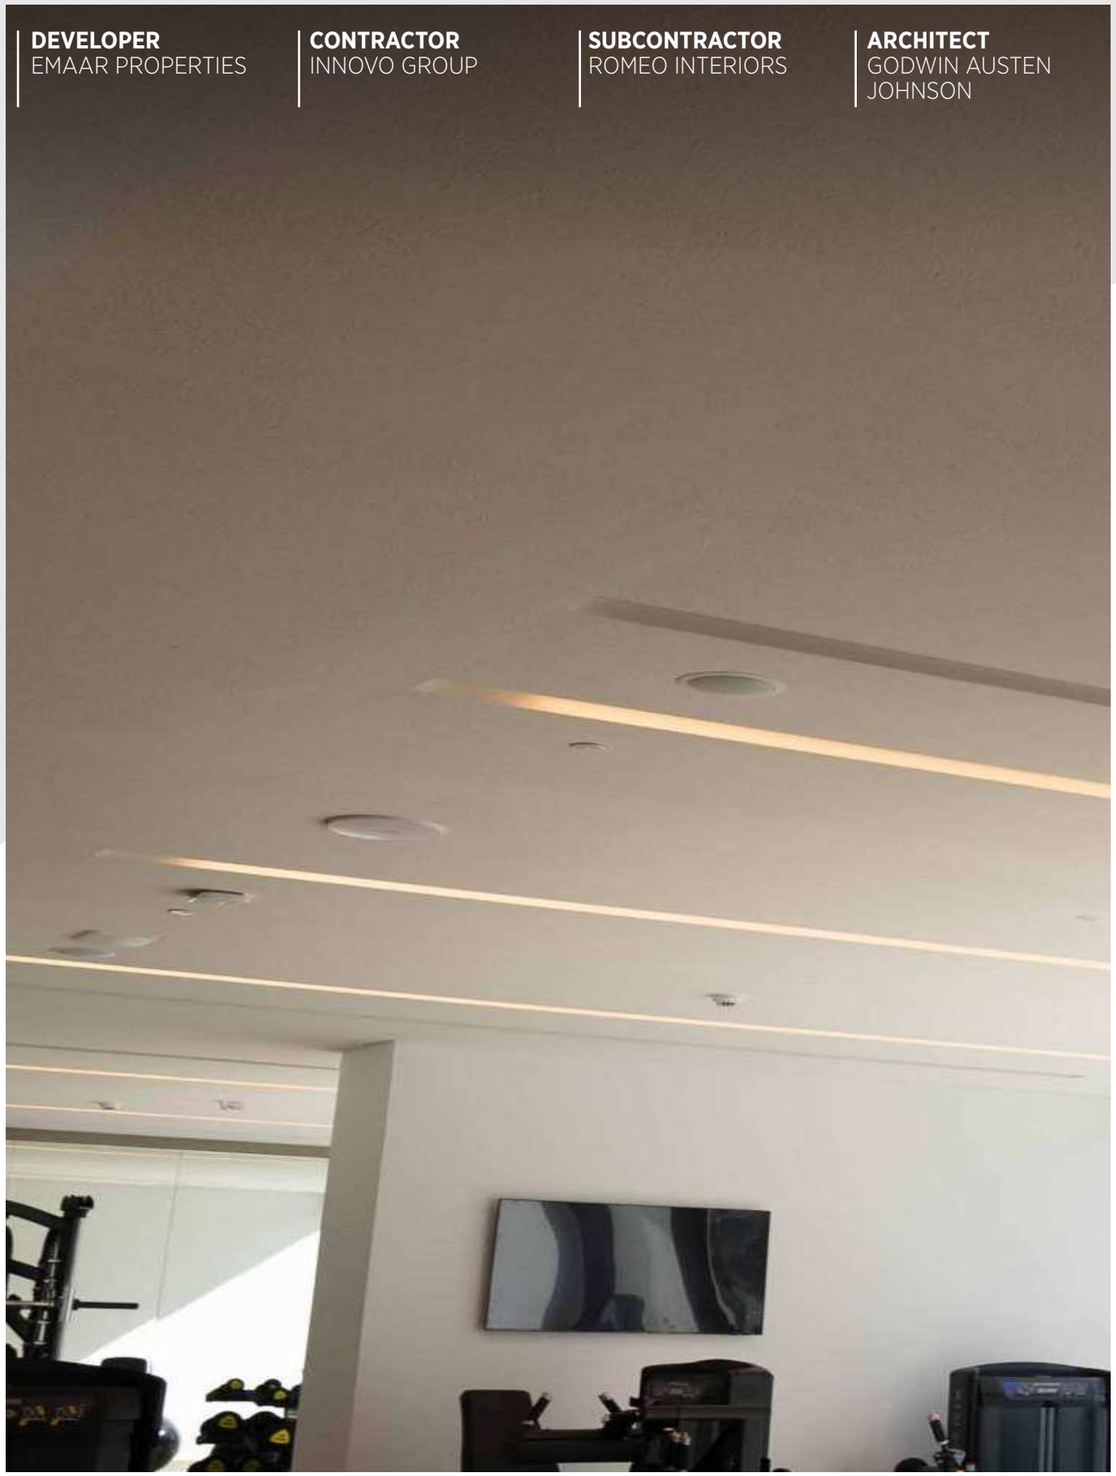

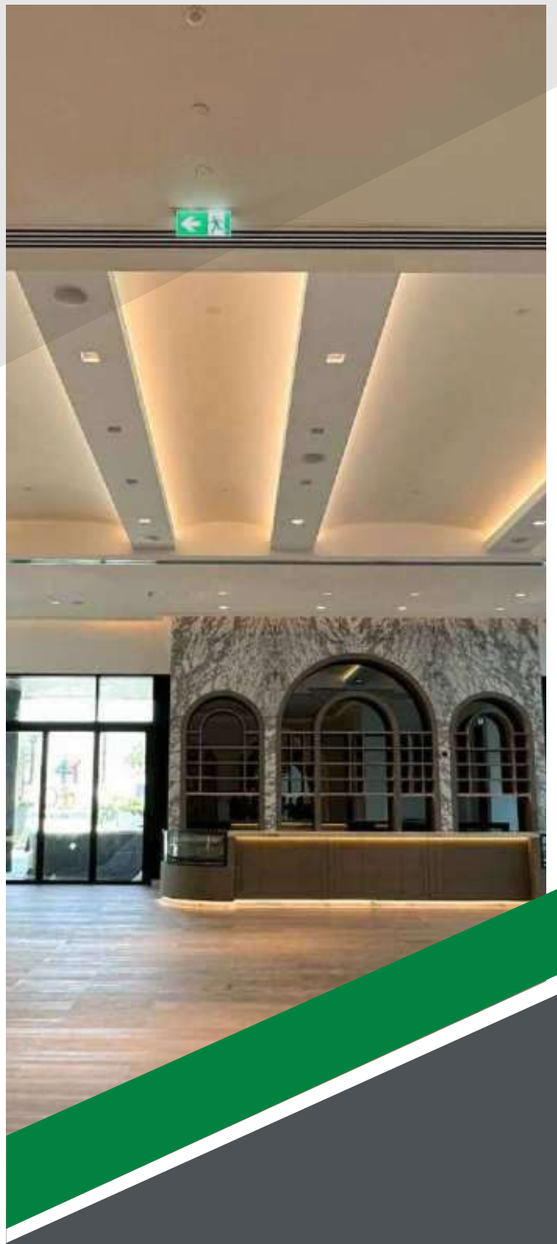



MONOLITHIC ACOUSTICAL CEILING (MAC) – ENSEMBLE®

MULTIWALL IMPACT BOARD

SHAFTWALL PARTITION SYSTEM

TWIN FRAME DRYWALL PARTITION SYSTEM

WALL LINING

SKYROCK® DRYWALL PARTITION AND DRYWALL CEILING

SOUNDBLOCK® GYPSUM CEILING TILES

Experience elevated everyday living at The Palace Hotel by Emaar Properties, an award-winning residence featuring branded canal-facing residence. Situated on the Creek Promenade, residents relish seamless access to 5-star services and world-class amenities.

USG Middle East is proud to have contributed to this prestigious project by supplying a comprehensive range of high-quality finished systems, including Multiwall Impact Board, Monolithic Acoustical Ceiling (MAC) – Ensemble®, Shaftwall Partition System, Twin Framing Drywall, Wall Lining, Skyrock® Drywall Partitions and Drywall Ceilings, along with Shades Gypsum Ceiling Tiles, enhancing both form and function in this architectural masterpiece.

DRYWALL CEILING

MONOSILENT MONOLITHIC ACOUSTICAL CEILING



HIGH SOUND ABSORPTION

CEILING ATTENUATION CLASS


FEATURES AND BENEFITS

- Seamless drywall ceiling system look with an acoustic performance of up to 0.95 NRC and 43 CAC.
- Class A fire rating.
- Class 1 surface burning as per BS 476, Part 7.
- High light-reflective finish (LR-0.85 for white finish) reduces fixture & energy use.
- Acoustically transparent spray-applied finish.
- Rate 10: resistant to mold growth as per ASTM D3273.
- Ideal for renovation when low room reverberation time is desired.

APPLICATIONS

- Lobbies
- Commercial offices
- Atriums
- Museums
- Executive/board rooms
- Conference rooms
- Corridors

MONOSILENT CEILING DRAWINGS

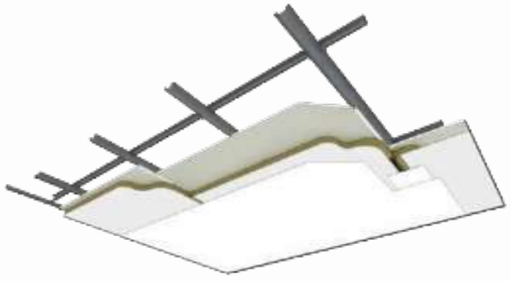

AVAILABLE COLOR


White

Custom PANTONE® Color *

**Check with our technical team for lead time delivery*

MONOSILENT CEILING DESCRIPTION

Lightweight, non-combustible, high acoustic, seamless ceiling system finished with acoustical spray applied paint finish.

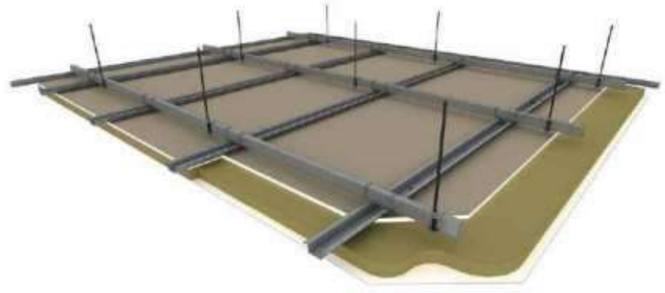



02

MONOSILENT MONOLITHIC ACOUSTICAL PLASTERBOARD CEILING

SYSTEM COMPONENTS

LINING




50mm board (NRC 0.95)




38mm board (NRC 0.75)

FRAMING

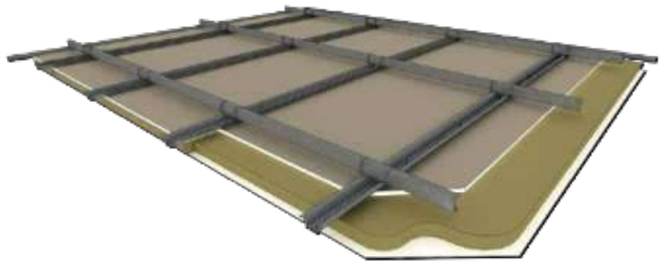

SYSTEM SPECIFICATION

	Monosilent	
Application	Lobbies, Commercial offices, Atriums, Museums, Executive/Board Rooms, Conference Rooms, Corridors	
Total Weight	15kg/m²	
Board Size	600 x 1200mm	
Acoustic Performance	Up to: NRC 0.95 and CAC 43dB	
Substrate	25mm or 38mm glasswool substrate attached to 12.5mm gypsum board on the rear side	
Light Reflectance	0.85 for white finish	
Fire Rated	Class A	
Surface Finish	White, seamless, spray-applied fine texture with low VOC-emitting material. Custom finishes are available upon request	
Specification	**Framing**	USG Middle East Primary Channel USG Middle East Furring Channel USG Middle East Connecting clip USG Middle East Primary C Bracket USG Middle East Suspension System
	Lining	USG Middle East gypsum board 12.5mm thick panel
	Insulation	25mm or 38mm glasswool 120kg/m³
	Joint Tape	Paper Tape or Fiberglass mesh tape 50mm width
	Joint Compound	USG ME Monosilent Compound
	Final Finish	USG ME Monosilent Spray-Applied Finish
Warranty	To ensure the performance of this system meets USG ME's Warranty requirements, USG ME products are to be used and installed only in accordance with our specifications and recommendations.	

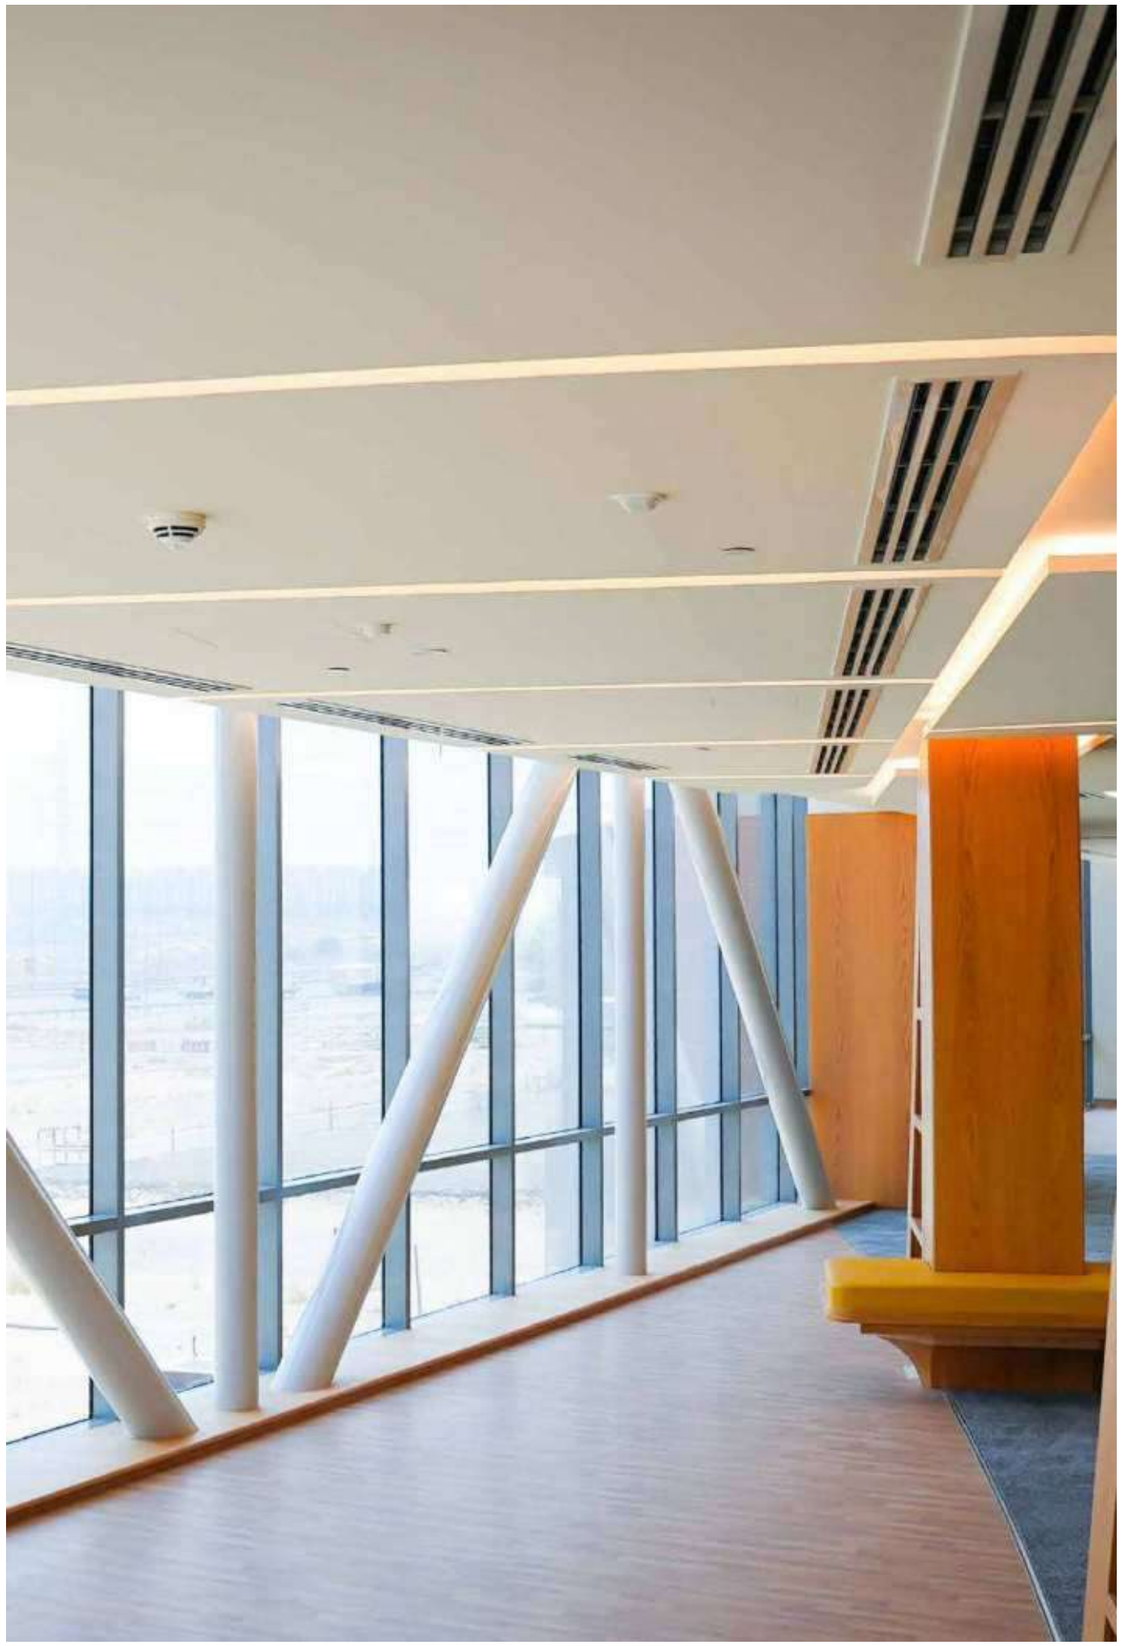

02

MONOSILENT MONOLITHIC
ACOUSTICAL PLASTERBOARD CEILING

PROJECT SHOWCASE
CAFE BATEEL - DUBAI

DEVELOPER
CAFE BATEEL







MONOSILENT MONOLITHIC ACOUSTICAL CEILING

In the bustling Dubai Hills Mall, Café Bateel, a high-traffic restaurant, sought to create a tranquil dining atmosphere.

They turned to our Monosilent Monolithic Acoustical Ceiling to tackle noise concerns. This choice not only absorbed disruptive sounds but also added to the cafe's ambiance. To further enhance the aesthetic, we expertly applied a dark grey acoustical spray, elevating both form and function in perfect harmony. Café Bateel's journey with our Monosilent solution transformed a noisy space into an oasis of serenity, offering patrons an exceptional dining experience amidst the mall's vibrant activity.



LIGHTER, STRONGER, SMOOTHER
FOR MONOLITHIC ACOUSTICAL CEILINGS

MONOSILENT COMPOUND: Unleash Flexibility and Excellence in Monolithic Acoustical Ceilings Panel Joints! The superior choice for high-performance, low-shrinkage compound. Elevate your Monolithic Acoustical Ceiling with effortless application and a flawless finish.

MONOSILENT SPRAY-APPLIED FINISH: Acoustic Innovation Meets Excellence. Discover LR-85% Light Reflectance and Effortless Application! Designed especially for the Monosilent Monolithic Acoustical Ceiling.

www.usgme.com

USG ME
INNOVATIVE SOLUTIONS. EVERYTIME.



ENHANCE YOUR CEILING WITH FINE-TEXTURED EXCELLENCE!
MAC PLASTER SPRAY APPLIED FINISH

Experience the future of ceiling finishes with MAC Plaster Spray Applied Finish by USG ME. This fine-textured, acoustically transparent solution boasts cutting-edge technology for a stunning LR-85% light reflectance. Lightweight, quick-drying, and easy to apply with pneumatic spray equipment, it transforms Monolithic Acoustical Ceiling (MAC)-Ensemble™ .

www.usgme.com

WELLNESS CEILING:

HEALING HORIZONS: THE HEALTHCARE HAVEN ABOVE



04

USG ME: PIONEERING HEALTHIER SPACES BY OFFERING HEALTHCARE CEILING FOR CLEAN, COMFORTABLE, AND HEALING ENVIRONMENTS.

USG Middle East's ceiling panels in healthcare facilities set a new standard, aligning with the most stringent international health guidelines. Our Antibacterial and Antimicrobial coatings fortify spaces against harmful microbes, preventing stains, bad odors, and material degradation. Achieving Clean Room ISO 4 and ISO 5 classifications per ISO 14644-1, our panels uphold the highest cleanliness standards. Responding to project needs, we offer water-absorbent layers for up to 2 hours, ensuring durability and protection. Aligned with the FGI:2018, our selected ceiling systems follow the latest healthcare design requirements. Furthermore, our panels boast a top rating of 10 on the ASTM D3273 scale for mold prevention, solidifying their commitment to fostering healthy, hygienic environments.



01



02

SOFT FIBER

1. HALCYON™ HEALTHCARE
2. LOUNA™ HYGIENE

MINERAL FIBER

3. CLEAN ROOM™
4. SONATA HEALTHCARE
5. SKYLITE CLEAN
6. TAIGA HYGIENE



03



04




05



06



07

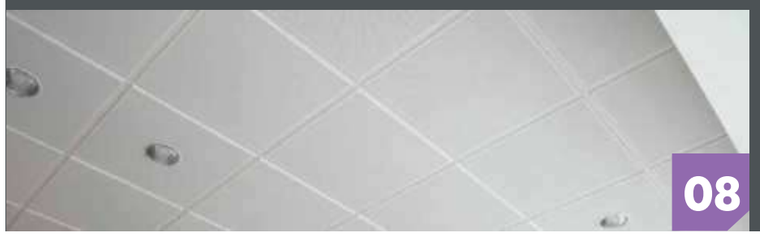

08

METAL CEILING

7. CLIP-IN METAL CEILING
8. LAY-IN METAL CEILING

01

SOFT FIBER

HALCYON™ HEALTHCARE



FEATURES AND BENEFITS

- Halcyon™ Healthcare is ISO 3 according to the ISO 14644-1: 2015 norm.
- Glasswool substrate with a water-repellent facing membrane designed to be durable and safe with common disinfectants.
- Elegant and refined acoustical facing and high-performance mineral fleece membrane on the backside.
- Exceptional sound absorption with NRC values up to 1.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- High light reflectance (LR-0.88) reduces light fixture & energy use.
- Using a CE grid for hospitals in high-humidity or wet-cleaned areas is recommended.
- Washable & scrubbable finish.
- Impact & scratch-resistant.
- Available in plank sizes compatible with Logix™ integrated ceiling system.

APPLICATIONS AS PER 2018 FGI GUIDELINES

- Class 1 MRI & imaging rooms
- Laboratories
- Laundry areas
- ICU / NICU

AVAILABLE COLOR

White

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
19mm	0.50	**0.90**	**1.0**	**0.90**	**0.95**	0.90	**0.95**
19mm Concealed	0.65	**0.85**	**0.80**	**0.95**	**1.0**	1.0	**0.95**
25mm	0.40	**0.90**	**1.0**	**0.95**	**1.0**	1.0	**1.0**
25mm Concealed	0.75	**0.85**	**0.85**	**1.0**	**1.0**	1.0	**1.0**
38mm	0.60	**0.90**	**1.0**	**1.0**	**1.0**	1.0	**1.0**

** Calculated to ASTM C 423-01*

SPECIFICATIONS DETAILS

Halcyon™ Healthcare Acoustical Ceiling meets specifications in accordance with ASTM E1264.

Materials Classification
Type: XII,
Form: 2,
Pattern: E, G

Substrate and Surface Finish
Glasswool substrate laminated with factory applied painted fiberglass scrim and water repellent membrane, and back fiberglass tissue

Water Absorbance
Repellency membrane that resists mild water drippage for up to 2 hrs

Thickness
19mm, 25mm, 38mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square, Reveal [SL, FL]
Concealed [D-BESK, S-BESK, BESK]

Weight
Square
19mm [1.85 kg/m^2],
25mm [2.4 kg/m^2],
38mm [4.37 kg/m^2]
Reveal [SL, FL]
19mm [2.2 kg/m^2],
25mm [2.87 kg/m^2]
Concealed [D-BESK, S-BESK, BESK]
19mm [2.75 kg/m^2],
25mm [3.62 kg/m^2]

Noise Reduction Coefficient [NRC]
[0.95] [1.0]

Ceiling Attenuation Class [CAC]
[24 - 31 dB]

Clean Room Classification as per ISO 14644-1
ISO 3

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth

Humidity Resistance
Maximum 99% RH / 40°C

Light Reflectance Coefficient [LR]
0.88

Color
Standard White

Surface Burning Characteristics as per ASTM E84
Class A

EN 13501-1 Class of Reaction to Fire Performance
A2-s1,d0

Thermal Conductivity
λ = 0.034 W/m°K

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6| IEQ Credit 8.1 | IEQ Credit 9








01


HALCYON™ HEALTHCARE

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating*	Recycled Content	VOC Emission	Cost
			NRC	CAC						$
SQ	HC669-HC HC229-HC	600*600*19 610*610*19	0.95	24	88%		Class A	40%	N/A	$$$$
	HC629-HC HC249-HC	600*1200*19 610*1220*19	0.95	24	88%		Class A	40%	N/A	$$$$
	HC6625-HC HC2225-HC	600*600*25 610*610*25	1.0	25	88%		Class A	40%	N/A	$$$$
	HC6225-HC HC2425-HC	600*1200*25 610*1220*25	1.0	25	88%		Class A	40%	N/A	$$$$
	HC6638-HC HC2238-HC	600*600*38 610*610*38	1.0	31	88%		Class A	40%	N/A	$$$$
	HC6238-HC HC2238-HC	600*1220*38 610*1220*38	1.0	31	88%		Class A	40%	N/A	$$$$
FL	HCRF6625-HC HCRF2225-HC	600*600*25 610*610*25	1.0	28	88%		Class A	40%	N/A	$$$$
	HCRF6225-HC HCRF2425-HC	600*1200*25 610*1220*25	1.0	28	88%		Class A	40%	N/A	$$$$
SL	HCR6625-HC HCR2225-HC	600*600*25 610*610*25	1.0	28	88%		Class A	40%	N/A	$$$$
	HCR6225-HC HCR2425-HC	600*1200*25 610*1220*25	1.0	28	88%		Class A	40%	N/A	$$$$
D-BESK**	HCRFDC669-HC	600*600*19	0.95	28	88%		Class A	40%	N/A	$$$$$
	HCRFDC6625-HC	600*600*25	1.0	30	88%		Class A	40%	N/A	$$$$$
S-BESK	HCDSC6625-HC	600*600*25	1.0	30	88%		Class A	40%	N/A	$$$$$
BESK**	HCFC669-HC	600*600*19	0.95	28	88%		Class A	40%	N/A	$$$$$
	HCFC6625-HC	600*600*25	1.0	30	88%		Class A	40%	N/A	$$$$$


GRID PROFILE OPTIONS

DX/DXL SQ Edge	CE SQ Edge	DXLT SQ Edge	DXT FL Edge	DXF FL Edge	DXI FL Edge	DX/DXL SL Edge
						

DX/DXL D-BESK Edge	DX/DXL S-BESK Edge	DX/DXL BESK Edge
		

*To ASTM E84

**Additional concealed panels configurations are available on special order: 600 x 1200, 600 x 1500, 600 x 1800 and 600 x 2400

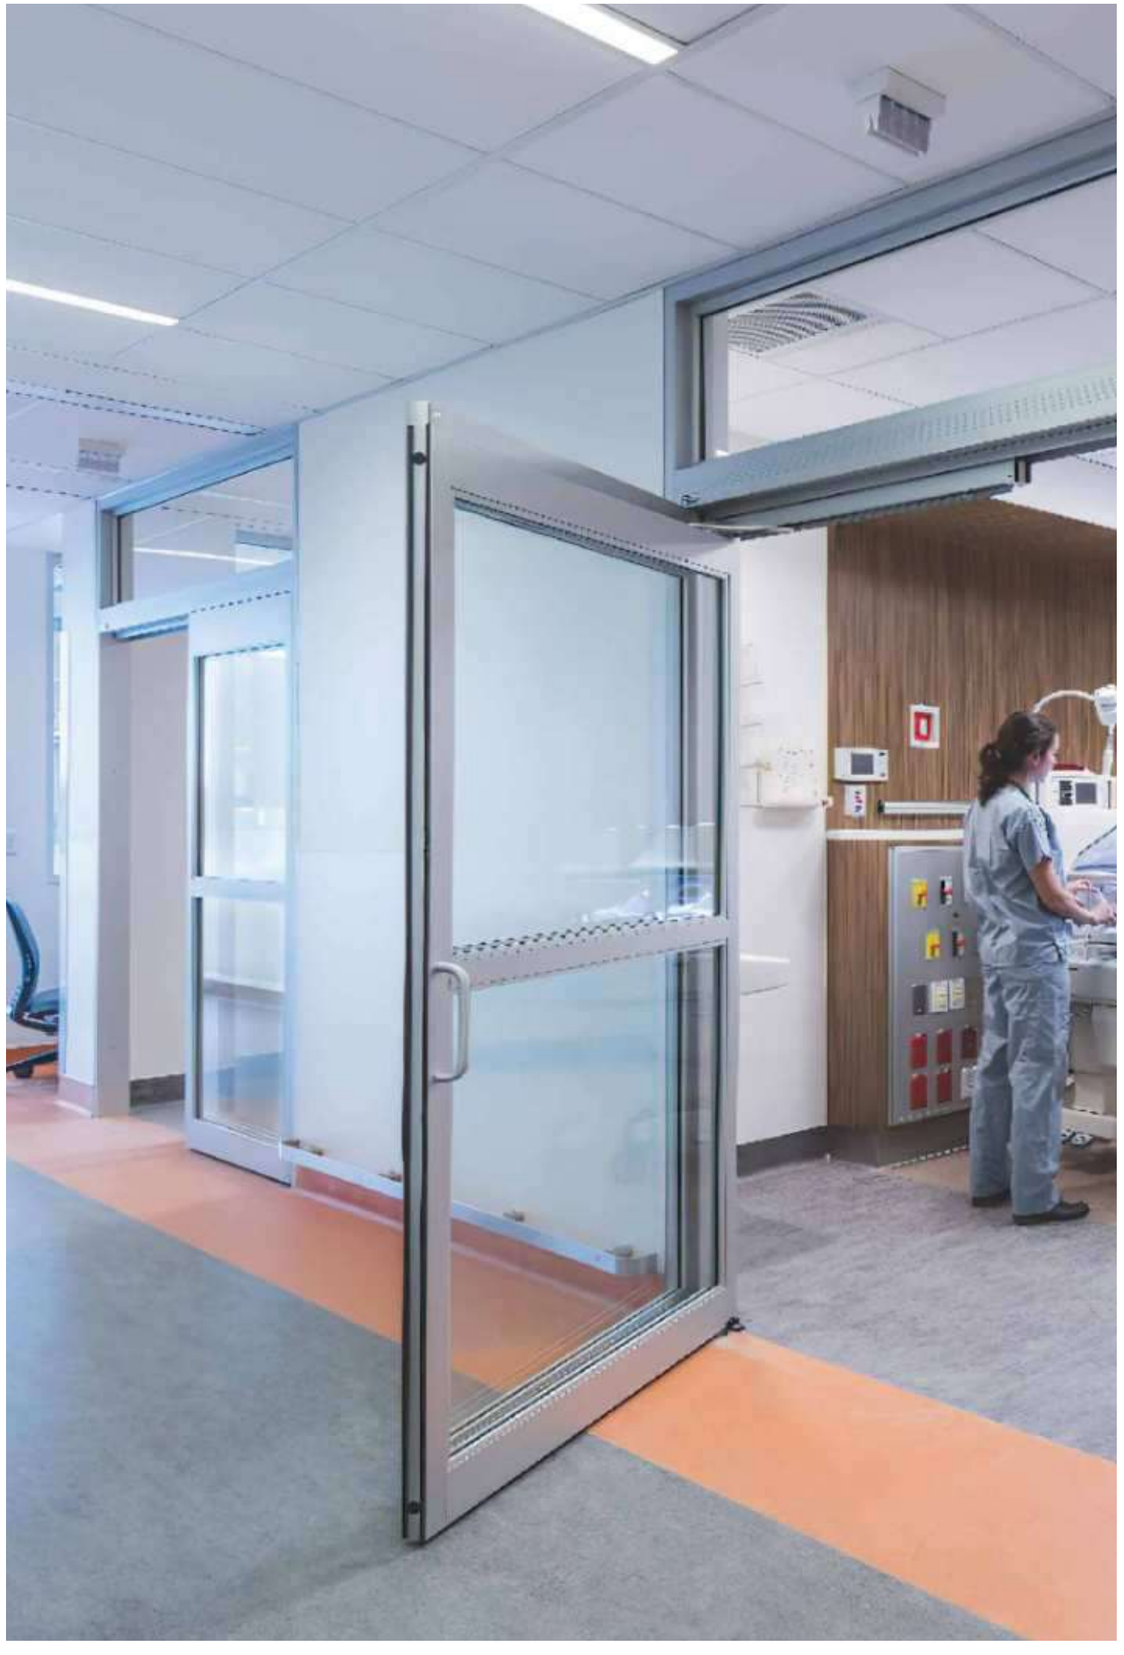

02

SOFT FIBER

LOUNA™ HYGIENE



FEATURES AND BENEFITS

- Louna™ Hygiene is ISO 4 according to the ISO 14644-1: 2015 norm.
- A superb ceiling panel made of stonewool substrate with a water-repellent facing membrane is designed to be durable and safe with standard disinfectants and sealed edges.
- Elegant and refined acoustical facing and high-performance mineral fleece membrane on the backside.
- For healthcare facilities, this option provides an excellent combination of noise reduction (up to NRC-0.95) and sound attenuation (up to CAC-39) to improve patient recovery.
- High light reflectance (LR-0.88) reduces wear and tear on light fixtures and energy use.
- Using an AX grid for hospitals in high-humidity or wet-cleaned areas is recommended.
- Washable & scrubbable finish. Impact & scratch-resistant.
- Available in plank sizes compatible with Logix™ system.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.

APPLICATIONS AS PER 2018 FGI GUIDELINES

- Class 1 MRI & imaging rooms
- Laboratories
- Laundry areas
- Lobbies
- ICU / NICU
- Pharmacies
- Waiting areas
- Ware washing

AVAILABLE COLOR

White

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
19mm	0.60	**0.85**	**0.85**	**0.95**	**1.0**	1.0	**0.90**
19mm-R**	0.55	**0.80**	**0.75**	**0.90**	**1.0**	1.0	**0.85**
25mm	0.65	**0.95**	**0.90**	**1.0**	**1.0**	1.0	**0.95**
25mm-R**	0.60	**0.80**	**0.80**	**1.0**	**1.0**	1.0	**0.90**
25mm-AF***	0.40	**0.70**	**0.85**	**1.0**	**1.0**	1.0	**0.90**
38mm-AF***	0.45	**0.65**	**0.80**	**0.95**	**0.95**	0.95	**0.85**

* *Calculated to ASTM C 423-01*
** *Reveal Edge*
*** *Aluminium Foil*

SPECIFICATIONS DETAILS

Louna™ Hygiene Acoustical Ceiling meets specifications in accordance with ASTM E1264.

Materials Classification
Type: XX,
Pattern: G

Substrate and Surface Finish
Stonewool substrate laminated with prepainted fiberglass scrim with sealed edges and water repellent membrane and back fiberglass tissue

Water Absorbance
Repellency membrane that resists mild water drippage for up to 2 hrs

Thickness
19mm, 25mm, 38mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm, 300 x 1200mm, 305 x 1220mm

Edge Detail Trim
Square, Reveal [SL, FL]
Concealed [D-BESK, S-BESK, BESK]

Weight
Square:
19mm: 2 kg/m²
25mm: 2.6 kg/m²
38mm: 4 kg/m²
Reveal [SL, FL]:
19mm: 2.75 kg/m²
25mm: 3.6 kg/m²
Concealed [D-BESK, S-BESK, BESK]:
19mm: 3.5 kg/m²
25mm: 4.6 kg/m²

Noise Reduction Coefficient [NRC]
[0.85] [0.90] [0.95]

Ceiling Attenuation Class [CAC]
[25 - 39 dB]

Clean Room Classification as per ISO 14644-1
ISO 4

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth

VOC Class
Greenguard & Greenguard Gold

Humidity Resistance
Maximum 99% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.88

Color
Standard White

Surface Burning Characteristics as per ASTM E84
Class A

EN 13501-1 Class of Reaction to Fire Performance
A1

Thermal Conductivity
λ = 0.036 W/m°K

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9








TABLE OF PERFORMANCE




Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating**	Recycled Content	VOC Emission	Cost
SQ	LC669H LC229H	600*600*19 610*610*19	0.90	25	88%		Class A	47%	N/A	$$$
	LC6625H LC2225H	600*600*25 610*610*25	0.95	26	88%		Class A	47%	N/A	$$$
	LC3225H LC1425H	300*1200*25 305*1220*25	0.90	26	88%		Class A	47%	N/A	$$$$
	LC6625-AFH* LC2225-AFH*	600*600*25 610*610*25	0.90	35	88%		Class A	47%	N/A	$$$$
	LC6638-AFH* LC2238-AFH*	600*600*38 610*610*38	0.85	39	88%		Class A	47%	N/A	$$$$
SL	LCR669H LCR229H	600*600*19 610*610*19	0.85	27	88%		Class A	47%	N/A	$$$$
	LCR6625H LCR2225H	600*600*25 610*610*25	0.90	28	88%		Class A	47%	N/A	$$$$
	LCR3225H LCR1425H	300*1200*25 305*1220*25	0.90	28	88%		Class A	47%	N/A	$$$$
	LCR6225H LCR2425H	600*1200*25 610*1220*25	0.90	28	88%		Class A	47%	N/A	$$$$
FL	LCRF669H LCRF229H	600*600*19 610*610*19	0.85	27	88%		Class A	47%	N/A	$$$$
	LCRF6625H LCRF2225H	600*600*25 610*610*25	0.90	28	88%		Class A	47%	N/A	$$$$
	LCRF6225H LCRF2425H	600*1200*25 610*1220*25	0.90	28	88%		Class A	47%	N/A	$$$$
	LCRF3225H LCRF1425H	300*1200*25 305*1220*25	0.90	28	88%		Class A	47%	N/A	$$$$
D-BESK	LCRFDC669H	600*600*19	0.85	28	88%		Class A	47%	N/A	$$$$$
	LCRFDC6625H	600*600*25	0.90	29	88%		Class A	47%	N/A	$$$$$
S-BESK	LCDSC6625H	600*600*25	0.90	29	88%		Class A	47%	N/A	$$$$$
BESK	LCFC669H	600*600*19	0.85	28	88%		Class A	47%	N/A	$$$$$
	LCFC225H	600*600*25	0.90	29	88%		Class A	47%	N/A	$$$$$


*Aluminium Foil
** To ASTM E84

Low Emissions (VOC)
Third party (GREENGUARD & GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXLT SQ Edge	AXCE SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge	DXI FL Edge
						

DX/DXL D-BESK	DX/DXL S-BESK	DX/DXL BESK Edge
		

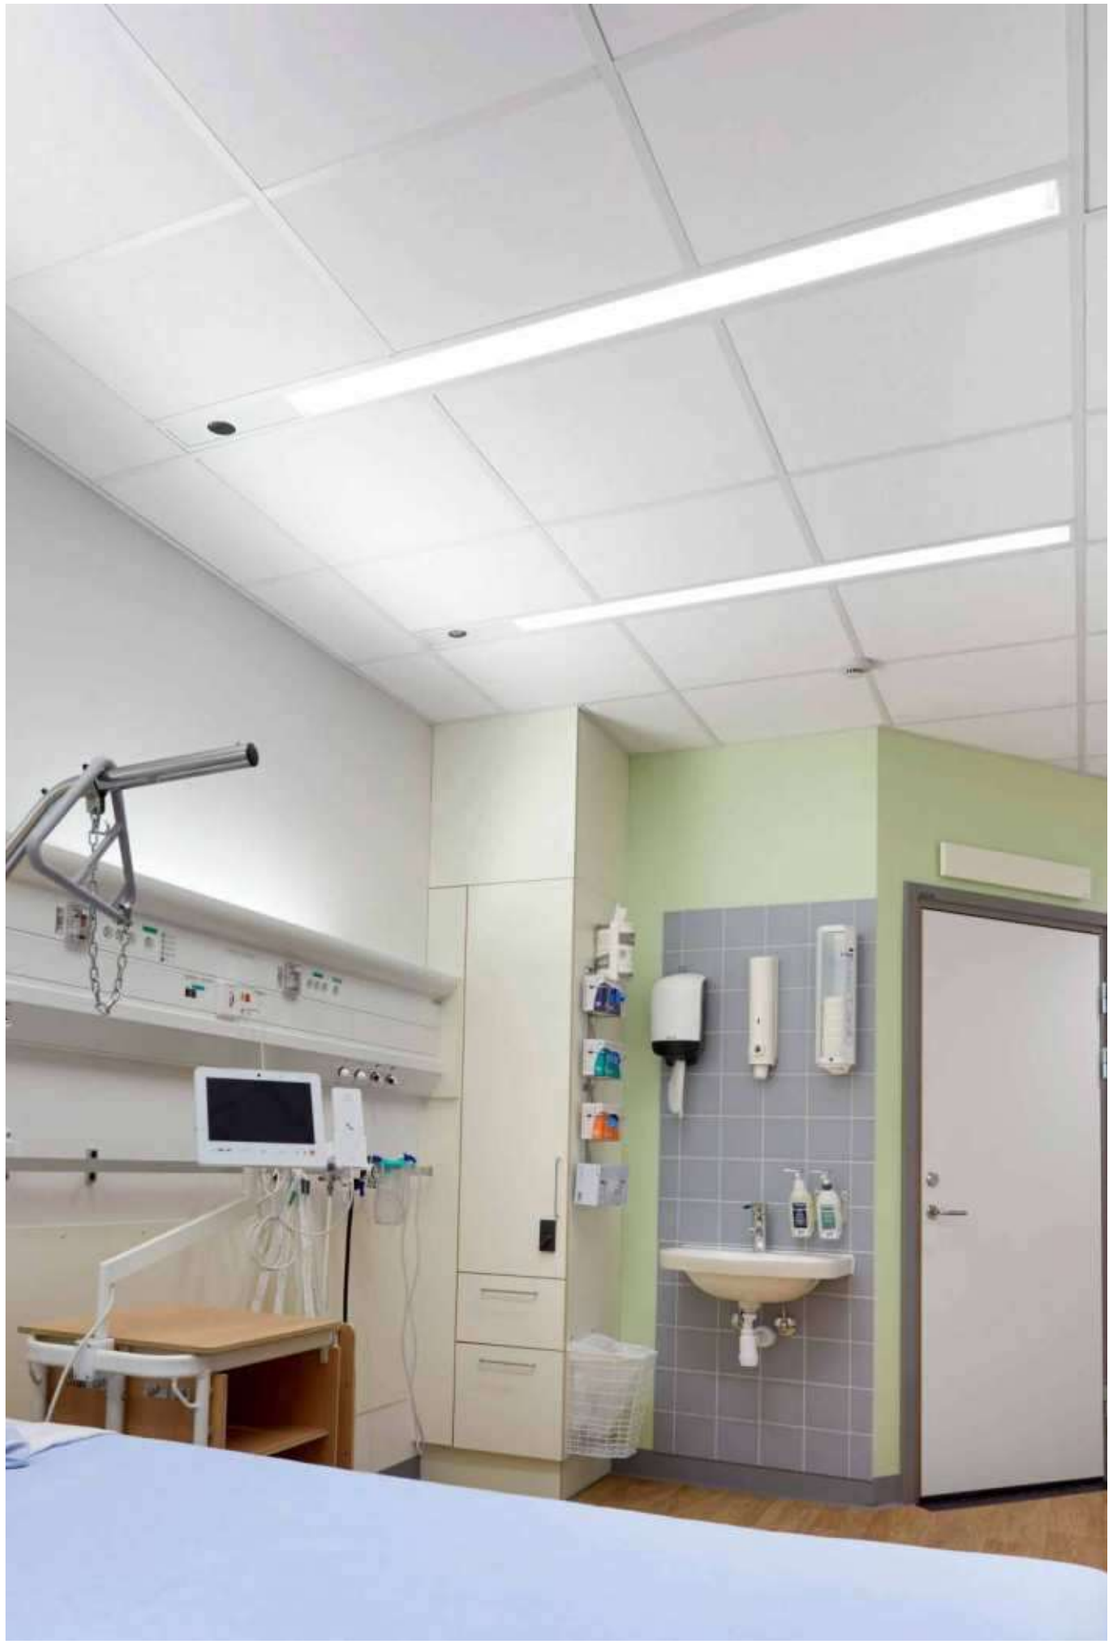

03


MINERAL FIBER

CLEAN ROOM™



PRODUCT CERTIFIED FOR LOW VOC EMISSIONS | HIGH SOUND ABSORPTION | CEILING ATTENUATION CLASS | HIGH RECYCLED CONTENT | FIRECODE | HEALTHCARE APPLICATION

CLEAN ROOM™

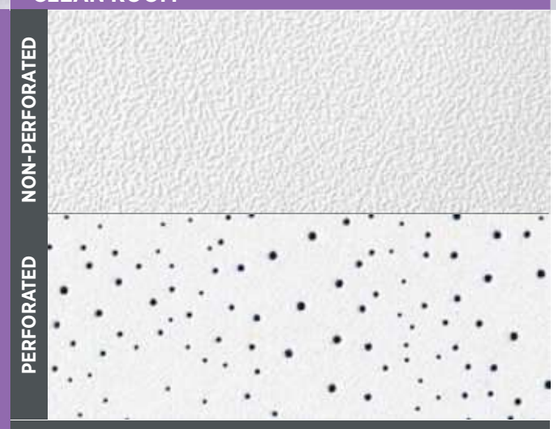

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC***
15mm*	0.35	**0.15**	**0.10**	**0.10**	**0.15**	0.25	**0.10**
19mm**	0.35	**0.40**	**0.65**	**0.60**	**0.55**	0.50	**0.55**

**Non-perforated*
*** Perforated*
****Calculated to ASTM C 423-01*

FEATURES AND BENEFITS

- Clean Room™ Non-Perforated pattern cross-reference to Class 5 per ISO 14644-1
- It has an embossed, vinyl-laminated face with a sealed back and edges for Class 100, washable, scrubbable resistance face. Clean Room™ Perforated pattern is also used in 10M-100M clean rooms as per Federal standard 209E for the Classification of Airborne particles.
- It is also anti-mold and resists mildew growth, and it is available in multi-perforation pin patterns for acoustic areas with high humidity.
- It is made with Firechief™ base materials to meet life safety codes.
- Classified High Recycled Content panels greater than 50%.
- It is recommended that the CE grid (gasketed tee flanges) be used for hospitals, laboratories, and general areas.
- Certified USDA bio-based product requirements for food processing areas where Clean Room™ has achieved both bio-preferred initiatives: Federal Procurement Preference and Certified Product Labeling.
- Cleanroom classified meets Federal Spec. 209E for non-perforated "Clean Room™ and workstation specifications in a controlled environment."

APPLICATIONS AS PER 2018 FGI GUIDELINES

- Class 1 MRI & imaging rooms
- Food preparation
- Food storage
- Hydro-therapy rooms

TABLE OF PERFORMANCE


Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	CLX665 CLX225	600*600*15 610*610*15	0.10	37	80%			52%	Low	$$$$
	CLX625 CLX245	600*1200*15 610*1220*15	0.10	37	80%			52%	Low	$$$$
	CLX669 CLX229	600*600*19 610*610*19	0.10	38	80%			52%	Low	$$$$
	CLX629 CLX249	600*1200*19 610*1220*19	0.10	38	80%			52%	Low	$$$$
	CLXP669 CLXP229	600*600*19 610*610*19	0.55	38	79%			52%	Low	$$$$
	CLXP629 CLXP249	600*1200*19 610*1220*19	0.55	38	79%			52%	Low	$$$$

Low Emissions (VOC)
Third party (GREENGUARD) certified for low-emitting performance, meets UL 2818 - 2022 Standard for Chemical Emissions for Building Materials, Finishes and Furnishings. 'Certificates of Compliance' for Low VOC Emissions are available on usgme.com and at spot.ul.com.


High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of post-consumer and pre-consumer (postindustrial) recycled content per FTC guidelines.
For Firechief™ products.

GRID PROFILE OPTIONS

DX/DXL
SQ Edge



CE
SQ Edge



SPECIFICATIONS DETAILS

Clean Room™ Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: X, Pattern: C, G, I

Substrate and Surface Finish
Mineral fiber substrates laminated with embossed vinyl-faced membrane and edges are sealed with water-based paint

Thickness
15mm, 19mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square

Weight
15mm [5.25 kg/m^2, Firechief™]
19mm [6.65 kg/m^2, Firechief™]

Noise Reduction Coefficient [NRC]
[0.10] [0.55]

Ceiling Attenuation Class [CAC]
[37 - 38 dB]

Clean Room Classification as per ISO 14644-1
ISO 5

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth

Humidity Resistance
Maximum 99% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
[0.79] [0.80]

Color
Standard White

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per BS 476
1hr Time-rated assembly

Thermal Conductivity
λ = 0.057 W/m°K

VOC Class
Greenguard

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

04

MINERAL FIBER

SONATA HEALTHCARE



PRODUCT CERTIFIED FOR ENVIRONMENTAL PRODUCT DECLARATION
PRODUCT CERTIFIED FOR LOW VOC EMISSIONS
HIGH SOUND ABSORPTION
CEILING ATTENUATION CLASS
HIGH RECYCLED CONTENT
FIRECODE
HEALTHCARE APPLICATION

SONATA HEALTHCARE

FEATURES AND BENEFITS

- Sonata Healthcare is in average condition; the face and back are ISO 4 according to the ISO 14644-1: 2015 norm.
- Sonata Healthcare microbiological class according to the norm NF S 90-351: 2013 is as follows: M100 / area 2 (Acinobacter baumannii), M1 / area 4 (Staphylococcus aureus MRSA, Bacillus cereus, Streptococcus pneumoniae, Escherichia coli, Candida albicans), <1 / area 2,3,4 (Aspergillus brasiliensis).
- It is recommended to be used with a CE grid (gasketed tee flanges) for restricted and semi-restricted areas in hospitals,
- Balanced Acoustics. High-NRC and High-CAC provide balance to room acoustics and sound attenuation.
- Excellent noise reduction (up to NRC-0.80) and sound attenuation (up to CAC-40).
- Sonata Healthcare fulfills the formaldehyde emissions by EN 717-1 and achieves Class E1.
- High Impact and scratch resistance, durable and cleanable surface.
- It is rated as Class 10 for mold prevention application as per ASTM D3273.

APPLICATIONS AS PER 2018 FGI GUIDELINES

- Central sterile supply
- Class 1 MRI and imaging rooms
- Class 2 MRI & imaging rooms
- Clean corridors
- Corridors
- Decontamination rooms
- Endoscope processing rooms
- Laboratories
- Laundry areas
- Nurse's stations
- Patient rooms
- Pharmacies
- Treatment and procedure rooms

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
19mm	0.40	**0.40**	**0.65**	**0.95**	**1.0**	1.0	**0.75**
22mm	0.45	**0.45**	**0.75**	**0.95**	**1.0**	1.0	**0.80**

**Calculated to ASTM C 423-01*








TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	SC669HC SC229HC	600*600*19 610*610*19	0.75	37	89%			83%	Low	$$$$
	SC629HC SC249HC	600*1200*19 610*1220*19	0.75	37	89%			83%	Low	$$$$
	SC6622HC SC2222HC	600*600*22 610*610*22	0.80	40	89%			83%	Low	$$$$$
SLT	SCR669HC SCR229HC	600*600*19 610*610*19	0.75	37	89%			83%	Low	$$$$
	SCR629HC SCR249HC	600*1200*19 610*1220*19	0.75	37	89%			83%	Low	$$$$
	SCR6622HC SCR2222HC	600*600*22 610*610*22	0.80	40	89%			83%	Low	$$$$$
FLB	SCRF669HC SCRF229HC	600*600*19 610*610*19	0.75	37	89%			83%	Low	$$$$
	SCRF629HC SCRF249HC	600*1200*19 610*1220*19	0.75	37	89%			83%	Low	$$$$
	SCRF6622HC SCRF2222HC	600*600*22 610*610*22	0.80	40	89%			83%	Low	$$$$$

Low Emissions (VOC)
Third party (GREENGUARD & GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of post-consumer and pre-consumer (postindustrial) recycled content per FTC guidelines.
For Firechief™ products.

GRID PROFILE OPTIONS

DX/DXL SQ Edge	CE SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXT FLB Edge	DXF FLB Edge	DXI FL Edge
						

SPECIFICATIONS DETAILS

Sonata Healthcare Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: IV,
Form: 2,
Pattern: E, G

Substrate and Surface Finish
Mineral fiber substrate laminated with fiberglass membrane and finished with factory-applied latex paint and water repellent membrane

Water Absorbance
Repellency membrane that resists mild water drippage for up to 2 hrs.

Thickness
19mm, 22mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square, Reveal [SLT, FLB]

Weight
19mm [4.75 kg/m^2]
22mm [5.5 kg/m^2]

Noise Reduction Coefficient [NRC]
[0.75] [0.80]

Ceiling Attenuation Class [CAC]
[37 - 40 dB]

Clean Room Classification as per ISO 14644-1
ISO 4

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth

Humidity Resistance
Maximum 99% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.89

Color
Standard White

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly

Thermal Conductivity
λ = 0.05 W/m°K

VOC Class
Greenguard & Greenguard Gold

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

05

MINERAL FIBER


SKYLITE CLEAN



EN 13964 : 2014 + A1 : 2007

HIGH SOUND ABSORPTION | CEILING ATTENUATION CLASS | HIGH RECYCLED CONTENT | FIRECODE | HEALTHCARE APPLICATION

SKYLITE CLEAN

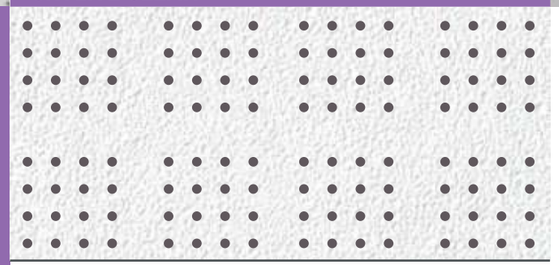



Punch through

FEATURES AND BENEFITS

- Special R6 wetfleted laminated with vinyl face.
- Made with Firechief™ base materials to meet life safety codes.
- Balanced Acoustics. High-NRC and High-CAC.
- Excellent noise reduction (up to NRC-0.85) and sound attenuation (up to CAC-38).
- Classified High Recycled Content panels as greater than 50%.
- An AXCE grid (gasketed tee flanges) is recommended for laboratory areas.
- Washable, scrubbable resistance.
- It is highly humidity-resistant, anti-mold, and resistant to mildew growth.
- Ideal solutions for healthcare facilities.

APPLICATIONS AS PER 2018 FGI GUIDELINES

- Laboratories
- Educational facilities
- Food preparation
- Hydro-therapy rooms
- Laundry areas

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
15mm	0.30	**0.30**	**0.40**	**0.70**	**0.95**	0.65	**0.60**
19mm	0.50	**0.65**	**0.85**	**1.0**	**0.90**	0.65	**0.85**

** Calculated to ASTM C 423-01*

EN 13964 : 2014 + A1 : 2007

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	SKCX665-R6 SKCX225-R6	600*600*15 610*610*15	0.60	38	80%			52%	Low	$$$$
	SKCX625-R6 SKCX245-R6	600*1200*15 610*1220*15	0.60	38	80%			52%	Low	$$$$
	SKCX669-R6 SKCX229-R6	600*600*19 610*610*19	0.85	31	80%			52%	Low	$$$$
	SKCX629-R6 SKCX249-R6	600*1200*19 610*1220*19	0.85	31	80%			52%	Low	$$$$

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of post-consumer and pre-consumer (postindustrial) recycled content per FTC guidelines.
For Firechief™ products.

GRID PROFILE OPTIONS

DX/DXL SQ Edge	AXCE SQ Edge

SPECIFICATION DETAILS

Skylite Clean Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: X,
Pattern: A

Substrate and Surface Finish
Mineral fiber substrates laminated with embossed vinyl-faced membrane

Thickness
15mm, 19mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square

Weight
15mm [5.25 kg/m², Firechief™]
19mm [6.65 kg/m², Firechief™]

Noise Reduction Coefficient [NRC]
[0.60] [0.85]*

Ceiling Attenuation Class [CAC]
[31 - 38 dB]

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth

Humidity Resistance
Maximum 95% RH / 40°C

Light Reflectance Coefficient [LR]
[0.80]

Color
Standard White

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per BS 476
1hr Time-rated assembly

Thermal Conductivity
λ = 0.05 W/m°K

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion

Formaldehyde Classification
Class E1 as per EN717-1

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

06

MINERAL FIBER

TAIGA HYGIENE



TAIGA HYGIENE

FEATURES AND BENEFITS

- Taiga Hygiene in normal conditions, face and back, is ISO 4 according to the ISO 14644-1: 2015 norm.
- All Taiga Hygiene items have a special fungicide treatment in the core and on the finished painted surface to enhance resistance to the growth of micro-organisms and ensure regular cleanability. It contains a broad spectrum of antimicrobial additives on the face and back of the panel, which provides resistance against the growth of mold and mildew.
- The microbiological class according to the norm NF S 90-351: 2013 is as follows: M100 / area 2 (Klebsiella pneumoniae), M1 / area 4 (Acinobacter baumannii, Staphylococcus aureus MRSA, Bacillus cereus, Streptococcus pneumoniae, Escherichia coli, Candida albicans), <1 / area 2,3,4 (Aspergillus brasiliensis).
- Taiga Hygiene has been developed to meet the most stringent standards for hygiene and cleanability.
- High light reflectance performance 86%.
- High humidity resistance in ClimaPlus™, suitable for intermittent heating and cooling applications.

APPLICATIONS AS PER 2018 FGI GUIDELINES

- Class 1 MRI and imaging rooms
- Laboratories
- Nurse's stations

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
			NRC	CAC					<	$
SQ	THS665 THS225	600*600*15 610*610*15	0.15	33	86%			25%	Low	$$
	THS669 THS229	600*600*19 610*610*19	0.15	36	86%			25%	Low	$$$
SLT	THSR665 THSR225	600*600*15 610*610*15	0.15	33	86%			25%	Low	$$
	THSR669 THSR229	600*600*19 610*610*19	0.15	36	86%			25%	Low	$$$
FLB	THSRF669 THSRF229	600*600*19 610*610*19	0.15	36	86%			25%	Low	$$$

Low Emissions (VOC)
Third party (GREENGUARD & GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXT FLB Edge

SPECIFICATIONS DETAILS

Taiga Hygiene Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: III,
Form: 2,
Pattern: G

Substrate and Surface Finish
Mineral fiber substrate finished with factory-applied water-based paint

Thickness
15mm, 19mm

Size
600 x 600mm, 610 x 610mm

Edge Detail Trim
Square, Reveal [SLT, FLB]

Weight
15mm [3.6 kg/m² Regular/ ClimaPlus™],
19mm [4.5 kg/m² Regular/ ClimaPlus™]

Noise Reduction Coefficient [NRC]
[0.15]

Ceiling Attenuation Class [CAC]
[33 - 36 dB]

Clean Room Classification as per ISO 14644-1
ISO 4

Mold Prevention Application as per ASTM D3273
Rate 9: Resistant to mold growth

Humidity Resistance
Maximum 99% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.86

Color
Standard White

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly

Thermal Conductivity
λ = 0.057 W/m°K

VOC Class
Greenguard & Greenguard Gold

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Formaldehyde Classification
Class E1 as per EN717-1

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

CELEBRETTO®
CLIP IN METAL CEILING



PRODUCT CERTIFIED FOR ENVIRONMENTAL PRODUCT DECLARATION
HIGH SOUND ABSORPTION
CEILING ATTENUATION CLASS
HIGH RECYCLED CONTENT
HEALTHCARE APPLICATION

FEATURES AND BENEFITS

- Concealed ceiling design.
- Wide range of standard perforation patterns.
- Wide range of optional wooden patterns.
- Durable and washable polyester powder finish.
- Robust and easy to clean.
- High sound absorption and sound attenuation.
- Environmentally friendly and recyclable.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.

APPLICATIONS

- Interior and exterior applications
- Transportation & airports
- Educational
- Healthcare
- Commercial buildings
- Hi-Rise & offices
- Financial & banking
- Malls & residential
- Kitchen & dietary
- Laundry

CLIP-IN METAL CEILING



AVAILABLE COLOR

Explore the complete range of colors, finishes, and perforation patterns on pages 306-310 for detailed insights.

SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
A1 Pattern** with Acoustic Fleece	0.70	**0.95**	**0.75**	**0.75**	**0.80**	0.80	**0.75**
A1 Pattern** with Infill***	0.70	**0.90**	**1.0**	**1.0**	**1.0**	1.0	**1.0**

** Calculated to ASTM C 423-01*
*** A1 Pattern: Diagonal Pattern. Hole Size Dia: 1.8mm, Open Area: 20%*
**** Infill: Acoustic Fleece and 30mm Soft Fiber with Aluminium Foil*

ANTIBACTERIAL COAT

Antimicrobial coating will provide lasting protection against microbes, harmful bacteria, mold, and fungus—ultimately helping to minimize stains, bad odors, and material degradation. The antimicrobial coating is more durable and lasts longer by making your ceiling systems less susceptible to mold growth and associated odors.

GRID PROFILE OPTIONS

SPRING T





CLIP-IN METAL CEILING

SPECIFICATIONS DETAILS

Clip-in Metal Ceiling by USG ME meets the requirements in accordance with ASTM C635, ASTM C636, ASTM C423 and ASTM E84.

Material Classification
Galvanized Steel: Type V
Aluminium: Type VII
Stainless Steel: Type VI
Pattern: A, C, G

Panel Size
300 x 300mm, 300 x 1200mm, 300 x 1500mm, 600 x 600mm, 600 x 1200mm, 1200 x 1200mm

Panel Thickness
0.6 to 1.4mm

Panel Height
10mm, 20mm

Edge Detail Trim
Beveled edge: 600 x 600mm, 600 x 1200mm
Square edge: All other panel configuration

Light Reflectance Coefficient [LR]
Based on the finish color, Up to 0.82

Color
Standard colors are RAL 9016, RAL 9006 and RAL 9010. Other RAL colors are available upon request. Wooden patterns are available upon request

Surface Burning Characteristics per ASTM E 84
Class A

Infill Options
Plain
Acoustic Fleece
Acoustic Fleece and Glasswool
Acoustic Fleece and Mineral Fiber

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub Cycles without surface break or the extent of abrasion

Relevant LEED® Credit
EA Credit 1 | MR Credit 4| MR Credit 5 | MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9



ITEM CODIFICATION

A: Aluminium
S: Galvanized Steel
SS: Stainless Steel
C: Clip-In
PA1: Perforated
600: First Dimension
600: Second Dimension
6: Material Thickness (0.6mm thickness)
R16: RAL 9016 Powder Coated Finish

ACPA1-600600 6R16

CLIP-IN METAL CEILING ACOUSTICAL PERFORMANCE

USG Middle East supplies metal ceiling panels with a range of acoustical performance to meet the needs of all kinds of projects. Various sound-absorbing backing options are available with performance up to 1.0 NRC and 34dB CAC. Consult with the USG Middle East technical team for further guidance.

PATTERN	OPEN AREA%	CELEBRETTO® METAL CEILING INFILL OPTIONS	CAC	NRC
A1	20%	Acoustic fleece	-	0.75
A1	20%	19mm Soft Fiber infill	-	0.90
A1	20%	15mm Mineral Fiber infill	32	-
A1	20%	Acoustic fleece with 30mm Stonewool & 19mm Mineral Fiber infill	32	0.90
A1	20%	Acoustic fleece with 25mm Glasswool & 12mm Gypsum infill	30	0.85
A1	20%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	34	1.00
B2	16%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	30	0.80
15E	11%	Acoustic fleece	-	0.65
15E	11%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	27	0.80
7E	1%	Celebretto Metal Ceiling with acoustic fleece	-	0.65
7E	1%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	26	0.90

- *A1 Pattern: Diagonal Pattern, Hole Size Dia 1.8mm*
- *B2 Pattern: Even Pattern, Hole Size Dia 2.5mm*
- *15D Pattern: Diagonal Pattern, Hole Size Dia 1.5mm*
- *15E Pattern: Even Pattern, Hole Size Dia 1.5mm*
- *7E Pattern: Even Pattern, Hole Size Dia 0.75mm*

INFILL OPTIONS*

Plain	Acoustic Fleece	Acoustic Fleece and Soft Fiber	Acoustic Fleece and Mineral Fiber
			

** Additional backer options available for NRC and CAC enhanced total acoustical performance*



CELEBRETTO®
LAY-IN METAL CEILING



FEATURES AND BENEFITS

- Durable and washable polyester powder finish.
- Wide range of standard perforation patterns.
- Wide range of optional wooden patterns.
- Easy access for service maintenance.
- Robust and easy to clean.
- High sound absorption and sound attenuation.
- Environmentally friendly and recyclable.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.

APPLICATIONS

- Transportation & airports
- Educational
- Healthcare
- Commercial buildings
- Hi-Rise & offices
- Financial & banking
- Malls & residential
- Kitchen & dietary
- Laundry
- Utility rooms

LAY-IN DRAWINGS



AVAILABLE COLOR







Explore the complete range of colors, finishes, and perforation patterns on pages 306-310 for detailed insights.

SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
A1 Pattern** with Acoustic Fleece	0.70	**0.95**	**0.75**	**0.75**	**0.80**	0.80	**0.75**
A1 Pattern** with Infill***	0.70	**0.90**	**1.0**	**1.0**	**1.0**	1.0	**1.0**

** Calculated to ASTM C 423-01*
*** A1 Pattern: Diagonal Pattern. Hole Size Dia: 1.8mm, Open Area: 20%*
**** Infill: Acoustic Fleece and 30mm Soft Fiber with Aluminium Foil*

GRID PROFILE OPTIONS

DX/DXL SL Edge	DXT/DXF FL Edge	DXF FL Edge	DXI FL Edge
			

T24 LAY IN PANEL DETAIL	T24 LAY ON PANEL DETAIL	T15 LAY IN PANEL DETAIL
		

ITEM CODIFICATION

A: Aluminium S: Galvanized Steel SS: Stainless Steel	L: Lay-In LO: Lay-On	PA1: Perforated	W: Wide (24 grid) N : Narrow (T15 grid)	600: First Dimension	600: Second Dimension	6: Material Thickness (0.6mm thickness)	R16: RAL 9016 Powder Coated Finish
ALP	A1	W-	600	600	6	R16	

SYSTEM SPECIFICATION

Lay-in Metal Ceiling by USG ME meets the requirements in accordance with ASTM E1264

Material Classification
Galvanized Steel: Type V
Aluminium: Type VII
Stainless Steel: Type VI
Pattern: A, C, G

Panel Size
300 x 300mm, 600 x 600mm, 600 x 1200mm

Panel Thickness
0.5 to 1.4mm

Panel Height
10mm, 20mm

Edge Detail Trim
Reveal [SL, FL]

Light Reflectance Coefficient [LR]
Based on the finish color and perforation pattern, LR up to 0.82

Color
Standard colors are RAL 9016, RAL9006 and RAL9010.
Other RAL colors are available upon request.
Wooden patterns are available upon request

Surface Burning Characteristics per ASTM E 84
Class A

Infill Options
Plain
Acoustical Fleece
Acoustical Fleece and Glasswool
Acoustical Fleece and Mineral Fiber

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub Cycles without surface break or the extent of abrasion

Relevant LEED® Credit
EA Credit 1 | MR Credit 4| MR Credit 5 | MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9



LAY-IN CEILING ACOUSTICAL PERFORMANCE

USG Middle East supplies metal ceiling panels with a range of acoustical performance to meet the needs of all kinds of projects. Various sound-absorbing backing options are available with performance up to 1.0 NRC and 34dB CAC. Consult with the USG Middle East technical team for further guidance.

PATTERN	OPEN AREA%	CELEBRETTO® METAL CEILING INFILL OPTIONS	CAC	NRC
A1	20%	Acoustic fleece	-	0.75
A1	20%	19mm Soft Fiber infill	-	0.90
A1	20%	15mm Mineral Fiber infill	32	-
A1	20%	Acoustic fleece with 30mm Stonewool & 19mm Mineral Fiber infill	32	0.90
A1	20%	Acoustic fleece with 25mm Glasswool & 12mm Gypsum infill	30	0.85
A1	20%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	34	1.00
B2	16%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	30	0.80
15E	11%	Acoustic fleece	-	0.65
15E	11%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	27	0.80
7E	1%	Celebretto Metal Ceiling with acoustic fleece	-	0.65
7E	1%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	26	0.90

- *A1 Pattern: Diagonal Pattern, Hole Size Dia 1.8mm*
- *B2 Pattern: Even Pattern, Hole Size Dia 2.5mm*
- *15D Pattern: Diagonal Pattern, Hole Size Dia 1.5mm*
- *15E Pattern: Even Pattern, Hole Size Dia 1.5mm*
- *7E Pattern: Even Pattern, Hole Size Dia 0.75mm*

INFILL OPTIONS*

Plain	Acoustic Fleece	Acoustic Fleece and Soft Fiber	Acoustic Fleece and Mineral Fiber
			

** Additional backer options available for NRC and CAC enhanced total acoustical performance*



USG DONN® BRAND CE®

HEALTHCARE SUSPENSION SYSTEM

DONN® BRAND CE® ACOUSTICAL SUSPENSION SYSTEM

Our DONN® BRAND CE®, aligning with the 2018 Guidelines, features a grid system with closed-cell foam gaskets for controlled environments. Produced with a minimum G30 hot-dipped galvanized body for corrosion protection, they support Clean Room HEPA filters and lights. ICC-ES was evaluated for code compliance and seismic installations, and ASTM D402 was tested for chemical resistance, ensuring durability and adherence to stringent healthcare standards.

www.usgme.com

USG ME
INNOVATIVE SOLUTIONS. EVERYTIME.



USG DONN® BRAND AX™ USG DONN® BRAND AXCE™

HEALTHCARE SUSPENSION SYSTEM

DONN® BRAND AX™/AXCE™ ACOUSTICAL SUSPENSION SYSTEM

Designed by the 2018 Guidelines, it features a noncorrosive aluminum 24mm exposed grid system with a stainless steel clip, perfect for high-humidity areas. It is resilient against cleaning chemicals (ASTM D5402) and meets USDA/FSIS standards for nonmagnetic environments. The cross-tee override-ends resist twisting, ensuring a polished finish.


www.usgme.com

SPECIALTY CEILING DESIGNS

LUXURY IN STYLE: A TALE OF FINE MASTERY

05

CHOICES OF CEILINGS THAT TELL A CAPTIVATING STORY OF ELEGANCE & DESIGN OPTIONS.

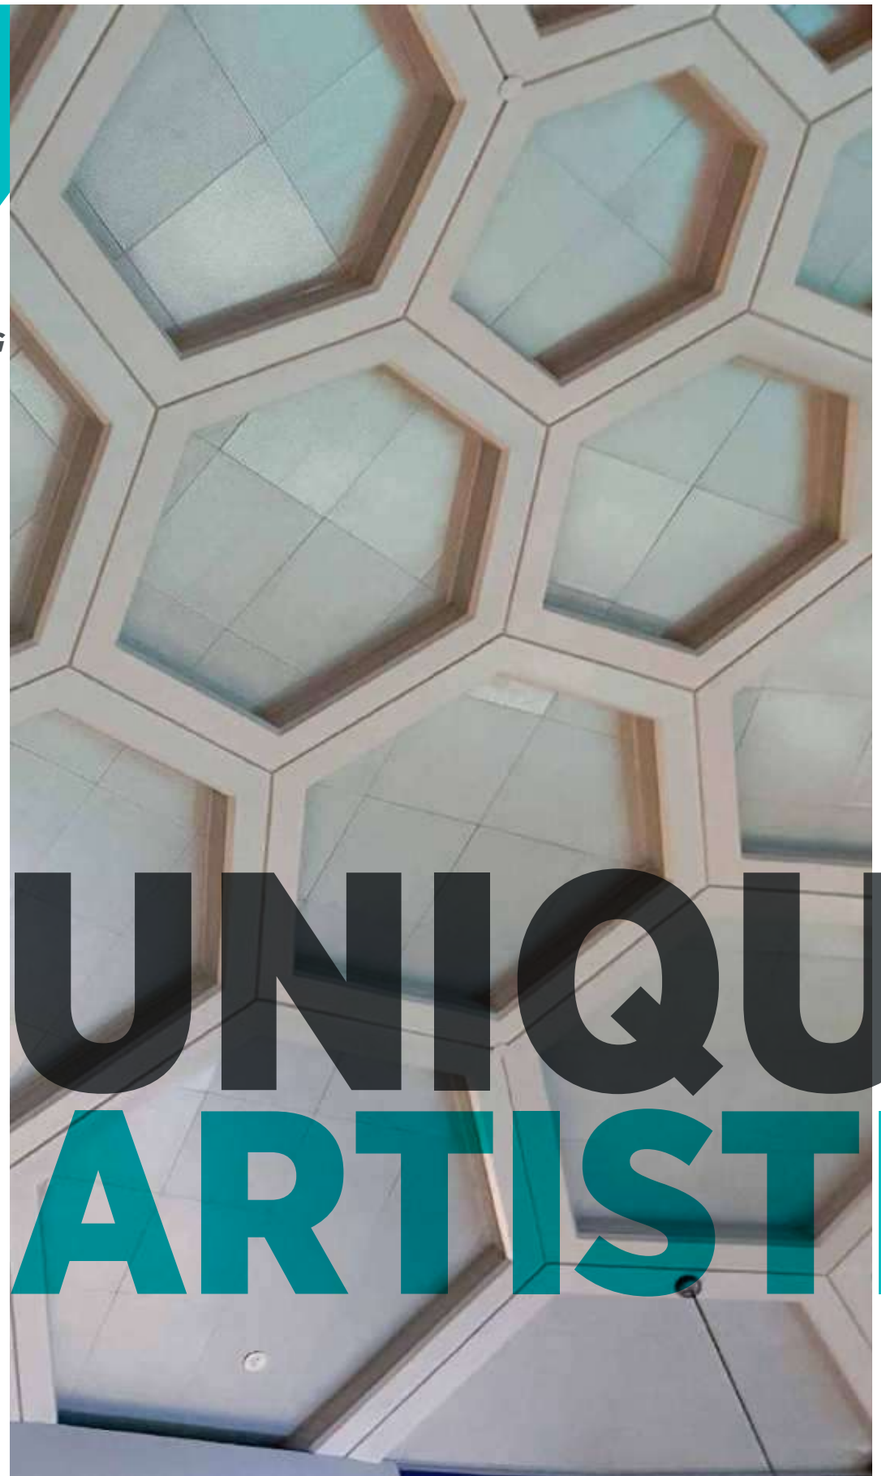



- Wael Abdelghani
USG ME
Regional Manager, Architectural Specialties

"At USG ME, our talented architects and engineers are adept at meeting the unique challenges presented by each project. We recognize that your project is more than just a structure; it's a vision brought to life. Our dedication lies in collaborating closely to develop solutions that match your creative and practical needs. Starting with a deep understanding of your vision, we apply our expertise to present solutions that meet your design goals, always adhering to the highest quality and international standards. Innovation, excellence, and customer service form the foundation of our work ethic. We invite you to consider the possibilities with us. Let's work together to create spaces that are functional and beautiful and leave a lasting impression on all who experience them".

UNIQUE ARTISTIC













CELEBRETTO®
SPECIALTY CEILING

1. HOOK-ON
2. CORRIDOR SYSTEM- HOOK ON
3. ISLAND HOOK ON
4. ALLURE
5. TORSION SPRING
6. INTERSECTO
7. LINEAR TRACK
8. STRIP CEILING
9. EXPANDED METAL MESH
10. GEOMETRIX










CELEBRETTO®
HOOK ON

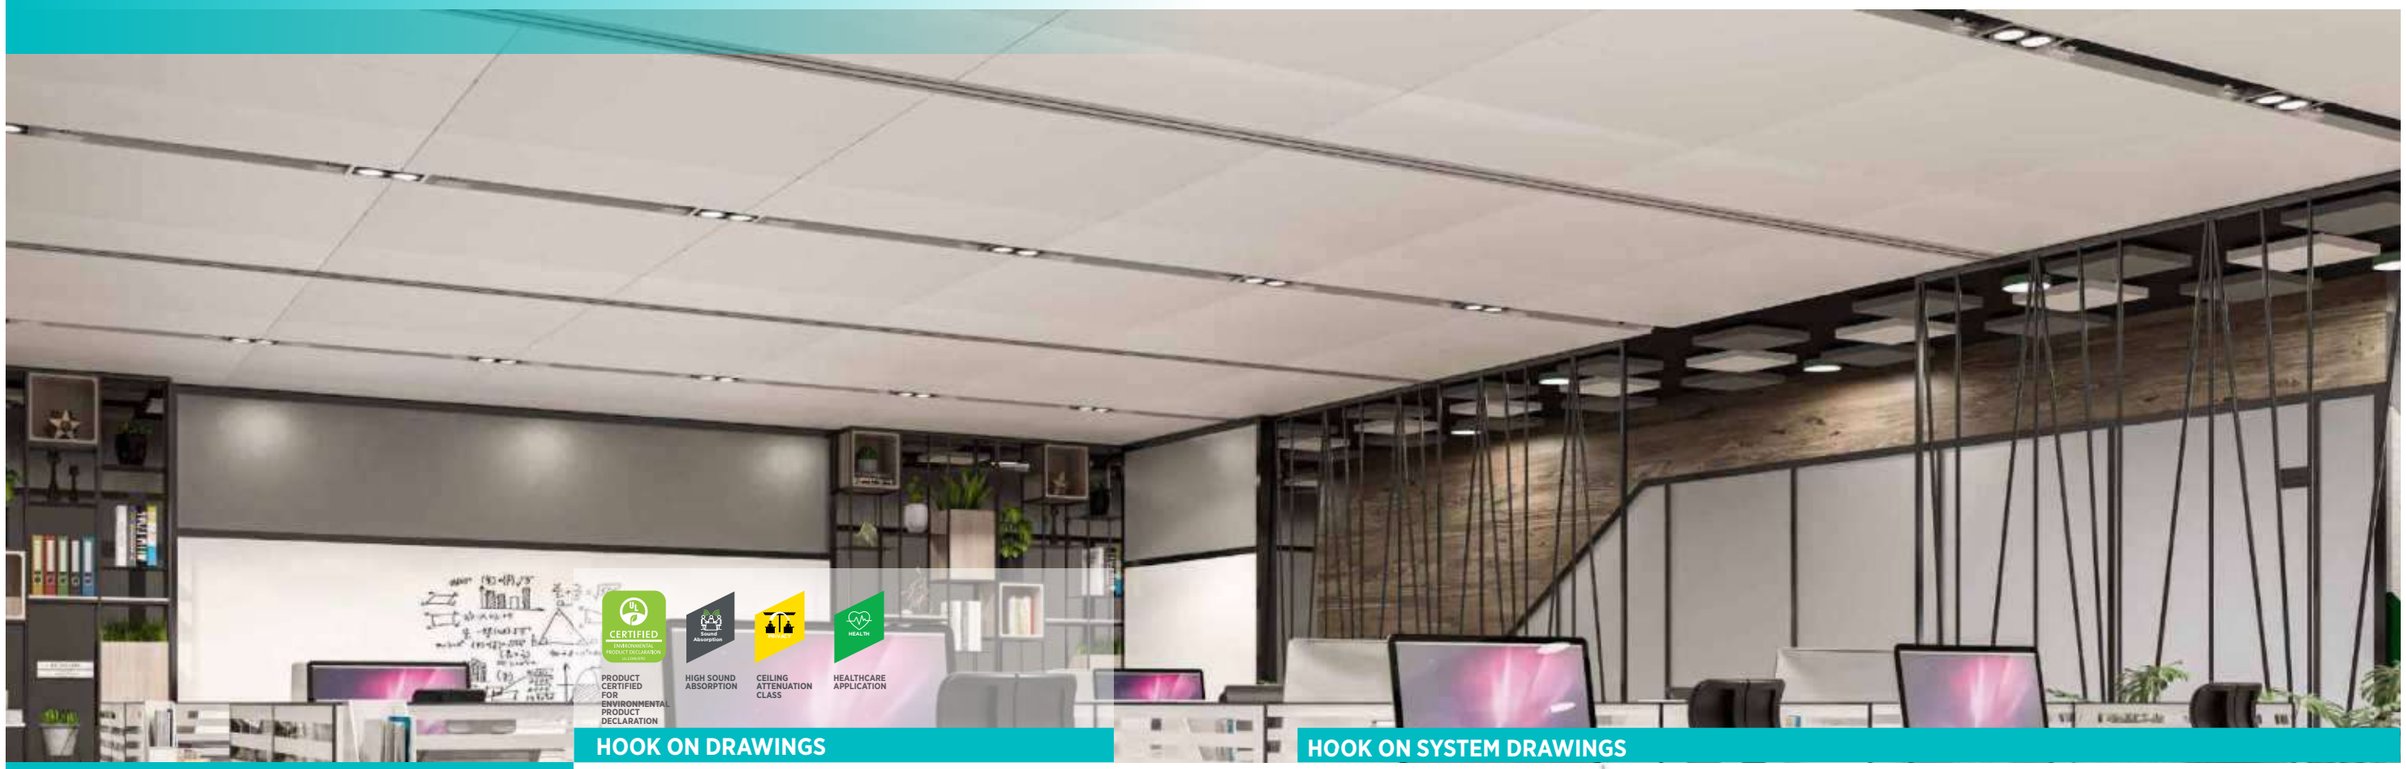


FEATURES AND BENEFITS

- Concealed suspension ceiling system with various configurations that fit any contemporary interior design.
- All panels are demountable without special tools, allowing easy access to the plenum for simple maintenance.
- Configurable panel sizes and layouts offer the designer more freedom with their design.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.

APPLICATIONS

- Airports
- Train stations
- Commercial spaces
- Offices
- Lounges
- Open halls

HOOK ON DRAWINGS

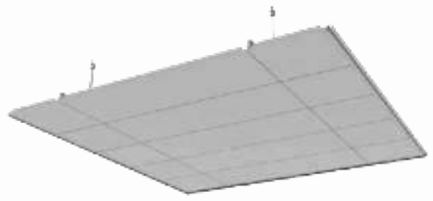

AVAILABLE FINISHES

Explore the complete range of colors, finishes, and perforation patterns on pages 306-310 for detailed insights.

SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
A1 Pattern** with Acoustic Fleece	0.70	**0.95**	**0.75**	**0.75**	**0.80**	0.80	**0.75**
A1 Pattern** with Infill***	0.70	**0.90**	**1.0**	**1.0**	**1.0**	1.0	**1.0**


* *Calculated to ASTM C 423-01*
** *A1 Pattern: Diagonal Pattern. Hole Size Dia: 1.8mm, Open Area: 20%*
*** *Infill: Acoustic Fleece and 30mm Soft Fiber with Aluminium Foil*

HOOK ON SYSTEM DRAWINGS






SYSTEM COMPONENTS



Metal Hook-On Panel




Galvanized Steel, H=51mm, L=2400mm

J-Profile




Hanging System



Galvanized Steel, H=40mm, L=3000mm


Primary Channel



Perimeter Wall Angle Options



J-Profile Hanging Bracket

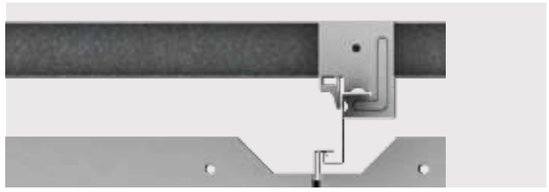

System Section

SYSTEM SPECIFICATION

Material Classification
Galvanized Steel: Type V
Aluminium: Type VII
Stainless Steel: Type VI
Pattern: A, C, G

Thickness
Powder coat finish: 0.6mm – 1.4mm
Wooden finish: 0.6mm

Panel Height
40mm up to 200mm

Panel Width
200mm up to 1200mm

Panel Length
Up to 2400mm

Edge (optional)
3mm black gasket

Color
Standard colors are RAL 9005, RAL 9006, RAL 9016.
Other RAL colors are available upon request.

Light Reflectance Coefficient [LR]
Based on the finish color and perforation pattern, LR up to 0.82

Surface Burning Characteristics per ASTM E 84
Class A

Additional Information
- Thickness depends on panel sizes and project requirements
- Consult USG Middle East technical team for other panel widths

HOOK-ON CEILING ACOUSTICAL PERFORMANCE

USG Middle East supplies metal ceiling panels with a range of acoustical performance to meet the needs of all kinds of projects. Various sound-absorbing backing options are available with performance up to 1.0 NRC and 34dB CAC. Consult with the USG Middle East technical team for further guidance.

PATTERN	OPEN AREA%	CELEBRETTO® METAL CEILING INFILL OPTIONS	CAC	NRC
A1	20%	Acoustic fleece	-	0.75
A1	20%	19mm Soft Fiber infill	-	0.90
A1	20%	15mm Mineral Fiber infill	32	-
A1	20%	Acoustic fleece with 30mm Stonewool & 19mm Mineral Fiber infill	32	0.90
A1	20%	Acoustic fleece with 25mm Glasswool & 12mm Gypsum infill	30	0.85
A1	20%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	34	1.00
B2	16%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	30	0.80
15E	11%	Acoustic fleece	-	0.65
15E	11%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	27	0.80
7E	1%	Celebretto Metal Ceiling with acoustic fleece	-	0.65
7E	1%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	26	0.90

- *A1 Pattern: Diagonal Pattern, Hole Size Dia 1.8mm*
- *B2 Pattern: Even Pattern, Hole Size Dia 2.5mm*
- *15D Pattern: Diagonal Pattern, Hole Size Dia 1.5mm*
- *15E Pattern: Even Pattern, Hole Size Dia 1.5mm*
- *7E Pattern: Even Pattern, Hole Size Dia 0.75mm*

INFILL OPTIONS*

Plain	Acoustic Fleece	Acoustic Fleece and Soft Fiber	Acoustic Fleece and Mineral Fiber
			

** Additional backer options available for NRC and CAC enhanced total acoustical performance*



ITEM CODIFICATION

A: Aluminium S: Steel	HO: Hook On	PA1: Perforated A1 Pattern	600: First Dimension	1200: Second Dimension	10: Material Thickness (10mm thickness)	R1035: RAL 1035 powder coated finish	SF25: Soft Fiber infill 25mm thickness	G: with gaskets
A	HO	PA1	600	1200	10	R1035	SF25	G

AHOPA1-600120010R1035-SF25G

CELEBRETTO®
CORRIDOR SYSTEM HOOK ON




FEATURES AND BENEFITS

- Free span solution - eliminates the need for threaded rods and vertical hangers.
- Quick installation.
- It is ideal for corridors that have condensed MEP fixtures.
- Total access to ceiling void, allowing easy maintenance.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.

APPLICATIONS

- Airports
- Hospitals
- Schools
- Business & residential towers
- Hotels

CORRIDOR SYSTEM HOOK ON DRAWINGS

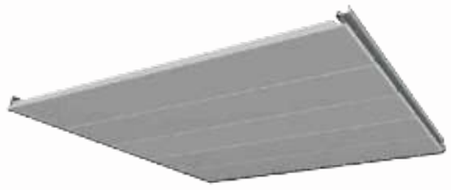

AVAILABLE FINISHES



Explore the complete range of colors, finishes, and perforation patterns on pages 306-310 for detailed insights.

SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
A1 Pattern** with Acoustic Fleece	0.70	**0.95**	**0.75**	**0.75**	**0.80**	0.80	**0.75**
A1 Pattern** with Infill***	0.70	**0.90**	**1.0**	**1.0**	**1.0**	1.0	**1.0**

** Calculated to ASTM C 423-01*
*** A1 Pattern: Diagonal Pattern. Hole Size Dia: 1.8mm, Open Area: 20%*
**** Infill: Acoustic Fleece and 30mm Soft Fiber with Aluminium Foil*

CORRIDOR SYSTEM HOOK ON SYSTEM DRAWINGS





CORRIDOR SYSTEM
HOOK-ON

SYSTEM COMPONENTS



Corridor Ceiling Panel



Galvanized Steel, H=51mm, L=2400mm

J-Profile




Galvanized Steel: H=30mm, L=2400mm

Angle Bar



Galvanized Steel, 27.50 x 15 x 27.50mm, L=2400mm

Z Profile



4.8x16mm

Bolt Pan Head

SYSTEM SPECIFICATION

Material Classification
Galvanized Steel: Type V
Aluminium: Type VII
Stainless Steel: Type VI
Pattern: A, C, G

Thickness
Powder coat finish: 0.6mm – 1.4mm
Wooden finish: 0.6mm

Panel Height
40mm up to 200mm

Panel Width
200 to 600mm

Panel Length
Up to 2400mm

Edge (optional)
3mm black gasket

Light Reflectance Coefficient [LR]
Based on the finish color and perforation pattern, LR up to 0.82

Color
Standard colors are RAL 9016, RAL 9006 and RAL 9010.
Other RAL colors are available upon request.
Wooden patterns are available upon request

Surface Burning Characteristics per ASTM E 84
Class A

Additional Information
- Thickness depends on panel sizes and project requirements
- Consult USG Middle East technical team for other panel widths




CORRIDOR SYSTEM HOOK-ON CEILING ACOUSTICAL PERFORMANCE

USG Middle East supplies metal ceiling panels with a range of acoustical performance to meet the needs of all kinds of projects. Various sound-absorbing backing options are available with performance up to 1.0 NRC and 34dB CAC. Consult with the USG Middle East technical team for further guidance.

PATTERN	OPEN AREA%	CELEBRETTO® METAL CEILING INFILL OPTIONS	CAC	NRC
A1	20%	Acoustic fleece	-	0.75
A1	20%	19mm Soft Fiber infill	-	0.90
A1	20%	15mm Mineral Fiber infill	32	-
A1	20%	Acoustic fleece with 30mm Stonewool & 19mm Mineral Fiber infill	32	0.90
A1	20%	Acoustic fleece with 25mm Glasswool & 12mm Gypsum infill	30	0.85
A1	20%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	34	1.00
B2	16%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	30	0.80
15E	11%	Acoustic fleece	-	0.65
15E	11%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	27	0.80
7E	1%	Celebretto Metal Ceiling with acoustic fleece	-	0.65
7E	1%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	26	0.90

- *A1 Pattern: Diagonal Pattern, Hole Size Dia 1.8mm*
- *B2 Pattern: Even Pattern, Hole Size Dia 2.5mm*
- *15D Pattern: Diagonal Pattern, Hole Size Dia 1.5mm*
- *15E Pattern: Even Pattern, Hole Size Dia 1.5mm*
- *7E Pattern: Even Pattern, Hole Size Dia 0.75mm*

INFILL OPTIONS*

Plain	Acoustic Fleece	Acoustic Fleece and Soft Fiber	Acoustic Fleece and Mineral Fiber
			


** Additional backer options available for NRC and CAC enhanced total acoustical performance*



ITEM CODIFICATION

ACHO	PA1-	600	120	010	R1035-	SF25	G
A: Aluminium S: Steel SS: Stainless Steel	CHO: Corridor Hook-On	PA1: Perforated A1 Pattern	600: First Dimension	1200: Second Dimension	10: Material Thickness (1.0mm Thickness)	R1035: RAL 1035 Powder Coated Finish	SF25: Soft Fiber Infill 25mm Thickness	G: with Gaskets

CELEBRETTO®
ISLAND HOOK ON

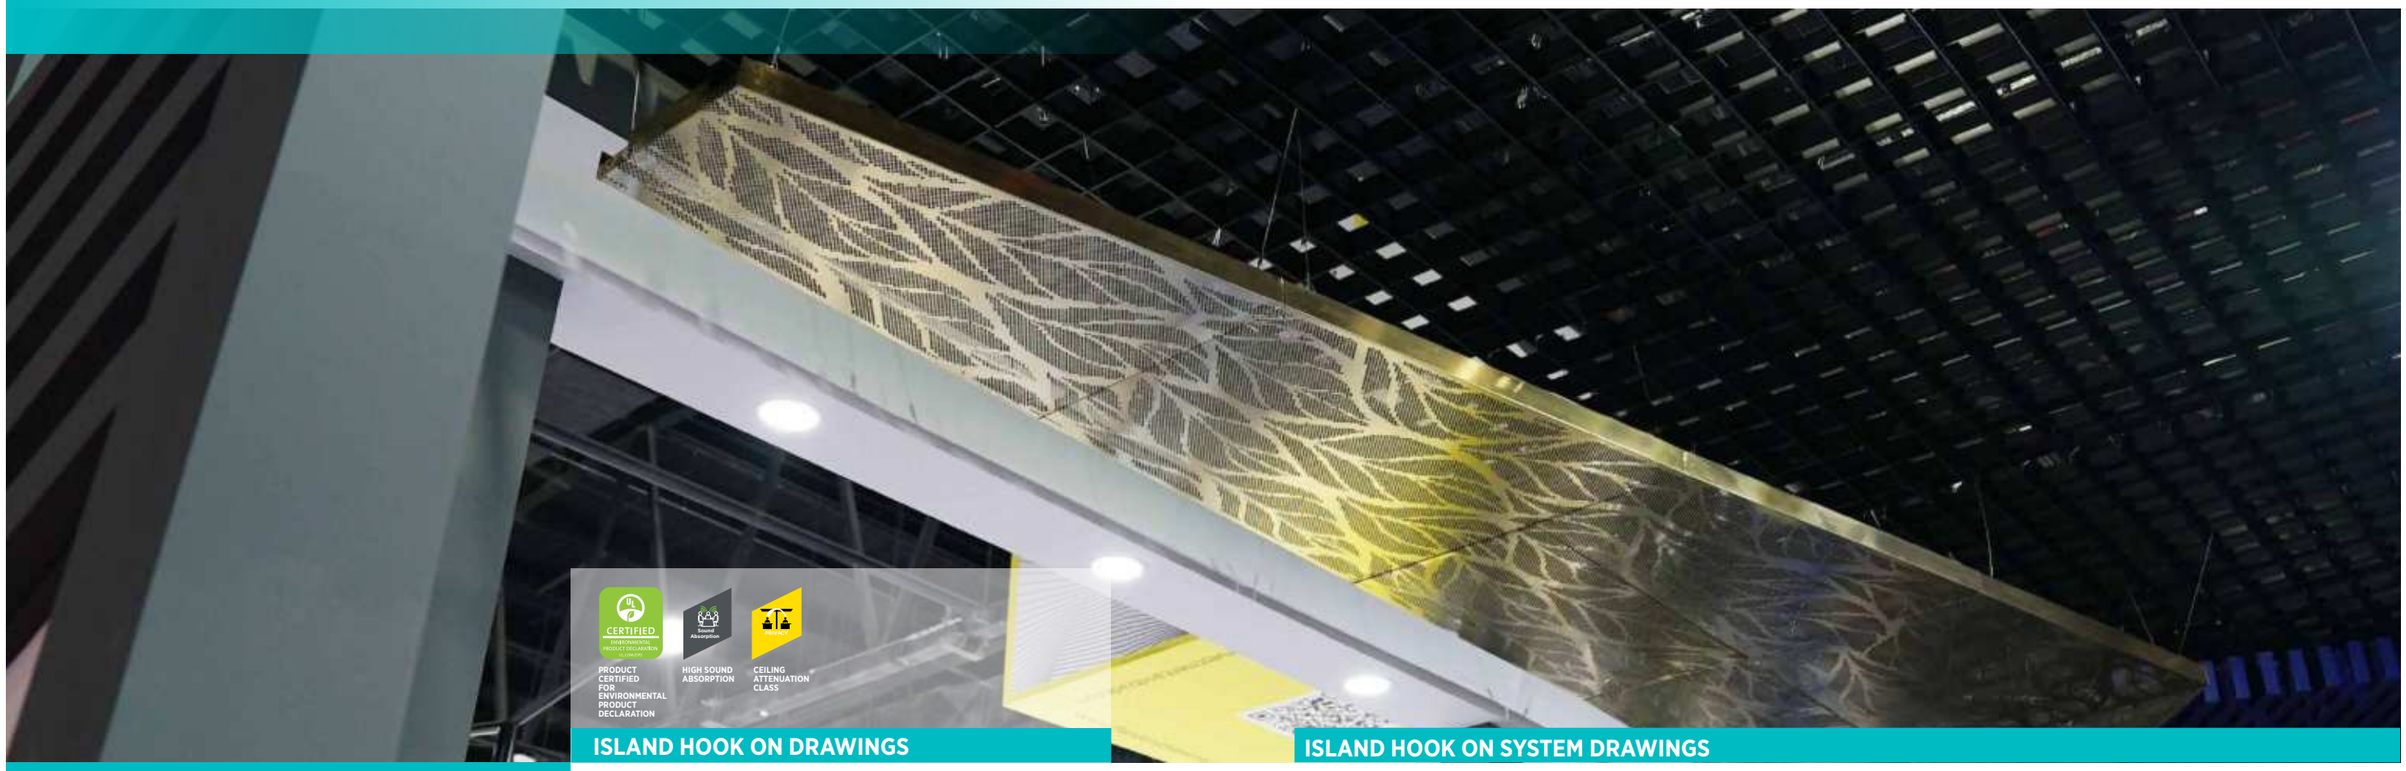

PRODUCT CERTIFIED FOR ENVIRONMENTAL PRODUCT DECLARATION

HIGH SOUND ABSORPTION

CEILING ATTENUATION CLASS


FEATURES AND BENEFITS

- Featuring a concealed island suspension ceiling system with unique design configurations.
- All island panels are demountable without special tools, allowing easy access to the plenum for simple maintenance.
- Configurable panel sizes and layouts offer the designer more freedom with their design.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.

APPLICATIONS

- Airports
- Train stations
- Commercial spaces
- Offices
- Lounges
- Open halls
- Hotel lobbies

ISLAND HOOK ON DRAWINGS

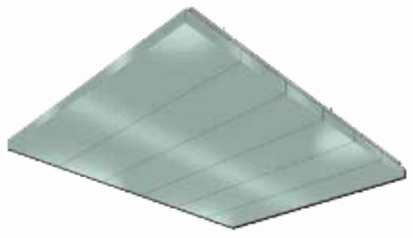

AVAILABLE FINISHES




Explore the complete range of colors, finishes, and perforation patterns on pages 306-310 for detailed insights.

SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
A1 Pattern** with Acoustic Fleece	0.70	**0.95**	**0.75**	**0.75**	**0.80**	0.80	**0.75**
A1 Pattern** with Infill***	0.70	**0.90**	**1.0**	**1.0**	**1.0**	1.0	**1.0**

** Calculated to ASTM C 423-01*
*** A1 Pattern: Diagonal Pattern. Hole Size Dia: 1.8mm, Open Area: 20%*
**** Infill: Acoustic Fleece and 30mm Soft Fiber with Aluminium Foil*

ISLAND HOOK ON SYSTEM DRAWINGS

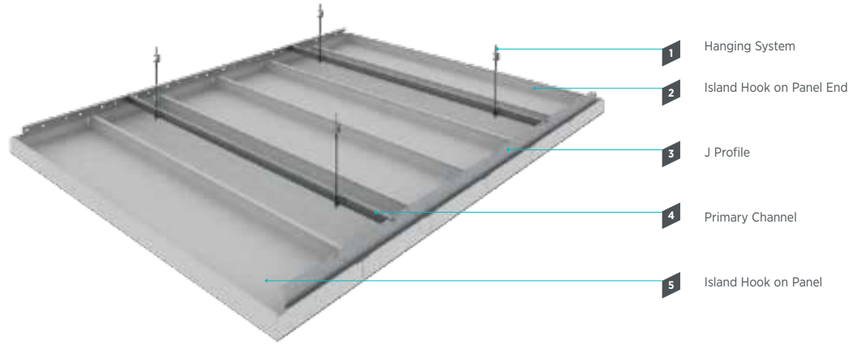



SYSTEM COMPONENTS



Island Hook-On Middle Panel



Island Hook-On End Panel



Primary Channel



Galvanized Steel, H=51mm, L=2400mm

J-Profile



Hanging System



4.8x16mm

Bolt Pan Head

SYSTEM SPECIFICATION

Material Classification
Galvanized Steel: Type V
Aluminium: Type VII
Stainless Steel: Type VI
Pattern: A, C, G

Thickness
Powder coat finish: 0.6mm – 1.4mm
Wooden finish: 0.6mm

Panel Height
40mm up to 200mm

Panel Width
200mm to 600mm

Panel Length
Up to 2400mm

Edge (optional)
3mm black gasket

Color
Standard colors are RAL 9005, RAL 9006, RAL 9016.
Other RAL colors are available upon request.

Light Reflectance Coefficient [LR]
Based on the finish color and perforation pattern, LR up to 0.82

Surface Burning Characteristics per ASTM E 84
Class A

Additional Information
- Thickness depends on panel sizes and project requirements
- Consult USG Middle East technical team for other panel widths

ISLAND HOOK-ON CEILING ACOUSTICAL PERFORMANCE

USG Middle East supplies metal ceiling panels with a range of acoustical performance to meet the needs of all kinds of projects. Various sound-absorbing backing options are available with performance up to 1.0 NRC and 34dB CAC. Consult with the USG Middle East technical team for further guidance.


PATTERN	OPEN AREA%	CELEBRETTO® METAL CEILING INFILL OPTIONS	CAC	NRC
A1	20%	Acoustic fleece	-	0.75
A1	20%	19mm Soft Fiber infill	-	0.90
A1	20%	15mm Mineral Fiber infill	32	-
A1	20%	Acoustic fleece with 30mm Stonewool & 19mm Mineral Fiber infill	32	0.90
A1	20%	Acoustic fleece with 25mm Glasswool & 12mm Gypsum infill	30	0.85
A1	20%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	34	1.00
B2	16%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	30	0.80
15E	11%	Acoustic fleece	-	0.65
15E	11%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	27	0.80
7E	1%	Celebretto Metal Ceiling with acoustic fleece	-	0.65
7E	1%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	26	0.90

- *A1 Pattern: Diagonal Pattern, Hole Size Dia 1.8mm*
- *B2 Pattern: Even Pattern, Hole Size Dia 2.5mm*
- *15D Pattern: Diagonal Pattern, Hole Size Dia 1.5mm*
- *15E Pattern: Even Pattern, Hole Size Dia 1.5mm*
- *7E Pattern: Even Pattern, Hole Size Dia 0.75mm*

INFILL OPTIONS*

Plain	Acoustic Fleece	Acoustic Fleece and Soft Fiber	Acoustic Fleece and Mineral Fiber
			

** Additional backer options available for NRC and CAC enhanced total acoustical performance*

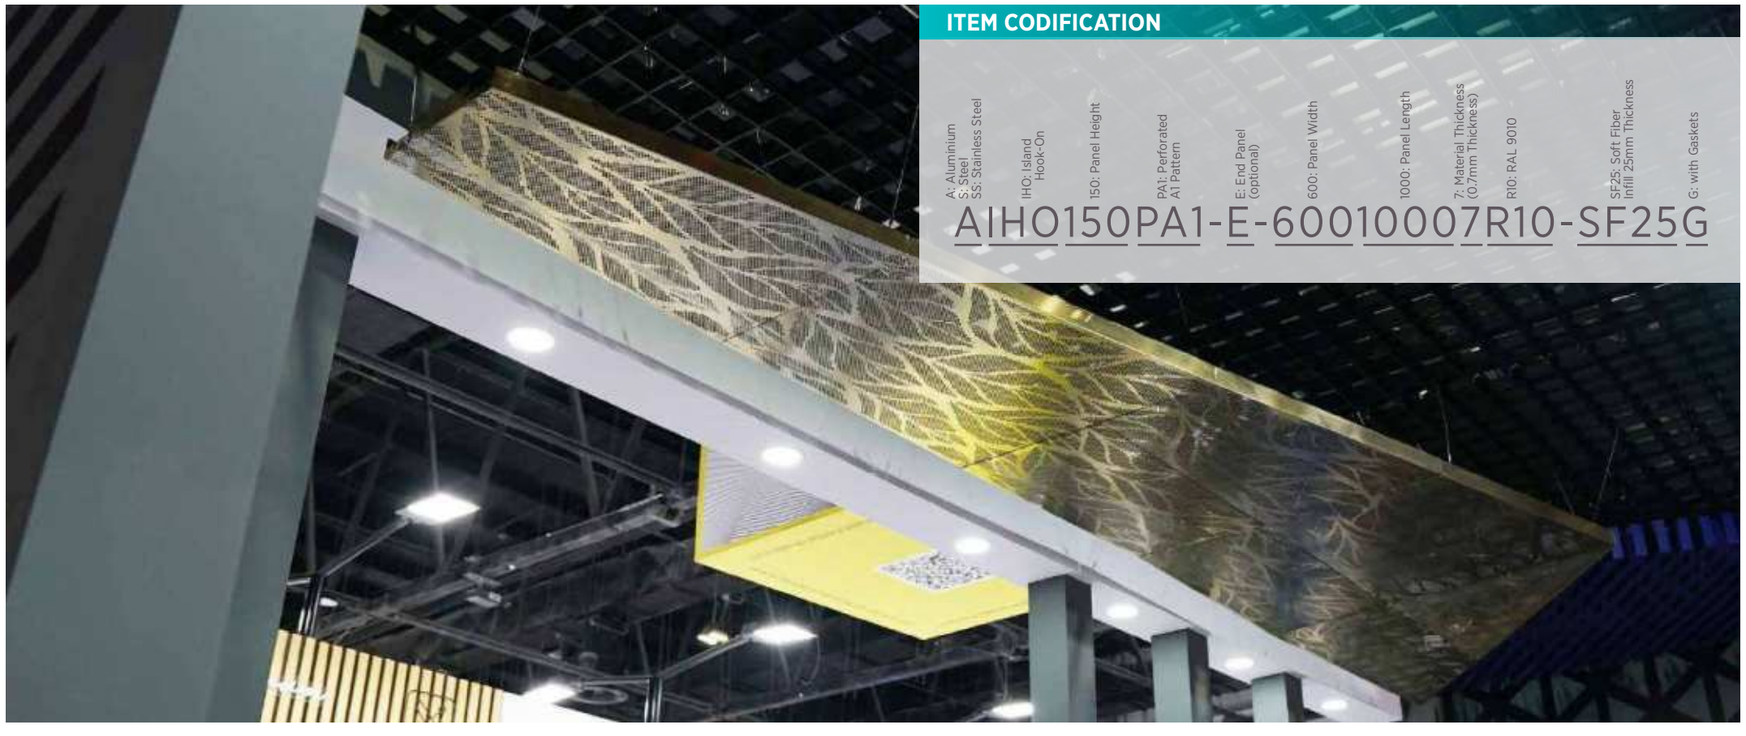

ITEM CODIFICATION

A: Aluminium S: Steel SS: Stainless Steel	IHO: Island Hook-On	150: Panel Height	PA1: Perforated A1 Pattern	E: End Panel (optional)	600: Panel Width	1000: Panel Length	7: Material Thickness (0.7mm Thickness)	R10: RAL 9010	SF25: Soft Fiber Infill 25mm Thickness	G: with Gaskets
AIHO	150	PA1	- E -	600	10	007	R10	- SF25	G	

AIHO150PA1-E-60010007R10-SF25G

CELEBRETTO®
ALLURE



FEATURES AND BENEFITS

- Allure is a distinctive ceiling solution that unlocks innovative design capabilities like multi-layered solutions, impressive curvilinear designs, and multicolored options.
- Fashion your ceiling design into organic, complicated, and uninterrupted shapes that lie beyond the scope of any preconfigured architectural pattern and imprint it across your space.
- Scalable and seamless panel solutions.
- Growing range of patterns or customizable unique designs.

APPLICATIONS

- Hotel lobbies
- Restaurants
- Commercial spaces
- Offices
- Lounges
- Open halls
- Reception
- Corridors

ALLURE DRAWINGS







AVAILABLE FINISHES



Explore the complete range of colors, finishes, and perforation patterns on pages 306-310 for detailed insights.

ALLURE SYSTEM DRAWINGS

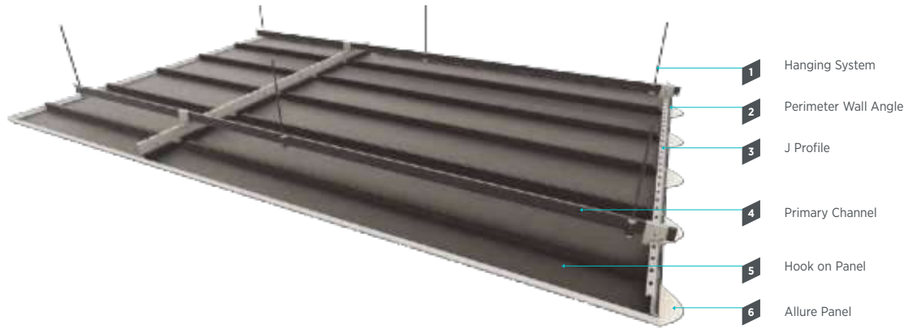

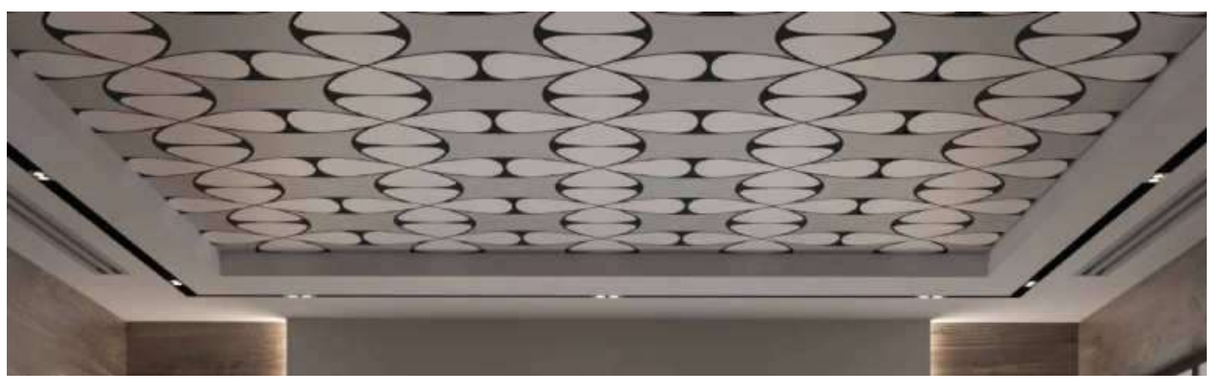

SYSTEM SPECIFICATION

Material Classification
Galvanized Steel: Type V
Stainless Steel: Type VI
Pattern: A, C, G
Thickness
Powder coat finish: 0.6mm – 1.4mm
Wooden finish: 0.6mm
Hook-On Panel Height
40mm to 200mm
Panel Width
Up to 1200mm
Panel Length
Up to 2400mm
Color
Standard: RAL 9016, RAL 9006 and RAL 9010.
Other RAL colors are available upon request.
Wooden patterns are available upon request
Light Reflectance Coefficient [LR]
Based on the finish color and
perforation pattern, LR up to 0.82
Surface Burning Characteristics per ASTM E 84
Class A
Additional Information
- Thickness depends on panel sizes and project requirements
- Consult USG Middle East technical team for other panel widths



ALLURE CEILING ACOUSTICAL PERFORMANCE


USG Middle East supplies metal ceiling panels with a range of acoustical performance to meet the needs of all kinds of projects. A variety of sound-absorbing backing options are available. Consult with the USG Middle East technical team for further guidance.

ITEM CODIFICATION



SYSTEMS CONFIGURATIONS*

LATCH

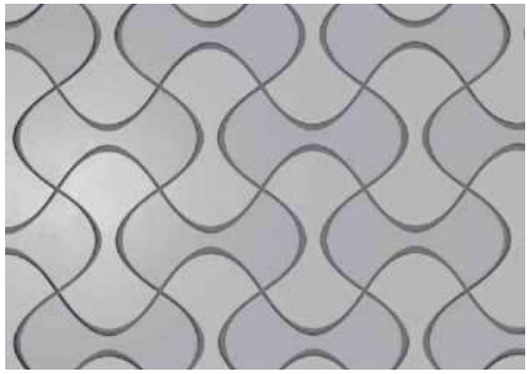


PANEL TYPES



LATCH Panel A
Panel Width: 600 mm
Panel Length: 1000mm

BLOSSOM

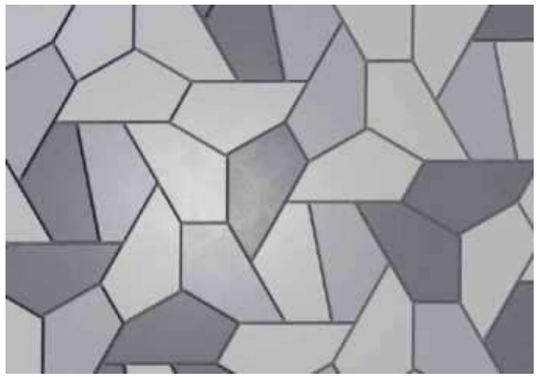

PANEL TYPES




BLOSSOM Panel A
Panel Width: 450 mm
Panel Length: 650mm



BLOSSOM Panel B
Panel Width: 400 mm
Panel Length: 800mm

BRAID

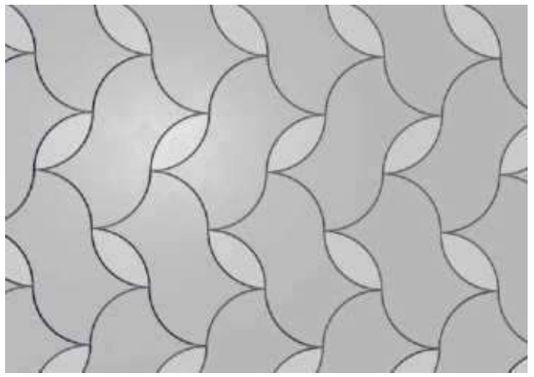

PANEL TYPES




BRAID Panel A
Panel Width: 900 mm
Panel Length: 1100mm



BRAID Panel B
Panel Width: 350 mm
Panel Length: 400mm

HARMONY

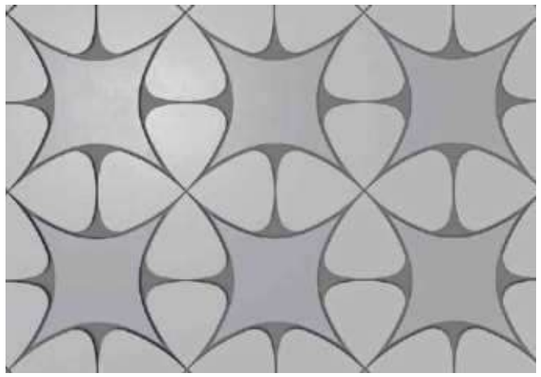

PANEL TYPES



HARMONY Panel A
Panel Width: 750 mm
Panel Length: 750mm



HARMONY Panel B
Panel Width: 450 mm
Panel Length: 500 mm

** All dimensions are customizable to fit the client's requirements.*

CELEBRETTO®
TORSION SPRING



PRODUCT CERTIFIED FOR ENVIRONMENTAL PRODUCT DECLARATION

HIGH SOUND ABSORPTION

CEILING ATTENUATION CLASS

HEALTHCARE APPLICATION

FEATURES AND BENEFITS


- Featuring a concealed suspension ceiling system with various configurations that can fit any contemporary interior design.
- All panels are demountable, allowing easy access to the plenum for easy maintenance.
- Configurable panel sizes and layouts allow designers flexibility in their designs.
- Available in two standard designs: triangular and rectangular.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.

APPLICATIONS

- Airports
- Train stations
- Commercial spaces
- Offices
- Lounges
- Open halls
- Restaurants

TORSION SPRING DRAWINGS

RECTANGULAR



TRIANGULAR



AVAILABLE FINISHES


Explore the complete range of colors, finishes, and perforation patterns on pages 306-310 for detailed insights.

SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
A1 Pattern** with Acoustic Fleece	0.70	**0.95**	**0.75**	**0.75**	**0.80**	0.80	**0.75**
A1 Pattern** with Infill***	0.70	**0.90**	**1.0**	**1.0**	**1.0**	1.0	**1.0**

** Calculated to ASTM C 423-01*
*** A1 Pattern: Diagonal Pattern. Hole Size Dia: 1.8mm, Open Area: 20%*
**** Infill: Acoustic Fleece and 30mm Soft Fiber with Aluminium Foil*

TORSION SPRING SYSTEM DRAWINGS

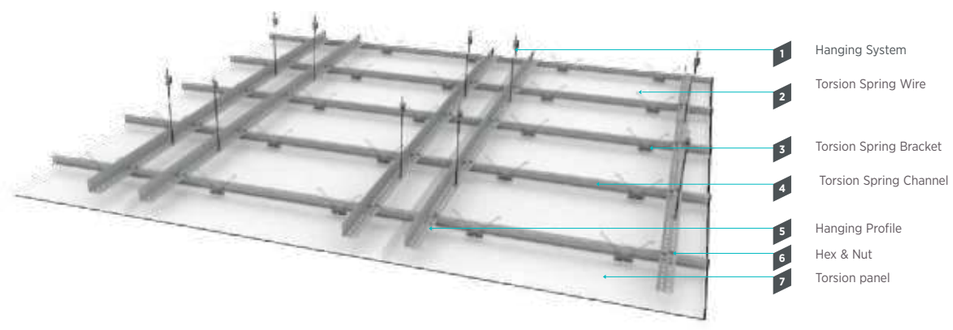



SYSTEM COMPONENTS



Torsion Spring Panel Option Design




Primary Channel Slotted



Torsion Spring Bracket



Torsion Spring Channel



Hanging System



Torsion Spring Wire

SYSTEM SPECIFICATION

Material Classification
Galvanized Steel: Type V
Aluminium: Type VII
Stainless Steel: Type VI
Pattern: A, C, G

Thickness
Powder coat finish: 0.6mm – 1.4mm
Wooden finish: 0.6mm

Panel Height
40mm to 70mm

Rectangular Panel Width
200mm to 600mm

Rectangular Panel Length
Up to 2400mm

Triangular Panel
Up to 1200mm

Color
Standard colors are RAL 9005, RAL 9006, RAL 9016.
Other RAL colors are available upon request.

Light Reflectance Coefficient [LR]
Based on the finish color and perforation pattern, LR up to 0.82

Surface Burning Characteristics per ASTM E 84
Class A

Additional Information
- Thickness depends on panel sizes and project requirements
- Consult USG Middle East technical team for other panel sizes

TORSION SPRING CEILING ACOUSTICAL PERFORMANCE

USG Middle East supplies metal ceiling panels with a range of acoustical performance to meet the needs of all kinds of projects. Various sound-absorbing backing options are available with performance up to 1.0 NRC and 34dB CAC. Consult with the USG Middle East technical team for further guidance.

PATTERN	OPEN AREA%	CELEBRETTO® METAL CEILING INFILL OPTIONS	CAC	NRC
A1	20%	Acoustic fleece	-	0.75
A1	20%	19mm Soft Fiber infill	-	0.90
A1	20%	15mm Mineral Fiber infill	32	-
A1	20%	Acoustic fleece with 30mm Stonewool & 19mm Mineral Fiber infill	32	0.90
A1	20%	Acoustic fleece with 25mm Glasswool & 12mm Gypsum infill	30	0.85
A1	20%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	34	1.00
B2	16%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	30	0.80
15E	11%	Acoustic fleece	-	0.65
15E	11%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	27	0.80
7E	1%	Celebretto Metal Ceiling with acoustic fleece	-	0.65
7E	1%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	26	0.90

- *A1 Pattern: Diagonal Pattern, Hole Size Dia 1.8mm*
- *B2 Pattern: Even Pattern, Hole Size Dia 2.5mm*
- *15D Pattern: Diagonal Pattern, Hole Size Dia 1.5mm*
- *15E Pattern: Even Pattern, Hole Size Dia 1.5mm*
- *7E Pattern: Even Pattern, Hole Size Dia 0.75mm*

INFILL OPTIONS*

Plain	Acoustic Fleece	Acoustic Fleece and Soft Fiber	Acoustic Fleece and Mineral Fiber


** Additional backer options available for NRC and CAC enhanced total acoustical performance*



ITEM CODIFICATION

ATS	PA1	-	TR	-	1100	1000	10	R10
A: Aluminium S: Steel SS: Stainless Steel TS: Torsion Spring	PA1: Perforated A1 Pattern		TR: Triangular		1100: Triangle Base	1000: Triangle Height	10: Material Thickness (1.0mm Thickness)	R10: RAL 9010 Powder Coated Finish

CELEBRETTO®
INTERSECTO

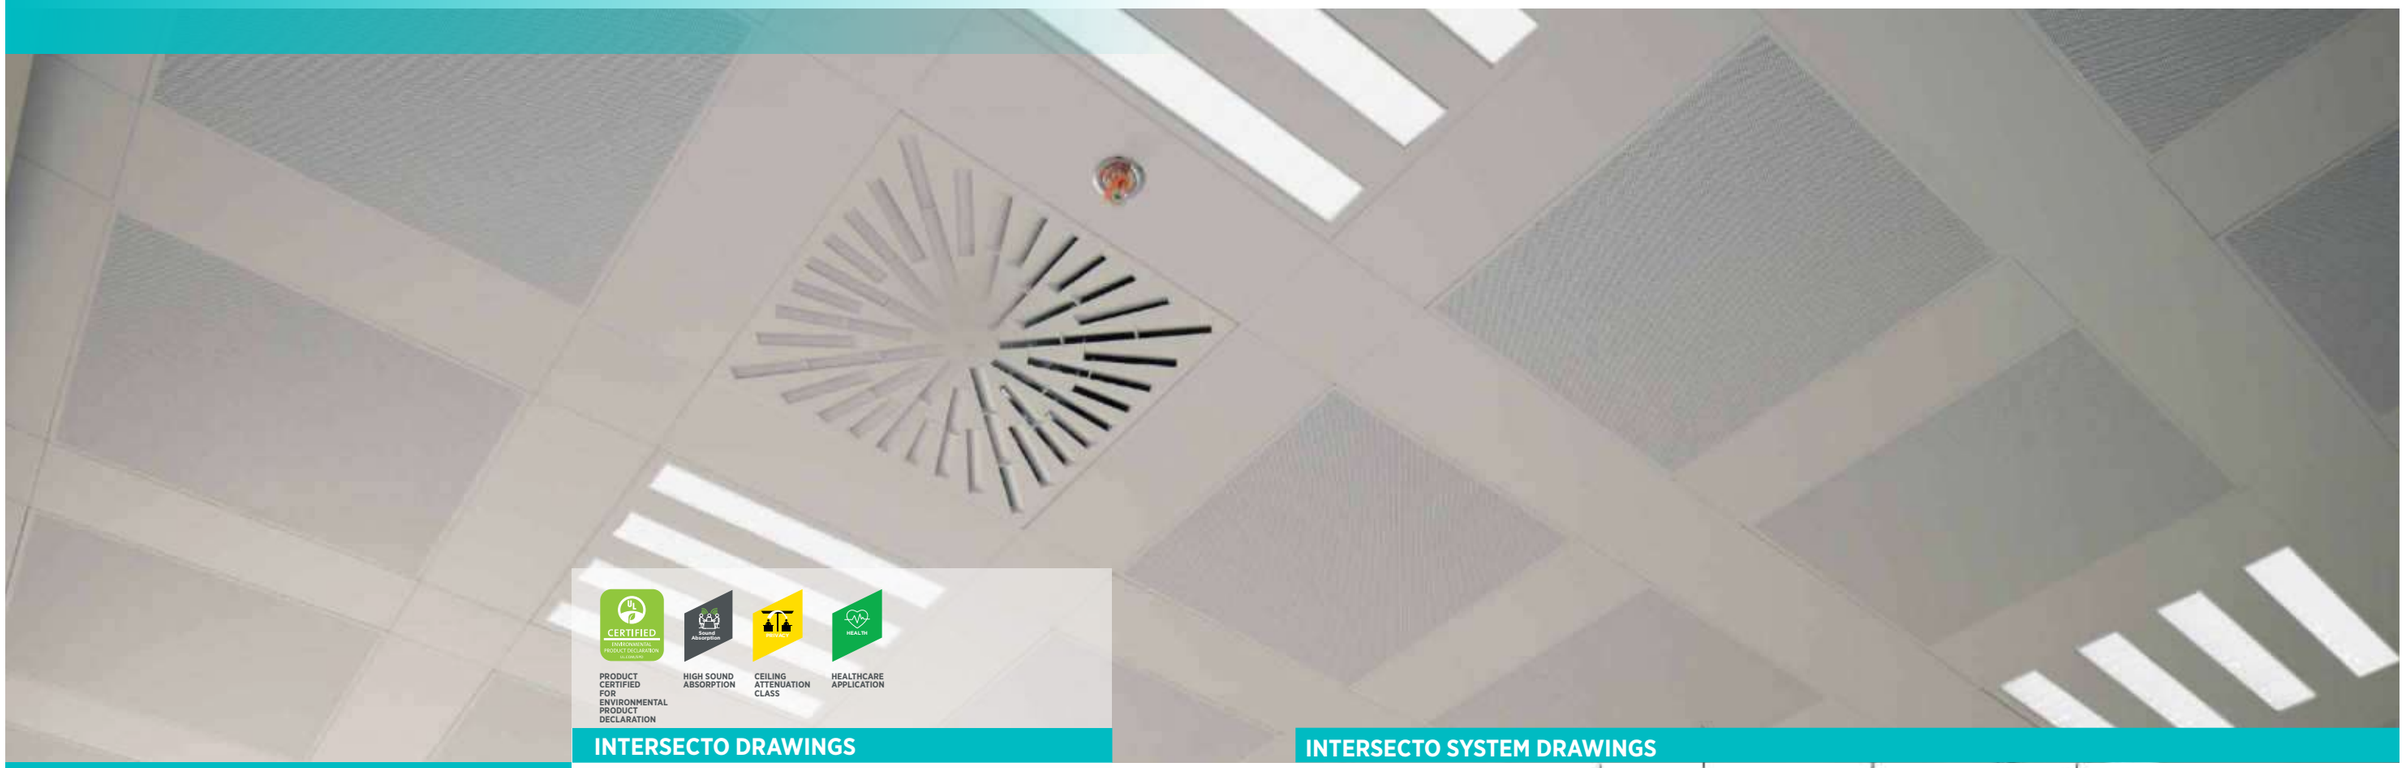

PRODUCT CERTIFIED FOR ENVIRONMENTAL PRODUCT DECLARATION

HIGH SOUND ABSORPTION

CEILING ATTENUATION CLASS

HEALTHCARE APPLICATION

FEATURES AND BENEFITS

- Modern modular design, configurable options.
- The crossing panel can be aligned with partitions for optimum design configurations.
- The width of the crossing panel is adjustable from narrow to wide.
- The crossing box adds continuity and a special appearance to the ceiling design.
- All panels are demountable, allowing easy access to the plenum.
- Easy service integration.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.

APPLICATIONS

- Public areas
- Reception
- Lobbies
- Office spaces
- Libraries
- Lecture halls
- Airports

INTERSECTO DRAWINGS



AVAILABLE FINISHES


Explore the complete range of colors, finishes, and perforation patterns on pages 306-310 for detailed insights.

SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
A1 Pattern** with Infill***	0.50	**0.60**	**0.65**	**0.75**	**0.70**	0.70	**0.70**


** Calculated to ASTM C 423-01*
*** A1 Pattern: Diagonal Pattern. Hole Size Dia: 1.8mm, Open Area: 20%*
**** Infill: Acoustic Fleece and 30mm Soft Fiber*

INTERSECTO SYSTEM DRAWINGS

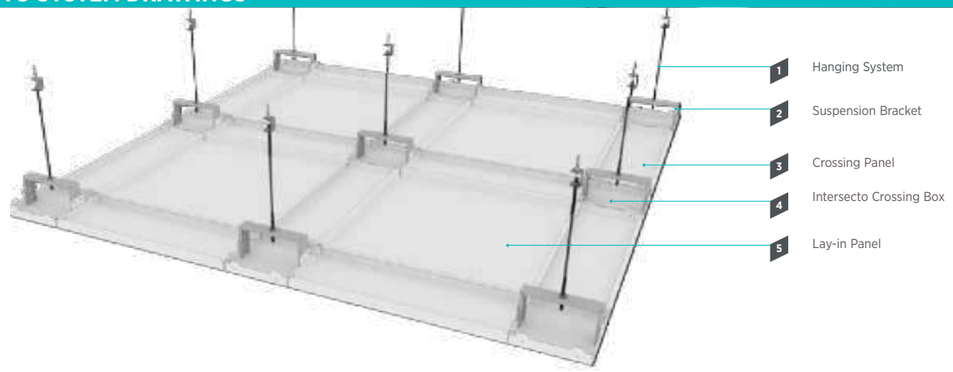



SYSTEM COMPONENTS



Crossing Box



Crossing Panel



Lay-In Panel



Suspension Bracket

Hanging System



SYSTEM SPECIFICATION

Material Classification
Galvanized Steel: Type V
Aluminium: Type VII
Stainless Steel: Type VI
Pattern: A, C
Thickness
Powder coat finish: 0.6mm – 1.4mm
Wooden finish: 0.6mm
Panel Height
30mm
Panel Size
Standard: 600 x 600mm
Crossing Panel Length
Up to 2400mm
Crossing Panel Width
100, 150 and 200mm
Color
Standard colors are RAL 9005, RAL 9006, RAL 9016.
Other RAL colors are available upon request.
Light Reflectance Coefficient [LR]
Based on the finish color and perforation pattern, LR up to 0.82
Surface Burning Characteristics per ASTM E 84
Class A
Additional Information
- Thickness depends on panel sizes and project requirements
- Consult USG Middle East technical team for other panel sizes




INTERSECTO CEILING ACOUSTICAL PERFORMANCE

USG Middle East supplies metal ceiling panels with a range of acoustical performance to meet the needs of all kinds of projects. A variety of sound-absorbing backing options are available. Consult with the USG Middle East technical team for further guidance.

PATTERN	OPEN AREA%	CELEBRETTO® METAL CEILING INFILL OPTIONS	CAC	NRC
A1	20%	Intersecto Metal Ceiling with Infill	35	0.70

• A1 Pattern: Diagonal Pattern, Hole Size Dia 1.8mm

INFILL OPTIONS*

Plain	Acoustic Fleece	Acoustic Fleece and Soft Fiber	Acoustic Fleece and Mineral Fiber
			

** Additional backer options available for NRC and CAC enhanced total acoustical performance*



ITEM CODIFICATION

Lay In Panel

A: Aluminium
S: Steel
SS: Stainless Steel
I: Intersecto
L: Lay-In
PA1: Perforated A1 Pattern
Panel Dimensions
10: 1.0mm Thickness
R10: RAL 9010
SF38: Soft Fiber Infill 38mm Thickness

AILPA1-600600 10 R10-SF38

Crossing Panel

S: Steel
A: Aluminium
SS: Stainless Steel
I: Intersecto
CP: Crossing Panel
200: First Dimension
1200: Second Dimension
9: 0.9mm Thickness
R10: RAL 9010


SI-CP-200 1200 9 R10

Crossing Box

S: Steel
A: Aluminium
SS: Stainless Steel
I: Intersecto
CB: Crossing Box
200: 200X200mm
9: 0.9mm Thickness
R10: RAL 9010

SI-CB-200 9 R10

CELEBRETTO®
LINEAR TRACK

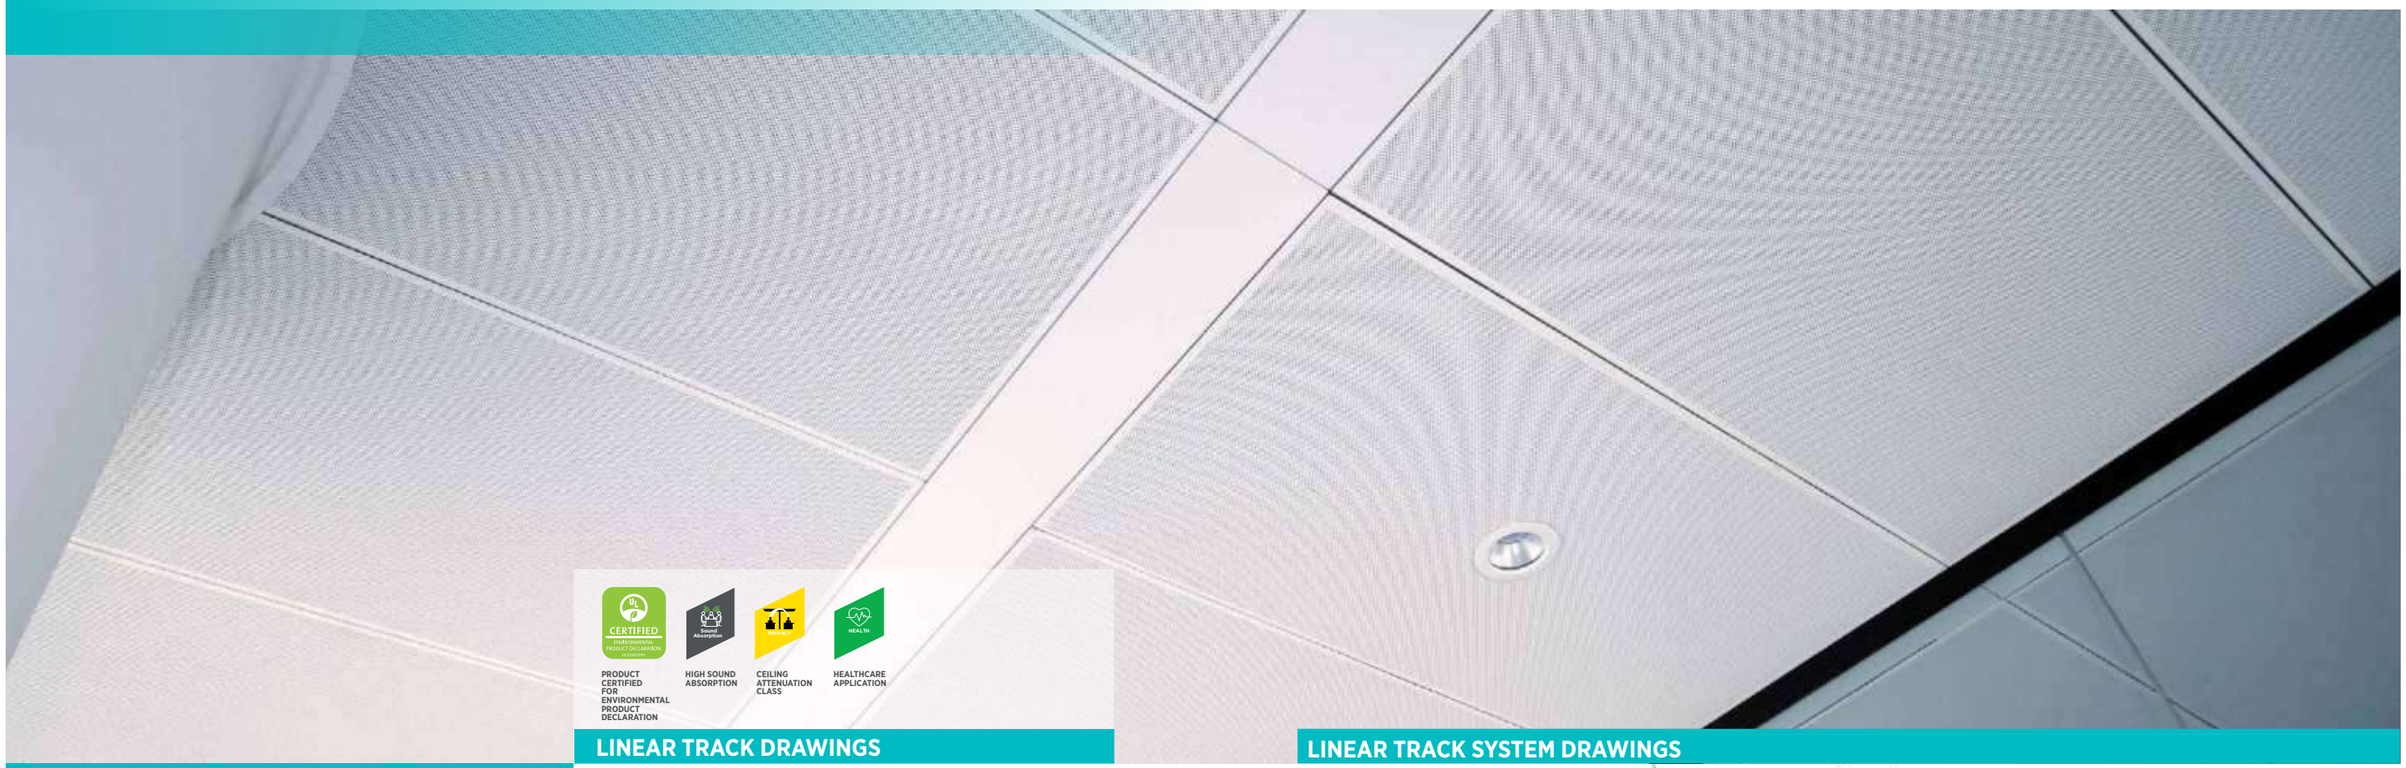

PRODUCT CERTIFIED FOR ENVIRONMENTAL PRODUCT DECLARATION

HIGH SOUND ABSORPTION

CEILING ATTENUATION CLASS

HEALTHCARE APPLICATION


FEATURES AND BENEFITS

- Modular design, configurable options.
- Linear track channels can be aligned with partitions.
- Linear track channel width is adjustable from narrow to wide.
- All panels are demountable without special tools, allowing easy access to the plenum.
- Easy service integration.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.

APPLICATIONS

- Large office spaces
- Train stations
- Universities
- Airports
- Executive offices

LINEAR TRACK DRAWINGS

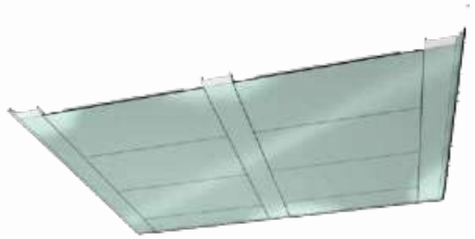

AVAILABLE FINISHES

Explore the complete range of colors, finishes, and perforation patterns on pages 306-310 for detailed insights.

SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
A1 Pattern** with Acoustic Fleece	0.70	**0.95**	**0.75**	**0.75**	**0.80**	0.80	**0.75**
A1 Pattern** with Infill***	0.70	**0.90**	**1.0**	**1.0**	**1.0**	1.0	**1.0**


** Calculated to ASTM C 423-01*
*** A1 Pattern: Diagonal Pattern. Hole Size Dia: 1.8mm, Open Area: 20%*
**** Infill: Acoustic Fleece and 30mm Soft Fiber with Aluminium Foil*

LINEAR TRACK SYSTEM DRAWINGS






SYSTEM COMPONENTS



Linear Track Panel



Linear Track Channel



Primary Channel



C-Channel Bracket



Hanging System



Perimeter Wall Angle Options

SYSTEM SPECIFICATION

Material Classification
Galvanized Steel: Type V
Aluminium: Type VII
Stainless Steel: Type VI
Pattern: A, C, G

Thickness
Powder coat finish: 0.6mm – 1.4mm
Wooden finish: 0.6mm

Panel Height
30mm to 50mm

Linear Track Width
100mm, 150mm, 200mm, 250mm, 300mm

Panel Width
200mm to 600mm

Panel Length
Up to 2400mm

Edge (optional)
3mm black gasket

Light Reflectance Coefficient [LR]
Based on the finish color and perforation pattern, LR up to 0.82

Color
Standard: RAL 9016, RAL9006 and RAL9010.
Other RAL colors are available upon request.
Wooden patterns are available upon request

Surface Burning Characteristics per ASTM E 84
Class A

Additional Information

- Thickness depends on panel sizes and project requirements
- Consult USG Middle East technical team for other panel sizes



LINEAR TRACK CEILING ACOUSTICAL PERFORMANCE

USG Middle East supplies metal ceiling panels with a range of acoustical performance to meet the needs of all kinds of projects. Various sound-absorbing backing options are available with performance up to 1.0 NRC and 34dB CAC. Consult with the USG Middle East technical team for further guidance.


PATTERN	OPEN AREA%	CELEBRETTO® METAL CEILING INFILL OPTIONS	CAC	NRC
A1	20%	Acoustic fleece	-	0.75
A1	20%	19mm Soft Fiber infill	-	0.90
A1	20%	15mm Mineral Fiber infill	32	-
A1	20%	Acoustic fleece with 30mm Stonewool & 19mm Mineral Fiber infill	32	0.90
A1	20%	Acoustic fleece with 25mm Glasswool & 12mm Gypsum infill	30	0.85
A1	20%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	34	1.00
B2	16%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	30	0.80
15E	11%	Acoustic fleece	-	0.65
15E	11%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	27	0.80
7E	1%	Celebretto Metal Ceiling with acoustic fleece	-	0.65
7E	1%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	26	0.90

- *A1 Pattern: Diagonal Pattern, Hole Size Dia 1.8mm*
- *B2 Pattern: Even Pattern, Hole Size Dia 2.5mm*
- *15D Pattern: Diagonal Pattern, Hole Size Dia 1.5mm*
- *15E Pattern: Even Pattern, Hole Size Dia 1.5mm*
- *7E Pattern: Even Pattern, Hole Size Dia 0.75mm*

INFILL OPTIONS*

Plain	Acoustic Fleece	Acoustic Fleece and Soft Fiber	Acoustic Fleece and Mineral Fiber
			

** Additional backer options available for NRC and CAC enhanced total acoustical performance*

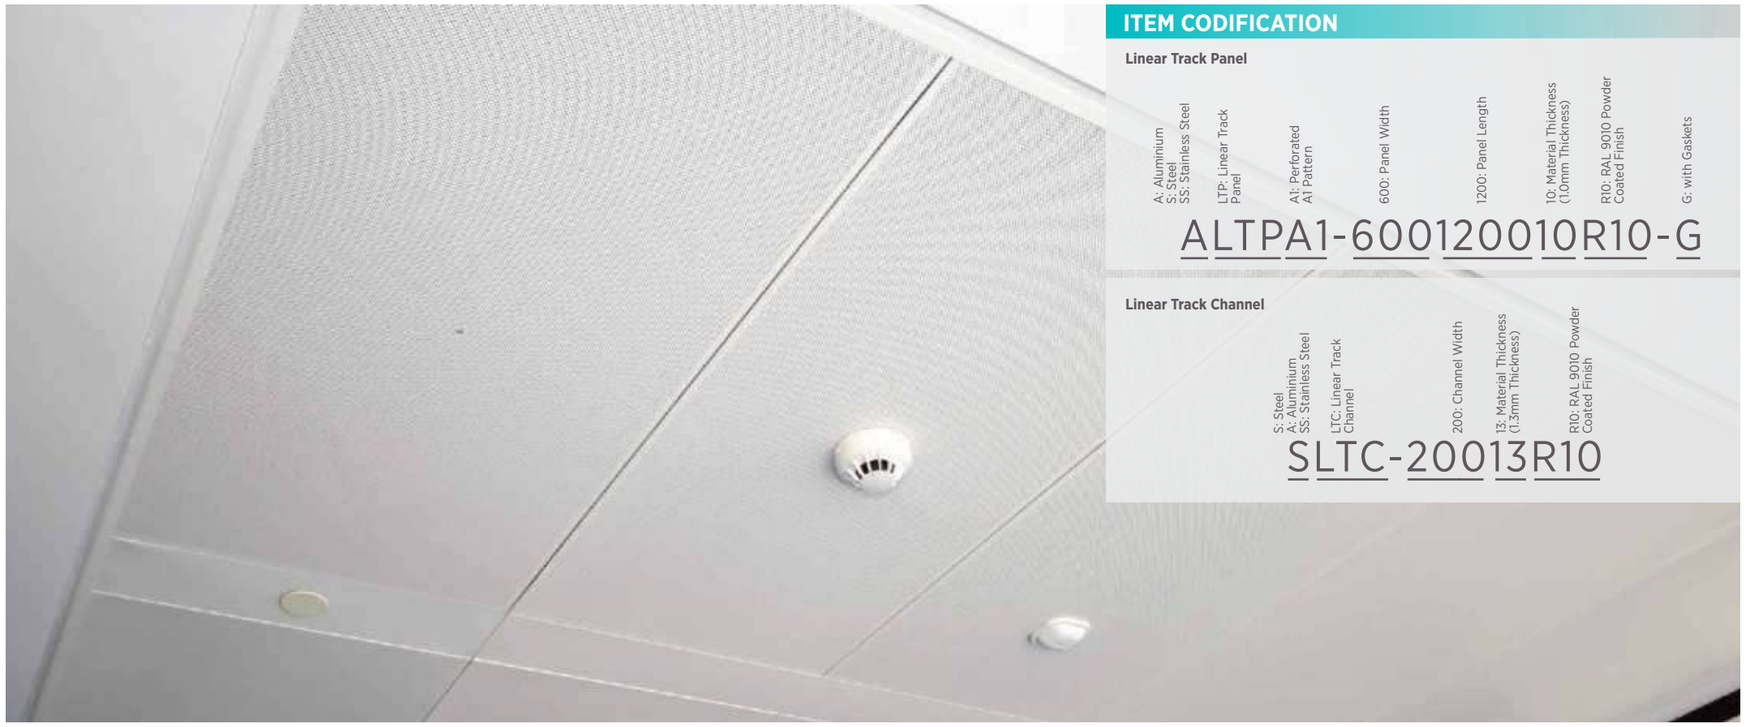

ITEM CODIFICATION

Linear Track Panel

A: Aluminium
S: Steel
SS: Stainless Steel

LTP: Linear Track Panel

A1: Perforated A1 Pattern

600: Panel Width

1200: Panel Length

10: Material Thickness (1.0mm Thickness)

R10: RAL 9010 Powder Coated Finish

G: with Gaskets

ALTPA1-600120010R10-G

Linear Track Channel

S: Steel
A: Aluminium
SS: Stainless Steel

LTC: Linear Track Channel

200: Channel Width

13: Material Thickness (1.3mm Thickness)

R10: RAL 9010 Powder Coated Finish

SLTC-20013R10

CELEBRETTO®
STRIP CEILING



HIGH SOUND ABSORPTION

CEILING ATTENUATION CLASS


FEATURES AND BENEFITS

- New strip panels offer beautiful ceiling design options and acoustic performance.
- Enhanced NRC performance with added acoustical backer.
- Standard and customizable perforations are available to create numerous visual patterns and to help with acoustical performance.
- Various mounting arrangements are available to accommodate any installation requirements and conditions: concealed, closed gap, and curved edges with filler strip.

APPLICATIONS

- Corridors
- Commercial offices
- Public areas
- Reception
- Airport
- Restrooms

STRIP CEILING DRAWINGS

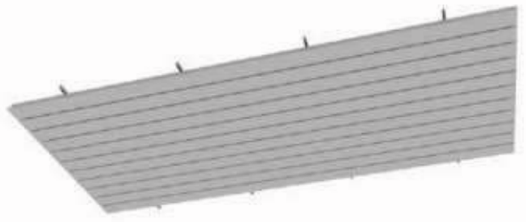

AVAILABLE FINISHES


Explore the complete range of colors, finishes, and perforation patterns on pages 306-310 for detailed insights.

SOUND ABSORPTION


Frequency, Hz	125	250	500	1000	2000	4000	NRC*
A1 Pattern** with Acoustic Fleece	0.70	**0.95**	**0.75**	**0.75**	**0.80**	0.80	**0.75**
A1 Pattern** with Infill***	0.70	**0.90**	**1.0**	**1.0**	**1.0**	1.0	**1.0**

** Calculated to ASTM C 423-01*
*** A1 Pattern: Diagonal Pattern. Hole Size Dia: 1.8mm, Open Area: 20%*
**** Infill: Acoustic Fleece and 30mm Soft Fiber with Aluminium Foil*

STRIP CEILING SYSTEM DRAWINGS

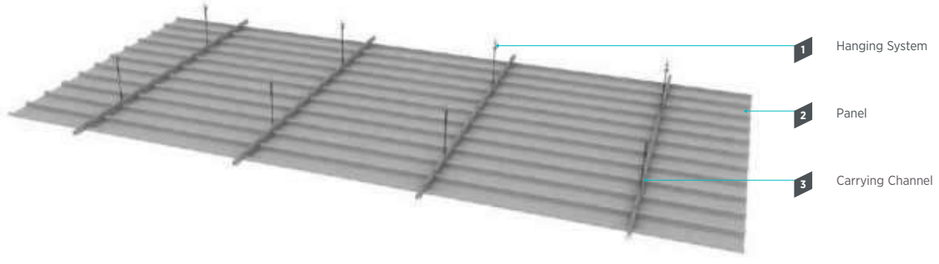

SYSTEM COMPONENTS



Panel and Connector



Carrying Channel and Connector



Hanging System

SYSTEM SPECIFICATION

Material Classification
Galvanized Steel: Type V
Aluminium: Type VII
Stainless Steel: Type VI
Pattern: G
Thickness
Prepainted Galvanized Steel: 0.5mm – 0.7mm
Prepainted Aluminium: 0.6mm - 1.0mm
Powder Coated: 0.6mm – 1.0mm
Wooden Finish: 0.6mm
Panel Width
80mm to 200mm
Panel Length
Powder Coated: Up to 3.5M
Prepainted and Wood Finish: Up to 6M

Panel Height
Refer to strip design drawing
Light Reflectance Coefficient [LR]
Based on the finish color and perforation pattern, LR up to 0.82
Color
Standard: RAL 9016, RAL 9006 and RAL 9010.
Other RAL colors are available upon request
Surface Burning Characteristics per ASTM E 84
Class A
Additional Information
- Thickness depends on panel sizes and project requirements
- Consult USG Middle East technical team for other panel sizes



STRIP CEILING ACOUSTICAL PERFORMANCE

USG Middle East supplies metal ceiling panels with a range of acoustical performance to meet the needs of all kinds of projects. Various sound-absorbing backing options are available with performance up to 1.0 NRC and 34dB CAC. Consult with the USG Middle East technical team for further guidance.

PATTERN	OPEN AREA%	CELEBRETTO® METAL CEILING INFILL OPTIONS	CAC	NRC
A1	20%	Acoustic fleece	-	0.75
A1	20%	19mm Soft Fiber infill	-	0.90
A1	20%	15mm Mineral Fiber infill	32	-
A1	20%	Acoustic fleece with 30mm Stonewool & 19mm Mineral Fiber infill	32	0.90
A1	20%	Acoustic fleece with 25mm Glasswool & 12mm Gypsum infill	30	0.85
A1	20%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	34	1.00
B2	16%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	30	0.80
15E	11%	Acoustic fleece	-	0.65
15E	11%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	27	0.80
7E	1%	Celebretto Metal Ceiling with acoustic fleece	-	0.65
7E	1%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	26	0.90

*
- *A1 Pattern: Diagonal Pattern, Hole Size Dia 1.8mm*
- *B2 Pattern: Even Pattern, Hole Size Dia 2.5mm*
- *15D Pattern: Diagonal Pattern, Hole Size Dia 1.5mm*
- *15E Pattern: Even Pattern, Hole Size Dia 1.5mm*
- *7E Pattern: Even Pattern, Hole Size Dia 0.75mm*

INFILL OPTIONS*


Plain	Acoustic Fleece	Acoustic Fleece and Soft Fiber	Acoustic Fleece and Mineral Fiber
			


** Additional backer options available for NRC and CAC enhanced total acoustical performance*

STRIP CEILING DESIGN

CLD: CONCEALED







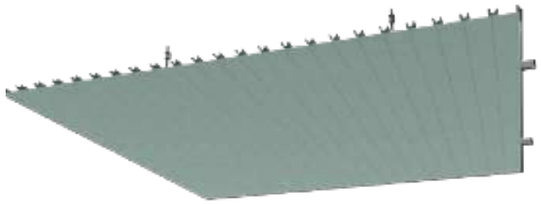


CG20: CLOSED GAP 20MM






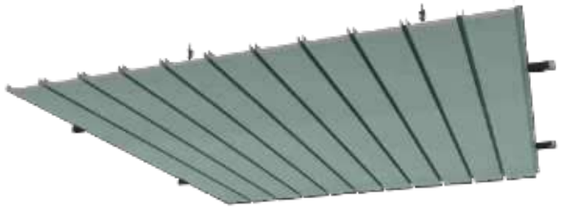



CVD: CURVED EDGES



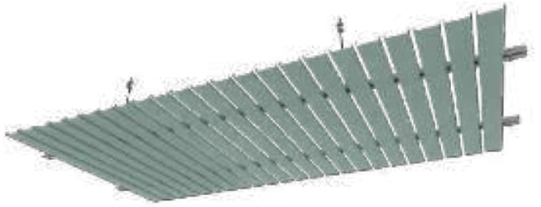

CVDF: CURVED EDGES WITH FILLER STRIP



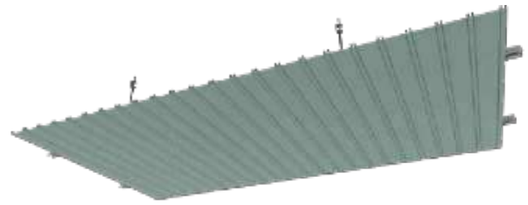



ITEM CODIFICATION

A: Aluminium
S: Steel
S: Strip Ceiling
CG20: Closed Gap 20mm
CLD: Concealed
CVD: Curved Edges
CVDF: Curved Edges with Filler
200: Module Width
7: Material Thickness (0.7mm Thickness)
R16: RAL 9016 Powder Coated Finish

AS-CG20-2007R16

CELEBRETTO®
EXPANDED METAL MESH CEILING



FEATURES AND BENEFITS

- Expanded Metal Mesh ceilings are becoming popular amongst designers due to their raw industrial appearance.
- Improves the smoke extraction requirements.
- Mainly available in lay-on and hook-on systems.
- Available in many mesh patterns and colors and with an optional acoustic infill to improve acoustic requirements.
- The mesh ceiling allows a more refined industrial look and an alternative option to the exposed soffit.

APPLICATIONS

- Restaurant
- Public areas
- Reception
- Lobbies
- Office spaces
- Airport

EXPANDED METAL MESH CEILING DRAWINGS



AVAILABLE COLORS

Explore the complete range of colors, finishes, and perforation patterns on pages 306-310 for detailed insights.

SYSTEM SPECIFICATION


Material Classification
Galvanized Steel: Type V
Aluminium: Type VII
Pattern: Z
Panel Size
300 x 300mm, 300 x 1200mm, 300 x 1500mm, 600 x 600mm, 600 x 1200mm
Thickness
1.5mm-3mm
Height
Lay-on: 20mm-30mm
Hook-on: 40mm up to 200mm
Color
Standard colors are RAL 9005, RAL 9006, RAL 9016. Other RAL colors are available upon request.

Infill
Mineral fiber (optional)
Soft fiber Infill (optional)
Surface Burning Characteristics per ASTM E 84
Class A
Additional Information
- Thickness depends on panel sizes and project requirements
- Consult USG Middle East technical team for other panel sizes




SYSTEM COMPONENTS


1. EXPANDED METAL MESH SYSTEM COMPONENTS LAY-ON SYSTEM



Lay-On Mesh Ceiling Panel



Suspension System (DONN® Brand)



Hanging System


2. EXPANDED METAL MESH SYSTEM COMPONENTS HOOK-ON SYSTEM



Hook-On Mesh Ceiling Panel



J-Profile




Hanging System




Galvanized Steel, H=40mm, L=3000mm

Primary Channel




J-Profile Hanging Bracket

1. EXPANDED METAL MESH LAY-ON SYSTEM DRAWINGS

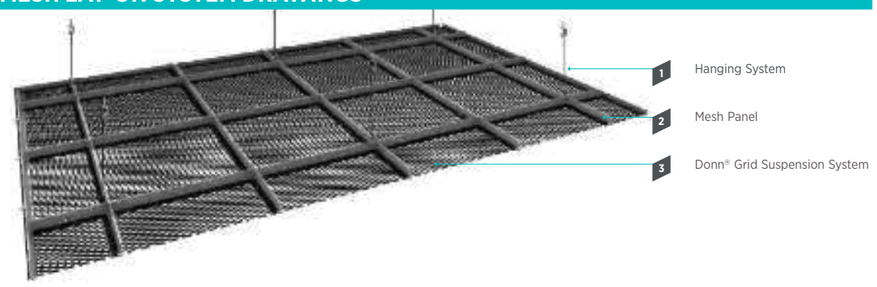


2. EXPANDED METAL MESH HOOK-ON SYSTEM DRAWINGS

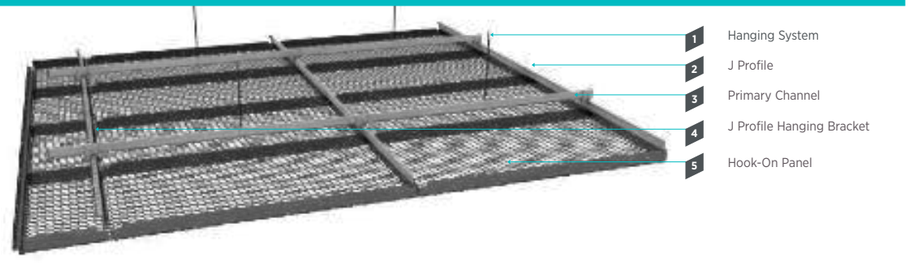


EXPANDED METAL MESH CEILING STANDARD PATTERNS


Pattern Name	S.W	L.W	Strand Width	Thickness	Open Area
S 1	17mm	35mm	5mm	1.5mm	54%
S 2	25mm	62mm	5mm	1.5mm	72%



S 1




S 2



S Mesh Pattern

EXPANDED METAL MESH CEILING PREMIUM PATTERNS*

Pattern Name	S.W	L.W	Strand Width	Thickness	Open Area
M 1	30mm	31mm	5mm	2mm	61.30%
M 2	30mm	125mm	20mm	3mm	72.87%



M 1




M 2




M Mesh Pattern


Pattern Name	S.W	L.W	Strand Width	Thickness	Open Area
L 1	18mm	29mm	5mm	2mm	48.25%
L 2	54mm	78mm	20mm	3mm	48.26%



L 1




L 2




L Mesh Pattern

(CONT.) EXPANDED METAL MESH CEILING PREMIUM PATTERNS*

Pattern Name	S.W	L.W	Strand Width	Thickness	Open Area
R 1	60mm	90mm	20mm	3mm	58.66%



R 1



R Mesh Pattern

Pattern Name	S.W	L.W	Strand Width	Thickness	Open Area
G 1	10mm	35mm	5mm	2mm	64.93%
G 2	20mm	70mm	10mm	2mm	54.73%
G 3	30mm	105mm	20mm	3mm	51.10%




G 1



G 2



G 3



G Mesh Pattern


** Available upon request. Check with our technical team for lead time delivery.*

INFILL



Expanded Metal Mesh with Infill

L.W / S.W ILLUSTRATION

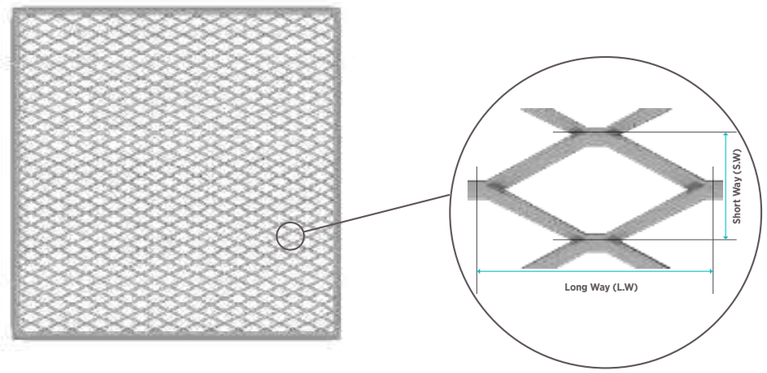

ITEM CODIFICATION

A: Aluminium
S: Steel

MSH: Mesh Ceiling

LO: Lay-On

M1: Pattern M1

600120: Mesh Panel Dimension

15: Thickness
(1.5mm Thickness)

R05: Color

SMSHLO-M1-600120015R05



CELEBRETTO®
GEOMETRIX



FEATURES AND BENEFITS

- Multiple panels depths lend new dimension to ceiling design
- Panel depths of 7mm-200mm provide an array of possibilities for the architect.
- 600x600mm lay-in panels are compatible with USG Middle East DONN® brand suspension systems for T24 or T15.
- Plain or perforated panels.
- Available in custom colors for design versatility.
- Panel configuration is available for flat panels and wedge panels.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.

APPLICATIONS

- All commercial applications
- Wall to wall ceilings
- Schools
- Executive offices
- Reception and lobby areas
- New construction or renovation

GEOMETRIX DRAWINGS



AVAILABLE FINISHES




Explore the complete range of colors, finishes, and perforation patterns on pages 306-310 for detailed insights.

SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
A1 Pattern** with Acoustic Fleece	0.70	**0.95**	**0.75**	**0.75**	**0.80**	0.80	**0.75**
A1 Pattern** with Infill***	0.70	**0.90**	**1.0**	**1.0**	**1.0**	1.0	**1.0**

* *Calculated to ASTM C 423-01*
** *A1 Pattern: Diagonal Pattern. Hole Size Dia: 1.8mm, Open Area: 20%*
*** *Infill: Acoustic Fleece and 30mm Soft Fiber with Aluminium Foil*

GEOMETRIX SYSTEM DRAWINGS

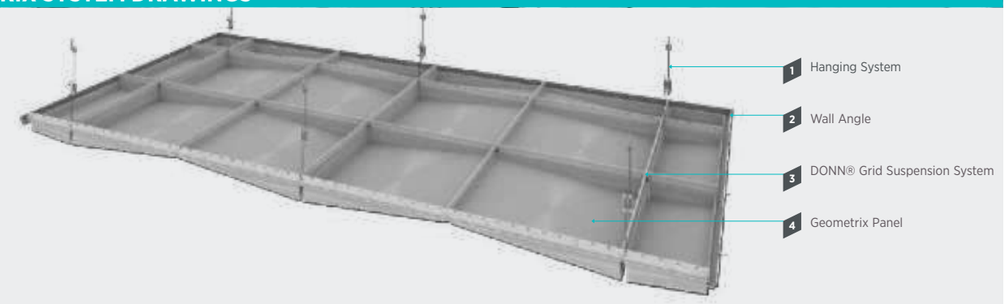

SYSTEM COMPONENTS



Geometrix Panel



Suspension System (DONN® Brand)



Hanging System

GEOMETRIX

SYSTEM SPECIFICATION

Material Classification
Galvanized Steel: Type V
Aluminium: Type VII
Stainless Steel: Type VI
Pattern: A, C, G
Panel Thickness
Powder coat finish: 0.6mm – 1.4mm
Wooden finish: 0.6mm
Panel Size
600 x 600mm
Panel Depth (Height)
7mm - 200mm
Edge
Lay-in square edge

Light Reflectance Coefficient [LR]
Based on the finish color and perforation pattern, LR up to 0.82
Color
Standard colors are RAL 9005, RAL 9006, RAL 9016. Other RAL colors are available upon request.
Surface Burning Characteristics per ASTM E 84
Class A
Additional Information
- Thickness depends on panel sizes and project requirements
- Consult USG Middle East technical team for other panel sizes


GEOMETRIX CEILING ACOUSTICAL PERFORMANCE

USG Middle East supplies metal ceiling panels with a range of acoustical performance to meet the needs of all kinds of projects. Various sound-absorbing backing options are available with performance up to 1.0 NRC and 34dB CAC. Consult with the USG Middle East technical team for further guidance.

PATTERN	OPEN AREA%	CELEBRETTO® METAL CEILING INFILL OPTIONS	CAC	NRC
A1	20%	Acoustic fleece	-	0.75
A1	20%	19mm Soft Fiber infill	-	0.90
A1	20%	15mm Mineral Fiber infill	32	-
A1	20%	Acoustic fleece with 30mm Stonewool & 19mm Mineral Fiber infill	32	0.90
A1	20%	Acoustic fleece with 25mm Glasswool & 12mm Gypsum infill	30	0.85
A1	20%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	34	1.00
B2	16%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece	-	0.60
15D	22%	Acoustic fleece with 30mm Stonewool & Aluminum Foil	30	0.80
15E	11%	Acoustic fleece	-	0.65
15E	11%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	27	0.80
7E	1%	Celebretto Metal Ceiling with acoustic fleece	-	0.65
7E	1%	Celebretto Metal Ceiling with acoustic fleece and 30mm Stonewool & Aluminum Foil	26	0.90

• A1 Pattern: Diagonal Pattern, Hole Size Dia 1.8mm
• B2 Pattern: Even Pattern, Hole Size Dia 2.5mm
• 15D Pattern: Diagonal Pattern, Hole Size Dia 1.5mm
• 15E Pattern: Even Pattern, Hole Size Dia 1.5mm
• 7E Pattern: Even Pattern, Hole Size Dia 0.75mm


INFILL OPTIONS*

Plain	Acoustic Fleece	Acoustic Fleece and Soft Fiber	Acoustic Fleece and Mineral Fiber
			


** Additional backer options available for NRC and CAC enhanced total acoustical performance*

GEOMETRIX DESIGNS


DESIGN 1

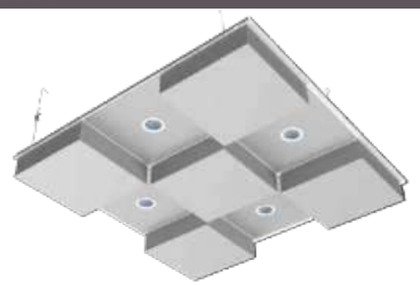


DESIGN 2

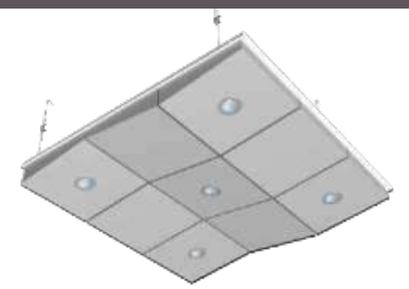


DESIGN 3

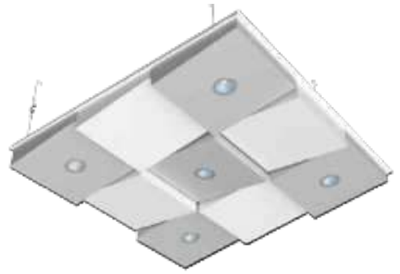


DESIGN 4

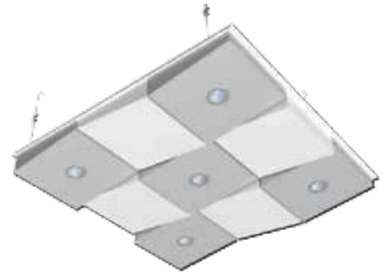

DESIGN 5

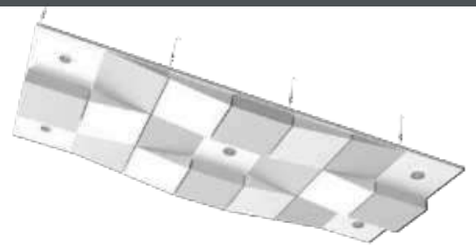

DESIGN 6

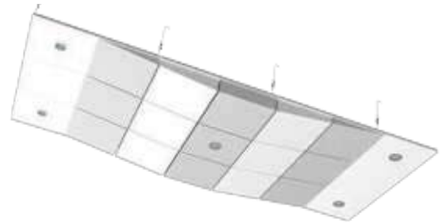


PANEL CONFIGURATIONS

FLAT PANEL



WEDGE PANEL

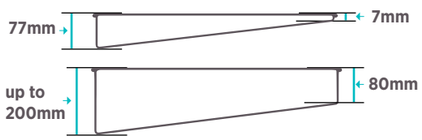



ITEM CODIFICATION

A: Aluminium
S: Steel
SS: Stainless Steel
LGX: Lay-In Geometrix
150: Panel Depth
N: Narrow (T15 grid)
W: Wide (24 grid)
600600: Panel Dimensions
7: Material Thickness (0.7mm thickness)
R16: RAL 9016 Powder Coated Finish

ALGX150N-6006007R16

06



NATURAL ELEGANCE

STORY OF NATURAL WOOD WOOL CEILING & DESIGN POSSIBILITIES

Ensuring visual appeal and a harmonious indoor atmosphere.

USG Middle East introduces Wood Wool Ceilings—versatile panels perfect for diverse environments. They are engineered for varied temperatures and humidity. They contain an original surface texture and a broad spectrum of color choices. Made from natural ingredients, they foster a cozy micro-climate akin to wooden structures, enhancing space comfort. Choose Wood Wool Ceilings for a natural charm and adaptability blend, ensuring visual appeal and a harmonious indoor atmosphere.



SKYNEST®

1. WOOD WOOL SUSPENDED CEILING

CEILINGS FEATURES

Enhance your space with natural elegance and acoustic quality. This elite ceiling solution, made from renewable wood fibers, improves aesthetics while decreasing sound reverberation. Skynest® Wood Wool Suspended Ceiling offers the ideal balance of design and suitability.



SKYNEST®

2. WOOD WOOL DIRECT MOUNTING CEILING

CEILINGS FEATURES

Experience the finesse of Skynest® Wood Wool Direct Mounting Ceiling. This ceiling solution, made from renewable wood fibers, combines beauty and suitability. It is ideal for rooms with a mixture of elegance and acoustic performance. It mounts quickly and has a long-lasting appeal.

01

SKYNEST®
WOOD WOOL SUSPENDED CEILING



FEATURES AND BENEFITS

- Durable and environmentally-friendly decorative acoustical wood wool panels for indoor use.
- Can achieve various required sound absorption parameters. The extended sound absorption coefficient can reach up to 1.0 NRC.
- Available in concealed and lay-in options.
- Made from high-quality wood wool and cement.
- Class A Firechief™ material with great acoustic and thermal insulation capacities.
- Perfectly suitable for the broadest range of interior solutions.
- Certified for FSC and the Programme for the Endorsement of Forest Certification (PEFC).
- M1 Formaldehyde emission class.
- Available in 1.0mm, and 1.5mm wood wool strips. 3mm as an option.
- Available in different colors and panel size configurations.
- Featuring a concealed suspension ceiling system with many design configurations for a modern interior design.


APPLICATIONS

- Public and office premises
- Recording studios, radio and TV studios
- Schools and kindergartens
- Concert halls, theaters, cinemas
- Industrial and production premises
- Restaurant

WOOD WOOL SUSPENDED CEILING



AVAILABLE COLORS



SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
15mm	0.55	**0.60**	**0.45**	**0.60**	**0.70**	0.75	**0.60**
15mm**	0.80	**1.0**	**1.0**	**1.0**	**1.0**	1.0	**1.0**
25mm	0.60	**0.60**	**0.55**	**0.65**	**0.85**	0.95	**0.65**
25mm**	0.85	**1.0**	**1.0**	**1.0**	**1.0**	1.0	**1.0**

* *Calculated to ASTM C 423-01*
** *With acoustical infill*


Superfine 1 mm Wood Wool Strand Width


Fine 1.5 mm Wood Wool Strand Width


Regular 3 mm Wood Wool Strand Width

ITEM CODIFICATION

SN: Skynest®
F: Fine 1.5mm
S: Super Fine 10mm

SB: Square Beveled
R: SLT Edge
RF: FL Edge
RFD: Concealed D-BESK
DSC: Concealed S-BESK
FC: Fully Concealed

Panel Size :66 (600x600mm)

5: Panel Thickness (15mm)







G: Grey Color
B: Black Color
N: Natural Color
-: White Color

SW: Stonewool (Optional Infill)

5030: 50kg/m³, 30mm Thick

SNFSB665-G-SW5030

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXT/DXF FLB Edge	DX/DXL D-BESK Edge	DX/DXL BESK Edge
					

SPECIFICATIONS DETAILS

Skynest® Wood Wool Acoustical Ceiling meets the specifications in accordance with EN 13964.

Material Classification
Type: XIV, Pattern: L

Benefits
The panels are suitable for use in premises with a wide range of temperatures and air humidity and provide pleasing value. With original surface texture, there is an unlimited choice of colors. Due to the natural ingredients, the panels ensure a comfortable micro-climate, typical of premises constructed from wood.

Substrate and Surface Finish
Wood Wool substrate finished with factory applied paint finish

Wood Wool
1mm, 1.5mm, 3mm*

Panel Thickness
15mm, 25mm

Edge Detail Trim
Square [SQ, SB], Reveal [SLT, FL]
Concealed [BESK, D-BESK, S-BESK]

Weight
1mm Wood Wool:
15mm: 6.3 kg/m²
25mm: 10.5 kg/m²
1.5mm Wood Wool:
15mm: 5.9 kg/m²
25mm: 9.8 kg/m²

Noise Reduction Coefficient [NRC]
[0.60] [0.65] [1.0]

Color
Natural, white, black, grey, or painted according to RAL color chart.

Reaction to Fire as per EN 13501-1
1mm Wood Wool: A2-s1, d0
1.5mm Wood Wool: B-s1, d0

Thermal conductivity
λ = 0.066 W/mK

Maintenance
Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with warm water and wipe surface.

Additional Information

- USG Middle East's Skynest® Wood Wool Acoustical Ceiling Panels are flat. However, they will exhibit an inherent deflection, which may be more apparent as the proximity to adjacent surfaces is reduced. This deflection should be no more than 5mm. Local environmental conditions may increase this variance.
- Take care to minimize movement due to airflow within a space.
- Installation of wood wool acoustic panels is for interior use in an environment with carefully controlled humidity and temperature.
- Installation should take place in a clean, dust-free environment.
- Panels should be stored flat to protect against moisture and dirt.
- Panel surface color may vary from edge color as these are natural materials.


** 3mm Wood Wool are available upon request, refer to our technical department for more information*


Superfine
1 mm Wood Wool Strand Width


Fine
1.5 mm Wood Wool Strand Width


Regular
3 mm Wood Wool Strand Width

SKYNEST®
WOOD WOOL DIRECT MOUNTING CEILING

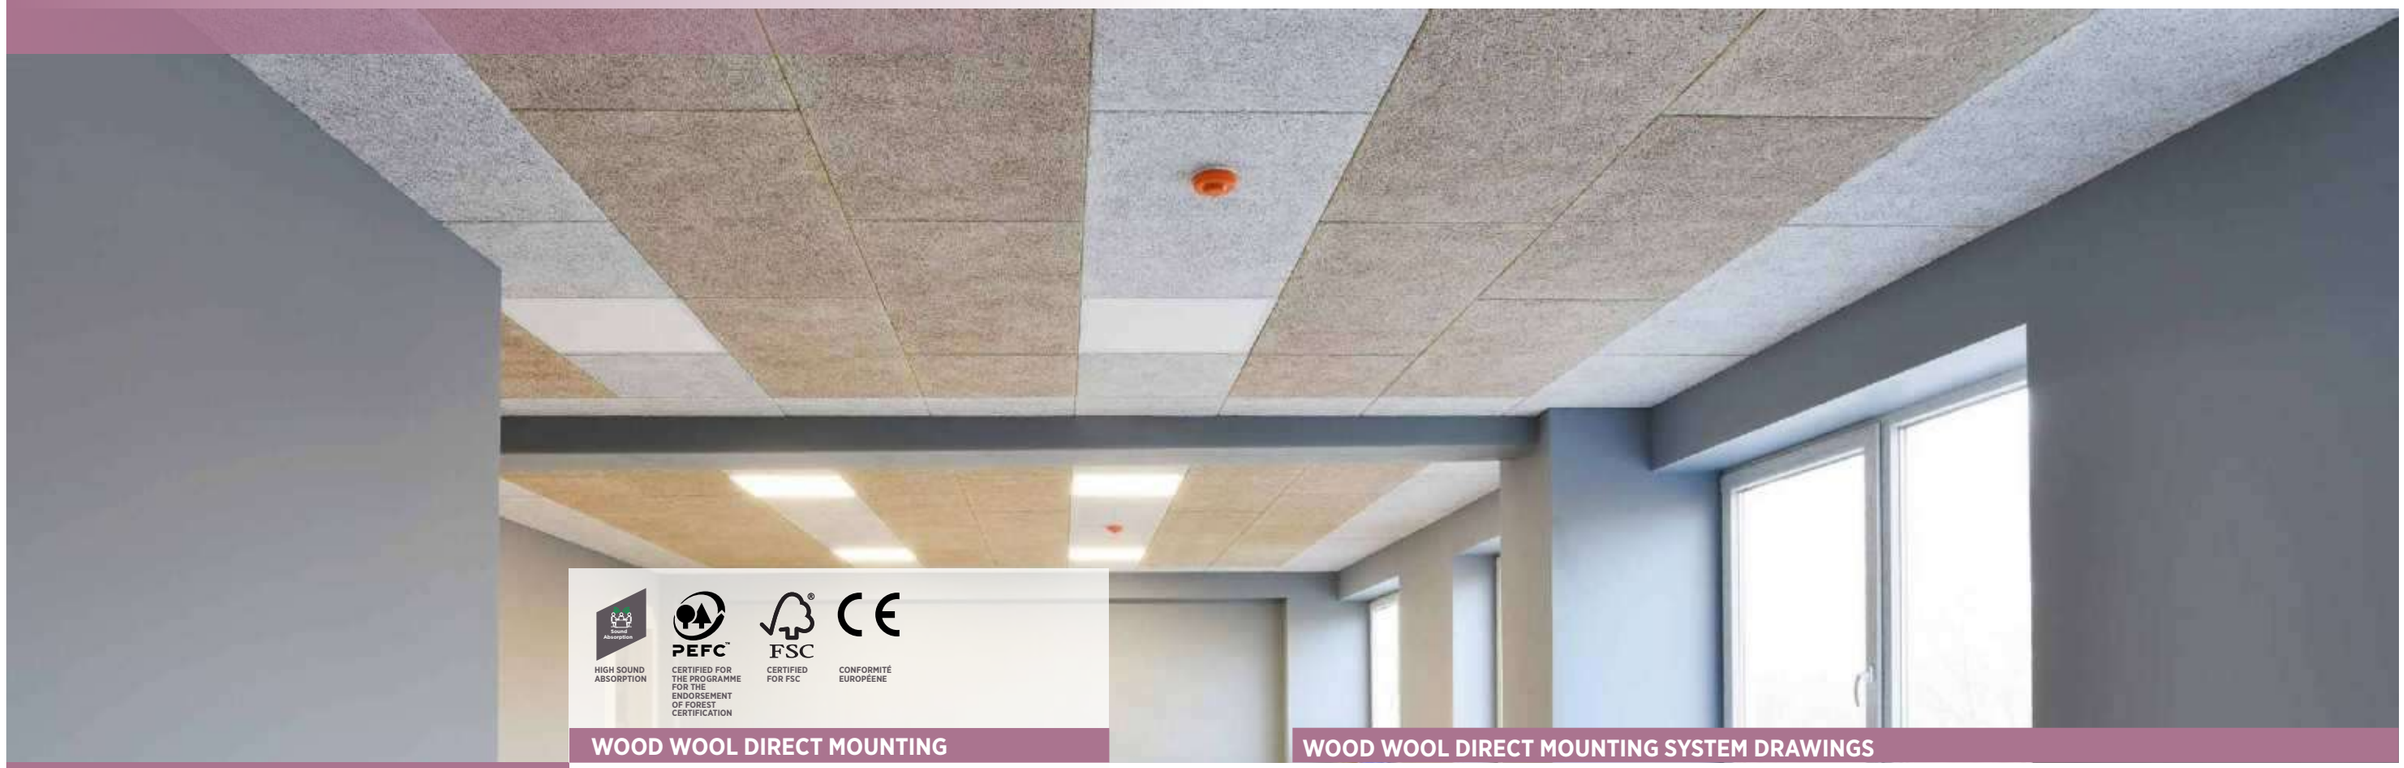

HIGH SOUND ABSORPTION
CERTIFIED FOR THE PROGRAMME FOR THE ENDORSEMENT OF FOREST CERTIFICATION
CERTIFIED FOR FSC
CONFORMITÉ EUROPÉENE


FEATURES AND BENEFITS

- Directly fixed to the ceiling plenum using the drywall suspension system.
- Durable and environmentally-friendly decorative acoustical wood wool panels for indoor use.
- Made from high-quality wood wool and cement.
- Can achieve various required sound absorption parameters. The extended sound absorption coefficient can reach up to 1.0 NRC.
- Class A Firechief™ material with great acoustic and thermal insulation capacities.
- Perfectly suitable for the broadest range of interior solutions.
- Certified for FSC and the Programme for the Endorsement of Forest Certification (PEFC).
- M1 Formaldehyde emission class.
- Available in 1.0mm, and 1.5mm wood wool strips. 3mm as an option.
- Available in different colors and panel size configurations.


APPLICATIONS

- Public and office premises
- Recording studios, radio and TV studios
- Schools and kindergartens
- Concert halls, theaters, cinemas
- Industrial and production premises
- Restaurant

WOOD WOOL DIRECT MOUNTING

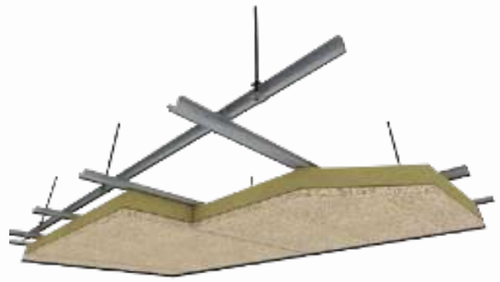

AVAILABLE COLORS




SOUND ABSORPTION

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
15mm	0.55	**0.60**	**0.45**	**0.60**	**0.70**	0.75	**0.60**
15mm**	0.80	**1.0**	**1.0**	**1.0**	**1.0**	1.0	**1.0**
25mm	0.60	**0.60**	**0.55**	**0.65**	**0.85**	0.95	**0.65**
25mm**	0.85	**1.0**	**1.0**	**1.0**	**1.0**	1.0	**1.0**

* *Calculated to ASTM C 423-01*
** *With acoustical infill*

WOOD WOOL DIRECT MOUNTING SYSTEM DRAWINGS

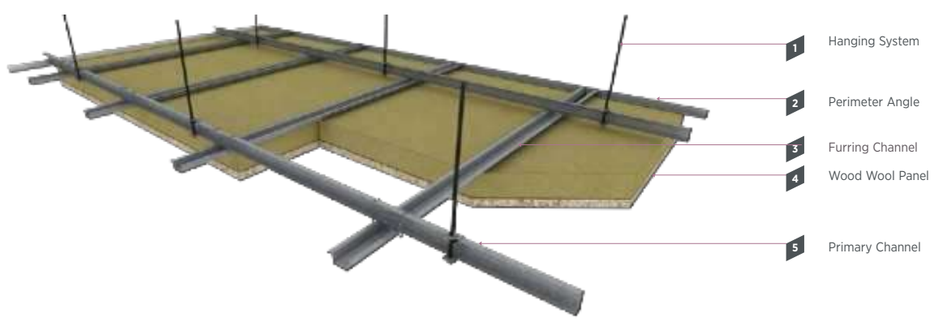



SYSTEM COMPONENTS



** Stonewool infill is available upon request*

Panel *



Furring Channel



Primary Channel



Perimeter Angle



Wire Connecting Clip



Screw

Superfine 1 mm Wood Wool Strand Width



Fine 1.5 mm Wood Wool Strand Width



Regular 3 mm Wood Wool Strand Width



SYSTEM SPECIFICATION

Skynest® Wood Wool Acoustical Ceiling meets the specifications in accordance with EN 13964.

Material Classification
Type: XIV
Pattern: L

Benefits
The panels are suitable for use in premises with a wide range of temperatures and air humidity and provide aesthetic value. With original surface texture, there is an unlimited choice of colors. Due to the natural ingredients, the panels ensure a comfortable micro-climate, typical of premises constructed from wood.

Substrate and Surface Finish
Wood Wool substrate finished with factory applied paint finish

Wood Wool
1mm, 1.5mm, 3mm**

Panel Thickness
15mm, 25mm

Edge Detail Trim
Square [SQ, SB], Reveal [SLT, FL], Concealed [Besk, D-Besk, S-Besk]

Weight
1mm Wood Wool:
15mm: 6.3 kg/m²
25mm: 10.5 kg/m²
1.5mm Wood Wool:
15mm: 5.9 kg/m²
25mm: 9.8 kg/m²

Infill Option
30mm to 75mm

Noise Reduction Coefficient [NRC]
[0.60] [0.65] [1.0]

Color
Natural, white, black, grey, or painted according to RAL color chart.

Reaction to Fire as per EN 13501-1
1mm Wood Wool: A2-s1, d0,
1.5mm Wood Wool: B-s1, d0

Thermal conductivity
λ = 0.066 W/mK

Maintenance
Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with warm water and wipe surface.

Additional Information

- USG Middle East's Skynest® Wood Wool Direct Mounting Ceiling Panels are flat. However, they will exhibit an inherent deflection, which may be more apparent as the proximity to adjacent surfaces is reduced. This deflection should be no more than 5mm. Local environmental conditions may increase this variance.
- Take care to minimize movement due to airflow within a space.
- Installation of wood wool acoustic panels is for interior use in an environment with carefully controlled humidity and temperature.
- Installation should take place in a clean, dust-free environment.
- Panels should be stored flat to protect against moisture and dirt.
- Panel surface color may vary from edge color as these are natural materials.

*** 3mm Wood Wool are available upon request, refer to our technical department for more information*



ITEM CODIFICATION

SN: Skynest®
F: Fine 1.5mm
S: Super Fine 1.0mm
SB: Square Beveled
R: SLT Edge
RF: FL Edge
RFD: Concealed D-BESK
DSC: Concealed S-BESK
FC: Fully Concealed
66: Panel Size (600x600mm)
5: Panel Thickness (15mm)
DM: Direct Mounting
G: Grey Color
B: Black Color
N: Natural Color
-: White Color
SW: Stonewool (Optional infil)
5030: Density: 50kg/m³ Thickness: 30mm, 40mm, 50mm, 60mm, 75mm

SNFSB665DM-G-SW5030

SOFT FIBER HARMONY:
CREATING QUITE SPACES WITH MODERN CEILING SOLUTIONS

07



> ***CONCEALED SOFT FIBER FOR SLEEK ELEGANCE, BRINGING TIMELESS COMFORT TO INTERIORS. REVEAL AND SQUARE EDGES TO ADD SENSE OF SERENITY TO YOUR SPACE.***

Step into the cozy charm of our Soft Fiber Modular Ceilings, where comfort meets creativity. Tailored for style; choose from various sizes and edge details, letting your creativity flow. Soft fibers not only add visual appeal but also bring a sense of calm. Designed for acoustic harmony, these tiles offer concealed options for a sleek finish. Whether concealed, reveal edges, or square edges, at USG Middle East, we create spaces that feel just right—where every module narrates a story of comfort and creative elegance.







SOFT FIBER CEILINGS

1. LOUNA™ ELEGANT
2. LOUNA™ ELITE
3. LOUNA™ NATURAL
4. LOUNA™ HI CAC
5. LOUNA™ HI CAC BLACK
6. HALCYON™
7. HALCYON™ BLACK
8. TRANQUILLE
9. FINISH OPTIONS
















01

SOFT FIBER

LOUNA™ ELEGANT

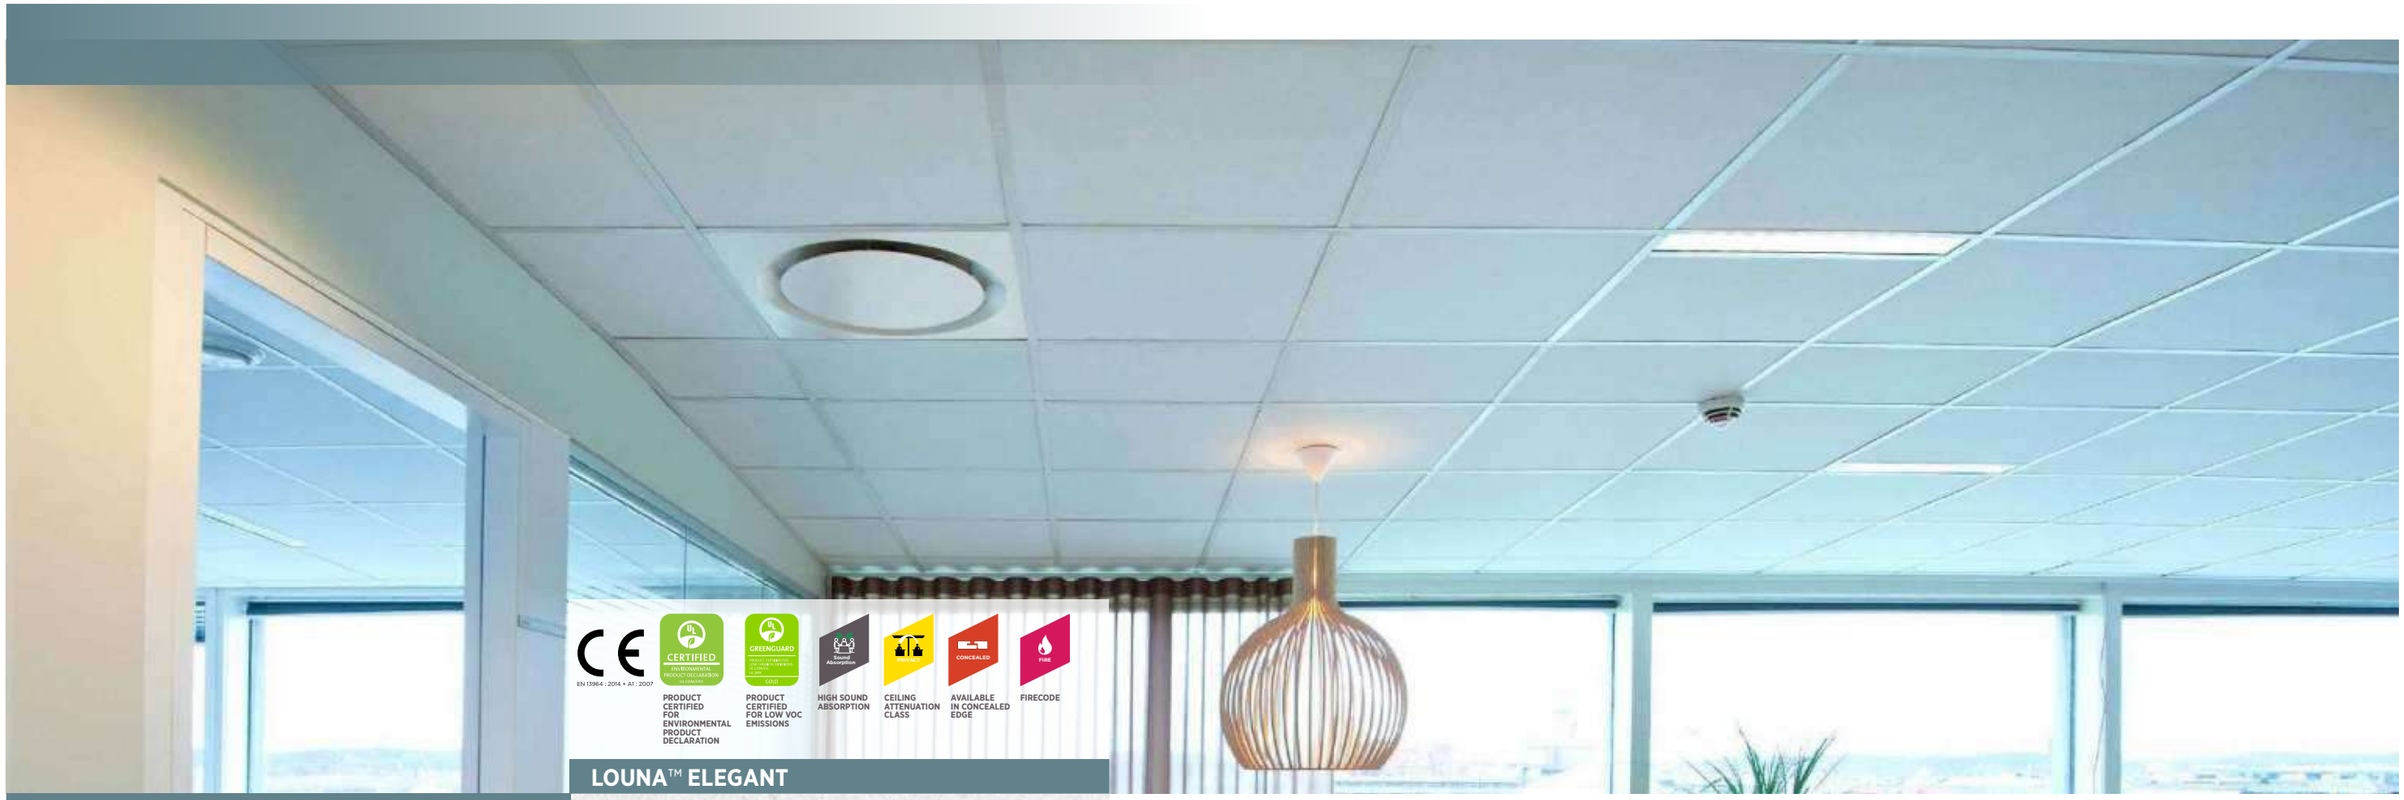

FEATURES AND BENEFITS

- The top-of-the-line ceiling panel is made of stonewool substrate. Monolithic visual reduces installation time.
- Elegant and refined acoustical facing and high-performance mineral fleece membrane on the backside.
- Excellent noise reduction (up to NRC-0.95) and sound attenuation (up to CAC-39).
- High light reflectance (LR-0.88) reduces wear and tear on light fixtures and energy use.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Washable & scrubbable finish.
- Impact & scratch-resistant.
- Available in plank sizes compatible with Logix™ Integrated ceiling system.

APPLICATIONS

- Executive offices
- Educational facilities
- Lobbies and waiting areas
- Sports facilities
- Recording studios
- Restaurants
- Receptions and offices
- Open-plan areas

AVAILABLE COLOR

White | Light Grey | Dark Grey | Yellow | Green | Blue | Brown | Black

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
19mm	0.60	**0.85**	**0.85**	**0.95**	**1.0**	1.0	**0.90**
19mm-R**	0.55	**0.80**	**0.75**	**0.90**	**1.0**	1.0	**0.85**
25mm	0.65	**0.95**	**0.90**	**1.0**	**1.0**	1.0	**0.95**
25mm-R**	0.60	**0.80**	**0.80**	**1.0**	**1.0**	1.0	**0.90**
25mm-AF***	0.40	**0.70**	**0.85**	**1.0**	**1.0**	1.0	**0.90**
38mm-AF***	0.45	**0.65**	**0.80**	**0.95**	**0.95**	0.95	**0.85**

** Calculated to ASTM C 423-01*
*** Reveal Edge*
**** Aluminium Foil*

SPECIFICATIONS DETAILS

Louna™ Elegant Acoustical Ceiling meets specifications in accordance with ASTM E1264.

Materials Classification
Type: XX,
Pattern: G

Substrate and Surface Finish
Stonewool substrate laminated with prepainted fiberglass scrim and back fiberglass tissue

Thickness
19mm, 25mm, 38mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm, 300 x 1200mm, 305 x 1220mm

Edge Detail Trim
Square, Reveal [SL, FL]
Concealed [D-BESK, S-BESK, BESK]

Noise Reduction Coefficient [NRC]
[0.85] [0.90] [0.95]

Ceiling Attenuation Class [CAC]
[25 - 39 dB]

Weight
Square:
19mm: 2 kg/m²
25mm: 2.6 kg/m²
38mm: 4 kg/m²
Reveal [SL, FL]:
19mm: 2.75 kg/m²
25mm: 3.6 kg/m²
Concealed [D-BESK, S-BESK, BESK]:
19mm: 3.5 kg/m²
25mm: 4.6 kg/m²

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth

Humidity Resistance
Maximum 99% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.88

Color
Standard White. Other colors are available upon request

VOC Class
Greenguard & Greenguard Gold

Surface Burning Characteristics as per ASTM E84
Class A

EN 13501-1 Class of Reaction to Fire Performance
A1

Thermal Conductivity
λ = 0.036 W/m°K

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

LOUNA™ ELEGANT







TABLE OF PERFORMANCE




Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold /Mildew & Sag Resistance	Fire Rating**	Recycled Content	VOC Emission	Cost
SQ	LC669 LC229	600*600*19 610*610*19	0.90	25	88%		Class A	47%	N/A	$$$
	LC6625 LC2225	600*600*25 610*610*25	0.95	26	88%		Class A	47%	N/A	$$$
	LC3225 LC1425	300*1200*25 305*1220*25	0.90	26	88%		Class A	47%	N/A	$$$$
	LC6625-AF* LC2225-AF*	600*600*25 610*610*25	0.90	35	88%		Class A	47%	N/A	$$$$
	LC6638-AF* LC2238-AF*	600*600*38 610*610*38	0.85	39	88%		Class A	47%	N/A	$$$$
SL	LCR669 LCR229	600*600*19 610*610*19	0.85	27	88%		Class A	47%	N/A	$$$$
	LCR6625 LCR2225	600*600*25 610*610*25	0.90	28	88%		Class A	47%	N/A	$$$$
	LCR3225 LCR1425	300*1200*25 305*1220*25	0.90	28	88%		Class A	47%	N/A	$$$$
	LCR6225 LCR2425	600*1200*25 610*1220*25	0.90	28	88%		Class A	47%	N/A	$$$$
FL	LCRF669 LCRF229	600*600*19 610*610*19	0.85	27	88%		Class A	47%	N/A	$$$$
	LCRF6625 LCRF2225	600*600*25 610*610*25	0.90	28	88%		Class A	47%	N/A	$$$$
	LCRF6225 LCRF2425	600*1200*25 610*1220*25	0.90	28	88%		Class A	47%	N/A	$$$$
	LCRF3225 LCRF1425	300*1200*25 305*1220*25	0.90	28	88%		Class A	47%	N/A	$$$$
D-BESK	LCRFDC669	600*600*19	0.85	28	88%		Class A	47%	N/A	$$$$$
	LCRFDC6625	600*600*25	0.90	29	88%		Class A	47%	N/A	$$$$$
S-BESK	LCDSC6625	600*600*25	0.90	29	88%		Class A	47%	N/A	$$$$$
BESK	LCFC669	600*600*19	0.85	28	88%		Class A	47%	N/A	$$$$$
	LCFC225	600*600*25	0.90	29	88%		Class A	47%	N/A	$$$$$

*Aluminium Foil
** To ASTM E84

Low Emissions (VOC)
Third party (GREENGUARD & GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXLT SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge	DXI FL Edge
					


DX/DXL D-BESK	DX/DXL S-BESK	DX/DXL BESK Edge
		



02

SOFT FIBER

LOUNA™ ELITE

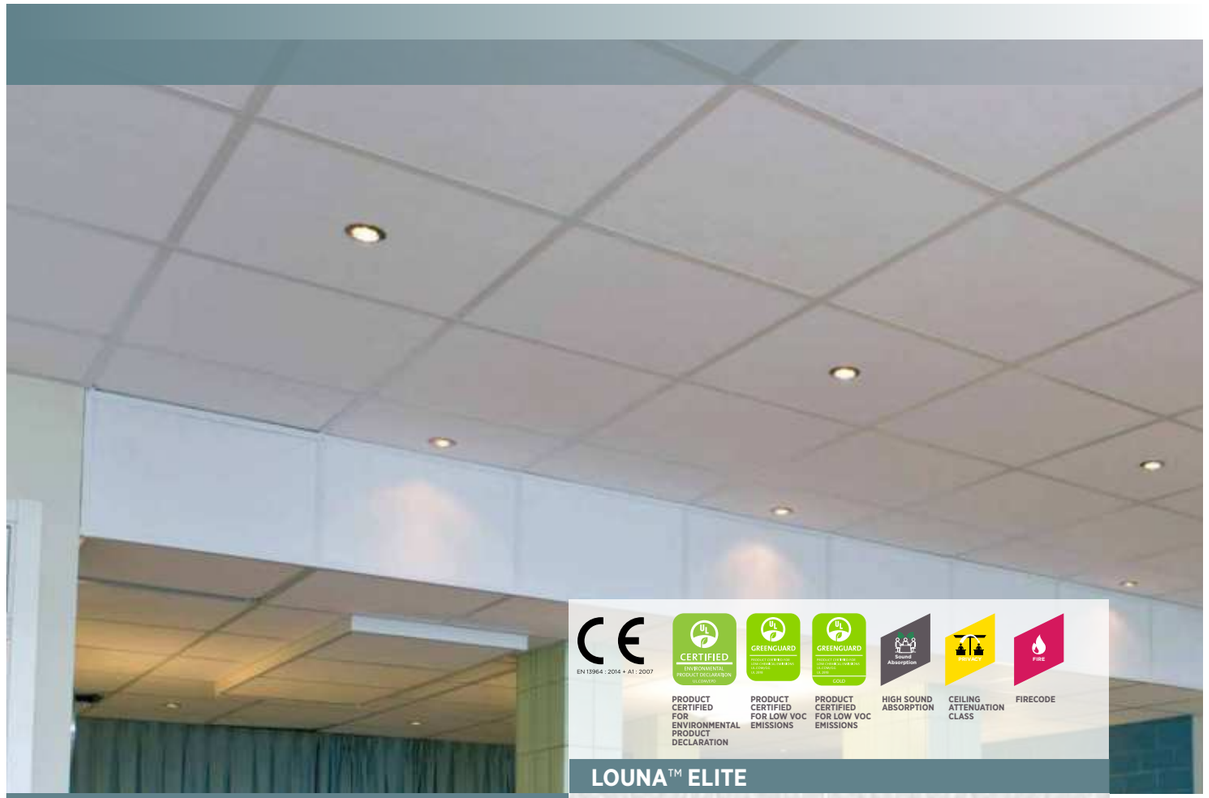

LOUNA™ ELITE

FEATURES AND BENEFITS

- Stonewool substrate has a stylish monolithic white surface and a high-performance mineral fleece membrane on the backside.
- Exceptional sound absorption with NRC values up to 0.95.
- Sanded surface finish with high light reflectance (LR-0.88) reduces wear and tear on light fixtures and energy use.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Moisture resistance to withstand severe conditions when used with the DONN® brand suspension system.
- Eco-friendly mineral wool products made from natural stone.
- Washable & scrubbable finish.

APPLICATIONS

- Open-plan offices
- Offices with indirect lighting
- Restaurants and cafes
- Media room
- Conference facilities
- Reception areas
- Libraries

AVAILABLE COLOR

White

ABSORPTION COEFFICIENT







Frequency, Hz	125	250	500	1000	2000	4000	NRC*
15mm	0.55	**0.80**	**0.75**	**0.90**	**1.0**	1.0	**0.85**
19mm	0.60	**0.95**	**0.85**	**0.95**	**1.0**	1.0	**0.95**

* *Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold /Mildew & Sag Resistance	Fire Rating*	Recycled Content	VOC Emission	Cost
			NRC	CAC						$
SQ	LEC665 LEC225	600*600*15 610*610*15	0.85	23	88%		Class A	47%	N/A	$$$
	LEC625 LEC245	600*1200*15 610*1220*15	0.85	23	88%		Class A	47%	N/A	$$$
	LEC669 LEC229	600*600*19 610*610*19	0.95	25	88%		Class A	47%	N/A	$$$$
	LEC629 LEC249	600*1200*19 610*1220*19	0.95	25	88%		Class A	47%	N/A	$$$$
SL	LECR665 LECR225	600*600*15 610*610*15	0.80	23	88%		Class A	47%	N/A	$$$$
	LECR625 LECR245	600*1200*15 610*1220*15	0.80	23	88%		Class A	47%	N/A	$$$$
	LECR669 LECR229	600*600*19 610*610*19	0.95	25	88%		Class A	47%	N/A	$$$$
	LECR629 LECR249	600*1200*19 610*1220*19	0.95	25	88%		Class A	47%	N/A	$$$$
FL	LECRF665 LECRF225	600*600*15 610*610*15	0.80	23	88%		Class A	47%	N/A	$$$$
	LECRF625 LECRF245	600*1200*15 610*1220*15	0.80	23	88%		Class A	47%	N/A	$$$$
	LECRF669 LECRF229	600*600*19 610*610*19	0.95	25	88%		Class A	47%	N/A	$$$$
	LECRF629 LECRF249	600*1200*19 610*1220*19	0.95	25	88%		Class A	47%	N/A	$$$$

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXLT SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge	DXI FL Edge
					

SPECIFICATIONS DETAILS

Louna™ Elite Acoustical Ceiling meets specifications in accordance with ASTM E1264.

Materials Classification
Type: XX, Pattern: E, G

Substrate and Surface Finish
Stonewool substrate finished with factory applied painted fiberglass scrim and back fiberglass tissue

Thickness
15mm, 19mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square, Reveal [SL, FL]

Weight
Square:
15mm: 1.55 kg/m²
19mm: 2 kg/m²
Reveal [SL, FL]:
15mm: 2.15 kg/m²
19mm: 2.75 kg/m²

Color
Standard White.

Noise Reduction Coefficient [NRC]
[0.80] [0.85] [0.95]

Ceiling Attenuation Class [CAC]
[23 - 25 dB]

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth

Humidity Resistance
Maximum 99% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.88

VOC Class
Greenguard & Greenguard Gold

Surface Burning Characteristics as per ASTM E84
Class A

EN 13501-1 Class of Reaction to Fire Performance
A1

Thermal Conductivity
λ = 0.036 W/m°K

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

03

SOFT FIBER

LOUNA™ NATURAL



FEATURES AND BENEFITS

- Specially engineered for cost-effective commercial projects that require improved sound absorption and a quality look.
- Stonewool substrate with monolithic white surface and mineral fleece membrane on the backside.
- High sound absorption with NRC values up to 0.95.
- High light reflectance (LR-0.88) reduces wear and tear on light fixtures and energy use.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Moisture resistant to withstand severe conditions when used with DONN® brand suspension system.
- Eco-friendly mineral wool product made from natural stone.
- Washable & scrubbable finish.

APPLICATIONS

- Commercial offices
- Warehouses and parking lots
- Offices with indirect lighting
- Restaurants and cafes
- Schools
- Reception areas
- Libraries

AVAILABLE COLOR

White

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
15mm	0.60	**0.85**	**0.80**	**0.95**	**1.0**	1.0	**0.90**
19mm	0.60	**0.90**	**0.85**	**1.0**	**1.0**	1.0	**0.95**



* *Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold /Mildew & Sag Resistance	Fire Rating*	Recycled Content	VOC Emission	Cost
SQ	LNC665 LNC225	600*600*15 610*610*15	0.90	-	88%		Class A	47%	N/A	$$
	LNC625 LNC245	600*1200*15 610*1220*15	0.90	-	88%		Class A	47%	N/A	$$
	LNC669 LNC229	600*600*19 610*610*19	0.95	25	88%		Class A	47%	N/A	$$
	LNC629 LNC249	600*1200*19 610*1220*19	0.95	25	88%		Class A	47%	N/A	$$

Low Emissions (VOC)
Third party (GREENGUARD & GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXLT SQ Edge
	

SPECIFICATIONS DETAILS

Louna™ Natural Acoustical Ceiling meets specifications in accordance with ASTM E1264.

Materials Classification
Type: XX, Pattern: G

Substrate and Surface Finish
Stonewool substrate laminated with prepainted fiberglass scrim and back fiberglass tissue

Thickness
15mm, 19mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Standard, Square.
Other edges are available upon request

Weight
15mm: 1.55 kg/m²
19mm: 2 kg/m²

Noise Reduction Coefficient [NRC]
[0.90] [0.95]

Ceiling Attenuation Class [CAC]
[25 dB]

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth

Humidity Resistance
Maximum 99% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.88

Color
Standard White.

VOC Class
Greenguard & Greenguard Gold

Surface Burning Characteristics as per ASTM E84
Class A

EN 13501-1 Class of Reaction to Fire Performance
A1

Thermal Conductivity
λ = 0.036 W/m°K

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

04

SOFT FIBER

LOUNA™ HI CAC



LOUNA™ HI CAC

FEATURES AND BENEFITS

- Balanced Acoustics. High-NRC and High-CAC.
- Specifically engineered when high acoustic performance is needed to satisfy high-frequency performance criteria.
- Hybrid ceiling panel is made of soft fiber substrate with wet-felted mineral fiber substrate on the rear side and finished with painted fiberglass scrim and sealed edge.
- Excellent noise reduction (up to NRC-0.90 for 53mm) and sound attenuation (up to CAC-42).
- Impact & scratch resistant finish scrim.
- Available in different colors.

APPLICATIONS

- Recording studios and radio stations
- Music and sports hall
- Industrial premises
- Convention halls and concourses
- Restaurants
- Sports facilities

AVAILABLE COLOR

White | Light Grey | Dark Grey | Yellow | Green | Blue | Brown

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
43mm	0.45	**0.50**	**0.85**	**1.0**	**1.0**	1.0	**0.85**
53mm	0.40	**0.50**	**0.90**	**1.0**	**1.0**	1.0	**0.90**





** Calculated to ASTM C 423-01*

EN 13964 : 2014 + A1 : 2007 | Sound Absorption | PRIVACY | FIRE

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold /Mildew & Sag Resistance	Fire Rating*	Recycled Content	VOC Emission	Cost
			NRC	CAC						$
SQ	LCX6643 LCX2243	600*600*43 610*610*43	0.85	42	88%			40%	N/A	$$$$$
	LCX6243 LCX2443	600*1200*43 610*1220*43	0.85	42	88%			40%	N/A	$$$$$
	LCXX6253 LCXX2453	600*600*53 610*610*53	0.90	41	88%			40%	N/A	$$$$$
	LCXX6253 LCXX2453	600*1200*53 610*1220*53	0.90	41	88%			40%	N/A	$$$$$
FL	LCXRF6643 LCXRF2243	600*600*43 610*1220*43	0.85	42	88%			40%	N/A	$$$$$
	LCXRF6243 LCXRF2443	600*1200*43 610*1220*43	0.85	42	88%			40%	N/A	$$$$$
	LCXXRF6253 LCXXRF2453	600*600*53 610*1220*53	0.90	41	88%			40%	N/A	$$$$$
	LCXXRF6653 LCXXRF2253	600*1200*53 610*1220*53	0.90	41	88%			40%	N/A	$$$$$

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DXT FL Edge	DXF FL Edge
			

SPECIFICATIONS DETAILS

Louna™ Hi CAC Acoustical Ceiling meets the specifications in accordance with ASTM E1264.

Materials Classification
Type: XX, Pattern: G

Substrate and Surface Finish
Soft fiber substrate attach with wetfelted mineral fiber substrate on the rear side, and laminated with factory-applied painted fiberglass scrim on the surface

Thickness
43mm, 53mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square, Reveal [FL]

Weight
43mm [8.85 kg/m²],
53mm [9.30 kg/m²]

Noise Reduction Coefficient [NRC]
[0.85] [0.90]

Ceiling Attenuation Class [CAC]
[41 - 42 dB]

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth

Humidity Resistance
Maximum 99% RH / 40°C

Light Reflectance Coefficient [LR]
0.88

Color
Standard White. Other colors are available upon request

Surface Burning Characteristics as per ASTM E84
Class A

EN 13501-1 Class of Reaction to Fire Performance
A1

Thermal Conductivity:
Soft fiber: λ = 0.034 W/m°K
Mineral fiber: λ = 0.057 W/m°K


Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

05

SOFT FIBER

LOUNA™ HI CAC BLACK

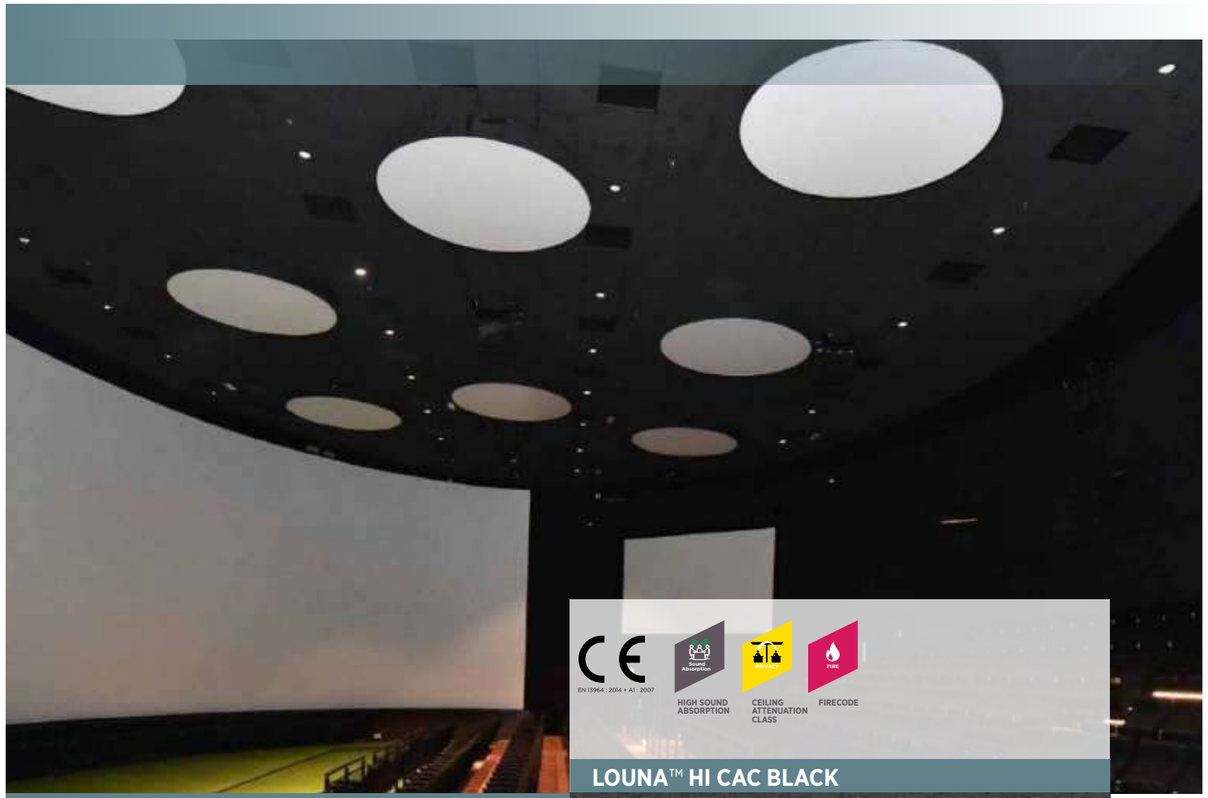

LOUNA™ HI CAC BLACK

FEATURES AND BENEFITS

- Balanced Acoustics. High-NRC and High-CAC.
- Offered in black to meet the growing demand from cinemas and theaters.
- Specifically engineered when high acoustic performance is needed to satisfy high-frequency performance criteria.
- Hybrid ceiling panel is made of soft fiber substrate with wet-felted mineral fiber substrate on the rear side and finished with painted fiberglass scrim and sealed edge.
- Excellent noise reduction (up to NRC-0.90 for 53mm) and sound attenuation (up to CAC-42).
- Impact & scratch resistant finish scrim.

APPLICATIONS

- Cinemas and operating theatres
- TV stations
- Recording studios and radio stations
- Music and sports hall
- Bowling alleys
- Industrial premises
- Convention halls and concourses
- Restaurants

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
43mm	0.45	**0.50**	**0.85**	**1.0**	**1.0**	1.0	**0.85**
53mm	0.40	**0.50**	**0.90**	**1.0**	**1.0**	1.0	**0.90**

** Calculated to ASTM C 423-01*

EN 13964 : 2014 + A1 : 2007

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold /Mildew & Sag Resistance	Fire Rating*	Recycled Content	VOC Emission	Cost
SQ	LCX6643B LCX2243B	600*600*43 610*610*43	0.85	42	-			40%	N/A	$$$$$
	LCX6243B LCX2443B	600*1200*43 610*1220*43	0.85	42	-			40%	N/A	$$$$$
	LCXX6653B LCXX2253B	600*600*53 610*610*53	0.90	41	-			40%	N/A	$$$$$
	LCXX6253B LCXX2453B	600*1200*53 610*1220*53	0.90	41	-			40%	N/A	$$$$$

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge

SPECIFICATION DETAILS

Louna™ Hi CAC Black Acoustical Ceiling meets the specifications in accordance with ASTM E1264.

Materials Classification
Type: XX, Pattern: G

Substrate and Surface Finish
Soft fiber substrate attach with wetfelted mineral fiber substrate on the rear side, and laminated with factory-applied painted fiberglass scrim on the surface

Thickness
43mm, 53mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square

Weight
43mm [8.85 kg/m^2], 53mm [9.30 kg/m^2]

Noise Reduction Coefficient [NRC]
[0.85] [0.90]

Ceiling Attenuation Class [CAC]
[41 - 42 dB]

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth

Humidity Resistance
Maximum 99% RH / 40°C for ClimaPlus™

Color
Black Color similar to RAL 7021

Surface Burning Characteristics as per ASTM E84
Class A

EN 13501-1 Class of Reaction to Fire Performance
A1

Thermal Conductivity:
Soft fiber: λ = 0.034 W/m°K
Mineral fiber: λ = 0.057 W/m°K


Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

06

SOFT FIBER

HALCYON™

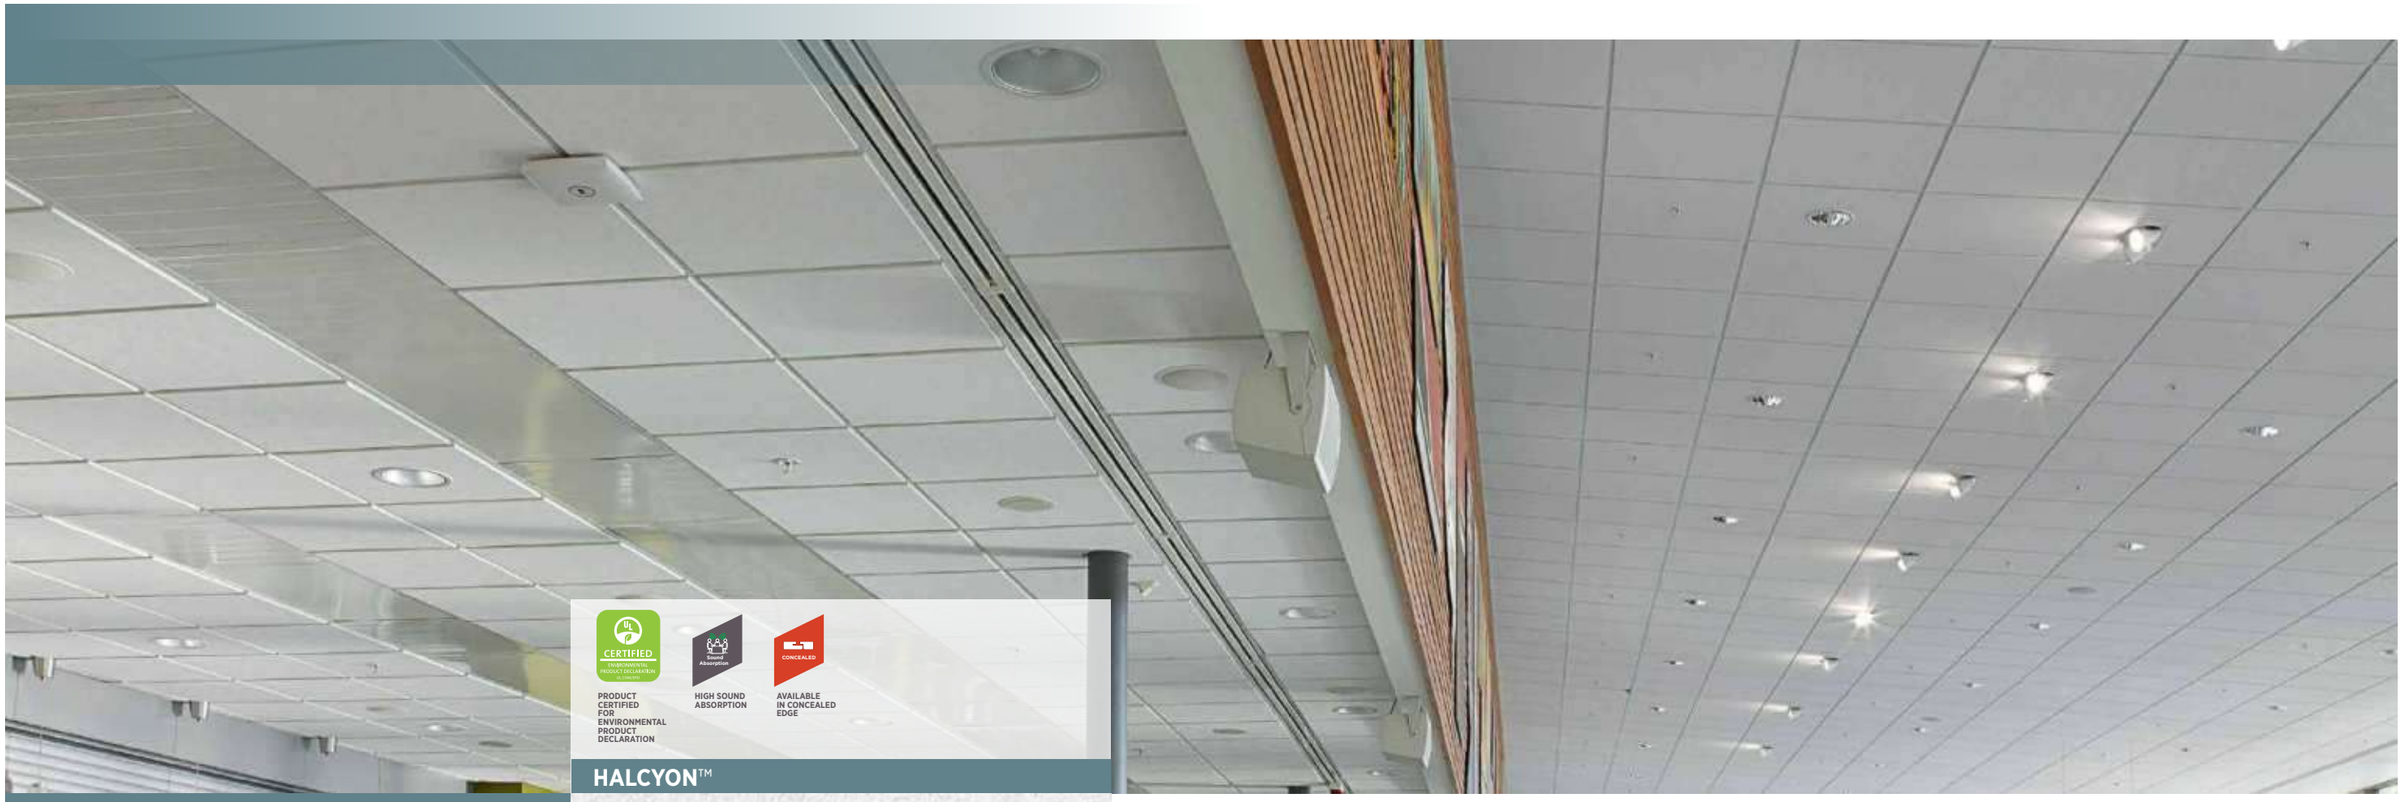


FEATURES AND BENEFITS

- Glasswool substrate with monolithic visual reduces installation time.
- Exceptional sound absorption with NRC values up to 1.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Elegant and refined acoustical facing and high-performance mineral fleece membrane on the backside.
- High light reflectance (LR-0.88) reduces light fixture & energy use.
- Washable & scrubbable finish.
- Available in concealed edges BESK, D-BESK & S-BESK.
- Impact & scratch-resistant.
- Available in plank sizes compatible with Logix™ integrated ceiling System.
- Available in black for ideal application in cinemas and theaters.

APPLICATIONS

- Open-plan areas
- Offices with indirect lighting
- Media rooms
- Receptions & lobby areas
- Libraries
- Convention halls and concourses
- Cinemas and theaters

AVAILABLE COLORS



ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
19mm	0.50	**0.90**	**1.0**	**0.90**	**0.95**	0.90	**0.95**
19mm Concealed	0.65	**0.85**	**0.80**	**0.95**	**1.0**	1.0	**0.95**
25mm	0.40	**0.90**	**1.0**	**0.95**	**1.0**	1.0	**1.0**
25mm Concealed	0.75	**0.85**	**0.85**	**1.0**	**1.0**	1.0	**1.0**
38mm	0.60	**0.90**	**1.0**	**1.0**	**1.0**	1.0	**1.0**

* *Calculated to ASTM C 423-01*

SPECIFICATIONS DETAILS

Halcyon™ Acoustical Ceiling meets specifications in accordance with ASTM E1264.

Materials Classification
Type: XII,
Form: 2,
Pattern: E, G

Substrate and Surface Finish
Glasswool substrate laminated with factory applied painted fiberglass scrim and back fiberglass tissue

Thickness
19mm, 25mm, 38mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square, Reveal [SL, FL]
Concealed [D-BESK, S-BESK, BESK]

Noise Reduction Coefficient [NRC]
[0.95] [1.0]

Ceiling Attenuation Class [CAC]
[24 - 32 dB]

Weight
Square
19mm [1.85 kg/m^2],
25mm [2.4 kg/m^2],
38mm [4.37 kg/m^2]
Reveal [SL, FL]
19mm [2.2 kg/m^2],
25mm [2.87 kg/m^2],
38mm [4.37 kg/m^2]
Concealed [D-BESK, S-BESK, BESK]
19mm [2.75 kg/m^2],
25mm [3.62 kg/m^2]

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth

Humidity Resistance
Maximum 99% RH / 40°C

Light Reflectance Coefficient [LR]
0.88

Color
Standard White. Other colors are available upon request

Surface Burning Characteristics as per ASTM E84
Class A

EN 13501-1 Class of Reaction to Fire Performance
A2-s1,d0

Thermal Conductivity
λ = 0.034 W/m°K

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9







HALCYON™


TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating*	Recycled Content	VOC Emission	Cost
SQ	HC669 HC229	600*600*19 610*610*19	0.95	24	88%		Class A	40%	N/A	$$$
	HC629 HC249	600*1200*19 610*1220*19	0.95	24	88%		Class A	40%	N/A	$$$
	HC6625 HC2225	600*600*25 610*610*25	1.0	25	88%		Class A	40%	N/A	$$$
	HC6638 HC2238	600*600*38 610*610*38	1.0	31	88%		Class A	40%	N/A	$$$
SL	HCR669 HCR229	600*600*19 610*610*19	0.95	25	88%		Class A	40%	N/A	$$$
	HCR629 HCR249	600*1200*19 610*1220*19	0.95	25	88%		Class A	40%	N/A	$$$
	HCR6625 HCR2225	600*600*25 610*610*25	1.0	28	88%		Class A	40%	N/A	$$$
	HCR6225 HCR2425	600*1200*25 610*1220*25	1.0	28	88%		Class A	40%	N/A	$$$
	HCR6638 HCR2238	600*600*38 610*610*38	1.0	32	88%		Class A	40%	N/A	$$$$
FL	HCRF669 HCRF229	600*600*19 610*610*19	0.95	25	88%		Class A	40%	N/A	$$$
	HCRF629 HCRF249	600*1200*19 610*1220*19	0.95	25	88%		Class A	40%	N/A	$$$
	HCRF6625 HCRF2225	600*600*25 610*610*25	1.0	28	88%		Class A	40%	N/A	$$$
	HCRF6225 HCRF2425	600*1200*25 610*1220*25	1.0	28	88%		Class A	40%	N/A	$$$$
	HCRF6638 HCRF2238	600*600*38 610*610*38	1.0	32	88%		Class A	40%	N/A	$$$$
D-BESK**	HCRFDC669	600*600*19	0.95	28	88%		Class A	40%	N/A	$$$$$
	HCRFDC6625	600*600*25	1.0	30	88%		Class A	40%	N/A	$$$$$
S-BESK	HCDSC6625	600*600*25	1.0	30	88%		Class A	40%	N/A	$$$$$
BESK**	HCFC669	600*600*19	0.95	28	88%		Class A	40%	N/A	$$$$$
	HCFC6625	600*600*25	1.0	30	88%		Class A	40%	N/A	$$$$$

*To ASTM E84
**Additional concealed panels configurations are available on special order: 600 x 1200, 600 x 1500, 600 x 1800 and 600 x 2400

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge	DXI FL Edge
					

DX/DXL D-BESK Edge	DX/DXL S-BESK Edge	DX/DXL BESK Edge
		



07

SOFT FIBER

HALCYON™ BLACK



FEATURES AND BENEFITS

- Glasswool substrate with elegant and refined acoustical facing and high-performance mineral fleece membrane on the backside. Planks are fully demountable, which reduces installation time.
- Light black tile is ideal for use in cinemas and theaters.
- Exceptional sound absorption with NRC values up to 1 & high acoustic sound absorption performance at low frequencies, satisfying high-performance needs for cinema construction.
- Impact & scratch-resistant.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Available in concealed edges BESK, D-BESK & S-BESK.

APPLICATIONS

- Cinemas and operating theatres
- Restaurants
- Convention halls and concourses
- Bowling alleys
- Conference rooms

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
19mm	0.50	**0.90**	**1.0**	**0.90**	**0.95**	0.90	**0.95**
19mm Concealed	0.65	**0.85**	**0.80**	**0.95**	**1.0**	1.0	**0.95**
25mm	0.40	**0.90**	**1.0**	**0.95**	**1.0**	1.0	**1.0**
25mm Concealed	0.75	**0.85**	**0.85**	**1.0**	**1.0**	1.0	**1.0**
38mm	0.60	**0.90**	**1.0**	**1.0**	**1.0**	1.0	**1.0**
50mm	0.60	**0.75**	**0.90**	**1.0**	**1.0**	1.0	**0.95**

* *Calculated to ASTM C 423-01*

SPECIFICATIONS DETAILS

Halcyon™ Black Acoustical Ceiling meets specifications in accordance with ASTM E1264.

Materials Classification
Type: XII,
Form: 2,
Pattern: E, G

Substrate and Surface Finish
Glasswool substrate laminated with factory applied painted fiberglass scrim and back fiberglass tissue

Thickness
19mm, 25mm, 38mm, 50mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square,
Concealed [D-BESK, S-BESK, BESK]

Noise Reduction Coefficient [NRC]
[0.90] [0.95] [1.0]

Ceiling Attenuation Class [CAC]
[24 - 34 dB]

Weight
Square
19mm [1.85 kg/m^2],
25mm [2.4 kg/m^2],
38mm [4.37 kg/m^2]
40mm [4.75 kg/m^2]
50mm [6 kg/m^2]
Concealed [D-BESK, S-BESK, BESK]
19mm [2.75 kg/m^2],
25mm [3.62 kg/m^2]

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth

Humidity Resistance
Maximum 99% RH / 40°C

Color
Black Color similar to RAL 7021

Surface Burning Characteristics as per ASTM E84
Class A

EN 13501-1 Class of Reaction to Fire Performance
A2-s1,d0

Thermal Conductivity
λ = 0.034 W/m°K

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4| MR Credit 5 | MR Credit 6 IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

07






HALCYON™ BLACK

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating**	Recycled Content	VOC Emission	Cost
SQ	HC669B HC229B	600*600*19 610*610*19	0.95	24	-		Class A	40%	N/A	$$$
	HC629B HC249B	600*1200*19 610*1220*19	0.95	24	-		Class A	40%	N/A	$$$
	HC6625B HC2225B	600*600*25 610*610*25	1.0	25	-		Class A	40%	N/A	$$$
	HC6238B HC2438B	600*1200*38 610*1220*38	1.0	31	-		Class A	40%	N/A	$$$
	HC6638B HC2238B	600*600*38 610*610*38	1.0	31	-		Class A	40%	N/A	$$$
	HCE6240B-AF HCE2440B-AF	600*1200*40 610*1220*40	0.90	34	-		Class A	40%	N/A	$$$$
	HCE6640B-AF HCE2240B-AF	600*600*40 610*610*40	0.90	34	-		Class A	40%	N/A	$$$$
	HCE6650B HCE2250B	600*600*50 610*610*50	0.95	32	-		Class A	40%	N/A	$$$$
	HCE6250B HCE2450B	600*1200*50 610*1220*50	0.95	32	-		Class A	40%	N/A	$$$$
D-BESK**	HCRFDC669B	600*600*19	0.95	28	-		Class A	40%	N/A	$$$$
	HCRFDC6625B	600*600*25	1.0	30	-		Class A	40%	N/A	$$$$
S-BESK	HCDSC6625B	600*600*25	1.0	30	-		Class A	40%	N/A	$$$$
BESK**	HCFC669B	600*600*19	0.95	28	-		Class A	40%	N/A	$$$$
	HCFC6625B	600*600*25	1.0	30	-		Class A	40%	N/A	$$$$

*To ASTM E84
**Additional concealed panels configurations are available on special order: 600 x 1200, 600 x 1500, 600 x 1800 and 600 x 2400

GRID PROFILE OPTIONS


DX/DXL SQ Edge	DXT SQ Edge	DX/DXL D-BESK Edge	DX/DXL S-BESK Edge	DX/DXL BESK Edge
				



08

SOFT FIBER

TRANQUILLE

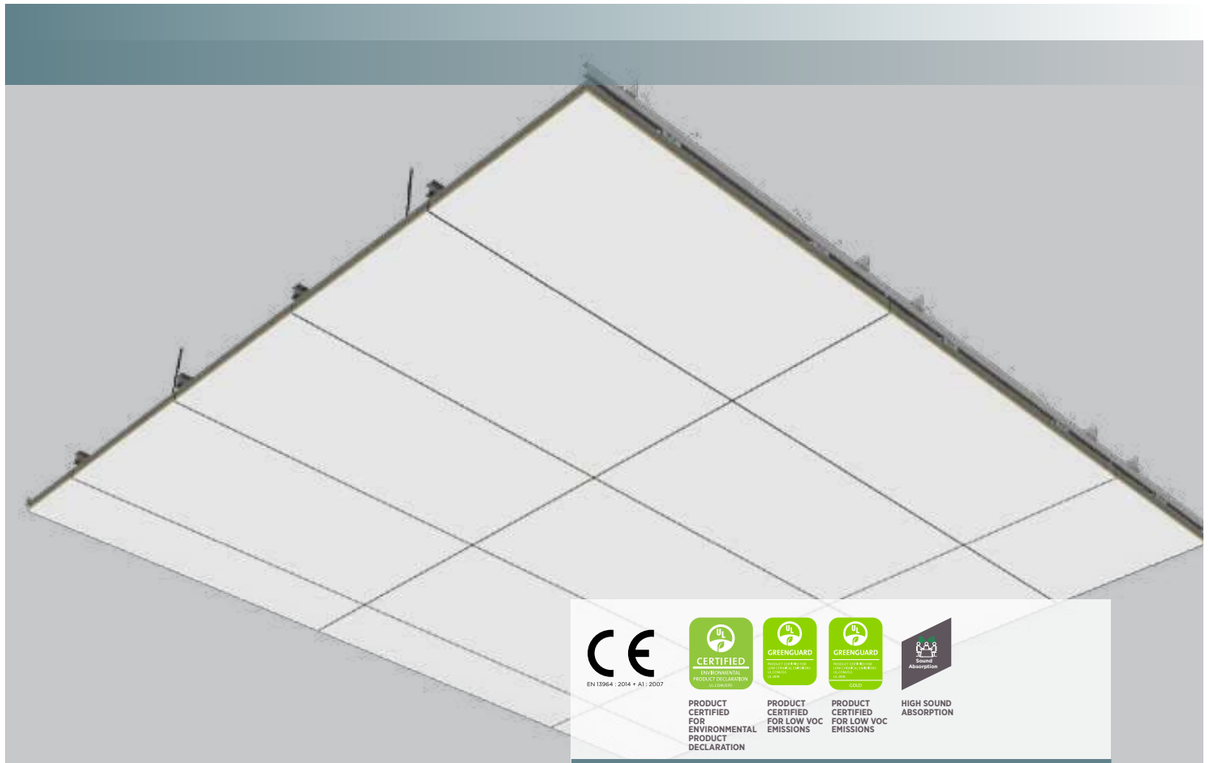

FEATURES AND BENEFITS


- Made of Soft fiber panels and a torsion spring hanging system.
- Excellent for critical lighting applications for High Light Reflectance (0.88).
- Excellent combination of noise reduction (up to NRC-1.0) and aesthetic appearance.
- Features a concealed suspension ceiling system with many design configurations that can fit any contemporary interior design.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- All panels are demountable, allowing easy access to the plenum for simple maintenance.
- Configurable panel sizes, shapes, and layouts allow for design freedom.

APPLICATIONS

- Airports
- Train stations
- Commercial spaces
- Offices
- Lounges
- Open halls
- Restaurants

TRANQUILLE


PANEL TOP



PANEL BOTTOM



AVAILABLE COLOR




ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
40mm	0.60	**0.90**	**1.0**	**1.0**	**1.0**	1.0	**1.0**

**Calculated to ASTM C 423-01*

TRANQUILLE SYSTEM DRAWINGS

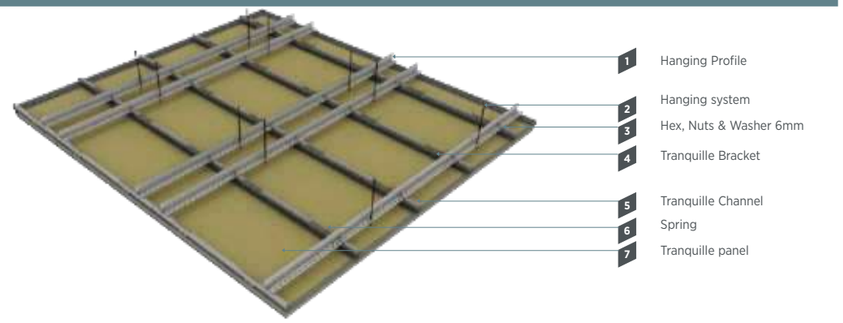

SYSTEM COMPONENTS



Tranquille Channel



Hanging System



Spring

Low Emissions (VOC)
Third party (GREENGUARD & GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com

SYSTEM SPECIFICATION

Tranquille meets the specifications in accordance with ASTM E1264.

Materials Classification
Type: XX, Form: 2, Pattern: E, G

Substrate and Surface Finish
Soft fiber substrate laminated with prepainted fiberglass scrim and back fiberglass tissue

Thickness
40mm

Weight
4.2 kg/m^2

Noise Reduction Coefficient [NRC]
[1.0]

Ceiling Attenuation Class [CAC]
[33 dB]

Humidity Resistance
Maximum 99% RH / 40°C

Light Reflectance Coefficient [LR]
0.88

Color
Standard White. Other colors are available upon request

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth

Surface Burning Characteristics as per ASTM E84
Class A

EN 13501-1 Class of Reaction to Fire Performance
A2-s1,d0

Thermal Conductivity
λ = 0.036 W/m°K

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

VOC Class
Greenguard & Greenguard Gold


Maintenance
Panel can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with warm water or a mild detergent and wipe panel surface.

Additional Information

- USG Middle East's Tranquille panels are flat. However, they will exhibit an inherent deflection, which may be more apparent as the proximity to adjacent surfaces is reduced. This deflection should be no more than 1-2mm. Local environmental conditions may increase this variance.
- Custom sizes and color options are available upon request. Consult USG Middle East technical team.
- Take care during installation and handling of panels.
- Stonewool substrate is available upon request.
- Different shapes, such as triangular, hexagonal, and trapezoidal, are available.

09

SOFT FIBER
FINISH OPTIONS

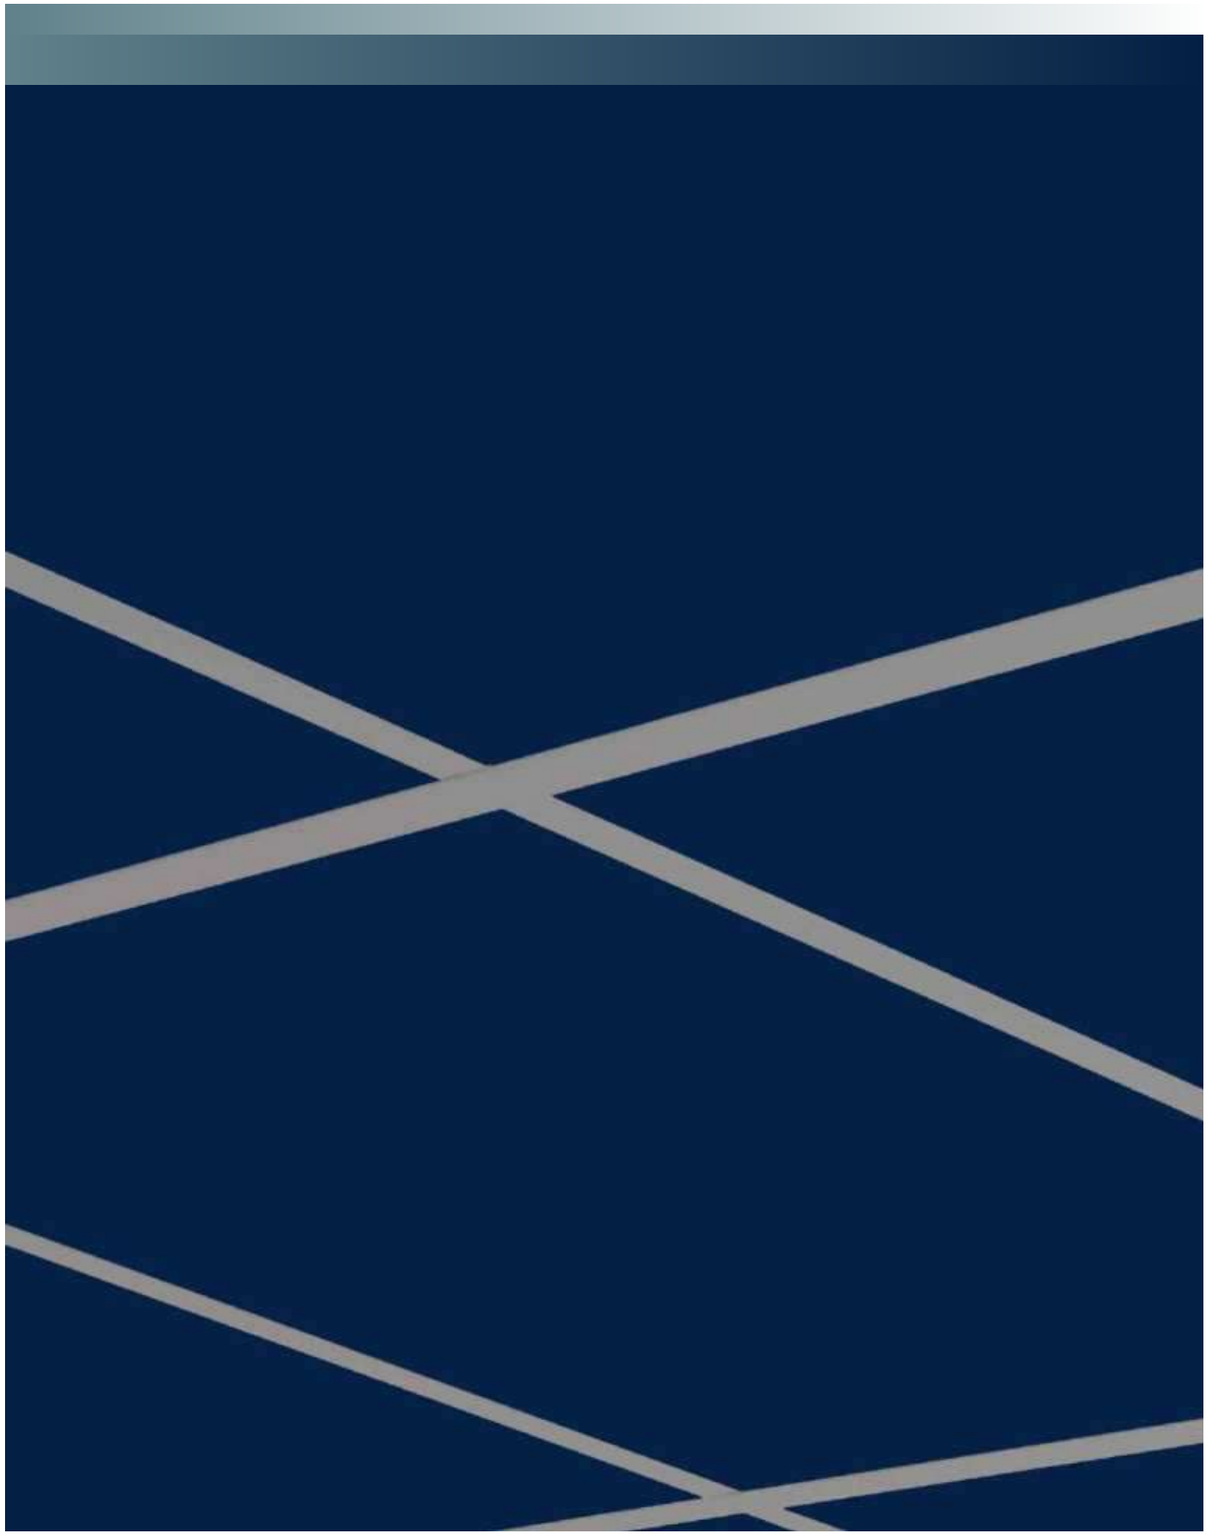

SOFT FIBER CEILING FINISH OPTIONS



RAL9003




RAL9006




RAL7045




RAL1018

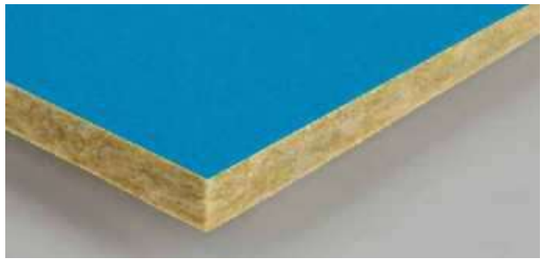


RAL5015

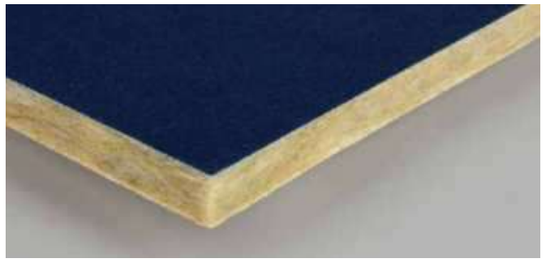

RAL5019

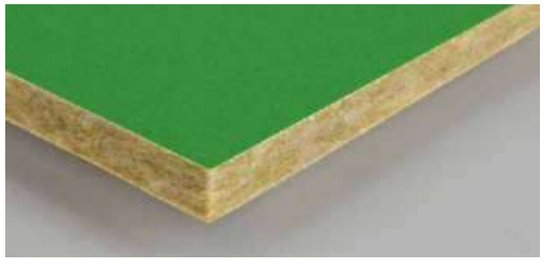

RAL6010

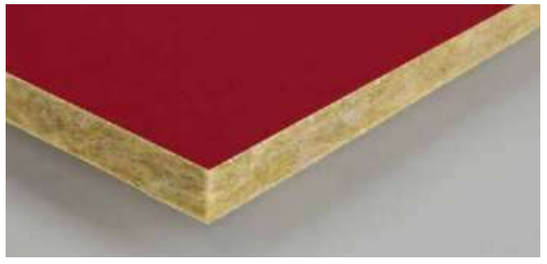

RAL3003



RAL7043



RAL7021

08

PERFORATED PRECISION:
INNOVATIVE DESIGNS IN GYPSUM CEILINGS



Unite style and purpose with USG Middle East's Perforated Gypsum Ceilings - harmonizing design finesse and practicality in classy perforation patterns.

Design possibilities with Perforated Gypsum Panels and Tiles. Upgrade spaces with the unique interplay of our perforation patterns. These patterns transcend the ordinary while offering a wide range of acoustical performance, ensuring a tailored solution for every design vision.

Whether enhancing acoustics, providing visual appearance, or both, our perforated gypsum ceiling solutions bring your creative concepts to life. Immerse your interiors in design possibilities, where each perforation tells a story of craftsmanship, reflecting innovation and style.








PERFORATED GYPSUM CEILINGS DESIGNS

1. SKYROCK® ECOBLOCK - H11
2. SKYROCK® ECOBLOCK - R6
3. SKYROCK® ECOBLOCK - R12
4. SKYROCK® ECOBLOCK - R8-15-20
5. SKYROCK® ECOBLOCK - Q3
6. SKYROCK® ECOBLOCK - Q9
7. SKYROCK® ECOBLOCK - Q12
8. SOUNDBLOCK - H11
9. SOUNDBLOCK - R6
10. SOUNDBLOCK - R12
11. SOUNDBLOCK - R8-15-20
12. SOUNDBLOCK - Q3
13. SOUNDBLOCK - Q9
14. SOUNDBLOCK - Q12
15. PAINTED
16. SHADES







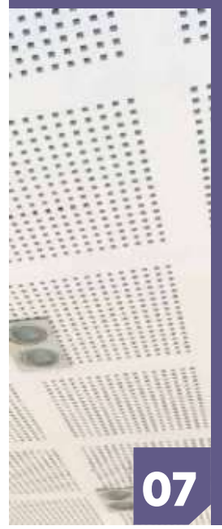




















01

SKYROCK®
ECOBLOCK - H11 ACOUSTICAL GYPSUM PANEL

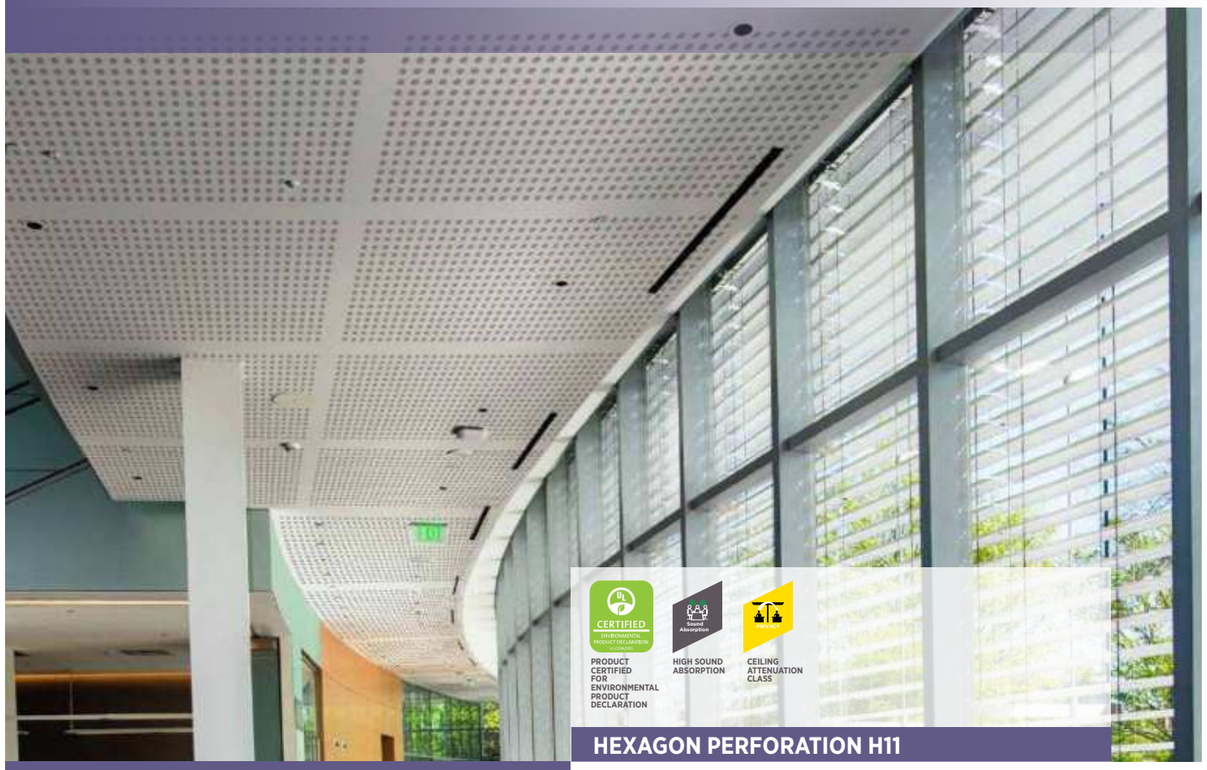

FEATURES AND BENEFITS

- Great Aesthetics, Excellent Noise Absorption.
- Hexagon H11 is tested to achieve up to 0.90 NRC (Noise Reduction Coefficient) as per ASTM C423.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- A square edge allows for finishing to a flat and seamless ceiling or wall.
- It is produced in a borderless perforation pattern for a seamless appearance to enhance the ceiling aesthetic.
- Complies with E84 for flame spread and smoke development.
- Available in various customized perforation configurations.
- Laminated at the back with fiberglass fleece.

APPLICATIONS

- Commercial, office and residential applications
- Retail complexes
- Large scale cinema spaces
- Public venues such as concert halls, auditoriums and sporting venues
- Schools, universities and lecture halls
- Hotel lobbies and conference rooms

HEXAGON PERFORATION H11

WITH BORDER 17.7%



BORDERLESS 19.7%



ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
H11	0.65	**0.80**	**0.70**	**0.70**	**0.75**	0.75	**0.65**
H11 with 19mm Soft Fiber Infill	0.70	**1.00**	**0.85**	**0.95**	**0.90**	0.80	**0.90**

** Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Property	H11	H11 Borderless
Weight (kg/m²) *after the perforation*	8.75	8.5
Thickness (mm)	12.5	12.5
Actual Length (mm)	2400	2400
Actual Width (mm)	1200	1200
Hole Type	Hexagon	Hexagon
Hole Size (mm)	ø11	ø11
Border (mm)	50	10
Pitch (mm) *(center to center spacing between holes)*	20	20
Holes layout (L x W)	116 x 56	120 x 60
Number of Holes	6496	7200
Perforation Rate (%)	17.7%	19.7%
Noise Reduction Coefficient (NRC)	0.65	0.65
Noise Reduction Coefficient (NRC) with Insulation	0.90	0.90
Board Edge detail	Square Edge	Square Edge
Mounting	E-400	E-400

H11 LAYOUT DESIGNS



1200mm x 2400mm
Gypsum Board H11, 17.7%
56 X 116 Holes



Borderless 1200mm x 2400mm
Gypsum Board H11, 19.7%
60 X 120 Holes



Strip design



Globe 8 design

Additional patterns layouts are available upon request. Please contact USG ME nearest sales office.

SYSTEM DESCRIPTION

Skyrock® Ecoblock Hexagon Perforation H11 is manufactured from a specially formulated core encased in recycled face and back liner papers. The panels have long square edges for easy application when used with USG Middle East's EASYJOINT™ 60 Setting-Type Premium-Jointing Powder. The acoustic gypsum boards are punched to specification with precision engineering before being laminated with a non-woven acoustic mat on the back.

These Acoustical Gypsum Boards are ideal for various sound absorption applications and have an enhanced aesthetic look.

FINISHING AND DECORATING

- The level of finish must be determined at the design stage since each level has specific requirements for substrate tolerances and gypsum board installation jointing and finishing. The desired level of finish may only be achieved if all of these requirements are met through various stages of construction.
- USG ME recommends using EASYJOINT™ 60 Setting-Type Premium-Jointing Powder for the best jointing strength.
- For priming and decorating with paint, USG ME recommends using roller applications. Roller application ensures a uniform texture over the entire surface and protects the non-woven acoustic mat on the back face.
- Avoid spray painting as it may block holes, thus affecting acoustic performance.

ADVANTAGES


- Performance: Manufactured in various configurations to satisfy many desired aesthetic designs.
- Acoustic Performance: Superior NRC Capabilities up-to 0.90.
- Easy to Install: Scores and snaps are easy—similar installation to conventional plasterboard.

COMPLIANCE

Comply with:

- ASTM C423 for Noise Reduction Coefficient.
- E84 for classification for fire propagation and surface flame spread.

SKYROCK®
ECOBLOCK - R6 ACOUSTICAL GYPSUM PANEL

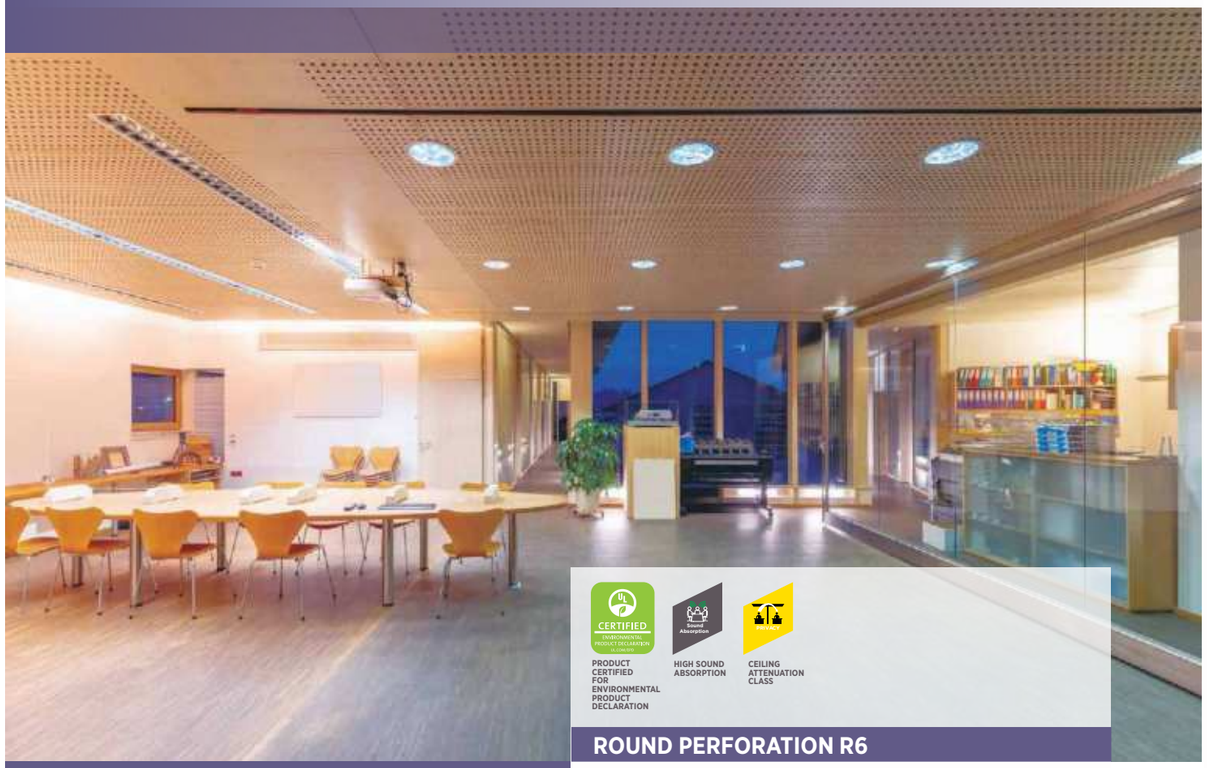

FEATURES AND BENEFITS

- Great Aesthetics, Excellent Noise Absorption.
- Tested to achieve up to 0.85 NRC (Noise Reduction Coefficient) as per ASTM C423.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- A square edge allows for finishing to a flat and seamless ceiling or wall.
- It is produced in a borderless perforation pattern for a seamless appearance to enhance the ceiling aesthetic.
- Complies with E84 for flame spread and smoke development.
- Available in various customized perforation configurations.
- Laminated at the back with fiberglass fleece.

APPLICATIONS

- Commercial, office and residential applications
- Retail complexes
- Large scale cinema spaces
- Public venues such as concert halls, auditoriums and sporting venues
- Schools, universities and lecture halls
- Hotel lobbies and conference rooms

ROUND PERFORATION R6

WITH BORDER 10%



BORDERLESS 11.1%



ABSORPTION COEFFICIENT


Frequency, Hz	125	250	500	1000	2000	4000	NRC*
R6	0.55	**0.75**	**0.70**	**0.65**	**0.60**	0.55	**0.70**
R6 with 100mm Soft Fiber Infill	0.75	**0.95**	**0.95**	**0.80**	**0.55**	0.40	**0.85**
R6 with 50mm Soft Fiber Infill	0.70	**0.90**	**0.85**	**0.70**	**0.55**	0.45	**0.75**

** Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Property	R6	R6 Borderless
Weight (kg/m²) *after the perforation*	8.5	8.3
Thickness (mm)	12.5	12.5
Actual Length (mm)	2384	2365
Actual Width (mm)	1200	1149
Hole Type	Round	Round
Hole Size (mm)	ø6	ø6
Border (mm)	45	8
Pitch (mm) *(center to center spacing between holes)*	16	16
Holes layout (L x W)	144 x 70	148 x 72
Number of Holes *(fully perforated board)*	10080	10656
Perforation Rate (%)	10%	11.1%
Noise Reduction Coefficient (NRC)	0.70	0.70
Noise Reduction Coefficient (NRC) with Insulation	0.85	0.85
Board Edge detail	Square Edge	Square Edge
Mounting	E-400	E-400

R6 LAYOUT DESIGNS

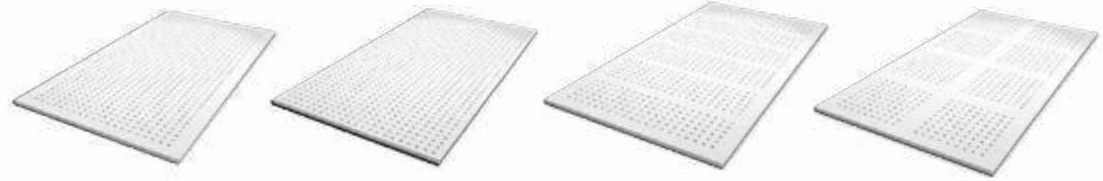

1200mm x 2384mm
Gypsum Board R6, 10%
70 X 144 Holes

Borderless 1149mm x 2365mm
Gypsum Board R6, 11.1%
72 X 148 Holes

Strip design

Globe 8 design

Additional patterns layouts are available upon request. Please contact USG ME nearest sales office.

SYSTEM DESCRIPTION

Skyrock® Ecoblock Round Perforation R6 is manufactured from a specially formulated core encased in recycled face and back liner papers. The panels have long square edges for easy application when used with USG Middle East's EASYJOINT™ 60 Setting-Type Premium-Jointing Powder. The acoustic gypsum boards are punched to specification with precision engineering before being laminated with a non-woven acoustic mat on the back.

These Acoustical Gypsum Boards are ideal for various sound absorption applications and have an enhanced aesthetic look.

FINISHING AND DECORATING

- The level of finish must be determined at the design stage since each level has specific requirements for substrate tolerances and gypsum board installation jointing and finishing. The desired level of finish may only be achieved if all of these requirements are met through various stages of construction.
- USG ME recommends using EASYJOINT™ 60 Setting-Type Premium-Jointing Powder for the best jointing strength.
- For priming and decorating with paint, USG ME recommends using roller applications. Roller application ensures a uniform texture over the entire surface and protects the non-woven acoustic mat on the back face.
- Avoid spray painting as it may block holes, thus affecting acoustic performance.

ADVANTAGES

- Performance: Manufactured in various configurations to satisfy many desired aesthetic designs.
- Acoustic Performance: Superior NRC Capabilities up to 0.85.
- Easy to Install: Scores and snaps are easy—similar installation to conventional plasterboard.

COMPLIANCE

Comply with:

- ASTM C423 for Noise Reduction Coefficient.
- E84 for classification for fire propagation and surface flame spread.

SKYROCK®
ECOBLOCK - R12 ACOUSTICAL GYPSUM PANEL



FEATURES AND BENEFITS

- Great Aesthetics, Excellent Noise Absorption.
- Tested to achieve up to 0.85 NRC (Noise Reduction Coefficient) as per ASTM C423.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- A square edge allows for finishing to a flat and seamless ceiling or wall.
- It is produced in a borderless perforation pattern for a seamless appearance to enhance the ceiling aesthetic.
- Complies with E84 for flame spread and smoke development.
- Available in various customized perforation configurations.
- Laminated at the back with fiberglass fleece.

APPLICATIONS

- Commercial, office and residential applications
- Retail complexes
- Large scale cinema spaces
- Public venues such as concert halls, auditoriums and sporting venues, schools, universities and lecture halls
- Schools, universities and lecture halls
- Hotel lobbies and conference rooms
- Restaurants

ROUND PERFORATION R12

WITH BORDER 16.4%



BORDERLESS 18.1%



ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
R12	0.60	**0.65**	**0.60**	**0.65**	**0.70**	0.75	**0.65**
R12 with 19mm Soft Fiber Infill	0.70	**0.90**	**0.80**	**0.90**	**0.75**	0.65	**0.85**

** Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Property	R12	R12 Borderless
Weight (kg/m²) *after the perforation*	8.9	8.7
Thickness (mm)	12.5	12.5
Actual Length (mm)	2400	2400
Actual Width (mm)	1200	1175
Hole Type	Round	Round
Hole Size (mm)	ø12	ø12
Border (mm)	50	12.5
Pitch (mm) *(center to center spacing between holes)*	25	25
Holes layout (L x W)	93 x 45	96 x 47
Number of Holes *(fully perforated board)*	4185	4512
Perforation Rate (%)	16.4%	18.1%
Noise Reduction Coefficient (NRC)	0.65	0.65
Noise Reduction Coefficient (NRC) with Insulation	0.85	0.85
Board Edge detail	Square Edge	Square Edge
Mounting	E-400	E-400

R12 LAYOUT DESIGNS



1200mm x 2400mm
Gypsum Board R12, 16.4%
45 x 93 Holes



Borderless 1175mm x 2400mm
Gypsum Board R12, 18.1%
47 x 96 Holes



Strip design



Globe 8 design

Additional patterns layouts are available upon request. Please contact USG ME nearest sales office.

SYSTEM DESCRIPTION

Skyrock® Ecoblock Round Perforation R12 is manufactured from a specially formulated core encased in recycled face and back liner papers. The panels have long square edges for easy application when used with USG Middle East's EASYJOINT™ 60 Setting-Type Premium-Jointing Powder. The acoustic gypsum boards are punched to specification with precision engineering before being laminated with a non-woven acoustic mat on the back.

These Acoustical Gypsum Boards are ideal for various sound absorption applications and have an enhanced aesthetic look.

FINISHING AND DECORATING

- The level of finish must be determined at the design stage since each level has specific requirements for substrate tolerances and gypsum board installation jointing and finishing. The desired level of finish may only be achieved if all of these requirements are met through various stages of construction.
- USG ME recommends using EASYJOINT™ 60 Setting-Type Premium-Jointing Powder for the best jointing strength.
- For priming and decorating with paint, USG ME recommends using roller applications. Roller application ensures a uniform texture over the entire surface and protects the non-woven acoustic mat on the back face.
- Avoid spray painting as it may block holes, thus affecting acoustic performance.

ADVANTAGES


- Performance: Manufactured in various configurations to satisfy many desired aesthetic designs.
- Acoustic Performance: Superior NRC Capabilities up to 0.85.
- Easy to Install: Scores and snaps are easy—similar installation to conventional plasterboard.

COMPLIANCE

Comply with:

- ASTM C423 for Noise Reduction Coefficient.
- E84 for classification for fire propagation and surface flame spread.

SKYROCK®
ECOBLOCK R8-15-20 ACOUSTICAL GYPSUM PANEL

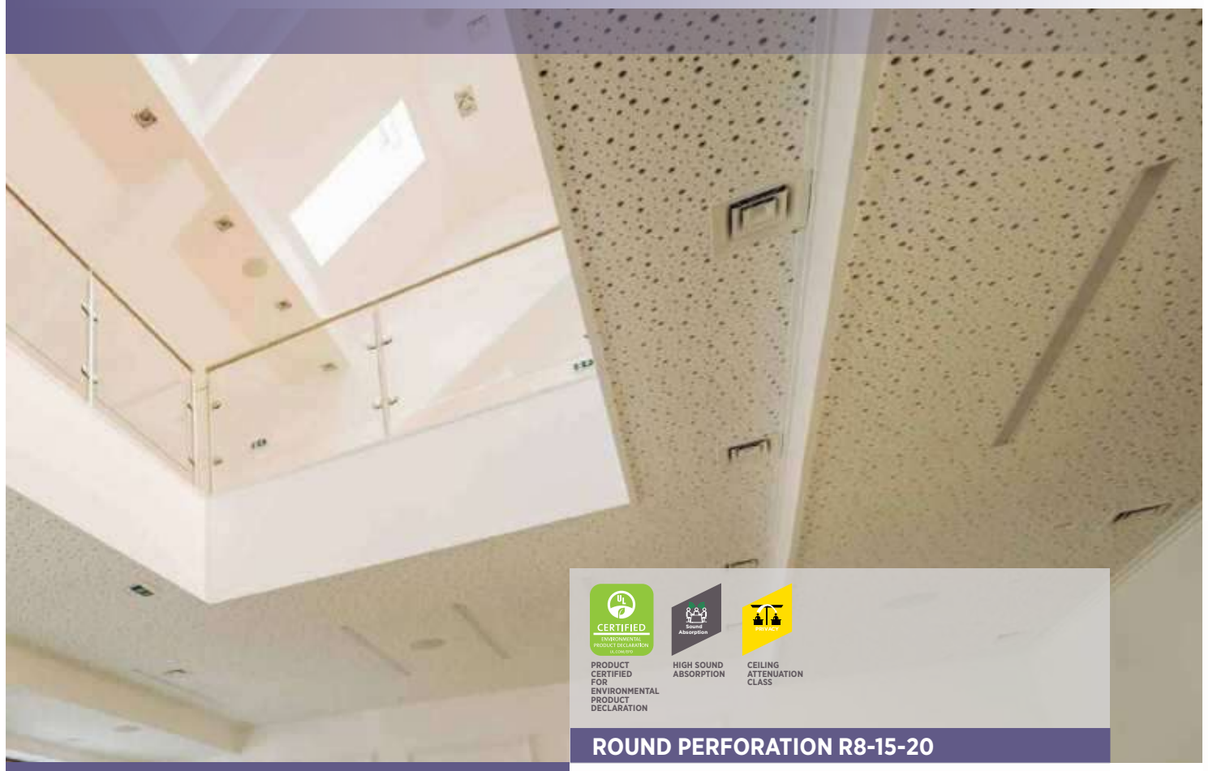

ROUND PERFORATION R8-15-20

BORDERLESS 20%



FEATURES AND BENEFITS

- Great Aesthetics, Excellent Noise Absorption.
- Tested to achieve up to 0.80 NRC (Noise Reduction Coefficient) as per ASTM C423.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- A square edge allows for finishing to a flat and seamless ceiling or wall.
- It is produced in a borderless perforation pattern for a seamless appearance to enhance the ceiling aesthetic.
- Complies with E84 for flame spread and smoke development.
- Available in various customized perforation configurations.
- Laminated at the back with fiberglass fleece.

APPLICATIONS

- Commercial, office and residential applications
- Retail complexes
- Large scale cinema spaces
- Public venues such as concert halls, auditoriums and sporting venues, schools, universities and lecture halls
- Schools, universities and lecture halls
- Hotel lobbies and conference rooms
- Restaurants

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
R8-15-20	0.55	**0.80**	**0.70**	**0.75**	**0.70**	0.80	**0.70**
R8-15-20 with 19mm Soft Fiber Infill	0.70	**0.95**	**0.80**	**0.90**	**0.75**	0.65	**0.80**

** Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Property	R8,15,20 Borderless
Weight (kg/m²) *after the perforation*	6.5
Thickness (mm)	12.5
Actual Length (mm)	2350
Actual Width (mm)	1145
Hole Type	Round
Hole Size (mm)	ø8, ø15, ø20
Border (mm)	4
Pitch (mm) *(center to center spacing between holes)*	N/A
Holes layout (L x W)	N/A
Number of Holes *(fully perforated board)*	R8=2860 ; R15=1053 ; R20=663
Perforation Rate (%)	20%
Noise Reduction Coefficient (NRC)	0.70
Noise Reduction Coefficient (NRC) with Insulation	0.80
Board Edge detail	Square Edge
Mounting	E-400

R8-15-20 LAYOUT DESIGNS



1145mm x 2350mm
Gypsum Board R8-15-20, 20%

SYSTEM DESCRIPTION

Skyrock® Ecoblock Random Perforation R8-15-20 is manufactured from a specially formulated core encased in recycled face and back liner papers. The panels have long square edges for easy application when used with USG Middle East's EASYJOINT™ 60 Setting-Type Premium-Jointing Powder. The acoustic gypsum boards are punched to specification with precision engineering before being laminated with a non-woven acoustic mat on the back.

These Acoustical Gypsum Boards are ideal for various sound absorption applications and have an enhanced aesthetic look.

FINISHING AND DECORATING

- The level of finish must be determined at the design stage since each level has specific requirements for substrate tolerances and gypsum board installation jointing and finishing. The desired level of finish may only be achieved if all of these requirements are met through various stages of construction.
- USG ME recommends using EASYJOINT™ 60 Setting-Type Premium-Jointing Powder for the best jointing strength.
- For priming and decorating with paint, USG ME recommends using roller applications. Roller application ensures a uniform texture over the entire surface and protects the non-woven acoustic mat on the back face.
- Avoid spray painting as it may block holes, thus affecting acoustic performance.

ADVANTAGES

- Performance: Manufactured in various configurations to satisfy many desired aesthetic designs.
- Acoustic Performance: Superior NRC Capabilities up to 0.80.
- Easy to Install: Scores and snaps are easy—similar installation to conventional plasterboard.

COMPLIANCE

Comply with:

- ASTM C423 for Noise Reduction Coefficient.
- E84 for classification for fire propagation and surface flame spread.

SKYROCK®
ECOBLOCK - Q3 ACOUSTICAL GYPSUM PANEL



SQUARE PERFORATION Q3

WITH BORDER 11.9%



ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
Q3	0.55	**0.60**	**0.55**	**0.50**	**0.60**	0.70	**0.55**
Q3 with 19mm Soft Fiber Infill	0.70	**0.95**	**0.75**	**0.80**	**0.60**	0.50	**0.80**

** Calculated to ASTM C 423-01*

FEATURES AND BENEFITS

- Great Aesthetics, Excellent Noise Absorption.
- Tested to achieve up to 0.80 NRC (Noise Reduction Coefficient) as per ASTM C423.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- A square edge allows for finishing to a flat and seamless ceiling or wall.
- It is produced in a strip and globe perforation pattern to enhance the ceiling aesthetic.
- Complies with E84 for flame spread and smoke development.
- Laminated at the back with fiberglass fleece.

APPLICATIONS

- Commercial, office and residential applications
- Retail complexes
- Large scale cinema spaces
- Public venues such as concert halls, auditoriums and sporting venues, schools, universities and lecture halls
- Schools, universities and lecture halls
- Hotel lobbies and conference rooms

TABLE OF PERFORMANCE

Property	Q3
Weight (kg/m²) *after the perforation*	9.3
Thickness (mm)	12.5
Actual Length (mm)	2400
Actual Width (mm)	1200
Hole Type	Square
Hole Size (mm)	3 x 3
Border (mm)	38
Pitch (mm) *(center to center spacing between holes)*	8.33
Holes layout (L x W)	280 x 136
Number of Holes *(fully perforated board)*	38080
Perforation Rate (%)	11.9%
Noise Reduction Coefficient (NRC)	0.55
Noise Reduction Coefficient (NRC) with Insulation	0.80
Board Edge detail	Square Edge
Mounting	E-400

Q3 LAYOUT DESIGNS



1200mm x 2400mm
Gypsum Board Q3, 11.9%
280 x 136 Holes



Strip design



Globe 8 design

Additional patterns layouts are available upon request. Please contact USG ME nearest sales office.

SYSTEM DESCRIPTION

Skyrock Ecoblock Square Perforation Q3 is manufactured from a specially formulated core encased in recycled face and back liner papers. The panels have long square edges for easy application when used with USG Middle East's EASYJOINT™ 60 Setting-Type Premium-Jointing Powder. The acoustic gypsum boards are punched to specification with precision engineering before being laminated with a non-woven acoustic mat on the back.

These Acoustical Gypsum Boards are ideal for various sound absorption applications and have an enhanced aesthetic look.

FINISHING AND DECORATING

- The level of finish must be determined at the design stage since each level has specific requirements for substrate tolerances and gypsum board installation jointing and finishing. The desired level of finish may only be achieved if all of these requirements are met through various stages of construction.
- USG ME recommends using EASYJOINT™ 60 Setting-Type Premium-Jointing Powder for the best jointing strength.
- For priming and decorating with paint, USG ME recommends using roller applications. Roller application ensures a uniform texture over the entire surface and protects the non-woven acoustic mat on the back face.
- Avoid spray painting as it may block holes, thus affecting acoustic performance.

ADVANTAGES

- Performance: Manufactured in various configurations to satisfy many desired aesthetic designs.
- Acoustic Performance: Superior NRC Capabilities up to 0.80.
- Easy to Install: Scores and snaps are easy—similar installation to conventional plasterboard.

COMPLIANCE

Comply with:

- ASTM C423 for Noise Reduction Coefficient.
- E84 for classification for fire propagation and surface flame spread.

SKYROCK®
ECOBLOCK - Q9 ACOUSTICAL GYPSUM PANEL



FEATURES AND BENEFITS

- Great Aesthetics, Excellent Noise Absorption.
- Tested to achieve up to 0.85 NRC (Noise Reduction Coefficient) as per ASTM C423.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- A square edge allows for finishing to a flat and seamless ceiling or wall.
- It is produced in a borderless perforation pattern for a seamless appearance to enhance the ceiling aesthetic.
- Complies with E84 for flame spread and smoke development.
- Available in various customized perforation configurations.
- Laminated at the back with fiberglass fleece.

APPLICATIONS

- Commercial, office and residential applications
- Retail complexes
- Large scale cinema spaces
- Public venues such as concert halls, auditoriums and sporting venues, schools, universities and lecture halls
- Schools, universities and lecture halls
- Hotel lobbies and conference rooms

SQUARE PERFORATION Q9

WITH BORDER 18.3%



BORDERLESS 20.3%



ABSORPTION COEFFICIENT


Frequency, Hz	125	250	500	1000	2000	4000	NRC*
Q9	0.65	**0.80**	**0.55**	**0.55**	**0.55**	0.55	**0.60**
Q9 with 19mm Soft Fiber Infill	0.80	**0.95**	**0.80**	**0.90**	**0.80**	0.65	**0.85**

** Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Property	Q9	Q9 Borderless
Weight (kg/m²) *after the perforation*	8.7	8.5
Thickness (mm)	12.5	12.5
Actual Length (mm)	2400	2400
Actual Width (mm)	1200	1200
Hole Type	Square	Square
Hole Size (mm)	9 x 9	9 x 9
Border (mm)	50	10
Pitch (mm) *(center to center spacing between holes)*	20	20
Holes layout (L x W)	116 x 56	120 x 60
Number of Holes *(fully perforated board)*	6496	7200
Perforation Rate (%)	18.3%	20.3%
Noise Reduction Coefficient (NRC)	0.60	0.60
Noise Reduction Coefficient (NRC) with Insulation	0.85	0.85
Board Edge detail	Square Edge	Square Edge
Mounting	E-400	E-400

Q9 LAYOUT DESIGNS

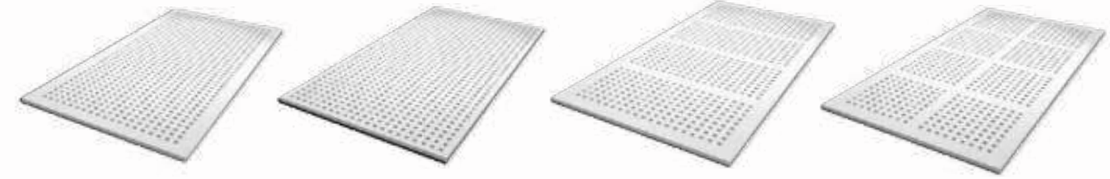

1200mm x 2400mm
Gypsum Board Q9, 18.3%
56 x 116 Holes

Borderless 1200mm x 2400mm
Gypsum Board Q9, 20.3%
60 x 120 Holes

Strip design

Globe 8 design

Additional patterns layouts are available upon request. Please contact USG ME nearest sales office.

SYSTEM DESCRIPTION

Skyrock® Ecoblock Square Perforation Q9 is manufactured from a specially formulated core encased in recycled face and back liner papers. The panels have long square edges for easy application when used with USG Middle East's EASYJOINT™ 60 Setting-Type Premium-Jointing Powder. The acoustic gypsum boards are punched to specification with precision engineering before being laminated with a non-woven acoustic mat on the back.

These Acoustical Gypsum Boards are ideal for various sound absorption applications and have an enhanced aesthetic look.

FINISHING AND DECORATING

- The level of finish must be determined at the design stage since each level has specific requirements for substrate tolerances and gypsum board installation jointing and finishing. The desired level of finish may only be achieved if all of these requirements are met through various stages of construction.
- USG ME recommends using EASYJOINT™ 60 Setting-Type Premium-Jointing Powder for the best jointing strength.
- For priming and decorating with paint, USG ME recommends using roller applications. Roller application ensures a uniform texture over the entire surface and protects the non-woven acoustic mat on the back face.
- Avoid spray painting as it may block holes, thus affecting acoustic performance.

ADVANTAGES

- Performance: Manufactured in various configurations to satisfy many desired aesthetic designs.
- Acoustic Performance: Superior NRC Capabilities up to 0.85.
- Easy to Install: Scores and snaps are easy—similar installation to conventional plasterboard.

COMPLIANCE

Comply with:

- ASTM C423 for Noise Reduction Coefficient.
- E84 for classification for fire propagation and surface flame spread.

SKYROCK®
ECOBLOCK - Q12 ACOUSTICAL GYPSUM PANEL



FEATURES AND BENEFITS

- Great Aesthetics, Excellent Noise Absorption
- Tested to achieve up to 0.85 NRC (Noise Reduction Coefficient) as per ASTM C423.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- A square edge allows for finishing to a flat and seamless ceiling or wall.
- It is produced in a borderless perforation pattern for a seamless appearance to enhance the ceiling aesthetic.
- Complies with E84 for flame spread and smoke development.
- Available in various customized perforation configurations.
- Laminated at the back with fiberglass fleece.

APPLICATIONS

- Commercial, office and residential applications
- Retail complexes
- Large scale cinema spaces
- Public venues such as concert halls, auditoriums and sporting venues, schools, universities and lecture halls
- Schools, universities and lecture halls
- Hotel lobbies and conference rooms

SQUARE PERFORATION Q12

WITH BORDER 21%



BORDERLESS 23%



ABSORPTION COEFFICIENT


Frequency, Hz	125	250	500	1000	2000	4000	NRC*
Q12	0.65	**0.75**	**0.70**	**0.70**	**0.75**	0.75	**0.70**
Q12 with 19mm Soft Fiber Infill	0.70	**0.95**	**0.80**	**0.85**	**0.80**	0.65	**0.85**

** Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Property	Q12	Q12 Borderless
Weight (kg/m²) *after the perforation*	8.4	8.2
Thickness (mm)	12.5	12.5
Actual Length (mm)	2400	2400
Actual Width (mm)	1200	1175
Hole Type	Square	Square
Hole Size (mm)	12 x 12	12 x 12
Border (mm)	50	12.5
Pitch (mm) *(center to center spacing between holes)*	25	25
Holes layout (L x W)	93 x 45	96 x 47
Number of Holes *(fully perforated board)*	4185	4512
Perforation Rate (%)	21%	23%
Noise Reduction Coefficient (NRC)	0.70	0.70
Noise Reduction Coefficient (NRC) with Insulation	0.85	0.85
Board Edge detail	Square Edge	Square Edge
Mounting	E-400	E-400

Q12 LAYOUT DESIGNS

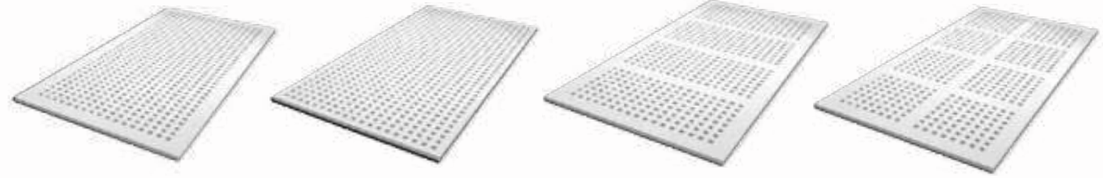

1200mm x 2400mm
Gypsum Board Q12, 21%
45 x 93 Holes

Borderless 1175mm x 2400mm
Gypsum Board Q12, 23%
47 x 96 Holes

Strip design

Globe 8 design

Additional patterns layouts are available upon request. Please contact USG ME nearest sales office.

SYSTEM DESCRIPTION

Skyrock® Ecoblock Square Perforation Q12 is manufactured from a specially formulated core encased in recycled face and back liner papers. The panels have long square edges for easy application when used with USG Middle East's EASYJOINT™ 60 Setting-Type Premium-Jointing Powder. The acoustic gypsum boards are punched to specification with precision engineering before being laminated with a non-woven acoustic mat on the back.
These Acoustical Gypsum Boards are ideal for various sound absorption applications and have an enhanced aesthetic look.

FINISHING AND DECORATING

- The level of finish must be determined at the design stage since each level has specific requirements for substrate tolerances and gypsum board installation jointing and finishing. The desired level of finish may only be achieved if all of these requirements are met through various stages of construction.
- USG ME recommends using EASYJOINT™ 60 Setting-Type Premium-Jointing Powder for the best jointing strength.
- For priming and decorating with paint, USG ME recommends using roller applications. Roller application ensures a uniform texture over the entire surface and protects the non-woven acoustic mat on the back face.
- Avoid spray painting as it may block holes, thus affecting acoustic performance.

ADVANTAGES

- Performance: Manufactured in various configurations to satisfy many desired aesthetic designs.
- Acoustic Performance: Superior NRC Capabilities up to 0.85.
- Easy to Install: Scores and snaps are easy—similar installation to conventional plasterboard.

COMPLIANCE

Comply with:

- ASTM C423 for Noise Reduction Coefficient.
- E84 for classification for fire propagation and surface flame spread.

SKYROCK®
SOUNDBLOCK - H11 ACOUSTICAL GYPSUM TILE




FEATURES AND BENEFITS

- Gypsum ceiling tiles with Hexagon perforations with an acoustic back fleece for exceptional sound absorption capabilities up-to 0.90 NRC.
- Tiles come in a range of surface finishes, including laminated and painted options.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Offered in both metric and imperial sizes.
- Available in a concealed edge design as an option, adding a refined touch to the overall space.
- Resistant to humidity and sagging, they exhibit impressive durability even in challenging environmental conditions.
- Additionally, their scrub-resistant properties facilitate easy removal of dirt marks.
- Tiles are demountable and designed to be seamlessly integrated with DONN® Brand acoustical ceiling suspensions.

APPLICATIONS

- Schools
- Commercial retails
- Department stores
- Hotels
- Malls and residential

HEXAGON PERFORATION H11

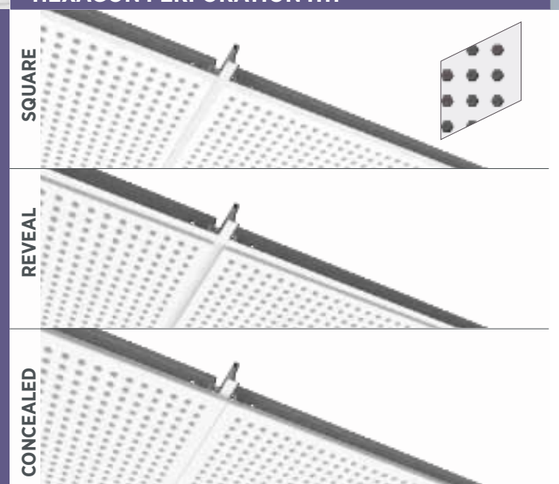

Explore the complete range of perforation patterns on pages 304-305 for detailed insights.

ABSORPTION COEFFICIENT





Frequency, Hz	125	250	500	1000	2000	4000	NRC*
H11	0.65	**0.80**	**0.70**	**0.70**	**0.75**	0.75	**0.65**
H11 with 19mm Soft Fiber Infill	0.70	**1.00**	**0.85**	**0.95**	**0.90**	0.80	**0.90**

** Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	GT-PS6609-H11 GT-PS2209-H11	600*600*9.5 610*610*9.5	0.65		81%			4%	Low	$$$
	GT-PS662-H11 GT-PS222-H11	600*600*12.5 610*610*12.5	0.65		81%			4%	Low	$$$
	GT-PS622-H11 GT-PS242-H11	600*1200*12.5 610*1220*12.5	0.65		81%			4%	Low	$$$
	LGAE-PS6609-H11 LGAE-PS2209-H11	600*600*9.5 610*610*9.5	0.65		84%			4%	Low	$$$
	LGAE-PS662-H11 LGAE-PS222-H11	600*600*12.5 610*610*12.5	0.65		84%			4%	Low	$$$
	LGAE-PS622-H11 LGAE-PS242-H11	600*1200*12.5 610*1220*12.5	0.65		84%			4%	Low	$$$
SL	GT-PSR662-H11 GT-PSR622-H11	600*600*12.5 600*1200*12.5	0.65		81%			4%	Low	$$$$
	LGAE-PSR662-H11 LGAE-PSR622-H11	600*600*12.5 600*1200*12.5	0.65		84%			4%	Low	$$$$
FL	GT-PSRF662-H11 GT-PSRF622-H11	600*600*12.5 600*1200*12.5	0.65		81%			4%	Low	$$$$
	LGAE-PSRF662-H11 LGAE-PSRF622-H11	600*600*12.5 600*1200*12.5	0.65		84%			4%	Low	$$$$
Concealed	GT-PSDC662-H11 LGAE-PSDC662-H11	600*600*12.5 600*600*12.5	0.65		81% 84%			4%	Low	$$$$
	GT-PSDC622-H11 LGAE-PSDC622-H11	600*1200*12.5 600*1200*12.5	0.65		81% 84%			4%	Low	$$$$

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge	DX/DXL Concealed
				

SYSTEM SPECIFICATION

Soundblock H11 Ceiling Tile meets specifications in accordance with ASTM E1264.

Materials Classification
Type: XX,
Pattern: C

Substrate and Surface Finish
Laminated: Gypsum ceiling panel laminated with vinyl-faced
Painted: Gypsum ceiling panel finished with factory-applied water-based paint

Thickness
9.5mm, 12.5mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm

Edge Detail Trim
Square, Reveal [SL, FL], Concealed

Open Area
600 x 600mm: 17.5%
600 x 1200mm: 18%

Weight
Square
9.5mm [5.09 kg/m^2],
12.5mm [8.76 kg/m^2]
Reveal and Concealed
12.5mm [8.76 kg/m^2]

Noise Reduction Coefficient [NRC]
[0.65] [0.90]

Mold Prevention
Resistant to mold growth. Panels are available upon request

Humidity Resistance
Maximum 95% RH / 40°C

Light Reflectance Coefficient [LR]
Laminated: 0.84
Painted: 0.81

Color
Laminated: Standard White
Painted: Standard White


Thermal Resistance
12.5mm [R 0.45]

Surface Burning Characteristics as per ASTM E84
Laminated: Class A
Painted: Class A

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub Cycles without surface break or the extent of abrasion

SKYROCK®
SOUNDBLOCK - R6 ACOUSTICAL GYPSUM TILE

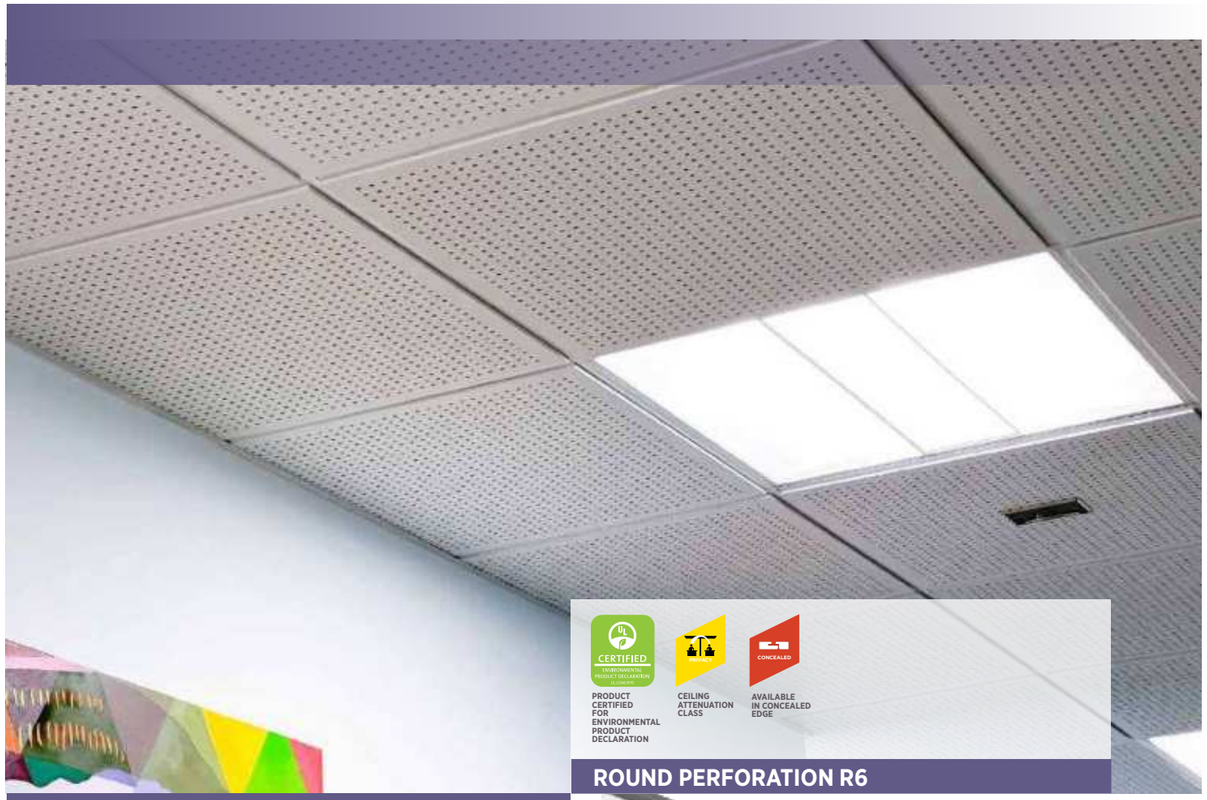


FEATURES AND BENEFITS

- Gypsum ceiling tiles with round perforations with an acoustic back fleece for exceptional sound absorption capabilities up-to 0.85 NRC.
- Tiles come in a range of surface finishes, including laminated and painted options.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Offered in both metric and imperial sizes.
- Available in a concealed edge design as an option, adding a refined touch to the overall space.
- Resistant to humidity and sagging, they exhibit impressive durability even in challenging environmental conditions.
- Additionally, their scrub-resistant properties facilitate easy removal of dirt marks.
- Tiles are demountable and designed to be seamlessly integrated with DONN® Brand acoustical ceiling suspensions.

APPLICATIONS

- Schools
- Commercial retails
- Department stores
- Hotels
- Malls and residential

ROUND PERFORATION R6

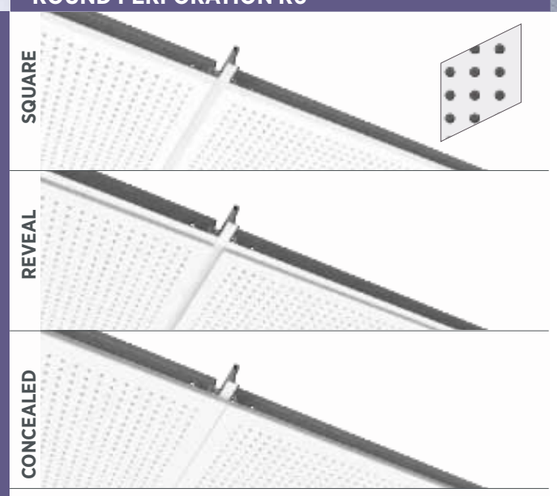

Explore the complete range of perforation patterns on pages 304-305 for detailed insights.

ABSORPTION COEFFICIENT





Frequency, Hz	125	250	500	1000	2000	4000	NRC*
R6	0.55	**0.75**	**0.70**	**0.65**	**0.60**	0.55	**0.70**
R6 with 100mm Soft Fiber Infill	0.75	**0.95**	**0.95**	**0.80**	**0.55**	0.40	**0.85**
R6 with 50mm Soft Fiber Infill	0.70	**0.90**	**0.85**	**0.70**	**0.55**	0.45	**0.75**

** Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	GT-PS6609-R6 GT-PS2209-R6	600*600*9.5 610*610*9.5	0.70		81%			4%	Low	$$$
	GT-PS662-R6 GT-PS222-R6	600*600*12.5 610*610*12.5	0.70		81%			4%	Low	$$$
	GT-PS622-R6 GT-PS242-R6	600*1200*12.5 610*1220*12.5	0.70		81%			4%	Low	$$$
	LGAE-PS6609-R6 LGAE-PS2209-R6	600*600*9.5 610*610*9.5	0.70		84%			4%	Low	$$$
	LGAE-PS662-R6 LGAE-PS222-R6	600*600*12.5 610*610*12.5	0.70		84%			4%	Low	$$$
	LGAE-PS622-R6 LGAE-PS242-R6	600*1200*12.5 610*1220*12.5	0.70		84%			4%	Low	$$$
SL	GT-PSR662-R6 GT-PSR622-R6	600*600*12.5 600*1200*12.5	0.70		81%			4%	Low	$$$$
	LGAE-PSR662-R6 LGAE-PSR622-R6	600*600*12.5 600*1200*12.5	0.70		84%			4%	Low	$$$$
FL	GT-PSRF662-R6 GT-PSRF622-R6	600*600*12.5 600*1200*12.5	0.70		81%			4%	Low	$$$$
	LGAE-PSRF662-R6 LGAE-PSRF622-R6	600*600*12.5 600*1200*12.5	0.70		84%			4%	Low	$$$$
Concealed	GT-PSDC662-R6 LGAE-PSDC662-R6	600*600*12.5 600*600*12.5	0.70		81% 84%			4%	Low	$$$$
	GT-PSDC622-R6 LGAE-PSDC622-R6	600*1200*12.5 600*1200*12.5	0.70		81% 84%			4%	Low	$$$$

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge	DX/DXL Concealed
				

SYSTEM SPECIFICATION

Soundblock R6 Ceiling Tile meets specifications in accordance with ASTM E1264

Materials Classification
Type: XX,
Pattern: C

Substrate and Surface Finish
Laminated: Gypsum ceiling panel laminated with vinyl-faced
Painted: Gypsum ceiling panel finished with factory-applied water-based paint

Thickness
9.5mm, 12.5mm

Size
600 x 600mm, 610 x 610mm,
600 x 1200mm

Edge Detail Trim
Square, Reveal [SL, FL], Concealed

Open Area
600 x 600mm: 9.3%
600 x 1200mm: 9.8%

Weight
Square
9.5mm [5.6 kg/m^2],
12.5mm [7.36 kg/m^2]
Reveal and Concealed
12.5mm [8.5 kg/m^2]

Noise Reduction Coefficient [NRC]
[0.70] [0.75] [0.85]

Mold Prevention
Resistant to mold growth. Panels are available upon request

Humidity Resistance
Maximum 95% RH / 40°C

Light Reflectance Coefficient [LR]
Laminated: 0.84
Painted: 0.81

Color
Laminated: Standard White
Painted: Standard White


Thermal Resistance
12.5mm [R 0.45]

Surface Burning Characteristics as per ASTM E84
Laminated: Class A
Painted: Class A

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub Cycles without surface break or the extent of abrasion

SKYROCK®
SOUNDBLOCK - R12 ACOUSTICAL GYPSUM TILE

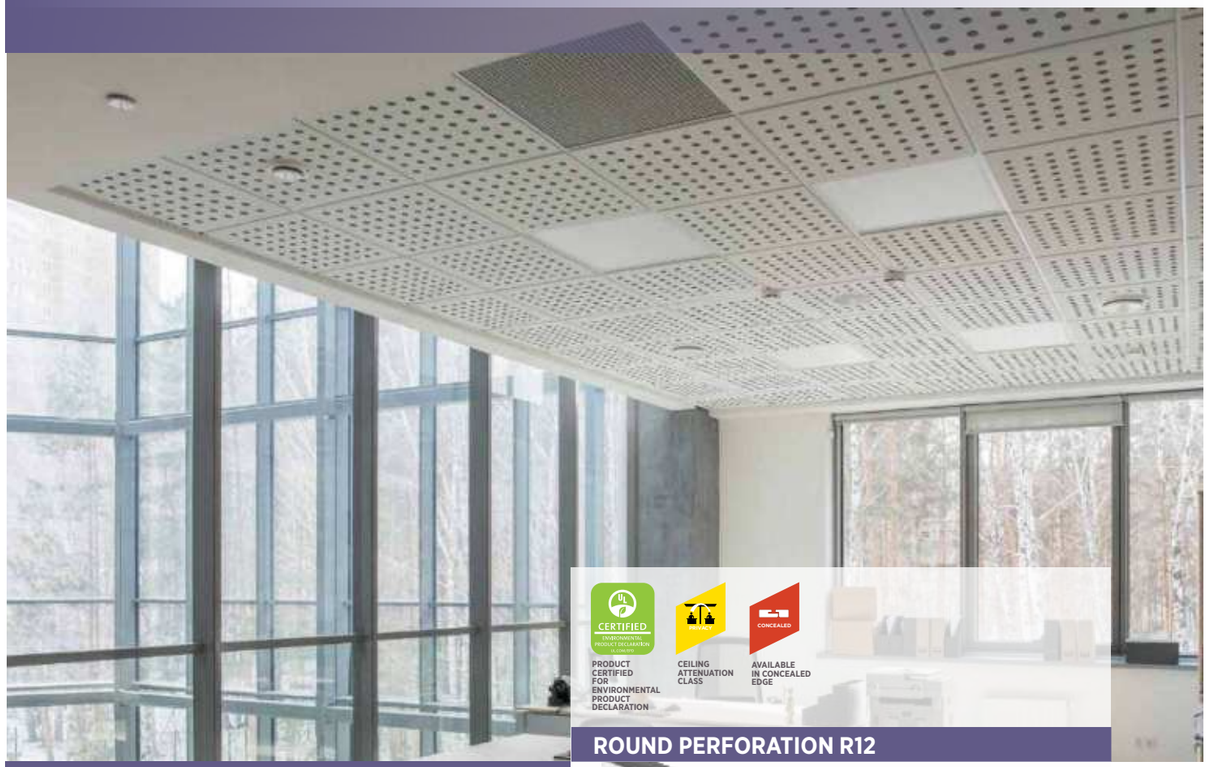


FEATURES AND BENEFITS

- Gypsum ceiling tiles with round perforations with an acoustic back fleece for exceptional sound absorption capabilities up-to 0.85 NRC.
- Tiles come in a range of surface finishes, including laminated and painted options.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Offered in both metric and imperial sizes.
- Available in a concealed edge design as an option, adding a refined touch to the overall space.
- Resistant to humidity and sagging, they exhibit impressive durability even in challenging environmental conditions.
- Additionally, their scrub-resistant properties facilitate easy removal of dirt marks.
- Tiles are demountable and designed to be seamlessly integrated with DONN® Brand acoustical ceiling suspensions.

APPLICATIONS

- Schools
- Commercial retails
- Department stores
- Hotels
- Malls and residential

ROUND PERFORATION R12

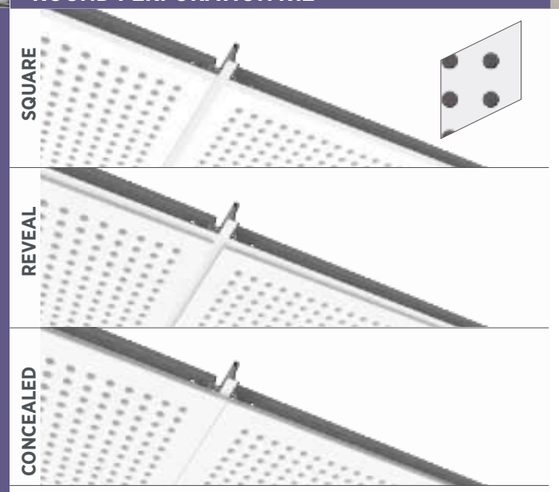

Explore the complete range of perforation patterns on pages 304-305 for detailed insights.

ABSORPTION COEFFICIENT





Frequency, Hz	125	250	500	1000	2000	4000	NRC*
R12	0.60	**0.65**	**0.60**	**0.65**	**0.70**	0.75	**0.65**
R12 with 19mm Soft Fiber Infill	0.70	**0.90**	**0.80**	**0.90**	**0.75**	0.65	**0.85**

** Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	GT-PS6609-R12	600*600*9.5	0.65		81%			4%	Low	$$$$
	LGAE-PS6609-R12	600*600*9.5			84%					
	GT-PS662-R12	600*600*12.5	0.65		81%			4%	Low	$$$$
	GT-PS622-R12	600*1200*12.5								
	LGAE-PS662-R12	600*600*12.5	0.65		84%			4%	Low	$$$$
	LGAE-PS622-R12	600*1200*12.5								
SL	GT-PSR662-R12	600*600*12.5	0.65		81%			4%	Low	$$$$
	GT-PSR622-R12	600*1200*12.5								
	LGAE-PSR662-R12	600*600*12.5	0.65		84%			4%	Low	$$$$
	LGAE-PSR622-R12	600*1200*12.5								
FL	GT-PSRF662-R12	600*600*12.5	0.65		81%			4%	Low	$$$$
	GT-PSRF622-R12	600*1200*12.5								
	LGAE-PSRF662-R12	600*600*12.5	0.65		84%			4%	Low	$$$$
	LGAE-PSRF622-R12	600*1200*12.5								
Concealed	GT-PSDC662-R12	600*600*12.5	0.65		81%			4%	Low	$$$$
	LGAE-PSDC662-R12	600*600*12.5			84%					
	GT-PSDC622-R12	600*1200*12.5	0.65		81%			4%	Low	$$$$
	LGAE-PSDC622-R12	600*1200*12.5			84%					

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge	DX/DXL Concealed
				

SYSTEM SPECIFICATION

Soundblock R12 Ceiling Tile meets specifications in accordance with ASTM E1264

Materials Classification
Type: XX,
Pattern: C

Substrate and Surface Finish
Laminated: Gypsum ceiling panel laminated with vinyl-faced
Painted: Gypsum ceiling panel finished with factory-applied water-based paint

Thickness
9.5mm, 12.5mm

Size
600 x 600mm, 610 x 610mm,
600 x 1200mm

Edge Detail Trim
Square, Reveal [SL, FL], Concealed

Open Area
600 x 600mm: 14.1%
600 x 1200mm: 15%

Weight
Square
9.5mm [5.6 kg/m^2],
12.5mm [9.13 kg/m^2]
Reveal and Concealed
12.5mm [9.13 kg/m^2]

Noise Reduction Coefficient [NRC]
[0.65] [0.85]

Mold Prevention
Resistant to mold growth. Panels are available upon request

Humidity Resistance
Maximum 95% RH / 40°C

Light Reflectance Coefficient [LR]
Laminated: 0.84
Painted: 0.81

Color
Laminated: Standard White
Painted: Standard White

Thermal Resistance
12.5mm [R 0.45]

Surface Burning Characteristics as per ASTM E84
Laminated: Class A
Painted: Class A

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub Cycles without surface break or the extent of abrasion

SKYROCK®
SOUNDBLOCK R8-15-20 ACOUSTICAL GYPSUM TILE




FEATURES AND BENEFITS

- Irregular round perforation Gypsum Ceiling tiles with acoustic back fleece for high acoustic performance up-to 0.80 NRC.
- Tiles come in a range of surface finishes, including laminated and painted options.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Offered in both metric and imperial sizes.
- Available in a concealed edge design as an option, adding a refined touch to the overall space.
- Resistant to humidity and sagging, they exhibit impressive durability even in challenging environmental conditions.
- Additionally, their scrub-resistant properties facilitate easy removal of dirt marks.
- Tiles are demountable and designed to be seamlessly integrated with DONN® Brand acoustical ceiling suspensions.

APPLICATIONS

- Schools
- Commercial retails
- Department stores
- Hotels
- Malls and residential

ROUND PERFORATION R8-15-20

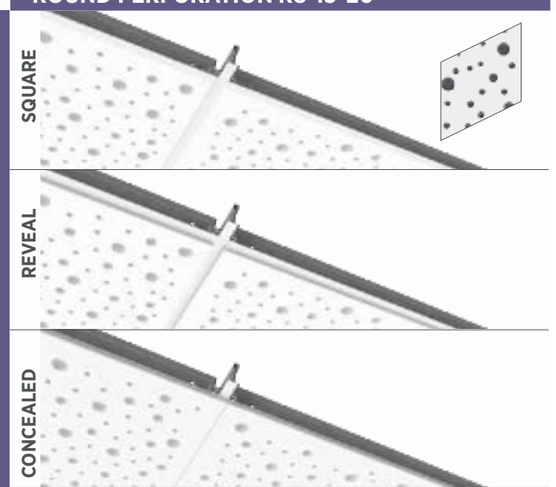

Explore the complete range of perforation patterns on pages 304-305 for detailed insights.

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
R8-15-20	0.55	**0.80**	**0.70**	**0.75**	**0.70**	0.80	**0.70**
R8-15-20 with 19mm Soft Fiber Infill	0.70	**0.95**	**0.80**	**0.90**	**0.75**	0.65	**0.80**

** Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	GT-PS6609-R8-15-20	600*600*9.5	0.70		81%			4%	Low	$$$
	LGAE-PS6609-R8-15-20	600*600*9.5			84%					
	GT-PS662-R8-15-20	600*600*12.5	0.70		81%			4%	Low	$$$$
	GT-PS622-R8-15-20	600*1200*12.5								
	LGAE-PS662-R8-15-20	600*600*12.5	0.70		84%			4%	Low	$$$$
	LGAE-PS622-R8-15-20	600*1200*12.5								
SL	GT-PSR662-R8-15-20	600*600*12.5	0.70		81%			4%	Low	$$$$
	GT-PSR622-R8-15-20	600*1200*12.5								
	LGAE-PSR662-R8-15-20	600*600*12.5	0.70		84%			4%	Low	$$$$
	LGAE-PSR622-R8-15-20	600*1200*12.5								
FL	GT-PSRF662-R8-15-20	600*600*12.5	0.70		81%			4%	Low	$$$$
	GT-PSRF622-R8-15-20	600*1200*12.5								
	LGAE-PSRF662-R8-15-20	600*600*12.5	0.70		84%			4%	Low	$$$$
	LGAE-PSRF622-R8-15-20	600*1200*12.5								
Concealed	GT-PSDC662-R8-15-20	600*600*12.5	0.70		81%			4%	Low	$$$$
	LGAE-PSDC662-R8-15-20	600*600*12.5			84%					
	GT-PSDC622-R8-15-20	600*1200*12.5	0.70		81%			4%	Low	$$$$
	LGAE-PSDC622-R8-15-20	600*1200*12.5			84%					

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge	DX/DXL Concealed

SYSTEM SPECIFICATION

Soundblock R8-15-20 Ceiling Tile meets specifications in accordance with ASTM E1264.

Materials Classification
Type: XX,
Pattern: B, C

Substrate and Surface Finish
Laminated: Gypsum ceiling panel laminated with vinyl-faced
Painted: Gypsum ceiling panel finished with factory-applied water-based paint

Thickness
9.5mm, 12.5mm

Size
600 x 600mm, 600 x 1200mm

Edge Detail Trim
Square, Reveal [SL, FL], Concealed

Open Area
600 x 600mm: 16.8%,
600 x 1200mm: 16.2%

Weight
Square
9.5mm [5.13 kg/m^2],
12.5mm [6.76 kg/m^2]
Reveal and Concealed
12.5mm [7.8 kg/m^2]

Noise Reduction Coefficient [NRC]
[0.70] [0.80]

Mold Prevention
Resistant to mold growth. Panels are available upon request

Humidity Resistance
Maximum 95% RH / 40°C

Light Reflectance Coefficient [LR]
Laminated: 0.84
Painted: 0.81

Color
Laminated: Standard White
Painted: Standard White


Thermal Resistance
12.5mm [R 0.45]

Surface Burning Characteristics as per ASTM E84
Laminated: Class A
Painted: Class A

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub Cycles without surface break or the extent of abrasion

SKYROCK®
SOUNDBLOCK - Q3 ACOUSTICAL GYPSUM TILE

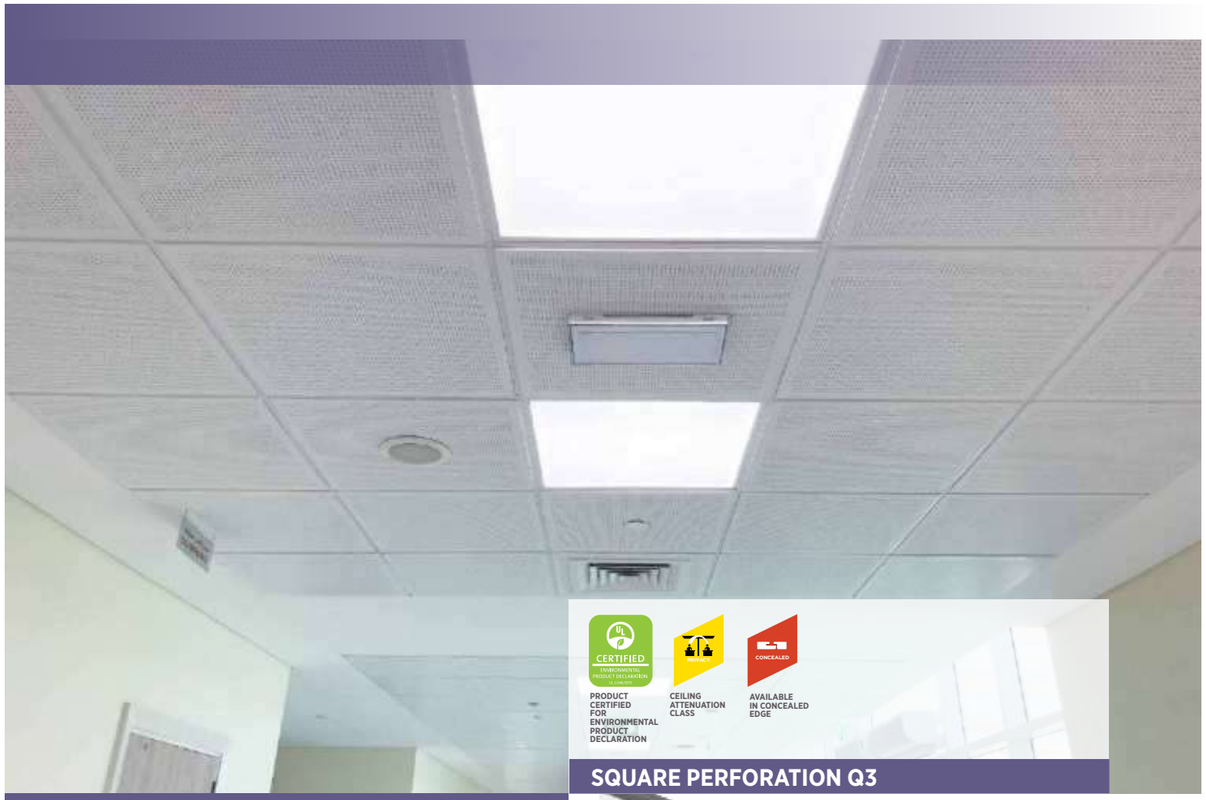


FEATURES AND BENEFITS

- 3mm Square perforation gypsum ceiling tiles with acoustic back fleece for high acoustic performance up-to 0.80 NRC.
- Tiles come in a range of surface finishes, including laminated and painted options.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Offered in both metric and imperial sizes.
- Available in a concealed edge design as an option, adding a refined touch to the overall space.
- Resistant to humidity and sagging, they exhibit impressive durability even in challenging environmental conditions.
- Additionally, their scrub-resistant properties facilitate easy removal of dirt marks.
- Tiles are demountable and designed to be seamlessly integrated with DONN® Brand acoustical ceiling suspensions.

APPLICATIONS

- Schools
- Commercial retails
- Department stores
- Hotels
- Malls and residential

SQUARE PERFORATION Q3

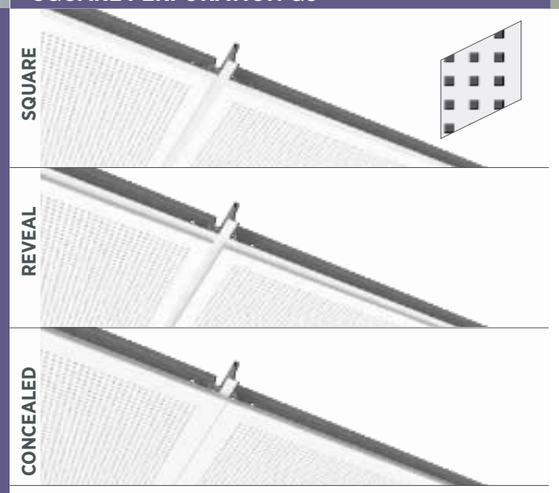

Explore the complete range of perforation patterns on pages 304-305 for detailed insights.

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
Q3	0.55	**0.60**	**0.55**	**0.50**	**0.60**	0.70	**0.55**
Q3 with 19mm Soft Fiber Infill	0.70	**0.95**	**0.75**	**0.80**	**0.60**	0.50	**0.80**

** Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	GT-PS662-Q3 GT-PS622-Q3	600*600*12.5 600*1200*12.5	0.55		81%			4%	Low	$$$
	LGAE-PS662-Q3 LGAE-PS622-Q3	600*600*12.5 600*1200*12.5	0.55		84%			4%	Low	$$$
SL	GT-PSR662-Q3 GT-PSR622-Q3	600*600*12.5 600*1200*12.5	0.55		81%			4%	Low	$$$$
	LGAE-PSR662-Q3 LGAE-PSR622-Q3	600*600*12.5 600*1200*12.5	0.55		84%			4%	Low	$$$$
FL	GT-PSRF662-Q3 GT-PSRF622-Q3	600*600*12.5 600*1200*12.5	0.55		81%			4%	Low	$$$$
	LGAE-PSRF662-Q3 LGAE-PSRF622-Q3	600*600*12.5 600*1200*12.5	0.55		84%			4%	Low	$$$$
Concealed	GT-PSDC662-Q3 LGAE-PSDC662-Q3	600*600*12.5 600*600*12.5	0.55		81% 84%			4%	Low	$$$$
	GT-PSDC622-Q3 LGAE-PSDC622-Q3	600*1200*12.5 600*1200*12.5	0.55		81% 84%			4%	Low	$$$$

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge	CONCEALED Square T24

SYSTEM SPECIFICATION

Soundblock Q3 Ceiling Tile meets specifications in accordance with ASTM E1264.

Materials Classification
Type: XX, Pattern: C

Substrate and Surface Finish
Laminated: Gypsum ceiling panel laminated with vinyl-faced
Painted: Gypsum ceiling panel finished with factory-applied water-based paint

Thickness
12.5mm

Size
600 x 600mm, 600 x 1200mm

Edge Detail Trim
Square, Reveal [SL, FL], Concealed

Open Area
600 x 600mm: 10.5%
600 x 1200mm: 10.8%

Weight
12.5mm [9.5 kg/m²]

Noise Reduction Coefficient [NRC]
[0.55] [0.80]

Mold Prevention
Resistant to mold growth. Panels are available upon request

Humidity Resistance
Maximum 95% RH / 40°C

Light Reflectance Coefficient [LR]
Laminated: 0.84
Painted: 0.81

Color
Laminated: Standard White
Painted: Standard White

Surface Burning Characteristics as per ASTM E84
Laminated: Class A
Painted: Class A

Thermal Resistance
12.5mm [R 0.45]

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub Cycles without surface break or the extent of abrasion

SKYROCK®
SOUNDBLOCK - Q9 ACOUSTICAL GYPSUM TILE



PRODUCT CERTIFIED FOR ENVIRONMENTAL PRODUCT DECLARATION

CEILING ATTENUATION CLASS

AVAILABLE IN CONCEALED EDGE


FEATURES AND BENEFITS

- 9mm Square perforation gypsum ceiling tiles with acoustic back fleece for high acoustic performance up-to 0.85 NRC.
- Tiles come in a range of surface finishes, including laminated and painted options.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Offered in both metric and imperial sizes.
- Available in a concealed edge design as an option, adding a refined touch to the overall space.
- Resistant to humidity and sagging, they exhibit impressive durability even in challenging environmental conditions.
- Additionally, their scrub-resistant properties facilitate easy removal of dirt marks.
- Tiles are demountable and designed to be seamlessly integrated with DONN® Brand acoustical ceiling suspensions.

APPLICATIONS

- Schools
- Commercial retails
- Department stores
- Hotels
- Malls and residential

SQUARE PERFORATION Q9

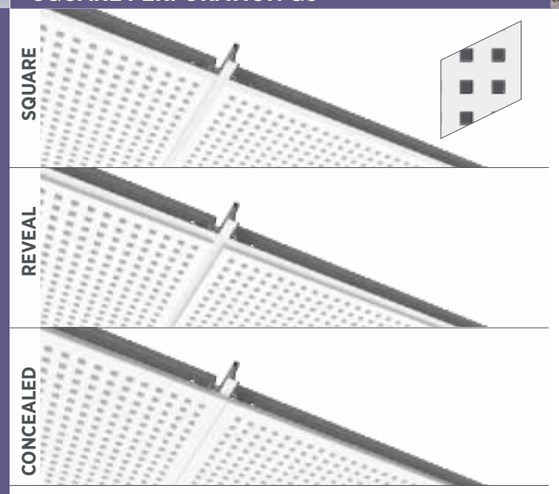

Explore the complete range of perforation patterns on pages 304-305 for detailed insights.

ABSORPTION COEFFICIENT






Frequency, Hz	125	250	500	1000	2000	4000	NRC*
Q9	0.65	**0.80**	**0.55**	**0.55**	**0.55**	0.55	**0.60**
Q9 with 19mm Soft Fiber Infill	0.80	**0.95**	**0.80**	**0.90**	**0.80**	0.65	**0.85**

** Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	GT-PS6609-Q9	600*600*9.5	0.60		81%			4%	Low	$$
	LGAE-PS6609-Q9	600*600*9.5			84%					
	GT-PS662-Q9	600*600*12.5	0.60		81%			4%	Low	$$
	GT-PS622-Q9	600*1200*12.5								
	LGAE-PS662-Q9	600*600*12.5	0.60		84%			4%	Low	$$
	LGAE-PS622-Q9	600*1200*12.5								
SL	GT-PSR662-Q9	600*600*12.5	0.60		81%			4%	Low	$$$$
	GT-PSR622-Q9	600*1200*12.5								
	LGAE-PSR662-Q9	600*600*12.5	0.60		84%			4%	Low	$$$$
	LGAE-PSR622-Q9	600*1200*12.5								
FL	GT-PSRF662-Q9	600*600*12.5	0.60		81%			4%	Low	$$$$
	GT-PSRF622-Q9	600*1200*12.5								
	LGAE-PSRF662-Q9	600*600*12.5	0.60		84%			4%	Low	$$$$
	LGAE-PSRF622-Q9	600*1200*12.5								
Concealed	GT-PSDC662-Q9	600*600*12.5	0.60		81%			4%	Low	$$$$
	LGAE-PSDC662-Q9	600*600*12.5			84%					
	GT-PSDC622-Q9	600*1200*12.5	0.60		81%			4%	Low	$$$$
	LGAE-PSDC622-Q9	600*1200*12.5			84%					

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge	DX/DXL Concealed
				

SYSTEM SPECIFICATION

Soundblock Q9 Ceiling Tile meets specifications in accordance with ASTM C1264.

Materials Classification
Type: XX,
Pattern: A

Substrate and Surface Finish
Laminated: Gypsum ceiling panel laminated with vinyl-faced
Painted: Gypsum ceiling panel finished with factory-applied water-based paint

Thickness
9.5mm, 12.5mm

Size
600 x 600mm, 600 x 1200mm

Edge Detail Trim
Square, Reveal [SL, FL], Concealed

Open Area
600 x 600mm: 18%
600 x 1200mm: 18.5%

Weight
Square
9.5mm [5.52 kg/m^2],
12.5mm [8.7 kg/m^2]
Reveal and Concealed
12.5mm [8.7 kg/m^2]

Noise Reduction Coefficient [NRC]
[0.60] [0.85]

Mold Prevention
Resistant to mold growth. Panels are available upon request

Humidity Resistance
Maximum 95% RH / 40°C

Light Reflectance Coefficient [LR]
Laminated: 0.84
Painted: 0.81

Color
Laminated: Standard White
Painted: Standard White


Thermal Resistance
12.5mm [R 0.45]

Surface Burning Characteristics as per ASTM E84
Laminated: Class A
Painted: Class A

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub Cycles without surface break or the extent of abrasion

SKYROCK®
SOUNDBLOCK - Q12 ACOUSTICAL GYPSUM TILE

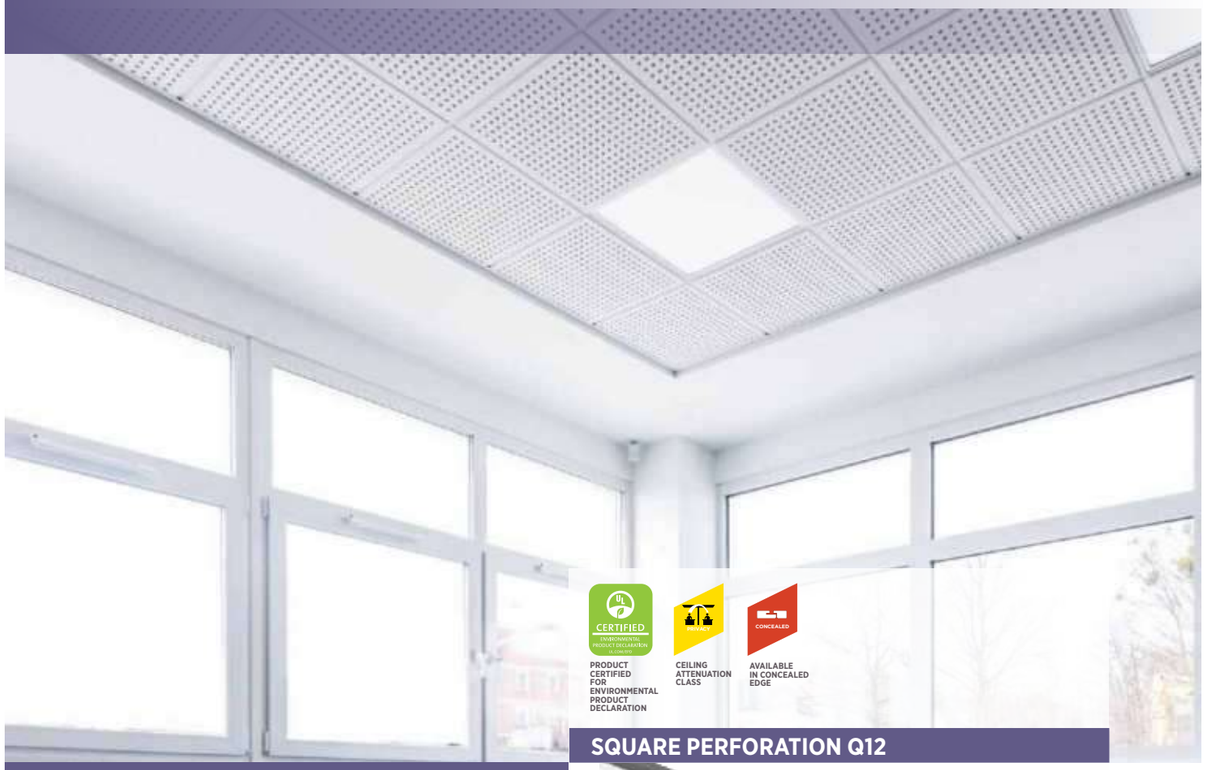


FEATURES AND BENEFITS

- 12mm Square perforation Gypsum Ceiling tiles with acoustic back fleece for high acoustic performance up-to 0.85 NRC.
- Tiles come in a range of surface finishes, including laminated and painted options.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Offered in both metric and imperial sizes.
- Available in a concealed edge design as an option, adding a refined touch to the overall space.
- Resistant to humidity and sagging, they exhibit impressive durability even in challenging environmental conditions.
- Additionally, their scrub-resistant properties facilitate easy removal of dirt marks.
- Tiles are demountable and designed to be seamlessly integrated with DONN® Brand acoustical ceiling suspensions.

APPLICATIONS

- Schools
- Commercial retails
- Department stores
- Hotels
- Malls and residential

SQUARE PERFORATION Q12

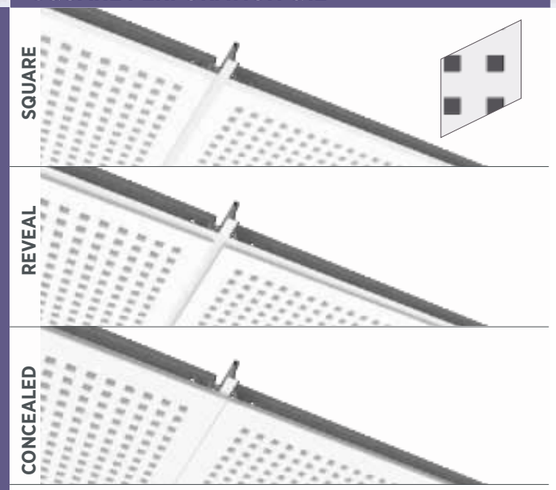

Explore the complete range of perforation patterns on pages 304-305 for detailed insights.

ABSORPTION COEFFICIENT






Frequency, Hz	125	250	500	1000	2000	4000	NRC*
Q12	0.65	**0.75**	**0.70**	**0.70**	**0.75**	0.75	**0.70**
Q12 with 19mm Soft Fiber Infill	0.70	**0.95**	**0.80**	**0.85**	**0.80**	0.65	**0.85**

** Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	GT-PS6609-Q12	600*600*9.5	0.70		81%			4%	Low	$$$$
	LGAE-PS6609-Q12	600*600*9.5			84%					
	GT-PS662-Q12	600*600*12.5	0.70		81%			4%	Low	$$$$
	GT-PS622-Q12	600*1200*12.5								
	LGAE-PS662-Q12	600*600*12.5	0.70		84%			4%	Low	$$$$
	LGAE-PS622-Q12	600*1200*12.5								
SL	GT-PSR662-Q12	600*600*12.5	0.70		81%			4%	Low	$$$$
	GT-PSR622-Q12	600*1200*12.5								
	LGAE-PSR662-Q12	600*600*12.5	0.70		84%			4%	Low	$$$$
	LGAE-PSR622-Q12	600*1200*12.5								
FL	GT-PSRF662-Q12	600*600*12.5	0.70		81%			4%	Low	$$$$
	GT-PSRF622-Q12	600*1200*12.5								
	LGAE-PSRF662-Q12	600*600*12.5	0.70		84%			4%	Low	$$$$
	LGAE-PSRF622-Q12	600*1200*12.5								
Concealed	GT-PSDC662-Q12	600*600*12.5	0.70		81%			4%	Low	$$$$
	LGAE-PSDC662-Q12	600*600*12.5			84%					
	GT-PSDC622-Q12	600*1200*12.5	0.70		81%			4%	Low	$$$$
	LGAE-PSDC622-Q12	600*1200*12.5			84%					

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge	DX/DXL Concealed
				

SYSTEM SPECIFICATION

Soundblock Q12 Ceiling Tile meets specifications in accordance with ASTM E1264.

Materials Classification
Type: XX,
Pattern: A

Substrate and Surface Finish
Laminated: Gypsum ceiling panel laminated with vinyl-faced
Painted: Gypsum ceiling panel finished with factory-applied water-based paint

Thickness
9.5mm, 12.5mm

Size
600 x 600mm, 600 x 1200mm

Edge Detail Trim
Square, Reveal [SL, FL], Concealed

Open Area
600 x 600mm: 18%
600 x 1200mm: 19.1%

Weight
Square
9.5mm [6.6 kg/m^2],
12.5mm [8.7 kg/m^2]
Reveal and Concealed
12.5mm [8.7 kg/m^2]

Noise Reduction Coefficient [NRC]
[0.70] [0.85]

Mold Prevention
Resistant to mold growth. Panels are available upon request

Humidity Resistance
Maximum 95% RH / 40°C

Light Reflectance Coefficient [LR]
Laminated: 0.84
Painted: 0.81

Color
Laminated: Standard White
Painted: Standard White

Thermal Resistance
R 0.45


Surface Burning Characteristics as per ASTM E84
Laminated: Class A
Painted: Class A

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub Cycles without surface break or the extent of abrasion

15

PAINTED
GYPSUM TILE

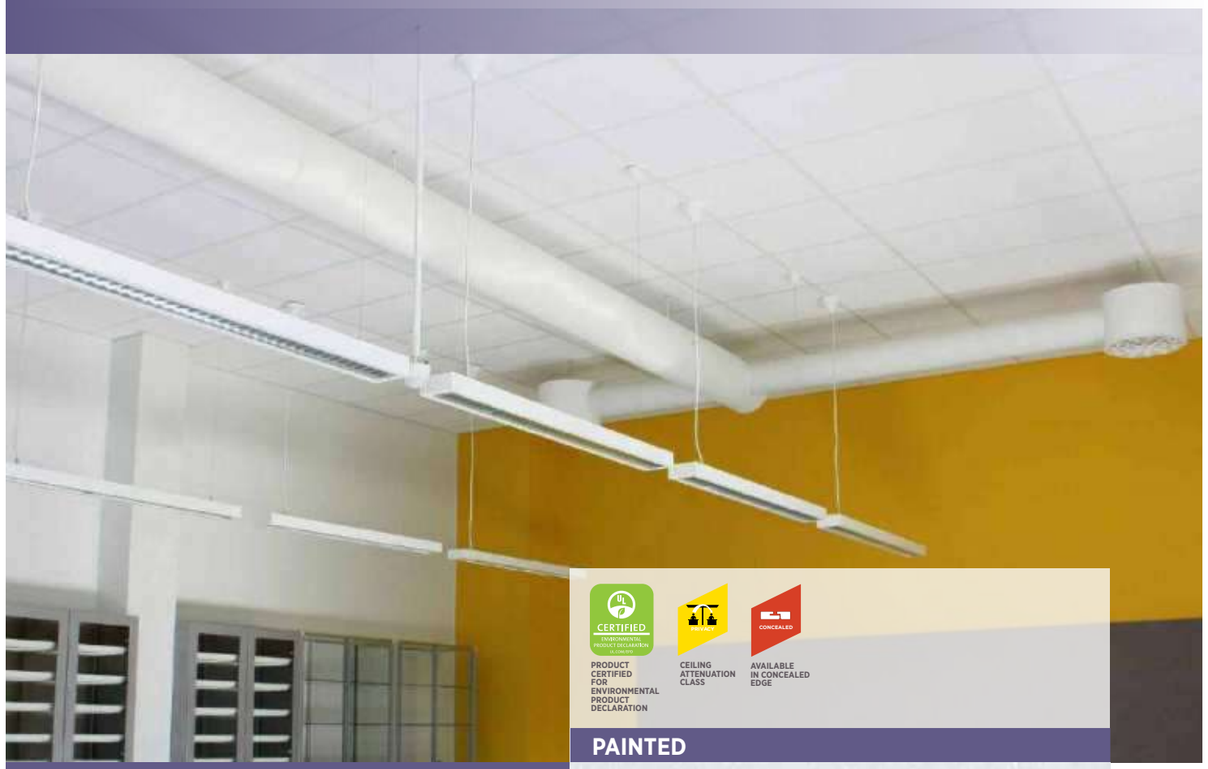

FEATURES AND BENEFITS

- Painted Gypsum Ceiling with acrylic emulsion matte finish for a smooth and brighter surface.
- High humidity resistant; sag resistance ensures durability in standard or extreme environmental conditions. It can be installed during the early construction phase.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Washable, durable, scuff, and scratch resistant for longer life.
- High Light Reflectance (LR-0.81) reduces light fixtures & energy use.
- It is economical and easy to trim and install.
- Demountable and designed to be installed on the DONN® Brand ceiling suspensions.
- Available in a concealed edge design, specifically produced to elevate the overall space appearance.


APPLICATIONS

- Laboratories
- Commercial retails
- Restrooms and wet areas
- Department stores

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
			CAC						
SQ	GT-BS6609 GT-BS2209	600*600*9.5 610*610*9.5	35	81%			4%	Low	$
	GT-BS662 GT-BS222	600*600*12.5 610*610*12.5	40	81%			4%	Low	$$
	GT-BS622 GT-BS242	600*1200*12.5 610*1220*12.5	40	81%			4%	Low	$$
SL	GT-BSR662 GT-BSR222	600*600*12.5 610*610*12.5	40	81%			4%	Low	$$
	GT-BSR622 GT-BSR242	600*1200*12.5 610*1220*12.5	40	81%			4%	Low	$$
FL	GT-BSRF662 GT-BSRF222	600*600*12.5 610*610*12.5	40	81%			4%	Low	$$
	GT-BSRF622 GT-BSRF242	600*1200*12.5 610*1220*12.5	40	81%			4%	Low	$$
Concealed	GT-BSDC662 GT-BSDC622	600*600*12.5 600*1200*12.5	40	81%			4%	Low	$$$

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge	DX/DXL Concealed
				

SYSTEM SPECIFICATION

Painted Gypsum Ceiling Tile meets specifications in accordance with ASTM E1264.

Materials Classification
Type: XX, Pattern: G

Substrate and Surface Finish
Gypsum ceiling panel finished with factory-applied water-based paint

Thickness
9.5mm, 12.5mm

Size
600 x 600mm, 610 x 610mm,
600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square, Reveal [SL, FL], Concealed

Weight
9.5mm [6.17 kg/m^2],
12.5mm [8.12 kg/m^2]
Reveal and Concealed
12.5mm [10.6 kg/m^2]

Ceiling Attenuation Class [CAC]
[35-40]

Mold Prevention
Resistant to mold growth. Panels are available upon request

Humidity Resistance
Maximum 95% RH / 40°C

Light Reflectance Coefficient [LR]
0.81

Color
Standard White

Surface Burning Characteristics per ASTM E 84
Class A


Thermal Resistance
12.5mm [R 0.45]

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub Cycles without surface break or the extent of abrasion

16

SHADES
GYPSUM TILE

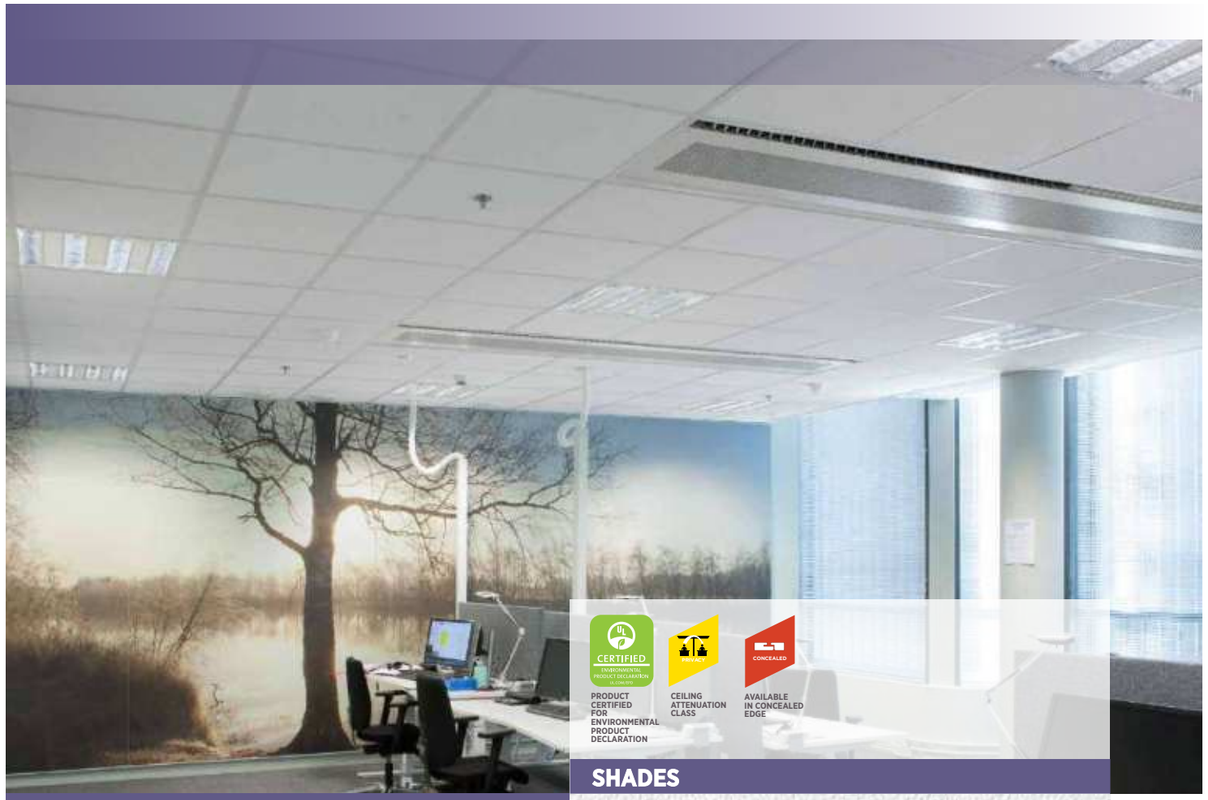

FEATURES AND BENEFITS

- Laminated Gypsum Ceiling with washable vinyl facing for easy maintenance.
- Available in plain facings with a smooth appearance.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- High resistance to mold and mildew, scoring a 10 (highest) when tested by ASTM D3273.
- Ultra-high humidity resistance: sag resistance ensures durability in standard or extreme environmental conditions.
- Standard is produced with aluminum foil backing, which acts
- as a vapor barrier and resists breathing, so the panel stays
- cleaner longer.
- Scrub resistant. Dirt marks are easy to remove.
- Suitable for areas with high humidity.
- It is economical and easy to trim and install.
- Demountable and designed to be installed on the DONN® Brand ceiling suspensions.
- Available in a concealed edge design, specifically produced to elevate the overall space appearance.






APPLICATIONS

- Laboratories
- Commercial retails
- Restrooms and wet areas
- Department stores
- Kitchen, dietary and laundry

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
			CAC						
SQ	LGAE-S6609 LGAE-S2209	600*600*9.5 610*610*9.5	35	84%			4%	Low	$
	LGAE-S662 LGAE-S222	600*600*12.5 610*610*12.5	40	84%			4%	Low	$
	LGAE-S622 LGAE-S242	600*1200*12.5 610*1220*12.5	40	84%			4%	Low	$$
SL	LGAE-SR662 LGAE-SR222	600*600*12.5 610*610*12.5	40	84%			4%	Low	$$
	LGAE-SR622 LGAE-SR242	600*1200*12.5 610*1220*12.5	40	84%			4%	Low	$$
FL	LGAE-SRF662 LGAE-SRF222	600*600*12.5 610*610*12.5	40	84%			4%	Low	$$
	LGAE-SRF622 LGAE-SRF242	600*1200*12.5 610*1220*12.5	40	84%			4%	Low	$$
Concealed	LGAE-SDC662 LGAE-SDC622	600*600*12.5 600*1200*12.5	40	84%			4%	Low	$$$

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge	DX/DXL Concealed
				

SYSTEM SPECIFICATION

Shades Gypsum Ceiling Tile meets specifications in accordance with ASTM E1264

Materials Classification
Type: XX, Pattern: E, G

Substrate and Surface Finish
Gypsum ceiling panel laminated with vinyl-faced

Thickness
9.5mm, 12.5mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square, Reveal [SL, FL], Concealed

Weight
Square
9.5mm [6.17 kg/m^2],
12.5mm [8.12 kg/m^2]
Reveal and Concealed
12.5mm [10.6 kg/m^2]

Ceiling Attenuation Class [CAC]
[35-40 dB]

Hygiene
Laminate PVC prevents the growth of mold and mildew. Scoring a 10 (highest) when tested in accordance with ASTM D3273.

Humidity Resistance
Maximum 95% RH / 40°C

Light Reflectance Coefficient [LR]
0.84

Color
Standard White

Surface Burning Characteristics per ASTM E 84
Class A

Thermal Resistance
12.5mm [R 0.45]

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub Cycles without surface break or the extent of abrasion

09



ACOUSTIC CONTROL: EXPLORING HIGH NRC MINERAL FIBER CEILINGS

Experience quietness: USG ME's Mineral Fiber Ceilings offer superior acoustics for calm and private spaces.

Produced for superior sound absorption, these ceilings redefine acoustics, achieving a remarkable Noise Reduction Coefficient (NRC). Beyond acoustics, their impressive Ceiling Attenuation Class (CAC) ensures enhanced privacy and confidentiality. Produced for environments demanding serenity and discretion, these ceilings offer a high sound absorption performance. Choose USG Middle East for ceilings that elevate the auditory experience and contribute to a refined, confidential atmosphere—where each ceiling tile is a testament to both acoustical and design excellence.



















MINERAL FIBER


1. ATHENA
2. AURATONE DESIGNER SERIES
3. FAVIA ACOUSTIC
4. OLYMPIA MICRO™
5. RADAR™
6. RADAR™ CERAMIC
7. SKYLITE ACOUSTIC
8. SONATA
9. TAIGA PERFORATED

01

HIGH NRC MINERAL FIBER
ATHENA



ATHENA

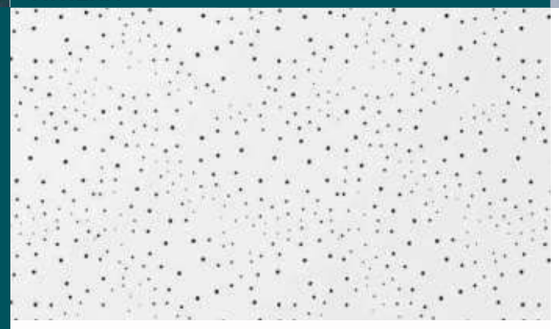

FEATURES AND BENEFITS

- Specially formulated in 16mm for high acoustic sound absorption specifications of the NRC 0.70.
- Accessible acoustical ceiling system with multiple random pin perforation panels.
- A perfect design solution for new-build or renovation projects.
- Available in semi-concealed and fully concealed tiles.
- It is ideal for mid to high sound absorption & sound attenuation, which provides balance to room acoustics.
- Excellent for general commercial construction projects.
- Maximum cost-efficiency and design simplicity.
- Available in washable & hygienic paint upon request.

APPLICATIONS

- Schools
- Corridors
- Lobby areas
- Offices
- Retail Stores

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
16mm	0.30	**0.35**	**0.65**	**0.90**	**1.0**	0.95	**0.70**
19mm HNRC	0.35	**0.45**	**0.80**	**0.70**	**0.65**	0.50	**0.65**

**Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	ATX666 ATX226	600*600*16 610*610*16	0.70	35	86%			68%	Low	$$$
	ATX626 ATX246	600*1200*16 610*1220*16	0.70	35	86%			68%	Low	$$$
SLT	ATXR666 ATXR226	600*600*16 610*610*16	0.70	35	86%			68%	Low	$$$
FLB	ATXRF666 ATXRF226	600*600*16 610*610*16	0.70	35	86%			68%	Low	$$$
D-BESK	ATXRFDC669-HNRC	600*600*19	0.65	40	86%			82%	Low	$$$$
BESK	ATXC669-HNRC	600*600*19	0.65	40	86%			82%	Low	$$$$

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.
For Firechief™ products.

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXT/DXF FLB Edge	DXI FL Edge	DX/DXL D-BESK Edge	DX/DXL BESK Edge
						

SPECIFICATIONS DETAILS

Athena Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: III,
Form: 2,
Pattern: C

Substrate and Surface Finish
Mineral fiber substrate finished with factory-applied water-based paint

Thickness
16mm, 19mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square,
Reveal [SLT, FLB],
Concealed [BESK, D-BESK]

Weight
16mm [5.45 kg/m², Firechief™]
19mm [6.45 kg/m², Firechief™]

Noise Reduction Coefficient [NRC]
[0.65] [0.70]

Ceiling Attenuation Class [CAC]
[35 - 40 dB]

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth. Panels are available upon request

Humidity Resistance
Maximum 99% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.86

Color
Standard White

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly

Thermal Conductivity
λ = 0.057 W/m°K

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

02

HIGH NRC MINERAL FIBER
AURATONE DESIGNER SERIES



EN 13964 : 2014 + A1 : 2007


PRODUCT CERTIFIED FOR LOW VOC EMISSIONS

PRODUCT CERTIFIED FOR LOW VOC EMISSIONS

HIGH SOUND ABSORPTION

CEILING ATTENUATION CLASS

AURATONE DESIGNER SERIES

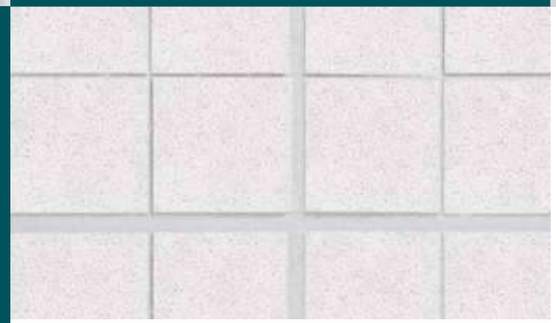

FEATURES AND BENEFITS

- Shallow geometric square face masks the grid for a uniform look to make it appear as part of the overall ceiling design.
- 360° non-directional pattern with a fresh, clean appearance offers fast, cost-effective installation
- Face scores create an illusion of a smaller-scaled ceiling system.
- Available in 4 different face styles ranging from smooth to textured.
- Low to mid-range sound attenuation. Ideal for general commercial construction.
- Fire-resistant system options for life safety & protection of property.
- Easy to trim and install.

APPLICATIONS

- Reception
- Shopping centers
- Waiting rooms
- Cafe and restaurants
- General offices
- Luxury retail stores

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
19mm QCFSR	0.45	**0.40**	**0.50**	**0.70**	**0.70**	0.60	**0.60**
19mm QTPSR	0.35	**0.40**	**0.65**	**0.85**	**0.85**	0.70	**0.70**
19mm QOLPCR	0.30	**0.45**	**0.70**	**0.70**	**0.70**	0.60	**0.65**
19mm QRDSR	0.35	**0.40**	**0.50**	**0.65**	**0.80**	0.90	**0.60**

* *Calculated to ASTM C 423-01*

EN 13964 : 2014 + A1 : 2007

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SLT	QCFSR669 QCFSR229	600*600*19 610*610*19	0.60	35	82%			25%	Low	$$$
	QTPSR669 QTPSR229	600*600*19 610*610*19	0.70	35	84%			25%	Low	$$$
	QTCR669 QTCR229	600*600*19 610*610*19	0.15	35	84%	✓		32%	Low	$$$$
	QTCR669 (36/15) QTCR229 (36/15)	600*600*19 610*610*19	0.15	37	84%	✓		32%	Low	$$$$
	QOLPCR669 QOLPCR229	600*600*19 610*610*19	0.65	37	85%	✓		32%	Low	$$$$
	QRDSR669 QRDSR229	600*600*19 610*610*19	0.60	35	83%			32%	Low	$$$
	QRDCR669 QRDCR229	600*600*19 610*610*19	0.60	35	83%	✓		32%	Low	$$$$

Low Emissions (VOC)
Third party (GREENGUARD & GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com

GRID PROFILE OPTIONS

DX/DXL
SLT Edge



SPECIFICATIONS DETAILS

Auratone Designer Series Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: III,
Form: 2,
Pattern: C, D, E, G, K

Substrate and Surface Finish
Mineral fiber substrate finished with factory-applied water-based paint

Thickness
19mm

Size
600 x 600mm, 610 x 610mm

Edge Detail Trim
Reveal [SLT]

Weight
19mm [4.5 kg/m, Regular/ ClimaPlus™]

Noise Reduction Coefficient [NRC]
[0.15] [0.60] [0.65] [0.70]

Ceiling Attenuation Class [CAC]
[35 - 37 dB]

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth. Panels are available upon request

Humidity Resistance
Maximum 90% RH / 30°C for ClimaPlus™

Light Reflectance Coefficient [LR]
[0.82 – 0.85]

Color
Standard White

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly

Thermal Conductivity
λ= 0.057 W/m°K

VOC Class
Greenguard & Greenguard Gold

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

HIGH NRC MINERAL FIBER
FAVIA ACOUSTIC



FEATURES AND BENEFITS

- Micro-fissured non-directional pattern for a cleaner, whiter appearance.
- Elegant light-textured panels with high light reflectance.
- Mid-range sound absorption and attenuation make it ideal for schools, corridors, and general commercial stores.
- Meets the emission test criteria as low emitting per standards established by the Collaborative for High-Performance Schools (CHPS) following the ASTM D5116 testing method.

APPLICATIONS

- Education
- Corridors and hallways
- Grocery stores
- Administration offices
- Rest Area
- Warehouse

FAVIA ACOUSTIC



ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
16mm HNRC	0.30	**0.35**	**0.60**	**0.80**	**0.90**	0.85	**0.65**
19mm	0.35	**0.35**	**0.45**	**0.70**	**0.75**	0.65	**0.55**


** Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
			NRC	CAC						
SQ	FAS665 FAS225	600*600*15 610*610*15	0.50	36	85%			25%	Low	$$
	FAS666 FAS226	600*600*16 610*610*16	0.65	35	85%			25%	Low	$$$
	FAS669 FAS229	600*600*19 610*610*19	0.55	37	85%			25%	Low	$$
SLT	FASR665 FASR225	600*600*15 610*610*15	0.50	36	85%			25%	Low	$$
	FASR666 FASR226	600*600*16 610*610*16	0.65	35	85%			25%	Low	$$$
	FASR669 FASR229	600*600*19 610*610*19	0.55	37	85%			25%	Low	$$

Low Emissions (VOC)
Third party (GREENGUARD & GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXLT-FLB
			

SPECIFICATIONS DETAILS

Favia Acoustic Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: III, Form: 2,
Pattern: C, D, E

Substrate and Surface Finish
Mineral fiber substrate finished with factory-applied water-based paint

Thickness
15mm, 16mm, 19mm

Size
600 x 600mm, 610 x 610mm

Edge Detail Trim
Square, Reveal [SLT]

Weight
15mm [3.6 kg/m², Regular/ ClimaPlus™]
16mm [3.85 kg/m², Regular/ ClimaPlus™]
19mm [4.5 kg/m², Regular/ ClimaPlus™]

Noise Reduction Coefficient [NRC]
[0.50] [0.55] [0.65]

Ceiling Attenuation Class [CAC]
[35 - 37 dB]

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth. Panels are available upon request

Humidity Resistance
Maximum 90% RH / 40°C

Light Reflectance Coefficient [LR]
0.85

Color
Standard White

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly

Thermal Conductivity
λ = 0.057 W/m°K

VOC Class
Greenguard & Greenguard Gold

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 |MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

HIGH NRC MINERAL FIBER
OLYMPIA MICRO™



PRODUCT CERTIFIED FOR ENVIRONMENTAL PRODUCT DECLARATION
PRODUCT CERTIFIED FOR LOW VOC EMISSIONS
HIGH SOUND ABSORPTION
CEILING ATTENUATION CLASS
FIRECODE
AVAILABLE IN CONCEALED EDGE
HIGH RECYCLED CONTENT

OLYMPIA MICRO™

FEATURES AND BENEFITS

- Balanced Acoustics. High-NRC and High-CAC.
- Excellent combination of noise reduction (up to NRC-0.70) and sound attenuation (up to CAC-37).
- Excellent for critical lighting applications that require High Light Reflectance (0.88).
- High Humidity Resistance up to RH-99%.
- Light granulated surface texture with virtually invisible micro-perforation for a smoother look than standard perforations.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Fire-resistant system options for life, safety, and property protection.
- Available in HRC (High Recycled Content) for optimized recycled content formulations to help maximize LEED® recycled content contribution and sound absorption.
- Ideal solutions for classroom and educational facilities.
- Upon request, panel faces, and back surfaces are treated with a patented, broad-spectrum antimicrobial standard formulation that inhibits mold growth.

APPLICATIONS

- Classrooms
- Libraries
- Corridors and stairwell
- Reception and lobby areas
- Restaurant and cafe
- Sports hall
- General offices
- Shopping centers

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
15mm	0.35	**0.35**	**0.50**	**0.65**	**0.60**	0.50	**0.55**
19mm	0.30	**0.45**	**0.70**	**0.70**	**0.70**	0.60	**0.65**
19mm HNRC	0.45	**0.50**	**0.75**	**0.85**	**0.80**	0.65	**0.70**

* *Calculated to ASTM C 423-01*

SPECIFICATIONS DETAILS

Olympia Micro™ Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: III, Form: 2, Pattern: C, E

Substrate and Surface Finish
Mineral fiber substrate finished with factory-applied water-based paint

Thickness
12mm, 15mm, 19mm

Size
300 x 1200mm, 305 x 1220mm, 600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square, Reveal [SLT, FLB], Concealed [BESK, D-BESK]

Weight
12mm [3.12 kg/m^2, Regular]
15mm [3.6 kg/m^2, Regular/ ClimaPlus™]
15mm [5.1 kg/m^2, Firechief™]
19mm [4.5 kg/m^2, Regular/ ClimaPlus™]
19mm [6.45 kg/m^2, Firechief™]

Noise Reduction Coefficient [NRC]
[0.40] [0.55] [0.65] [0.70]

Ceiling Attenuation Class [CAC]
[34 - 37 dB]

Humidity Resistance
Maximum 99% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.88

Color
Standard White

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth. Panels are available upon request

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly

Thermal Conductivity
λ = 0.057 W/m°K

VOC Class
Greenguard & Greenguard Gold

Formaldehyde Classification
Class E1 as per EN717-1







Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request



Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	OLPS662 OLPS222	600*600*12 610*610*12	0.40	34	88%			25%	Low	$
	OLPS665 OLPS225	600*600*15 610*610*15	0.55	35	88%			25%	Low	$
	OLPC665 OLPC225	600*600*15 610*610*15	0.55	35	88%	●		39%	Low	$
	OLPC625 OLPC245	600*1200*15 610*1220*15	0.55	35	88%	●		39%	Low	$
	OLPX665 OLPX225	600*600*15 610*610*15	0.55	36	88%		●	56%	Low	$$
	OLPX625 OLPX245	600*1200*15 610*1220*15	0.55	36	88%		●	56%	Low	$$
	OLPC325 OLPC145	300*1200*15 305*1220*15	0.55	35	88%	●		39%	Low	$$
	OLPC669-HNRC OLPC229-HNRC	600*600*19 610*610*19	0.70	37	88%	●		82%	Low	$$$
	OLPS669 OLPS229	600*600*19 610*610*19	0.65	37	88%			25%	Low	$$
	OLPC329 OLPC349	300*1200*19 305*1220*19	0.65	37	88%	●		39%	Low	$$
	OLPC629-HNRC OLPC249-HNRC	600*1200*19 610*1220*19	0.70	37	88%	●		82%	Low	$$$
SLT	OLPSR665 OLPSR225	600*600*15 610*610*15	0.55	35	88%			25%	Low	$
	OLPCR665 OLPCR225	600*600*15 610*610*15	0.55	35	88%	●		39%	Low	$
	OLPSR669 OLPSR229	600*600*19 610*610*19	0.65	37	88%			25%	Low	$$
	OLPCR669-HNRC OLPCR229-HNRC	600*600*19 610*610*19	0.70	37	88%	●		82%	Low	$$$
	OLPXR629 OLPXR249	600*1200*19 610*1220*19	0.65	37	88%		●	56%	Low	$$$
	OLPCR629-HNRC OLPCR249-HNRC	600*1200*19 610*1220*19	0.70	37	88%	●		82%	Low	$$$
FLB	OLPSRF665 OLPSRF225	600*600*15 610*610*15	0.55	35	88%			25%	Low	$
	OLPCRF665 OLPCRF225	600*600*15 610*610*15	0.55	35	88%	●		39%	Low	$$
	OLPCRF325 OLPCRF145	300*1200*15 305*1220*15	0.55	35	88%	●		39%	Low	$$
	OLPSRF669 OLPSRF229	600*600*19 610*610*19	0.65	37	88%			25%	Low	$$
	OLPCRF669-HNRC OLPCRF229-HNRC	600*600*19 610*610*19	0.70	37	88%	●		82%	Low	$$$
	OLPCRF629-HNRC OLPCRF249-HNRC	600*1200*19 610*1220*19	0.70	37	88%	●		82%	Low	$$$
BESK	OLPXC665	600*600*15	0.55	36	88%		●	56%	Low	$$$$
	OLPXC669	600*600*19	0.65	37	88%		●	56%	Low	$$$$
D-BESK	OLPXRFDC325	300*1200*15	0.55	35	88%		●	56%	Low	$$$$
	OLPXRFDC625	600*1200*15	0.55	35	88%		●	56%	Low	$$$$
	OLPXRFDC329	300*1200*19	0.65	37	88%		●	56%	Low	$$$$
	OLPXRFDC629	600*1200*19	0.65	37	88%		●	56%	Low	$$$$


GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXT FLB Edge	DXF FLB Edge	DXI FLB Edge
					

DX/DXL BESK Edge	DX/DXL D-BESK Edge
	

Low Emissions (VOC)
Third party (GREENGUARD & GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.
For Firechief™ products.

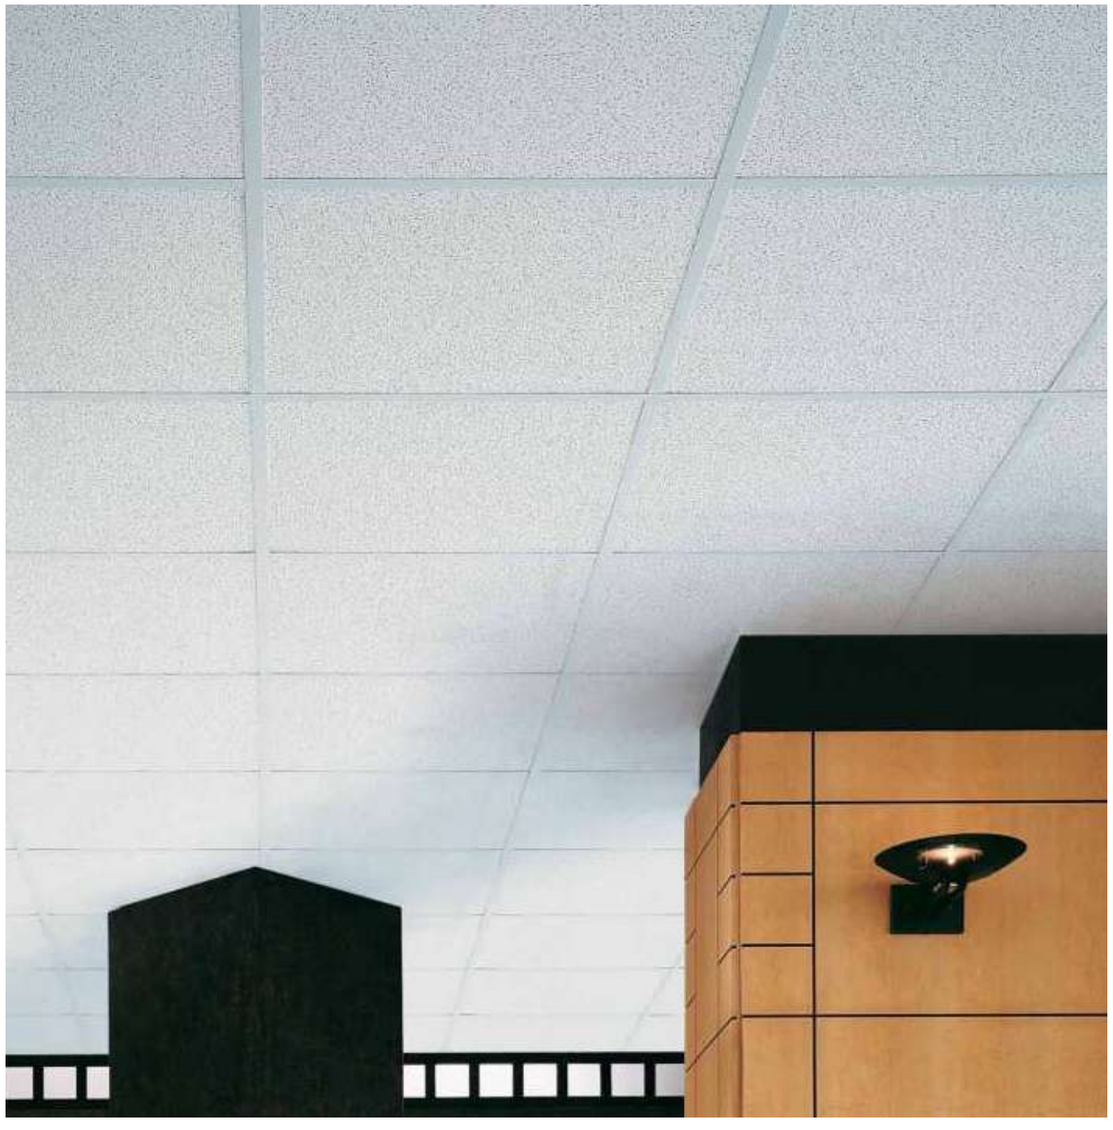


HIGH NRC MINERAL FIBER
RADAR™



PRODUCT CERTIFIED FOR ENVIRONMENTAL PRODUCT DECLARATION | PRODUCT CERTIFIED FOR LOW VOC EMISSIONS | PRODUCT CERTIFIED FOR LOW VOC EMISSIONS | HIGH SOUND ABSORPTION | CEILING ATTENUATION CLASS | FIRECODE | HIGH RECYCLED CONTENT

RADAR™

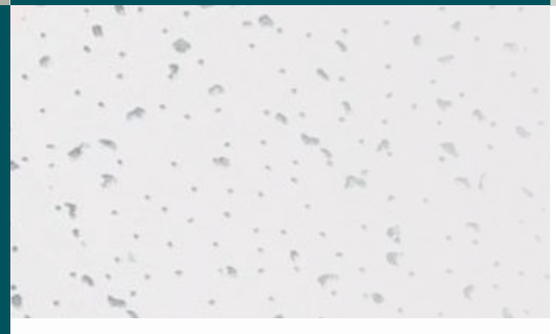

FEATURES AND BENEFITS

- Balanced Acoustics. High-NRC and High-CAC balance room acoustics and sound attenuation are ideal for general commercial construction.
- Excellent combination of noise reduction (up to NRC-0.80) and sound attenuation (up to CAC-40).
- 360° non-directional pattern with a fresh, clean appearance that allows for fast, efficient installation.
- Cost-effective all-purpose ceiling pattern solution offered in many sizes and edge details.
- Fire-resistant system options for life, safety, and property protection.
- Available in HRC (High Recycled Content) for optimized recycled content formulations to help maximize LEED® recycled content contribution and sound absorption.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.
- Available in 22mm for High NRC & High CAC panels.
- It is also available in washable paint and various plank sizes.

APPLICATIONS

- Education
- Corridors
- Cafeterias
- Libraries
- Open office plans
- Retail stores
- Basement

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
12mm	0.30	**0.30**	**0.40**	**0.55**	**0.75**	0.85	**0.50**
15mm	0.40	**0.35**	**0.45**	**0.60**	**0.70**	0.70	**0.50**
19mm	0.30	**0.35**	**0.55**	**0.75**	**0.75**	0.65	**0.60**
19mm HNRC	0.25	**0.35**	**0.65**	**0.85**	**0.90**	0.90	**0.70**
22mm	0.35	**0.50**	**0.75**	**0.95**	**1.0**	0.90	**0.80**

** Calculated to ASTM C 423-01*

SPECIFICATIONS DETAILS

Radar™ Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: III, Form: 2, Pattern: C,D, E

Substrate and Surface Finish
Mineral fiber substrate finished with factory-applied water-based paint

Thickness
12mm, 15mm, 19mm, 22mm

Size
300 x 1200mm, 305 x 1220mm, 600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square, Reveal [SLT, FLB]

Weight
12mm [2.85 kg/m², Regular/ ClimaPlus™],
15mm [3.6 kg/m², Regular/ ClimaPlus™],
15mm [5.1 kg/m², Firechief™],
19mm [4.5 kg/m², Regular/ ClimaPlus™],
19mm [6.45 kg/m², Firechief™],
22mm [5.25 kg/m², Regular/ ClimaPlus™]

Noise Reduction Coefficient [NRC]
[0.50] [0.60] [0.70] [0.80]

Ceiling Attenuation Class [CAC]
[35 - 40 dB]

Humidity Resistance
Maximum 99% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.85

Color
Standard White

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth. Panels are available upon request

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly

Thermal Conductivity
λ = 0.057 W/m°K

VOC Class
Greenguard & Greenguard Gold

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9






TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	RDS662 RDS222	600*600*12 610*610*12	0.50	35	85%			25%	Low	$
	RDS665 RDS225	600*600*15 610*610*15	0.50	36	85%			25%	Low	$
	RDC665 RDC225	600*600*15 610*610*15	0.50	36	85%	●		39%	Low	$
	RDX665 RDX225	600*600*15 610*610*15	0.50	37	85%		●	56%	Low	$$
	RDX625 RDX245	600*1200*15 610*1220*15	0.50	37	85%		●	56%	Low	$$
	RDX669 RDX229	600*600*19 610*610*19	0.60	40	85%		●	56%	Low	$$
	RDC325 RDC145	300*1200*15 305*1220*15	0.50	36	85%	●		39%	Low	$$
	RDS669 RDS229	600*600*19 610*610*19	0.60	38	85%			25%	Low	$$
	RDC669-HNRC RDC229-HNRC	600*600*19 610*610*19	0.70	40	85%	●		82%	Low	$$$
	RDC329 RDC149	300*1200*19 305*1220*19	0.60	40	85%	●		39%	Low	$$$
	RDC669 RDC229	600*600*19 610*610*19	0.60	40	85%	●		39%	Low	$$$
	RDC6622 RDC2222	600*600*22 610*610*22	0.80	39	85%	●		39%	Low	$$$$
SLT	RDSR665 RDSR225	600*600*15 610*610*15	0.50	36	85%			25%	Low	$
	RDCR665 RDCR225	600*600*15 610*610*15	0.50	36	85%	●		39%	Low	$
	RDXR669 RDXR229	600*600*19 610*610*19	0.60	40	85%		●	56%	Low	$$
	RDCR325 RDCR145	300*1200*15 305*1220*15	0.50	36	85%	●		39%	Low	$$
	RDSR669 RDSR229	600*600*19 610*610*19	0.60	38	85%			25%	Low	$$
	RDCR669-HNRC RDCR229-HNRC	600*600*19 610*610*19	0.70	40	85%	●		82%	Low	$$$
	RDCR329 RDCR149	300*1200*19 305*1220*19	0.60	40	85%	●		39%	Low	$$$
	RDCR669 RDCR229	600*600*19 610*610*19	0.60	40	85%	●		39%	Low	$$$
	RDCR6622 RDCR2222	600*600*22 610*610*22	0.80	39	85%	●		39%	Low	$$$$
FLB	RDSRF665 RDSRF225	600*600*15 610*610*15	0.50	36	85%			25%	Low	$
	RDCRF665 RDCRF225	600*600*15 610*610*15	0.50	36	85%	●		39%	Low	$
	RDCRF325 RDCRF145	300*1200*15 305*1220*15	0.50	36	85%	●		39%	Low	$$
	RDCRF329 RDCRF149	300*1200*19 305*1220*19	0.60	40	85%	●		39%	Low	$$$

Low Emissions (VOC)
Third party (GREENGUARD & GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.
For Firechief™ products.

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXT FLB Edge	DXF FLB Edge
				



06

HIGH NRC MINERAL FIBER

RADAR™ CERAMIC



RADAR™ CERAMIC



FEATURES AND BENEFITS

- 100% ceramic bonded mineral fiber.
- Humidity resistance up to 100% RH, 40°C without visible sag, and formulated to meet Firechief™ standards.
- It ensures durability and is considered the highest-quality Environmental Resistant Panel.
- Withstands high heat, ultra-high humidity, corrosive chemical fumes, and steam.
- It can withstand the humidity and steam from saunas and steam rooms.
- Due to its high density, it provides high sound attenuation for room-to-room privacy.
- It meets U.S. Coast Guard standards and can be used in high-humidity marine applications.
- 360° non-directional pattern with a fresh, clean appearance that allows for fast, efficient installation.
- It is recommended to be installed with a USG DONN® Brand AX-AXCE aluminum corrosion-resistant grid system.

APPLICATIONS

- High humidity areas
- Pools and shower areas
- Exterior soffits
- Saunas and steam rooms
- Food preparation areas
- Laboratories

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
15mm	0.35	**0.28**	**0.38**	**0.60**	**0.76**	0.77	**0.50**

** Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	RDXX665 RDXX225	600*600*15 610*610*15	0.50	39	85%			46%	Low	$$$$

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	AXCE SQ Edge

SPECIFICATIONS DETAILS

Radar™ Ceramic Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: XX, Pattern: C, D, E

Substrate and Surface Finish
Ceramic bonded mineral fiber substrate finished with factory-applied water-based paint

Thickness
15mm

Size
600 x 600mm, 610 x 610mm

Edge Detail Trim
Square

Weight
15mm [8.25 kg/m², Ceramic Firechief™]

Noise Reduction Coefficient [NRC]
[0.50]

Ceiling Attenuation Class [CAC]
[39 dB]

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth. Panels are available upon request

Humidity Resistance
Maximum 100% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.85

Color
Standard White

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly

Thermal Conductivity
λ = 0.057 W/m°K

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 |MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

07

HIGH NRC MINERAL FIBER

SKYLITE ACOUSTIC




FEATURES AND BENEFITS

- Special R6 wetfleted perforated design meets the growing demand for high sound control ceiling panels with a modern and stylish look.
- Balanced Acoustics. High-NRC and High-CAC.
- Excellent combination of noise reduction (up to NRC-0.70) and sound attenuation (up to CAC-39).
- Excellent for critical lighting applications that require High Light Reflectance (0.89).
- High Humidity Resistance up to RH-95%.
- Produced in HRC (High Recycled Content) for optimized recycled content formulations to help maximize LEED® recycled content contribution and high sound absorption.
- Ideal solutions for educational facilities and offices.

APPLICATIONS

- Classrooms
- Offices
- Reception and lobby areas
- Restaurant and cafe
- Sports hall
- Shopping centers

SKYLITE ACOUSTIC

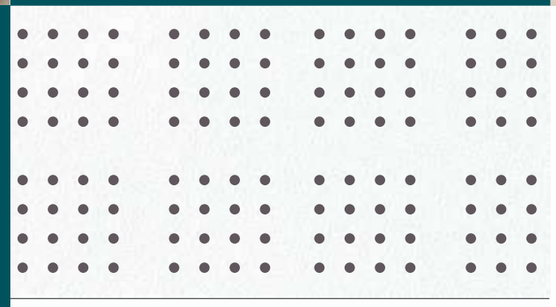



Half punch

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
19mm	0.30	**0.35**	**0.65**	**0.90**	**0.95**	0.70	**0.70**

**Calculated to ASTM C 423-01*

EN 13964 : 2014 + A1 : 2007

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	SKAX669-R6 SKAX229-R6	600*600*19 610*610*19	0.70	39	89%			83%	Low	$$$$
	SKAX629-R6 SKAX249-R6	600*1200*19 610*1220*19	0.70	39	89%			83%	Low	$$$$
SL	SKAXR669-R6 SKAXR229-R6	600*600*19 610*610*19	0.70	39	89%			83%	Low	$$$$
	SKAXR629-R6 SKAXR249-R6	600*1200*19 610*1220*19	0.70	39	89%			83%	Low	$$$$
FL	SKAXRF669-R6 SKAXRF229-R6	600*600*19 610*610*19	0.70	39	89%			83%	Low	$$$$
	SKAXRF629-R6 SKAXRF249-R6	600*1200*19 610*1220*19	0.70	39	89%			83%	Low	$$$$

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.
For Firechief™ products.

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXT FLB Edge	DXF FLB Edge
				

SPECIFICATIONS DETAILS

Skylite Acoustic Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: III, Form: 2,
Pattern: A

Substrate and Surface Finish
Mineral fiber substrate finished with factory-applied water-based paint

Thickness
19mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square, Reveal [SL, FL]

Weight
7 kg/m² [Firechief™]

Noise Reduction Coefficient [NRC]
[0.70]

Ceiling Attenuation Class [CAC]
[39 dB]

Humidity Resistance
Maximum 95% RH

Light Reflectance Coefficient [LR]
0.89

Color
Standard White

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth. Panels are available upon request

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0


Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly

Thermal Conductivity
λ = 0.05 W/m°K

Formaldehyde Classification
Class E1 as per EN717-1

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 |MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

HIGH NRC MINERAL FIBER
SONATA

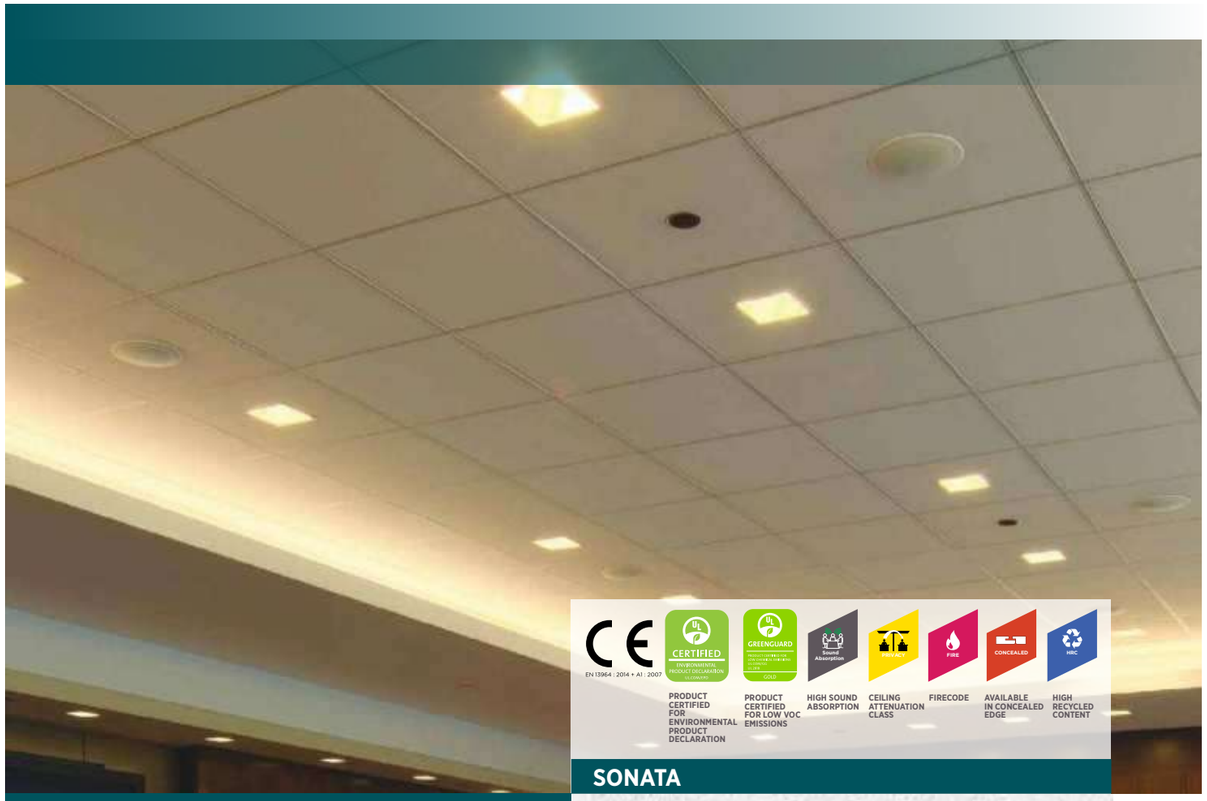

SONATA

FEATURES AND BENEFITS

- Balanced Acoustics. High-NRC and High-CAC provide balance to room acoustics and sound attenuation.
- Excellent combination of noise reduction (up to NRC-0.80) and sound attenuation (up to CAC-40).
- Sonata fulfills the formaldehyde emissions per EN 717-1 and achieves Class E1.
- Fine, monolithic texture offers the industry's highest light reflectance at LR 0.89. Reduces light fixtures and energy usage and is part of indirect lighting.
- High impact and scratch-resistant; durable and cleanable surface.
- It is rated as Class 10 for mold prevention application as per ASTM D3273.
- Available in plank size, FLB edges are compatible with the Logix™ integrated ceiling system.
- Available in custom sizes and different colors on request.
- Certificated for Environmental Product Declaration (EPD) as per ISO 14025.

APPLICATIONS

- Executive offices
- Conference rooms
- Reception areas
- Lobbies
- Classrooms
- Corridors
- Restaurants
- Entertainment & gaming centers
- Nurseries

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
19mm	0.40	**0.40**	**0.65**	**0.95**	**1.0**	1.0	**0.75**
22mm	0.45	**0.45**	**0.75**	**0.95**	**1.0**	1.0	**0.80**








** Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	SC669 SC229	600*600*19 610*610*19	0.75	37	89%			83%	Low	$$$$
	SC629 SC249	600*1200*19 610*1220*19	0.75	37	89%			83%	Low	$$$$
	SC6622 SC2222	600*600*22 610*610*22	0.80	40	89%			83%	Low	$$$$$
	SC6222 SC2422	600*1200*22 610*1220*22	0.80	40	89%			83%	Low	$$$$$
SLT	SCR669 SCR229	600*600*19 610*610*19	0.75	37	89%			83%	Low	$$$$
	SCR629 SCR249	600*1200*19 610*1220*19	0.75	37	89%			83%	Low	$$$$
	SCR6622 SCR2222	600*600*22 610*610*22	0.80	40	89%			83%	Low	$$$$$
FLB	SCRF669 SCRF229	600*600*19 610*610*19	0.75	37	89%			83%	Low	$$$$
	SCRF629 SCRF249	600*1200*19 610*1220*19	0.75	37	89%			83%	Low	$$$$
	SCRF6622 SCRF2222	600*600*22 610*610*22	0.80	40	89%			83%	Low	$$$$$
BESK	SXFC669	600*600*19	0.75	40	89%			83%	Low	$$$$$
D-BESK	SXRFDC669	600*600*19	0.75	40	89%			83%	Low	$$$$$

Low Emissions (VOC)
Third party (GREENGUARD & GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXT/DXF FLB Edge	DXI FLB Edge	DX/DXL D-BESK Edge	DX/DXL BESK Edge
						

SPECIFICATIONS DETAILS

Sonata Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: IV, Form: 2, Pattern: E, G

Substrate and Surface Finish
Mineral fiber substrate laminated with fiberglass membrane and finished with factory-applied latex paint

Thickness
19mm, 22mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square, Reveal [SLT, FLB], Concealed [BESK, D-BESK]

Weight
19mm [4.75 kg/m^2]
19mm [4.75 kg/m^2, Firechief™]
22mm [5.5 kg/m^2]

Noise Reduction Coefficient [NRC]
[0.75] [0.80]

Ceiling Attenuation Class [CAC]
[37 - 40 dB]

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth

Humidity Resistance
Maximum 99% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.89

Color
Standard White

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly

Thermal Conductivity
λ = 0.05 W/m°K

VOC Class
Greenguard & Greenguard Gold


Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request


Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 |MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

09

HIGH NRC MINERAL FIBER
TAIGA PERFORATED

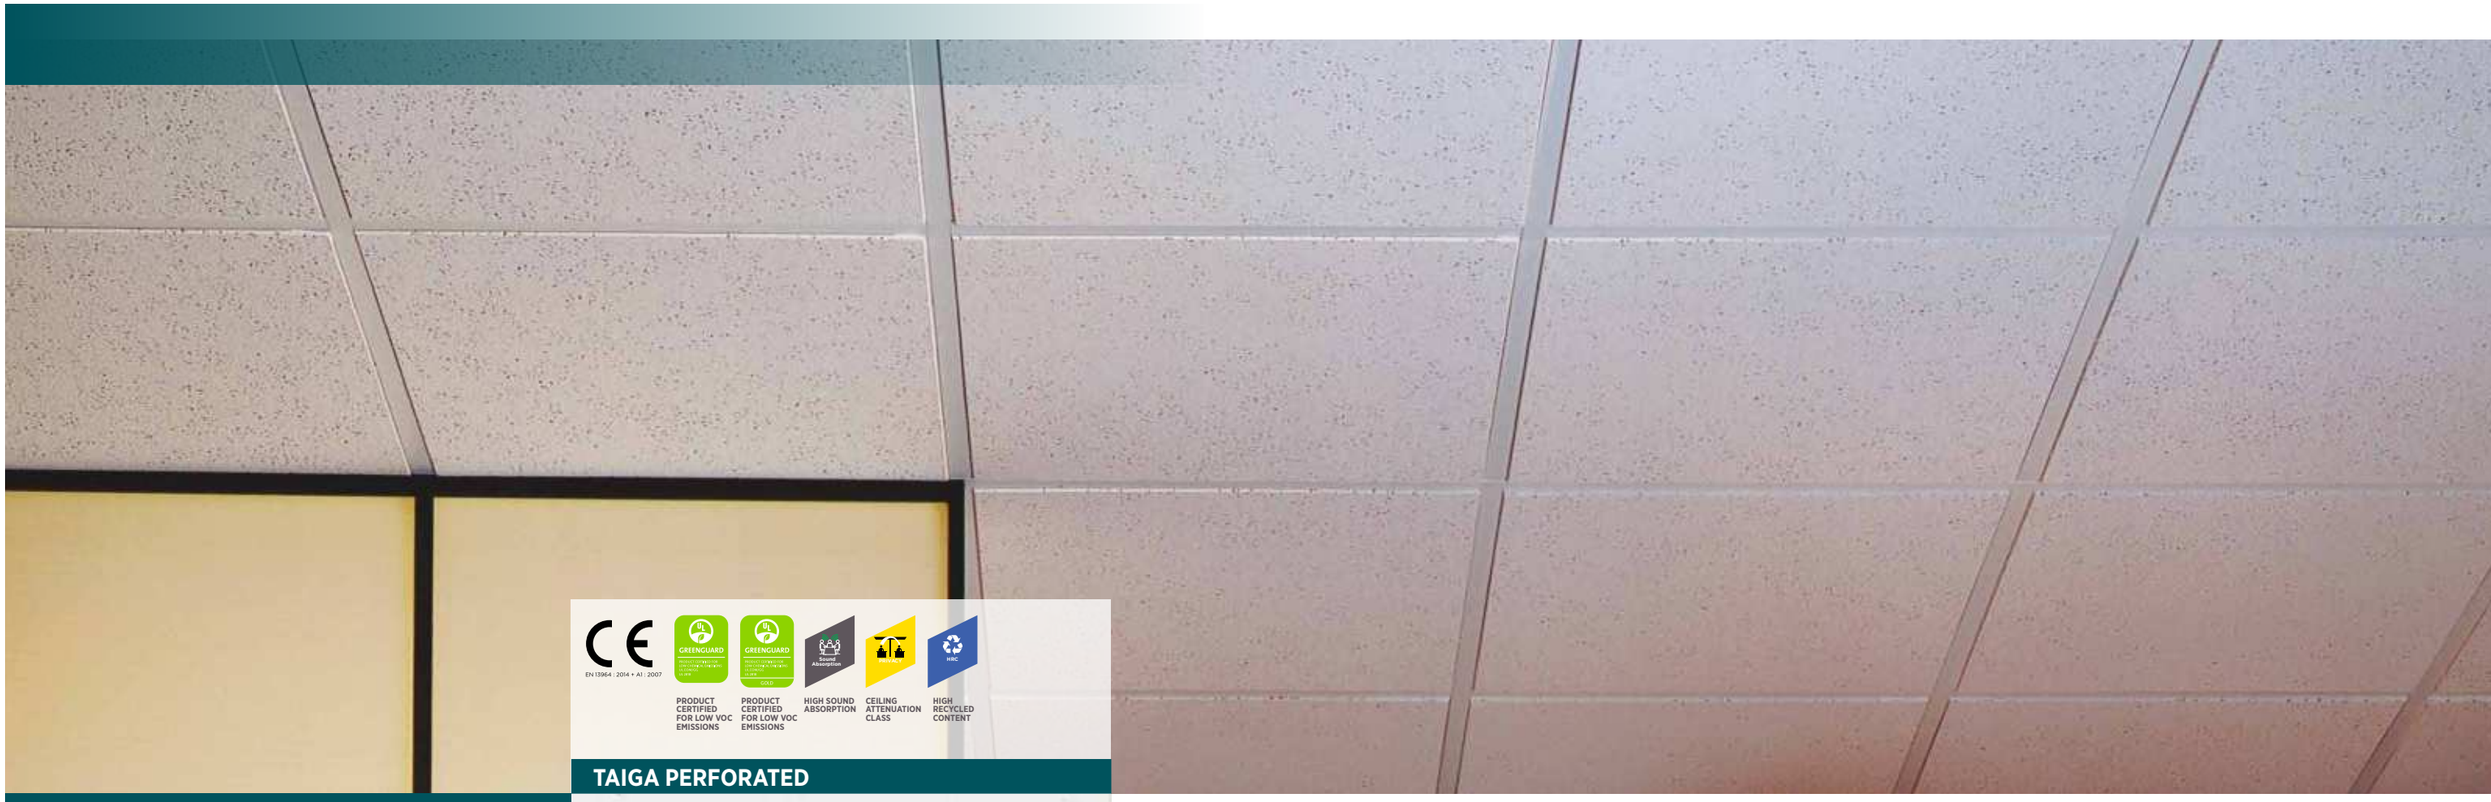

TAIGA PERFORATED

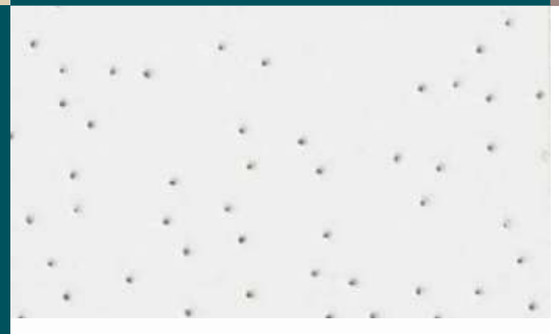

FEATURES AND BENEFITS

- Offered in standard pin perforation for ideal mid-range sound absorption & sound attenuation, providing balance to room acoustics.
- Excellent for general commercial construction.
- Excellent for critical lighting applications; Taiga Perforated achieves High Light Reflectance (LR- 0.86).
- Maximum economy and design simplicity.
- Also available in washable & hygienic paint.
- High sound absorption up to 0.7 NRC; specially formulated in 16mm HNRC & 19mm thickness for school and executive offices.

APPLICATIONS

- Schools
- Healthcare
- Corridors
- Lobby areas
- Executive offices
- Retail stores

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
12mm	0.25	**0.30**	**0.40**	**0.55**	**0.65**	0.70	**0.50**
15mm	0.35	**0.40**	**0.40**	**0.55**	**0.55**	0.55	**0.45**
16mm HNRC	0.30	**0.35**	**0.70**	**0.90**	**0.85**	0.75	**0.70**
19mm	0.35	**0.40**	**0.65**	**0.85**	**0.85**	0.70	**0.70**

** Calculated to ASTM C 423-01*

SPECIFICATIONS DETAILS

Taiga Perforated Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: III, Form: 2, Pattern: C, E

Substrate and Surface Finish
Mineral fiber substrate finished with factory-applied water-based paint

Thickness
12mm, 15mm, 16mm, 19mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square, Reveal [SLT, FLB]

Weight
12mm [2.85 kg/m², Regular/ ClimaPlus™],
15mm [3.6 kg/m² Regular/ ClimaPlus™],
16mm [3.85 kg/m² Regular/ ClimaPlus™],
19mm [4.5 kg/m² Regular/ ClimaPlus™]

Noise Reduction Coefficient [NRC]
[0.45] [0.50] [0.70]

Ceiling Attenuation Class [CAC]
[35 - 37 dB]

Humidity Resistance
Maximum 99% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.86

Color
Standard White

Mold Prevention Application as per ASTM D3273
Rate 9: Resistant to mold growth.

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly

Thermal Conductivity
λ = 0.057 W/m°K

VOC Class
Greenguard & Greenguard Gold

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 |MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

TAIGA PERFORMATED






TABLE OF PERFORMANCE


Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	TPS662 TPS222	600*600*12 610*610*12	0.50	35	86%			25%	Low	$
	TPS665 TPS225	600*600*15 610*610*15	0.45	35	86%			25%	Low	$
	TPC665 TPC225	600*600*15 610*610*15	0.45	35	86%	●		39%	Low	$$
	TPC625 TPC245	600*1200*15 610*1220*15	0.45	35	86%	●		39%	Low	$$
	TPC666-HNRC TPC226-HNRC	600*600*16 610*610*16	0.70	37	86%	●		82%	Low	$$$
	TPC669 TPC229	600*600*19 610*610*19	0.70	37	86%	●		39%	Low	$$$
SLT	TPSR665 TPSR225	600*600*15 610*610*15	0.45	35	86%			25%	Low	$$
	TPCR665 TPCR225	600*600*15 610*610*15	0.45	35	86%	●		39%	Low	$$
	TPCR625 TPCR245	600*1200*15 610*1220*15	0.45	35	86%	●		39%	Low	$$
	TPCR666-HNRC TPCR226-HNRC	600*600*16 610*610*16	0.70	37	86%	●		82%	Low	$$$
	TPCR669 TPCR229	600*600*19 610*610*19	0.70	37	86%	●		39%	Low	$$$
FLB	TPSRF665 TPSRF225	600*600*15 610*610*15	0.45	35	86%			25%	Low	$
	TPCRF665 TPCRF225	600*600*15 610*610*15	0.45	35	86%	●		39%	Low	$$
	TPCRF625 TPCRF245	600*1200*15 610*1220*15	0.45	35	86%	●		39%	Low	$$
	TPCRF666-HNRC TPCRF226-HNRC	600*600*16 610*610*16	0.70	37	86%	●		82%	Low	$$$
	TPSRF669 TPSRF229	600*600*19 610*610*19	0.70	37	86%			39%	Low	$$$

Low Emissions (VOC)
Third party (GREENGUARD & GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.
For Firechief™ products.

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXT FLB Edge	DXF FLB Edge
				

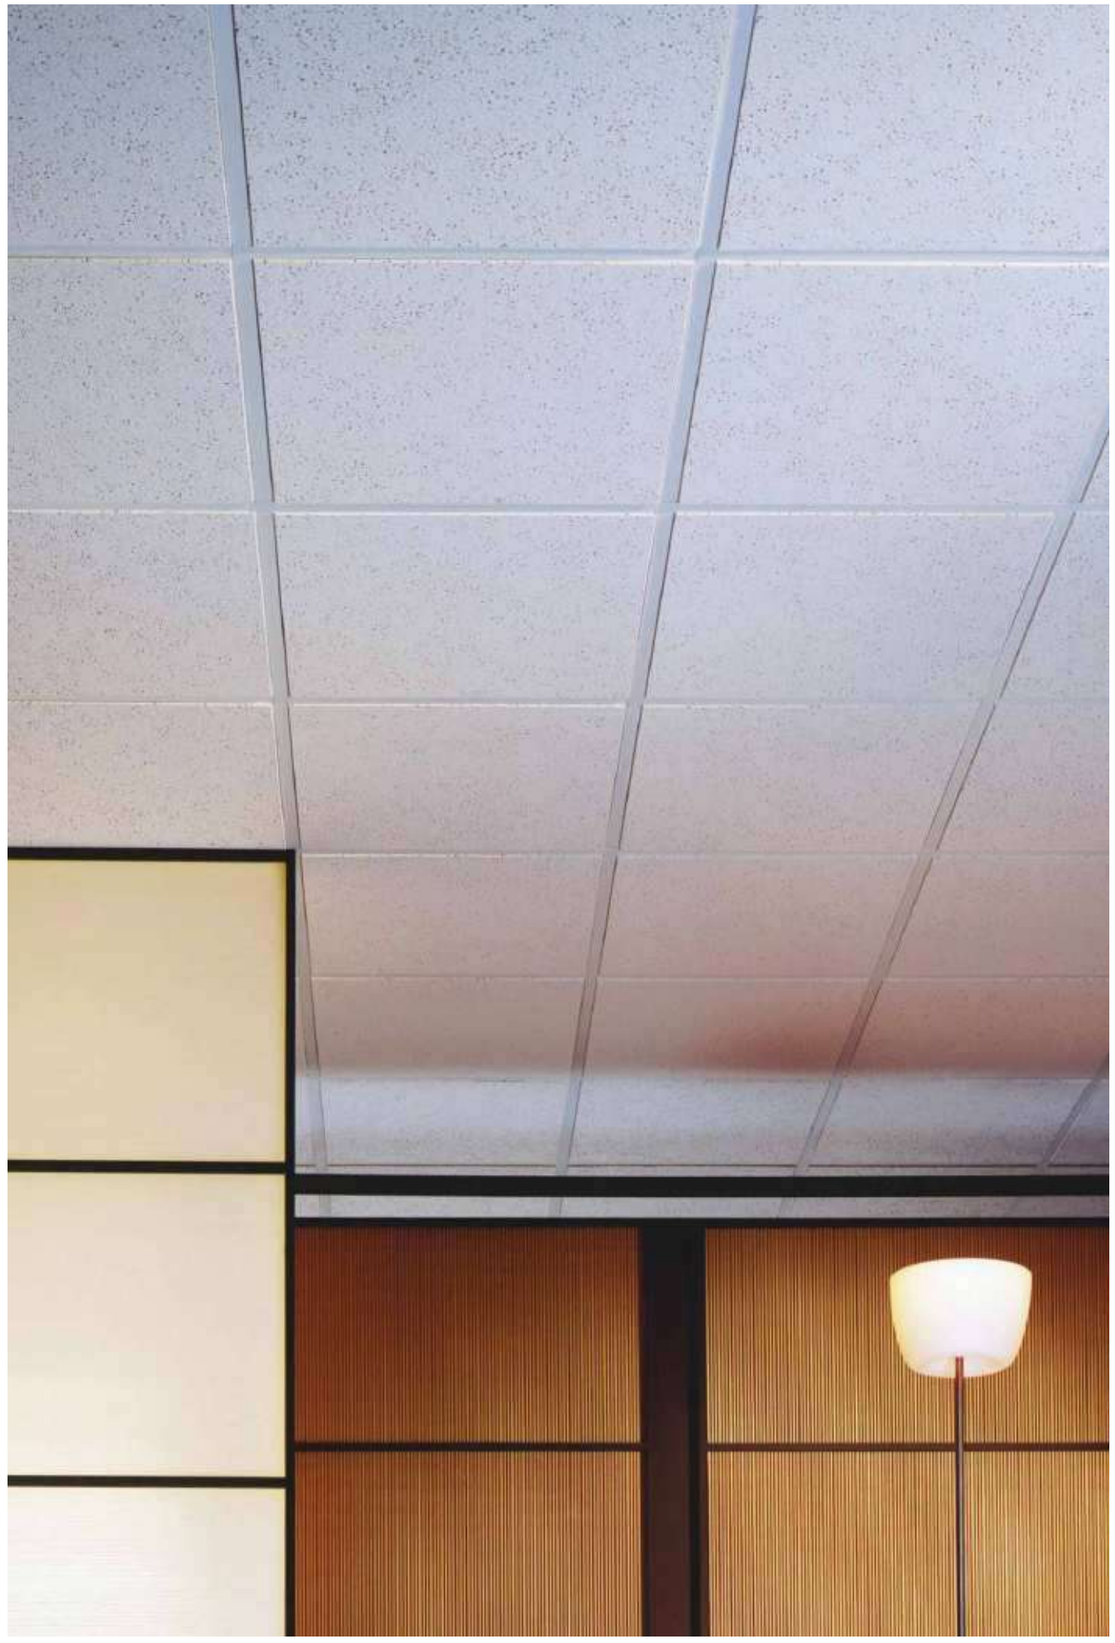

MINERAL FIBER CEILINGS FOR COMMERCIAL SPACES:

REDEFINING WORKSPACE
COST-EFFECTIVE CEILING SOLUTIONS

10



"PRESENTING A RANGE OF ECONOMICAL CEILINGS FOR MODERN WORKSPACES WITH AFFORDABILITY, QUALITY, AND PERFORMANCE IN MIND.

To create vibrant workspaces as productivity hubs, USG Middle East has introduced "Redefining Workspace: Cost-Effective Ceiling Solutions." For diverse commercial buildings, these ceilings redefine affordability without compromising on quality and performance. Improve your office, retail, or hospitality environment with ceilings that value every square meter. The economical solutions boast an impeccable balance and combine cost-effectiveness with durability and design. With a spectrum of designs and finishes, these ceilings offer a canvas for creative expression. USG Middle East's commitment to excellence shines through, ensuring that every workspace, regardless of its budget, has ceilings that redefine the standard, creating environments where affordability meets architectural smartness.



01


02

MINERAL FIBER

1. CROSS FISSURED
2. FAVIA
3. OLYMPIA™
4. OMNI
5. SPARTA
6. TAIGA


03


04


05


06

MINERAL FIBER CEILINGS FOR COMMERCIAL SPACES

CROSS FISSURED





FEATURES AND BENEFITS

- Economical, all-purpose ceiling pattern available in various panel sizes.
- Directionally fissured panels are an excellent choice for large ceiling areas.
- Mid-range sound absorption and sound attenuation for a flexible office layout, making it ideal for schools, corridors, and general commercial stores where privacy is not an issue.
- Optional Firechief™ formulation designed to meet life safety codes.
- Meets the emission test criteria as low emitting per standards established by the Collaborative for High-Performance Schools (CHPS) and following the ASTM D5116 testing method.

APPLICATIONS

- Education
- Corridors and hallways
- Mass merchandisers
- Convenience stores
- Mezzanine and basement
- Warehouse

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
15mm	0.40	**0.35**	**0.40**	**0.55**	**0.70**	0.75	**0.50**
19mm	0.45	**0.40**	**0.50**	**0.70**	**0.70**	0.60	**0.60**

** Calculated to ASTM C 423-01*





TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	CFS665 CFS225	600*600*15 610*610*15	0.50	35	82%			25%	Low	$
	CFC665 CFC225	600*600*15 610*610*15	0.50	35	82%	●		32%	Low	$
	CFC625 CFC245	600*1200*15 610*1220*15	0.50	35	82%	●		32%	Low	$
	CFX665 CFX225	600*600*15 610*610*15	0.50	35	82%		●	56%	Low	$
	CFS669 CFS229	600*600*19 610*610*19	0.60	37	82%			25%	Low	$$
	CFX669 CFX229	600*600*19 610*610*19	0.60	37	82%		●	56%	Low	$$$
SLT	CFSR665 CFSR225	600*600*15 610*610*15	0.50	35	82%			25%	Low	$
	CFCR665 CFCR225	600*600*15 610*610*15	0.50	35	82%	●		25%	Low	$$
	CFXR665 CFXR225	600*600*15 610*610*15	0.50	35	82%		●	56%	Low	$$$
	CFSR669 CFSR229	600*600*19 610*610*19	0.60	37	82%			25%	Low	$$

Low Emissions (VOC)
Third party (GREENGUARD & GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.
For Firechief™ products.

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXT FLB Edge
			

SPECIFICATIONS DETAILS

Cross Fissured Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: III, Form: 2, Pattern: C, D

Substrate and Surface Finish
Mineral fiber substrate finished with factory-applied water-based paint

Thickness
15mm, 19mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square, Reveal [SLT, FLB]

Weight
15mm [3.6 kg/m², Regular/ ClimaPlus™],
15mm [5.1 kg/m², Firechief™],
19mm [4.5 kg/m², Regular/ ClimaPlus™],
19mm [6.45 kg/m², Firechief™]

Noise Reduction Coefficient [NRC]
[0.50] [0.60]

Ceiling Attenuation Class [CAC]
[35 - 37 dB]

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth. Panels are available upon request

Humidity Resistance
Maximum 90% RH / 30°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.82

Color
Standard White

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly

Thermal Conductivity
λ = 0.057 W/m°K

VOC Class
Greenguard & Greenguard Gold


Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 |MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

MINERAL FIBER CEILINGS FOR COMMERCIAL SPACES

FAVIA

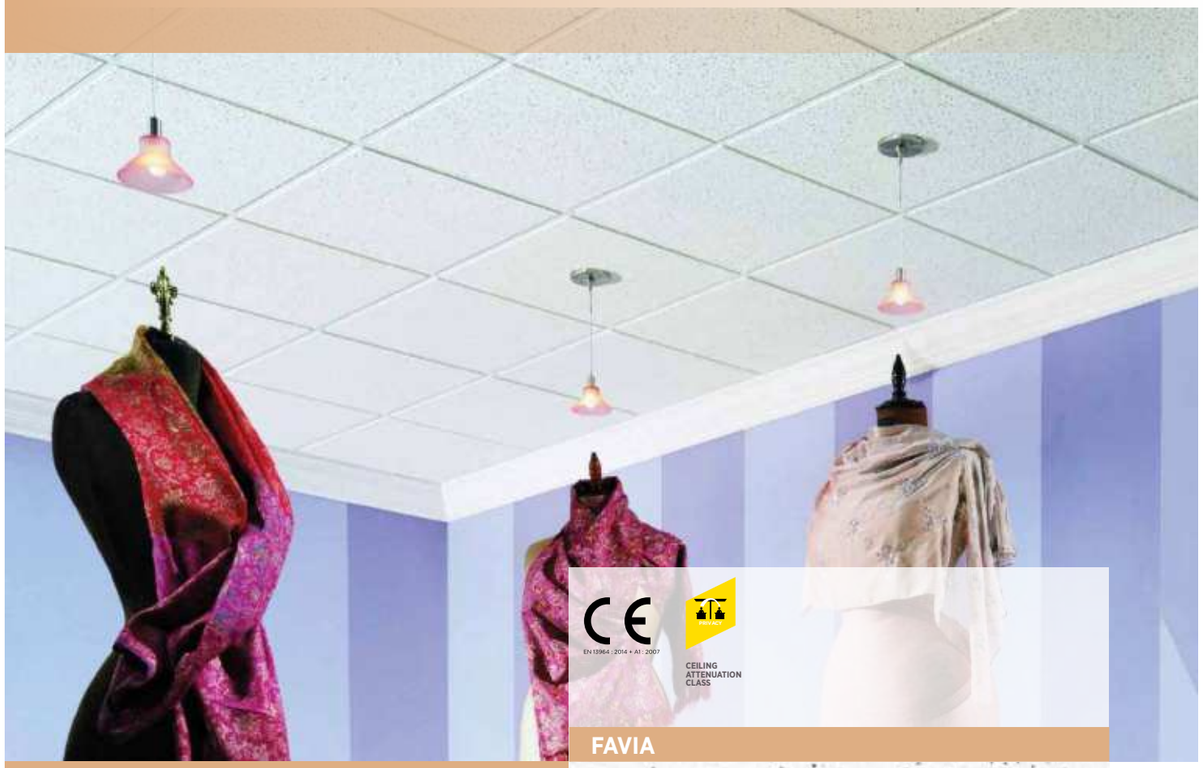

FAVIA



FEATURES AND BENEFITS

- Finest fissuring pattern among USG ME's product portfolio.
- Elegant non-directional pattern for a fresh, clean, and white appearance.
- The cost-effective series is ideal for retail businesses and general commercial stores.
- High-light reflectance ceilings can reduce the number of light fixtures needed while maintaining good indoor environmental air quality.
- Durable and attractive micro-textured white surface for design freedom during installation.
- Available in ClimaPlus™ formulation for high-humid areas.

APPLICATIONS

- Groceries
- Corridors and hallways
- Basements
- Administration offices
- Rest areas
- Cafeterias
- Warehouse

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
15mm	0.35	**0.25**	**0.20**	**0.20**	**0.30**	0.50	**0.25**

** Calculated to ASTM C 423-01*

EN 13964 : 2014 + A1 : 2007

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	FNS665 FNS225	600*600*15 610*610*15	0.25	35	85%			25%	Low	$
	FNC625 FNC245	600*1200*15 610*1220*15	0.25	35	85%	✓		39%	Low	$
SLT	FNSR665 FNSR225	600*600*15 610*610*15	0.25	35	85%			25%	Low	$
	FNCR625 FNCR245	600*1200*15 610*1220*15	0.25	35	85%	✓		39%	Low	$

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXT FLB Edge

SPECIFICATION DETAILS

Favia Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: III,
Form: 2,
Pattern: D, E

Substrate and Surface Finish
Mineral fiber substrate finished with factory-applied water-based paint

Thickness
15mm

Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square, Reveal [SLT, FLB]

Weight
15mm [3.6 kg/m^2, Regular/ ClimaPlus™]

Noise Reduction Coefficient [NRC]
[0.25]

Ceiling Attenuation Class [CAC]
[35 dB]

Humidity Resistance
Maximum 95% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.85

Color
Standard White

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth. Panels are available upon request

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly

Thermal Conductivity
λ = 0.057 W/m°K

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 |MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

MINERAL FIBER CEILINGS FOR COMMERCIAL SPACES

OLYMPIA™

EN 13964 : 2014 + A1 : 2007



OLYMPIA™

FEATURES AND BENEFITS

- Finely granulated surface texture.
- High light reflectance finish (up to LR-0.88) reduces wear and tear on light fixtures and energy use.
- Economical, non-directional pattern reduces installation time and waste.
- Fire resistant system options for life safety and protection of property.
- Available also in ClimaPlus™ formulation for 99% humidity resistance and various plank sizes.
- Available in Pedestal edge for 19mm thickness.

APPLICATIONS

- Reception
- Commercial stores
- Libraries
- Banks
- Fitness rooms
- Corridors/stairwell
- Waiting area
- Nursery
- Retail stores

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
15mm	0.35	**0.25**	**0.15**	**0.15**	**0.20**	0.30	**0.15**

* *Calculated to ASTM C 423-01*

SPECIFICATIONS DETAILS

Olympia™ Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: III, Form: 2, Pattern: E

Substrate and Surface Finish
Mineral fiber substrate finished with factory-applied water-based paint

Thickness
12mm, 15mm, 19mm

Size*
300 x 1200mm, 305 x 1220mm, 300 x 1500mm, 305 x 1520mm, 600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm

Edge Detail Trim
Square,
Reveal [SLT, FLB, Pedestal]

Weight
12mm [3.12 kg/m², Regular],
15mm [3.6 kg/m², Regular/ ClimaPlus™],
15mm [5.1 kg/m², Firechief™],
19mm [4.5 kg/m², Regular/ ClimaPlus™],
19mm [6.45 kg/m², Firechief™]

Noise Reduction Coefficient [NRC]
[0.15]

Ceiling Attenuation Class [CAC]
[31 - 37 dB]

Humidity Resistance
Maximum 99% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.86-0.88

Color
Standard White

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth. Panels are available upon request

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly

Thermal Conductivity
λ = 0.057 W/m°K

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

*Panels available up-to 1800mm length







OLYMPIA™


TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	OLS662 OLS222	600*600*12 610*610*12	0.15	31	86%			25%	Low	$
	OLS665 OLS225	600*600*15 610*610*15	0.15	33	86%			25%	Low	$
	OLC665 OLC225	600*600*15 610*610*15	0.15	33	88%	●		39%	Low	$
	OLC625 OLC245	600*1200*15 610*1220*15	0.15	33	88%	●		39%	Low	$
	OLX665 OLX225	600*600*15 610*610*15	0.15	35	86%		●	56%	Low	$$
PLANKS	OLC325 OLC145	300*1200*15 305*1220*15	0.15	33	88%	●		39%	Low	$$$
	OLS669 OLS229	600*600*19 610*610*19	0.15	37	86%			25%	Low	$$$
	OLC669 OLC229	600*600*19 610*610*19	0.15	37	88%	●		39%	Low	$$$
PLANKS	OLC359 OLC159	300*1500*19 305*1520*19	0.15	37	88%	●		39%	Low	$$$$
SLT	OLSR665 OLSR225	600*600*15 610*610*15	0.15	33	86%			25%	Low	$
	OLCR665 OLCR225	600*600*15 610*610*15	0.15	33	88%	●		39%	Low	$
PLANKS	OLCR325 OLCR145	300*1200*15 305*1220*15	0.15	33	88%	●		39%	Low	$$$
	OLSR669 OLSR229	600*600*19 610*610*19	0.15	37	86%			25%	Low	$$$
	OLC629 OLC249	600*1200*19 610*1220*19	0.15	37	88%	●		39%	Low	$$$
	OLCR629 OLCR245	600*1200*19 610*1220*19	0.15	37	88%	●		39%	Low	$$$
FLB	OLSRF665 OLSRF225	600*600*15 610*610*15	0.15	33	86%			25%	Low	$
	OLCRF665 OLCRF225	600*600*15 610*610*15	0.15	33	88%	●		39%	Low	$
PLANKS	OLCRF325 OLCRF145	300*1200*15 305*1220*15	0.15	33	88%	●		39%	Low	$$$
	OLSRF669 OLSRF229	600*600*19 610*610*19	0.15	37	86%			25%	Low	$$$
	OLXR629 OLXR249	600*1200*19 610*1220*19	0.15	37	86%		●	56%	Low	$$$
	OLCRF629 OLCRF249	600*1200*19 610*1220*19	0.15	37	88%	●		39%	Low	$$$
PEDESTAL	DP1OLCRI669 DP1OLCRI229	600*600*19 610*610*19	0.15	37	88%	●		39%	Low	$$$
	DP4OLCRI669 DP4OLCRI229	600*600*19 610*610*19	0.15	37	88%	●		39%	Low	$$$

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.
For Firechief™ products.

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXT FLB Edge	DXF FLB Edge	DXT PEDESTAL
					

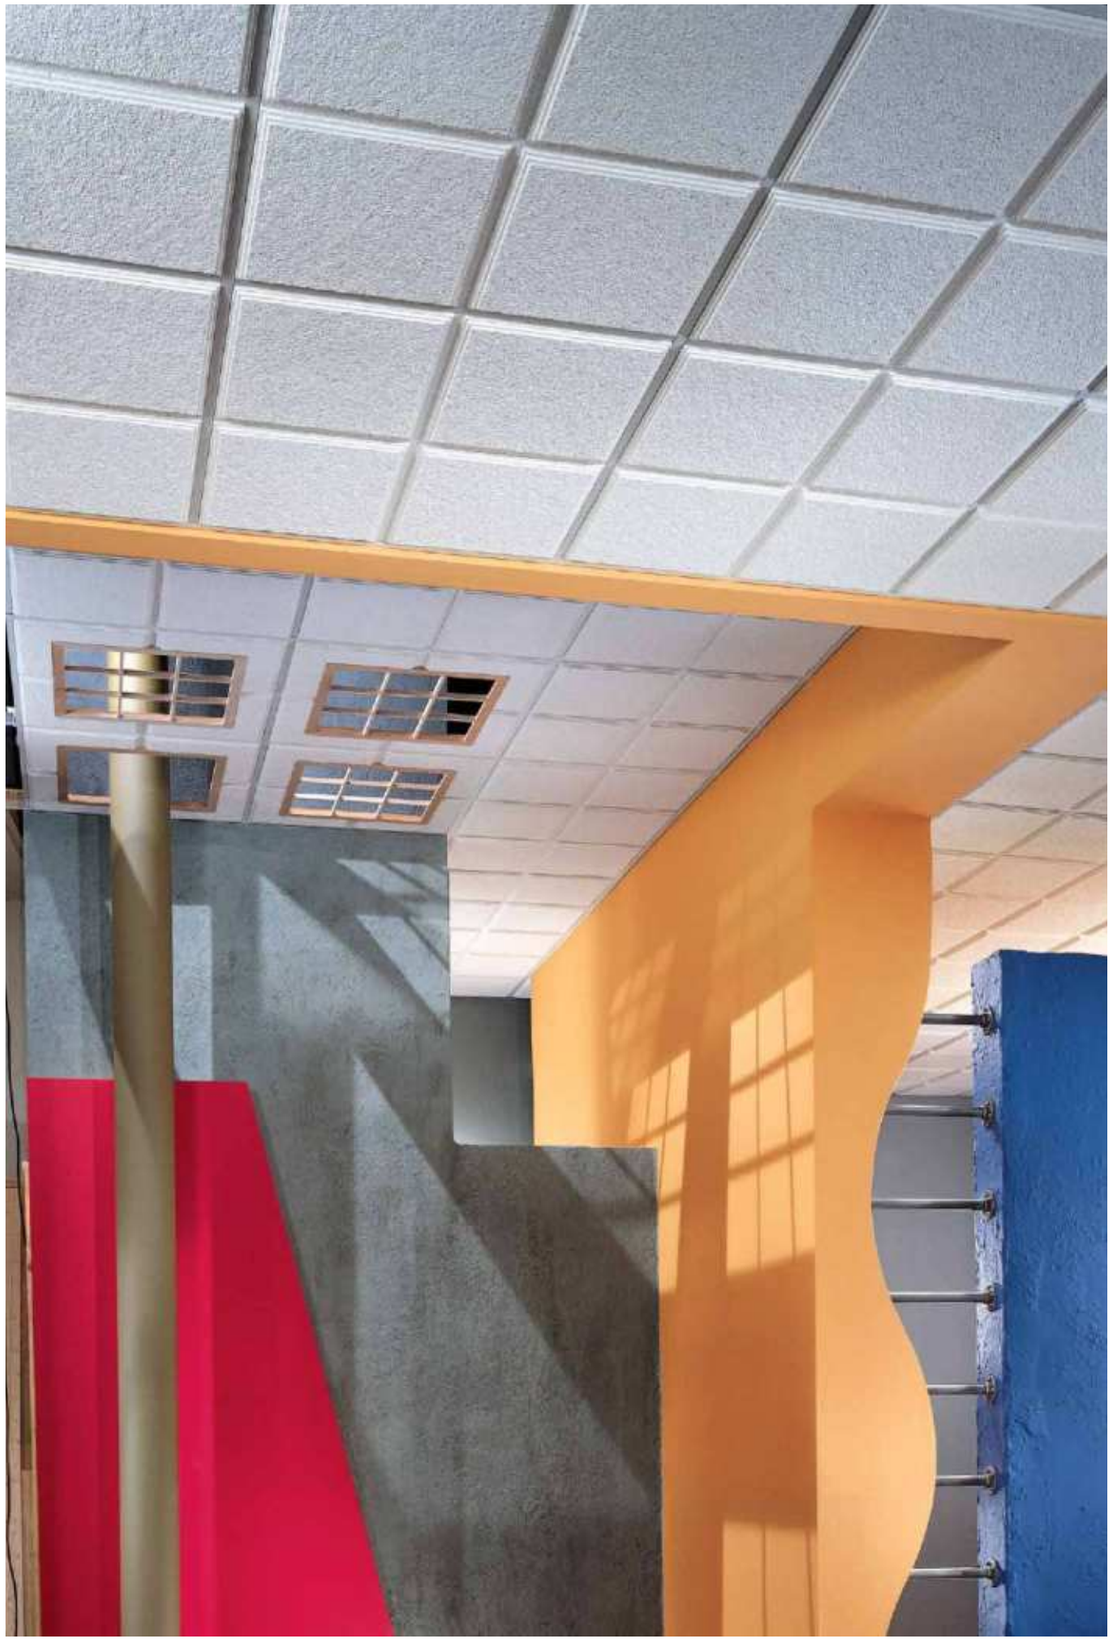


MINERAL FIBER CEILINGS FOR COMMERCIAL SPACES

OMNI



OMNI

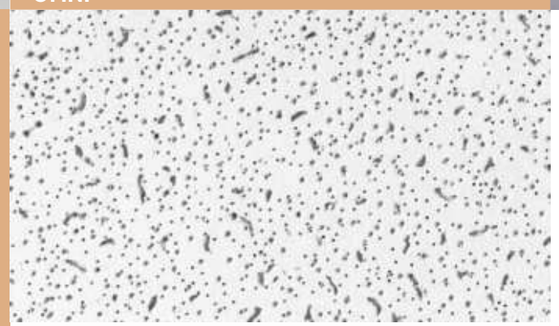

FEATURES AND BENEFITS

- Medium-textured panels feature a unique, non-directional pattern with a fresh, clean appearance, allowing fast, efficient installation.
- Mid-range sound absorption and sound attenuation make it ideal for general commercial stores.
- It is a cost-effective solution with various panel options for multiple applications.
- Optional Firechief™ formulation designed to meet life safety codes.
- Available in washable paint for easy maintenance (use a soft brush or vacuum to clean the surface).

APPLICATIONS

- Stores
- Corridors and hallways
- Warehouses
- Mechanical rooms
- Stairways and elevator shafts
- Basement


TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
			NRC	CAC						
SQ	OMS665 OMS225	600*600*15 610*610*15	0.50	35	82%			25%	Low	$
	OMC625 OMC245	600*1200*15 610*1220*15	0.50	35	82%			39%	Low	$
	OMX665 OMX225	600*600*15 610*610*15	0.50	35	82%			56%	Low	$$
	OMS669 OMS229	600*600*19 610*610*19	0.60	37	82%			25%	Low	$$
	OMX669 OMX229	600*600*19 610*610*19	0.60	37	82%			56%	Low	$$
SLT	OMSR665 OMSR225	600*600*15 610*610*15	0.50	35	82%			25%	Low	$$

Low Emissions (VOC)
Third party (GREENGUARD & GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.
For Firechief™ products.

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXT FLB Edge
			

SPECIFICATIONS DETAILS

Omni Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.
Materials Classification
Type: III, Form: 2, Pattern: C, D, E
Substrate and Surface Finish
Mineral fiber substrate finished with factory-applied water-based paint
Thickness
15mm, 19mm
Size
600 x 600mm, 610 x 610mm, 600 x 1200mm, 610 x 1220mm
Edge Detail Trim
Square, Reveal [SLT, FLB]
Weight
15mm [3.6 kg/m², Regular/ ClimaPlus™]
15mm [5.1 kg/m², Firechief™]
19mm [4.5 kg/m², Regular/ ClimaPlus™]
19mm [6.45 kg/m², Firechief™]
Noise Reduction Coefficient [NRC]
[0.50] [0.60]

Ceiling Attenuation Class [CAC]
[35 - 37 dB]
Humidity Resistance
Maximum 95% RH / 40°C for ClimaPlus™
Light Reflectance Coefficient [LR]
0.82
Color
Standard White
Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth. Panels are available upon request
Surface Burning Characteristics as per ASTM E84
Class A
Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0
Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly
Thermal Conductivity
λ = 0.057 W/m°K
VOC Class
Greenguard & Greenguard Gold

Formaldehyde Classification
Class E1 as per EN717-1
Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request
Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 |MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

MINERAL FIBER CEILINGS FOR COMMERCIAL SPACES

SPARTA



SPARTA

FEATURES AND BENEFITS

- Laminated washable vinyl facing ceiling tile for easy maintenance.
- Available only in plain facings with a smooth appearance.
- Ultra-high humidity resistance: sag resistance ensures durability in standard or extreme environmental conditions.
- It may be installed in the early project stages.
- Standard with aluminum foil at the rear side, which acts as a vapor barrier and resists breathing so the panel stays clean for a long time.
- Scrub-resistant, dirt marks are easy to remove.
- Suitable for Healthcare applications.
- It is economical and easy to trim and install.

APPLICATIONS

- Hydro-therapy rooms
- Nurse's stations
- Patient rooms
- Kitchen
- Groceries
- Bathroom

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
			NRC	CAC						
SQ	LPW665 LPW225	600*600*15 610*610*15	-	35	84%			20%	Low	$
	LPW669 LPW229	600*600*19 610*610*19	-	36	84%			20%	Low	$$

Low Emissions (VOC)
Third party (GREENGUARD) certified for low-emitting performance, meets UL 2818 - 2022 Standard for Chemical Emissions for Building Materials, Finishes and Furnishings. 'Certificates of Compliance' for Low VOC Emissions are available on usgme.com and at spot.ul.com.

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge

SPECIFICATION DETAILS

Sparta Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: X, Pattern: G

Substrate and Surface Finish
Mineral fiber substrates laminated with embossed vinyl-faced membrane and aluminium foil layer at the rear side

Thickness
15mm, 19mm

Size
600 x 600mm, 610 x 610mm

Edge Detail Trim
Square

Weight
15mm [3.75 kg/m², Regular/ ClimaPlus™]
19mm [4.75 kg/m², Regular/ ClimaPlus™]

Ceiling Attenuation Class [CAC]
[35 - 36 dB]

Humidity Resistance
Maximum 99% RH / 40°C for ClimaPlus™

Mold Prevention Application as per ASTM D3273
Rate 10: Resistant to mold growth. Panels are available upon request

Light Reflectance Coefficient [LR]
0.84

Color
Standard White

Surface Burning Characteristics as per ASTM E84
Class A

Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly

Thermal Conductivity
λ = 0.057 W/m°K

VOC Class
Greenguard

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 |MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

MINERAL FIBER CEILINGS FOR COMMERCIAL SPACES

TAIGA



FEATURES AND BENEFITS

- Taiga is available in three different surface designs: Plain, Chessboard, and Comet Line.
- Taiga panels were developed to meet today's trend for cleaner finishes with high light reflectance at 86%; improving daylighting results in energy cost savings and increased comfort.
- Enhanced surface durability makes Taiga more resistant to everyday dirt and wear and tear, improving the product's lifespan.
- Low sound absorption is ideal where increased room reverberation is desired.
- High humidity resistance in ClimaPlus™, suitable for intermittent heating and cooling applications.
- Available in Pedestal edge.

APPLICATIONS


- Showrooms and lounges
- Shops
- Supermarkets and departments stores
- Luxury retail stores
- General offices
- Municipal buildings
- Warehouses

PRODUCT CERTIFIED FOR LOW VOC EMISSIONS

PRODUCT CERTIFIED FOR LOW VOC EMISSIONS

CEILING ATTENUATION CLASS

TAIGA

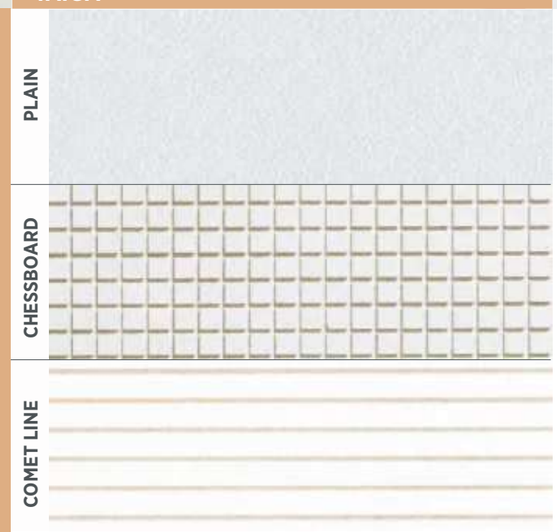

ABSORPTION COEFFICIENT

Frequency, Hz	125	250	500	1000	2000	4000	NRC***
15mm	0.35	**0.25**	**0.10**	**0.15**	**0.20**	0.45	**0.15**
19mm*	0.30	**0.25**	**0.25**	**0.30**	**0.40**	0.60	**0.30**
19mm**	0.25	**0.25**	**0.25**	**0.30**	**0.35**	0.50	**0.30**







** Chessboard Design*
*** Comet Line Design*
****Calculated to ASTM C 423-01*

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	TS665 TS225	600*600*15 610*610*15	0.15	33	86%			25%	Low	$$
	TS669 TS229	600*600*19 610*610*19	0.15	37	86%			25%	Low	$$$
SLT	TSR665 TSR225	600*600*15 610*610*15	0.15	33	86%			25%	Low	$$
	TSR669 TSR229	600*600*19 610*610*19	0.15	37	86%			25%	Low	$$$
	CHSR669 CHSR229	600*600*19 610*610*19	0.30	35	83%			25%	Low	$$$
	CSR669 CSR229	600*600*19 610*610*19	0.30	35	83%			32%	Low	$$$
FLB	TSRF665 TSRF225	600*600*15 610*610*15	0.15	33	86%			25%	Low	$$$
PEDESTAL	DP1TSRI669 DP1TSRI229	600*600*19 610*610*19	0.15	37	86%			25%	Low	$$$
	DP4TSRI669 DP4TSRI229	600*600*19 610*610*19	0.15	37	86%			25%	Low	$$$

Low Emissions (VOC)
Third party (GREENGUARD & GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXF FLB Edge	DXT FLB Edge	DXT PEDESTAL
					

SPECIFICATIONS DETAILS

Taiga Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: III,
Form: 2,
Pattern: G, K

Substrate and Surface Finish
Mineral fiber substrate finished with factory-applied water-based paint

Thickness
15mm, 19mm

Size
600 x 600mm, 610 x 610mm

Edge Detail Trim
Square,
Reveal [SLT, FLB, Pedestal]

Weight
15mm [3.6 kg/m², Regular/ ClimaPlus™]
19mm [4.5 kg/m², Regular/ ClimaPlus™]

Noise Reduction Coefficient [NRC]
[0.15][0.30]

Ceiling Attenuation Class [CAC]
[33 - 37 dB]

Humidity Resistance
Maximum 95% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.83-0.86

Color
Standard White

Mold Prevention Application as per ASTM D3273
Rate 9: Resistant to mold growth. Panels are available upon request

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Fire Rating as per BS 476 (Firechief™ Option)
1hr Time-rated assembly

Thermal Conductivity
λ = 0.057 W/m°K

VOC Class
Greenguard & Greenguard Gold

Formaldehyde Classification
Class E1 as per EN717-1

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 |MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9


INNOVATIVE STATEMENTS:
EXPLORING THE GRIDS AND SUSPENSIONS RANGE

11



"BOARD ON A JOURNEY OF CEILING CARRIERS WITH USG MIDDLE EAST'S GRIDS AND SUSPENSION SYSTEMS—DESIGNED FOR SAFETY AND STRUCTURAL RESILIENCE, HARMONIZING FORM AND FUNCTION IN EVERY SPACE.

Our grids boast a collection of profile options, offering a tailored design for any space. Choose from fire-rated or non-fire-rated options, ensuring safety without compromising design. Engineered for seismic applications as an option, these suspension systems provide stability in regions exposed to seismic activity, a testament to our commitment to structural integrity. Whether it's a contemporary office space or a seismic-sensitive area, our suspension systems offer the perfect balance of form and function. Enhance your ceilings with USG Middle East, where innovation meets reliability in every suspended detail, ensuring your spaces not only look exceptional but also stand the test of time.

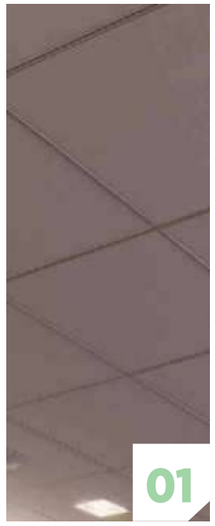


















GRIDS AND SUSPENSIONS

1. DONN® BRAND DXF® FINELINE® SUSPENSION SYSTEM
2. DONN® BRAND DXI® IDENTITEE® SUSPENSION SYSTEM
3. DONN® BRAND DX®/DXL® T24 FIRE RATED SUSPENSION SYSTEM
4. DONN® BRAND DX®/DXL® T15 CENTRICITEE FIRE RATED SUSPENSION SYSTEM
5. DONN® BRAND DXH® 38 T24 SUSPENSION SYSTEM
6. DONN® BRAND AX™/AXCE™ SUSPENSION SYSTEM
7. DONN® BRAND CE® SUSPENSION SYSTEM
8. DONN® BRAND DX®/DXH® 33 T24 SUSPENSION SYSTEM
9. USG ME BRAND QUADRA T24 SAFE CEILING CARRIER

GRIDS AND SUSPENSIONS

DONN® BRAND DXF® FINELINE® SUSPENSION SYSTEM

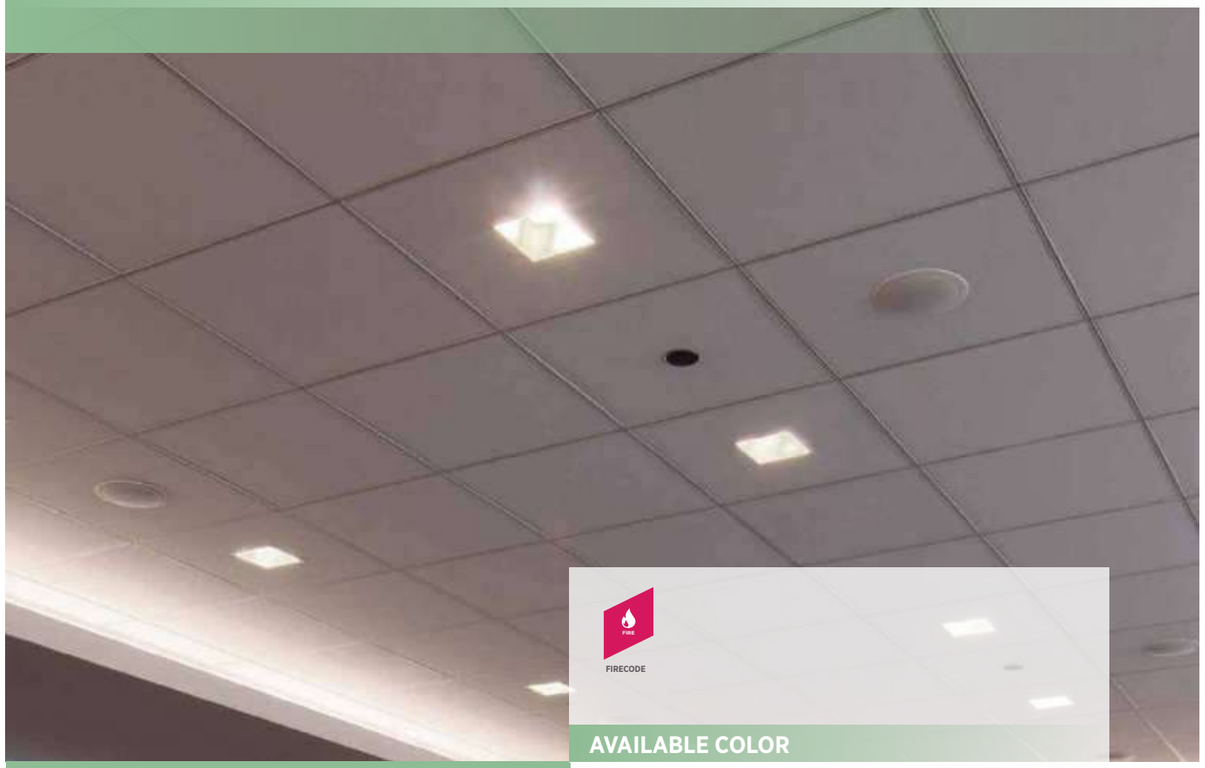

FEATURES AND BENEFITS

- Narrow-profile, slotted grid system with 6.35mm reveal provides a streamlined appearance.
- Reveal accommodates partition attachments and pendant-mounted light fixtures.
- Mitered intersections offer a clean, tailored appearance.
- Optional integrated air diffuser.
- Available in black/white and white/white options.
- High recycled content (HRC) available.
- ICC-ES evaluated for seismic installations (ESR-1222).


APPLICATIONS

- Fire-rated interior general-use areas
- All interior general-use areas


AVAILABLE COLOR




PROFILE



EDGE DETAIL



FINELINE BEVELED - FLB




FINELINE - FL

PRODUCT INFORMATION


Description	Item Reference	Load*	Profile Color	Cross Section	Component Length
Main Runner	221DXBW01NZ	24KG/LM	Black & White	45/15mm	3600mm
	801DXFBW3000H38	17.5KG/LM	Black & White	38/15mm	3000mm
	801DXFBW3600-XH	17.5KG/LM	Black & White	38/15mm	3600mm
	801DXFW3600-XH	17.5KG/LM	White & White	38/15mm	3600mm
Long Cross Tee	221DXF003NZ		Black & White	45/15mm	1200mm
	803DXFBW1200-XH		Black & White	38/15mm	1200mm
	803DXFW1200-XH		White & White	38/15mm	1200mm
Short Cross Tee	221DXBW04NZ		Black & White	45/15mm	600mm
	804DXFBW600-XH		Black & White	38/15mm	600mm
	804DXFW600-XH		White & White	38/15mm	600mm
Wall Angle	802MT15-3600			24/15mm	3600mm
Wall Angle Shadowline	802MS3600			19/9/9/19mm	3600mm
U-Trim	UT123525 - UT124825 - UT125325			25.4/12.7mm	3000mm

** Load of 1200MM hanger spacing in KG/LM and deflection limit of L/360.*
Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.


Main Runner 221DXBW01NZ / 801DXFBW3000H38 / 801DXFBW3600-XH / 801DXFW3600-XH




Long Cross Tee 221DXF003NZ / 803DXFBW1200-XH / 803DXFW1200-XH

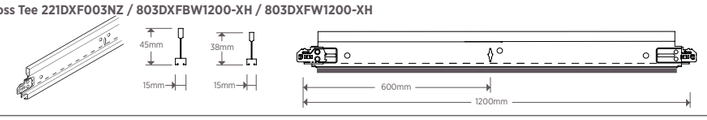


Short Cross Tee 221DXBW04NZ / 804DXFBW600-XH / 804DXFW600-XH



Wall Angle



U-Trim

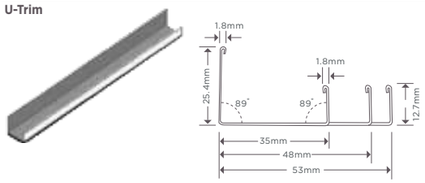

SUSPENSION OPTIONS



Adjustable Hanger | Suspension Wire | Angle Section | Hanging Bracket

PHYSICAL DATA

Material: Min. G30 pre-painted galvanized steel.

Installation: Install according to ASTM C636, ASTM E580 and USG requirements.

Limitations: For exposed grids in non-fire-rated, high-humidity applications, use USG Donn® Brand ZXLA™ painted suspension systems.

02

GRIDS AND SUSPENSIONS

DONN® BRAND DXI® IDENTITEE® SUSPENSION SYSTEM




FEATURES AND BENEFITS

- Narrow-profile grid system with double 3.175mm reveal.
- Seamless reveal at intersections.
- Meets all code requirements, including seismic.
- Compatible with USG ME Logix™ Integrated System.
- Custom colors available.
- ICC-ES evaluated for seismic installations (ESR-1222).
- G30 hot-dipped galvanized steel body and cap inhibit red rust.
- All USG Donn® Brand Identitee® DXI™ items have High Recycled
- Content (HRC).
- Available in metric and imperial sizes.
- Compatible with FLB and FL ceiling tile edges.
- Proprietary cap lance allows various color and coating options to meet unique project requirements.
- Comply with CDPH 01350 V.2-2017 for low VOC emission.


APPLICATIONS

- All interior general-use areas
- USG Logix™ Integrated System


AVAILABLE COLOR

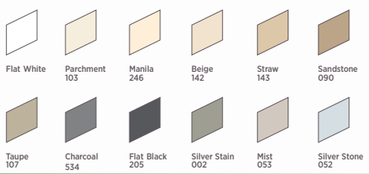


PROFILE



EDGE DETAIL



FINELINE BEVELED - FLB




FINELINE - FL

PRODUCT INFORMATION


Description	Item Reference	Load*	Cross Section	Component Length
Main Runner	DXI26HRC	24KG/LM	46/15mm	3600/366mm
Long Cross Tee	DXI424HRC		46/15mm	1200/1220mm
Short Cross Tee	DXI224HRC		46/15mm	600/610mm
Wall Angle	802MT15-3600		24/15mm	3600mm
Wall Angle Shadowline	802MS3600		19/9/9/19mm	3600mm
U-Trim	UT123525 - UT124825 - UT125325		25.4/12.7mm	3000mm

** Load of 4" hanger spacing in KG/LM and deflection limit of L/360*


Main Runner DXI26HRC




Long Cross Tee DXI424HRC




Short Cross Tee DXI224HRC



Wall Angle

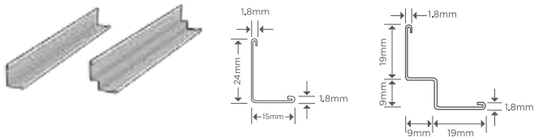

U-Trim

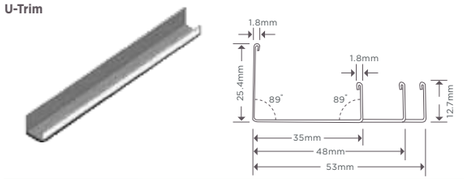

SUSPENSION OPTIONS



Adjustable Hanger | Suspension Wire | Angle Section | Hanging Bracket

PHYSICAL DATA

Material
Min. G30 hot-dipped galvanized steel body and cap. Baked-on polyester paint.

Installation
Install according to ASTM C636, ASTM E580 and USG requirements.

Limitations
- Please refer to USG Donn® Brand AX™ or ZXLA™ for exposed suspension systems in non-fire-rated, high-humidity applications.
- Interior applications only.

GRIDS AND SUSPENSIONS


DONN® BRAND DX®/DXL® T24 FIRE RATED SUSPENSION SYSTEM




EN 13964 : 2014 + A1 : 2007

FIRECODE


AVAILABLE COLOR



PROFILE




FIRE LANCE




EDGE DETAIL



SQUARE EDGE - SQ



SHADOWLINE TAPERED - SLT



CONCEALED EDGE
(BESK, S-BESK, D-BESK)

FEATURES AND BENEFITS

- Main tees are designed to expand at the fire lance in the event of a fire. This maintains the structural integrity of the ceiling and holds tiles in place.
- Fire Rated features a body and cap made of G30 hot-dip galvanized steel as per EN 10346/ASTM A653 with pre-painted 24mm width capping to ensure the cap remains clean and rust-free.
- A four-step coating process that outperforms paint adhesion and corrosion resistance, as proven by industry-standard salt spray tests conducted by an independent laboratory.
- Safe, fast and, simple to install & easily accessible.
- Maximum economy and design simplicity.
- Cross-tees with override ends resist twisting and give a professionally finished look with no exposed steel edges.
- Patented QUICK-RELEASE™ clip design: demountable without
- tools.
- Compatible with Square, SLT, and Concealed ceiling tile edges.
- Audible Click means you know when tees are connected.
- Complies with ASTM C635 and EN1396:2014.
- Available in metric and imperial sizes.

APPLICATIONS

- Fire-rated interior general-use area


EN 13964 : 2014 + A1 : 2007

PRODUCT INFORMATION


Description	Item Reference Metric	Item Reference Imperial	Cross Section	Body Thickness	Component Length	Reaction To Fire*
Main Runner	801DXL3600	801DXL3660	38/24mm	0.38mm	3600/3660mm	Class A
Long Cross Tee	803DX1200H38	803DX1220H38	38/24mm	0.30mm	1200/1220mm	Class A
Short Cross Tee	804DX600H38	804DX610H38	38/24mm	0.30mm	600/610mm	Class A
Wall Angle	802MT3600		22/19mm	0.50mm	3600mm	Class A
Wall Angle Shadowline	802MS3600 - 802MS164L		19/9mm - 20/20mm	0.50mm	3600mm	Class A
U-Trim	UT123525 - UT124825 - UT125325		25.4/12.7mm	0.50mm	3000mm	Class A

** As per EN 1364 : 2014 and EN 13501-1 : 2018*


Main Runner 801DXL3600




Long Cross Tee 803DX1200H38




Short Cross Tee 804DX600H38




Wall Angle

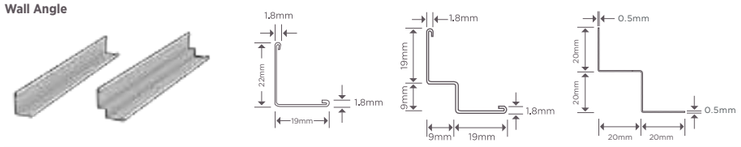

U-Trim

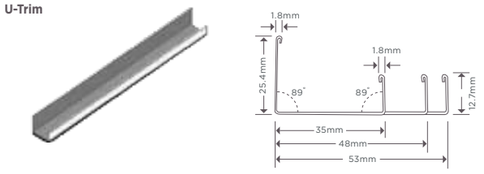

SUSPENSION OPTIONS

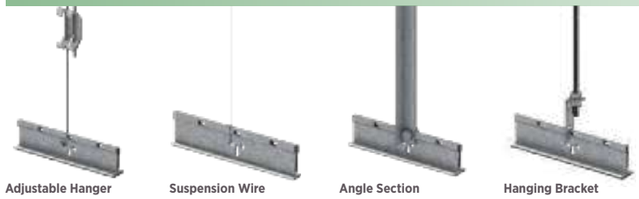

Adjustable Hanger | Suspension Wire | Angle Section | Hanging Bracket

MAXIMUM ALLOWED OF TILES WEIGHT KG PER M²**

DXLH38 - T24 - Minimum Load - Carrying Capabilities of Main Runners

Hanger distance (mm)	Applied Load (N) at 1.2 M Span	Equivalent Uniform Load (N/M)	Allowable Midspan Deflection (mm)	Deflection Limit
900	365	304	3.33	L/360
1200	274	228	3.33	L/360
1500	219	183	3.33	L/360

*** The load per m² must be distributed uniformly (no point loads) over the ceiling area. After loading, the deflection of any grid component will remain within the maximum deflection per span.*

Consult USG Middle East technical team for layouts, load or hanger distance.

GRIDS AND SUSPENSIONS


DONN® BRAND DX®/DXL® T15 CENTRICITEE FIRE RATED SUSPENSION SYSTEM




EN 13964 : 2014 + A1 : 2007

FIRECODE


AVAILABLE COLOR




PROFILE




FIRE LANCE




EDGE DETAIL



SQUARE EDGE - SQ



FINELINE BEVELED - FLB



FINELINE - FL

FEATURES AND BENEFITS

- Main tees are designed to expand at the fire lance in the event of a fire. This maintains the structural integrity of the ceiling and holds tiles in place.
- Fire Rated features a body and cap made of G30 hot-dip galvanized steel as per EN 10346/ASTM A653 with pre-painted 15mm width capping to ensure the cap remains clean and rust-free.
- A four-step coating process that outperforms paint adhesion and corrosion resistance, as proven by industry-standard salt spray tests conducted by an independent laboratory.
- Safe, fast and, simple to install & easily accessible.
- Maximum economy and design simplicity.
- Cross-tees with override-ends resist twisting and give a professionally finished look with no exposed steel edges.
- Patented QUICK-RELEASE™ clip design: demountable without tools.
- Compatible with Square, FL, and FLB ceiling tile edges.
- Audible Click means you know when tees are connected.
- Complies with ASTM C635 and EN1396:2014.
- Available in metric and imperial sizes.

APPLICATIONS

- Fire-rated interior general-use areas
- Logix™ Integrated Ceiling Systems


EN 13964 : 2014 + A1 : 2007

PRODUCT INFORMATION


Description	Item Reference Metric	Item Reference Imperial	Cross Section	Body Thickness	Component Length	Reaction To Fire*
Main Runner	801DXLT15-3600	801DXLT15-3660	38/15mm	0.38mm	3600/3660mm	Class A
Long Cross Tee	803DXT15-1200H38	803DXT15-1220H38	38/15mm	0.30mm	1200/1220mm	Class A
Short Cross Tee	804DXT15-600H38	804DXT15-610H38	38/15mm	0.30mm	600/610mm	Class A
Wall Angle	802MT15-3600		24/15mm	0.50mm	3600mm	Class A
Wall Angle Shadowline	802MS3600		19/9/9/19mm	0.50mm	3600mm	Class A
U-Trim	UT123525 - UT124825 - UT125325		25.4/12.7mm	0.50mm	3000mm	Class A

** As per EN 1364 : 2014 and EN 13501-1 : 2018*


Main Runner 801DXLT15-3600




Long Cross Tee 803DXT15-1200H38




Short Cross Tee 804DXT15-600H38



Wall Angle

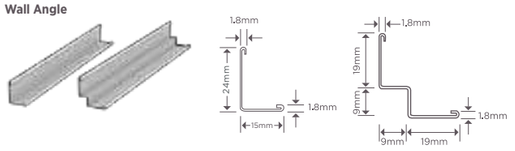

U-Trim

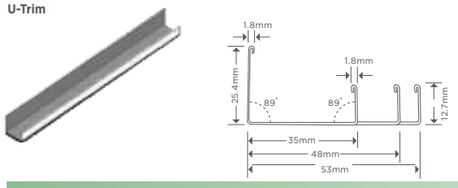

SUSPENSION OPTIONS



Adjustable Hanger



Suspension Wire



Angle Section



Hanging Bracket

MAXIMUM ALLOWED OF TILES WEIGHT KG PER M²**

DXL H38- T15 - Minimum Load - Carrying Capabilities of Main Runners

Hanger distance (mm)	Applied Load (N) at 1.2 M Span	Equivalent Uniform Load (N/M)	Allowable Midspan Deflection (mm)	Deflection Limit
900	320	267	3.33	L/360
1200	240	200	3.33	L/360
1500	192	160	3.33	L/360

*** The load per m² must be distributed uniformly (no point loads) over the ceiling area. After loading, the deflection of any grid component will remain within the maximum deflection per span.*

Consult USG Middle East technical team for layouts, load or hanger distance.


GRIDS AND SUSPENSIONS

DONN® BRAND DXH® 38 T24 SUSPENSION SYSTEM




CE
EN 13964 : 2014 + A1 : 2007


AVAILABLE COLOR



PROFILE




EDGE DETAIL



SQUARE EDGE - SQ



SHADOWLINE TAPERED - SLT



CONCEALED EDGE
(BESK, S-BESK, D-BESK)

FEATURES AND BENEFITS

- The body and cap are made of G30 hot-dip galvanized steel as per EN 10346/ASTM A653 with pre-painted 24mm width capping to ensure the cap remains clean and rust-free.
- A four-step coating process that outperforms paint adhesion and corrosion resistance, as proven by industry-standard salt spray tests conducted by an independent laboratory.
- Safe, fast and, simple to install & easily accessible.
- Maximum economy and design simplicity.
- Cross-tees with override ends resist twisting and give a professionally finished look with no exposed steel edges.
- Patented QUICK-RELEASE™ clip design: demountable without
- tools.
- Compatible with Square, SLT, and Concealed ceiling tile edges.
- Audible Click means you know when tees are connected.
- Complies with ASTM C635 and EN1396:2014.
- Available in metric and imperial sizes.

APPLICATIONS


- Interior general-use areas

CE
EN 13964 : 2014 + A1 : 2007


PRODUCT INFORMATION

Description	Item Reference Metric	Item Reference Imperial	Cross Section	Body Thickness	Component Length
Main Runner	801DX3600H38	801DX3660H38	38/24mm	0.30mm	3600/3660mm
Long Cross Tee	803DX1200H38	803DX1220H38	38/24mm	0.30mm	1200/1220mm
Short Cross Tee	804DX600H38	804DX610H38	38/24mm	0.30mm	600/610mm
Wall Angle	802MT3600		22/19mm	0.50mm	3600mm
Wall Angle Shadowline	802MS3600 - 802MS164L		19/9mm - 20/20mm	0.50mm	3600mm
U-Trim	UT123525 - UT124825 - UT125325		25.4/12.7mm	0.50mm	3000mm


Main Runner 801DX3600H38

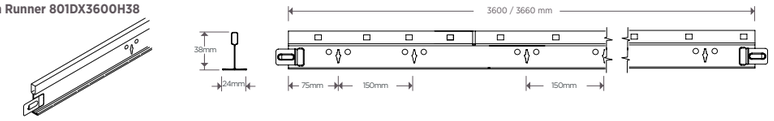


Long Cross Tee 803DX1200H38




Short Cross Tee 804DX600H38



Wall Angle

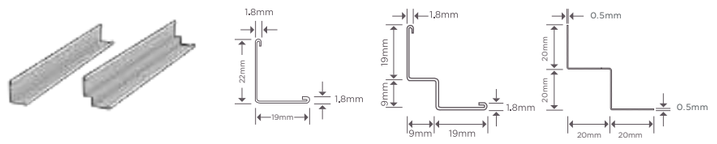

U-Trim

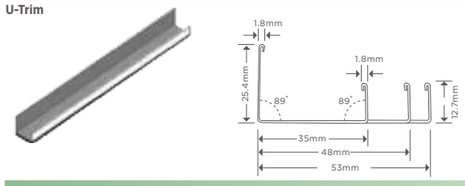

SUSPENSION OPTIONS



Adjustable Hanger



Suspension Wire



Angle Section



Hanging Bracket

MAXIMUM ALLOWED OF TILES WEIGHT KG PER M²**

DXH 38 - T24 - Minimum Load - Carrying Capabilities of Main Runners

Hanger distance (mm)	Applied Load (N) at 1.2 M Span	Equivalent Uniform Load (N/M)	Allowable Midspan Deflection (mm)	Deflection Limit
900	283	236	3.33	L/360
1200	212	177	3.33	L/360
1500	170	142	3.33	L/360

** The load per m² must be distributed uniformly (no point loads) over the ceiling area. After loading, the deflection of any grid component will remain within the maximum deflection per span.*

Consult USG Middle East technical team for layouts, load or hanger distance.

GRIDS AND SUSPENSIONS

DONN® BRAND AX™/AXCE™ SUSPENSION SYSTEM (ALUMINIUM)



FEATURES AND BENEFITS

- Meets 2018 Guidelines For Healthcare Facilities.
- A noncorrosive aluminum 24mm exposed grid system with a stainless steel clip is ideal for high-humidity or wet-cleaned areas.
- Capable of withstanding cleaning and disinfecting chemicals as tested by ASTM D5402.
- Tested for environmental conditions in accordance with ASTM C635.
- Aluminum components can be used in nonmagnetic environments and meet USDA/FSIS requirements.
- Cross-tee override-ends resist twisting and give a professionally finished look.
- Proprietary stainless steel Quick-Release™ clip.
- Compatible with Square and SLT ceiling tile edges.
- Up to 90% recycled content.
- Factory applied white closed cell foam gasket.

APPLICATIONS

- Healthcare facilities, restricted and semi-restricted areas
- MRI rooms
- Magnetic-free zones
- High-humidity areas
- Food processing areas
- Certified to meet ISO 14644-1 Class 5 (Fed. Standard 209E Class 100)


AVAILABLE COLOR




White

PROFILE


USG DONN® BRAND AX™




USG DONN® BRAND AXCE™



EDGE DETAIL



SQUARE EDGE - SQ




SHADOWLINE TAPERED - SLT

PRODUCT INFORMATION


Description	Item Reference	Load*	Cross Section	Component Length
Main Runner	AX26/AXCE26	10.5KG/LM	38/24mm	3600/3660mm
Long Cross Tee	AX424/AXCE424		38/24mm	1200/1220mm
Short Cross Tee	AX224/AXCE224		38/24mm	600/610mm
Wall Angle	M7A/ M7ACE		22/22mm	3600mm

** Load of 4" hanger spacing in KG/LM and deflection limit of L/360*


Main Runner AX26/AXCE26




Long Cross Tee AX424/AXCE424




Short Cross Tee AX224/AXCE224



Wall Angle



SUSPENSION OPTION



Adjustable Hanger

PHYSICAL DATA

Material

Double-web aluminium tee with aluminium cap and stainless steel Quick-Release™ clip. Baked-on polyester paint or powder-coated finish.

Installation

Install according to ASTM C636, ASTM E580 and USG requirements.

Limitations

- Non-fire-rated applications only. Finish is not UV-resistant; should not be installed with direct exposure to sun or weather.
- Indirect exposure to severe environmental conditions may shorten the lifespan of the product.
- The gasket face applied to USG Donn® Brand AXCE™ contains a protective strip that must be removed prior to panel installation.
- The standard gasket is not recommended for installations with metal panels.
- If metal panels are desired, a special gasket suitable for metal panels may be applied to the USG Donn® Brand DXACE™ suspension system through special order.

ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

GRIDS AND SUSPENSIONS

DONN® BRAND CE® SUSPENSION SYSTEM



FEATURES AND BENEFITS

- Meets 2018 Guidelines for Healthcare Facilities.
- Grid system with factory-applied white, closed-cell foam gaskets for controlled-environments.
- Min. G30 hot-dipped galvanized body provides corrosion protection.
- Supports Clean Room HEPA filters and lights.
- ICC-ES evaluated for building code compliance and seismic installations (ICC-ESR-1222).
- Capable of withstanding cleaning and/or disinfecting chemicals as tested in accordance with ASTM D402.

APPLICATIONS


- Clean Rooms
- Hospitals
- Food processing areas
- Healthcare facilities, restricted and semi-restricted areas
- Certified to meet ISO 14644-1 Class 5-8 (Fed. Standard 209E Class 100-100,000)

AVAILABLE COLOR




White

PROFILE



EDGE DETAIL




SQUARE EDGE - SQ

PRODUCT INFORMATION


Description	Item Reference	Load *	Cross Section	Component Length
Main Runner	DXCE24	17.75KG/LM	42/24mm	3600/3660mm
Long Cross Tee	DXCE424		38/24mm	1200/1220mm
Short Cross Tee	DXCE224		38/24mm	600/610mm
Wall Angle	M7CE		22/22mm	3660mm
U-Trim	UT123525 - UT124825 - UT125325		25.4/12.7mm	3000mm

** Load of 4" hanger spacing in KG/LM and deflection limit of L/360*


Main Runner DXCE24




Long Cross Tee DXCE424




Short Cross Tee DXCE224



Wall Angle



U-Trim

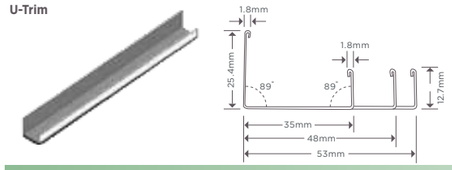

SUSPENSION OPTION



Adjustable Hanger | Suspension Wire | Angle Section | Hanging Bracket | Hold Down Clip

PHYSICAL DATA

Material
Min. G30 hot-dipped galvanized steel body and cap. Baked-on polyester paint.

Installation
Install according to ASTM C636, ASTM E580 and USG requirements. Class 5-8 (Fed. Standard 209E Class 100-100,000) installations require hold-down clips. Install a L15 hold-down clip within 76mm of each panel corner. For a 610mm x 1220mm system install an additional L15 hold-down clip centered on the 1220mm side. Border panels shall have a C-8 hold-down clip within 76mm of each panel corner. For a 610mm x 1220mm system install an additional C-8 hold-down clip centered on the 1220mm side. Alternative assemblies and installation methods may be utilized when approved by the authority having jurisdiction.

Limitations
- Interior applications only.
- The gasket face contains a protective strip that must be removed prior to panel installation.
- The standard gasket is not recommended for installations with metal panels.
- If metal panels are desired, a special gasket suitable for metal panels may be applied to the USG Donn® Brand CE™ Acoustical Suspension System through special order.

ASTM Load Compliance
Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.


GRIDS AND SUSPENSIONS

DONN® BRAND DX®/DXH® 33 T24 SUSPENSION SYSTEM




CE
EN 13964 : 2014 + A1 : 2007


AVAILABLE COLOR




PROFILE



EDGE DETAIL



SQUARE EDGE - SQ



SHADOWLINE TAPERED - SLT

FEATURES AND BENEFITS

- The body and cap are made of G30 hot-dip galvanized steel as per EN 10346/ ASTM A653 with pre-painted 24mm width capping to ensure the cap remains clean and rust-free.
- A four-step coating process that outperforms paint adhesion and corrosion resistance, as proven by industry-standard salt spray tests conducted by an independent laboratory.
- Safe, fast and, simple to install & easily accessible.
- Maximum economy and design simplicity.
- Cross-tees with override ends resist twisting and give a professionally finished look with no exposed steel edges.
- Patented QUICK-RELEASE™ clip design: demountable without tools.
- Compatible with Square and SLT ceiling tile edges.
- Audible Click means you know when tees are connected.
- Complies with ASTM C635 and EN1396:2014.
- Available in metric and imperial sizes.

APPLICATIONS

- Interior general-use areas
- Logix™ Integrated Ceiling Systems


CE
EN 13964 : 2014 + A1 : 2007

PRODUCT INFORMATION


Description	Item Reference Metric	Item Reference Imperial	Cross Section	Body Thickness	Component Length	Reaction To Fire*
Main Runner	801DX3600H33	801DX3660H33	33/24mm	0.30mm	3600/3660mm	Class A
Long Cross Tee	803DX1200H25	803DX1220H25	25/24mm	0.30mm	1200/1220mm	Class A
Short Cross Tee	804DX600H25	804DX610H25	25/24mm	0.30mm	600/610mm	Class A
Wall Angle	802MT3600		22/19mm	0.50mm	3600mm	Class A
Wall Angle Shadowline	802MS3600 - 802MS164L		19/9mm - 20/20mm	0.50mm	3600mm	Class A
U-Trim	UT123525 - UT124825 - UT125325		25.4/12.7mm	0.50mm	3000mm	Class A

** As per EN 1364 : 2014 and EN 13501-1 : 2018*


Main Runner 801DX3600H33




Long Cross Tee 803DX1200H25




Short Cross Tee 804DX600H25



Wall Angle

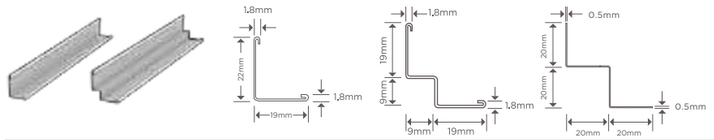

U-Trim

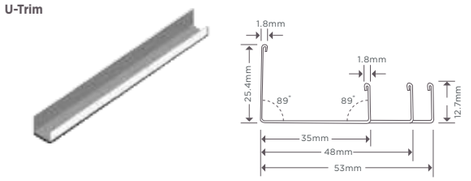

SUSPENSION OPTION



Adjustable Hanger | Suspension Wire | Angle Section | Hanging Bracket

MAXIMUM ALLOWED OF TILES WEIGHT KG PER M²**

DXH 33 - T24 - Minimum Load - Carrying Capabilities of Main Runners

Hanger distance (mm)	Applied Load (N) at 1.2 M Span	Equivalent Uniform Load (N/M)	Allowable Midspan Deflection (mm)	Deflection Limit
900	208	173	3.33	L/360
1200	156	130	3.33	L/360
1500	125	105	3.33	L/360

** The load per m² must be distributed uniformly (no point loads) over the ceiling area. After loading, the deflection of any grid component will remain within the maximum deflection per span.* Consult USG Middle East technical team for layouts, load or hanger distance.

GRIDS AND SUSPENSIONS

USG ME BRAND QUADRA T24 SAFE CEILING CARRIER




CE
EN 13964 : 2014 + A1 : 2007


AVAILABLE COLOR

White

PROFILE



EDGE DETAIL



SQUARE EDGE - SQ



SHADOWLINE TAPERED - SLT

FEATURES AND BENEFITS

- USG ME Brand QUADRA T24 Safe Ceiling Carrier features a body and cap made of G30 hot-dip galvanized steel as per EN 10346/ ASTM A653 with pre-painted 24mm width capping to ensure that the cap remains clean and rust-free.
- A four-step coating process that outperforms paint adhesion and corrosion resistance, as proven by industry-standard salt spray tests conducted by an independent laboratory.
- Safe, fast and, simple to install & easily accessible.
- Maximum economy and design simplicity.
- Cross-tees with override ends resist twisting and give a professionally finished look with no exposed steel edges.
- Compatible with Square and SLT ceiling tile edges.
- Exceeds load compliance specifications as per ASTM C 635.
- Tees are stitched on the web for additional load-bearing capacity.
- Available in metric and imperial sizes.

APPLICATIONS

- Interior general-use areas

CE
EN 13964 : 2014 + A1 : 2007


PRODUCT INFORMATION

Description	Item Reference Metric	Item Reference Imperial	Cross Section	Body Thickness	Component Length
Main Runner	QG-MT3600H38	QG-MT3660H38	38/24mm	0.28mm	3600/3660mm
Long Cross Tee	QG-CT1200H25	QG-CT1220H25	25/24mm	0.28mm	1200/1220mm
Short Cross Tee	QG-CT600H25	QG-CT610H25	25/24mm	0.28mm	600/610mm
Wall Angle	QG-WA3600		22/19mm	0.40mm	3600mm
U-Trim	UT123525 - UT124825 - UT125325		25.4/12.7mm	0.40mm	3000mm


Main Runner QG-MT3600H38/QG-MT3660H38




Long Cross Tee QG-CT1200H25/ QG-CT1220H25




Short Cross Tee QG-CT600H25/QG-CT610H25



Wall Angle



U-Trim

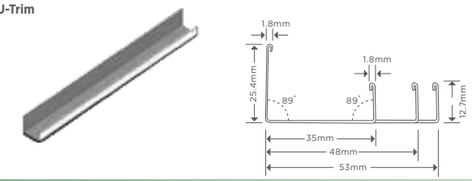

SUSPENSION OPTION



Adjustable Hanger | Suspension Wire | Angle Section | Hanging Bracket

MAXIMUM ALLOWED OF TILES WEIGHT KG PER M²**

DX QUADRA - T24 - Minimum Load - Carrying Capabilities of Main Runners


Hanger distance (mm)	Applied Load (N) at 1.2 M Span	Equivalent Uniform Load (N/M)	Allowable Midspan Deflection (mm)	Deflection Limit
900	199	220	3.33	L/360
1200	149	165	3.33	L/360
1500	119	132	3.33	L/360

** The load per m² must be distributed uniformly (no point loads) over the ceiling area. After loading, the deflection of any grid component will remain within the maximum deflection per span.*

Consult USG Middle East technical team for layouts, load or hanger distance.


GRIDS AND SUSPENSIONS


ROD HANGER & ADJUSTABLE BUTTERFLY CLIP

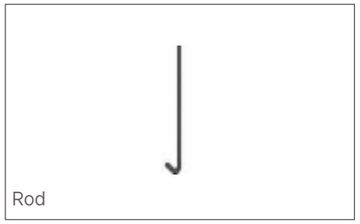
Rod


Butterfly Clip

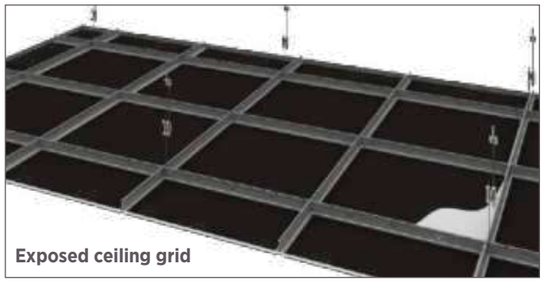


Exposed ceiling grid

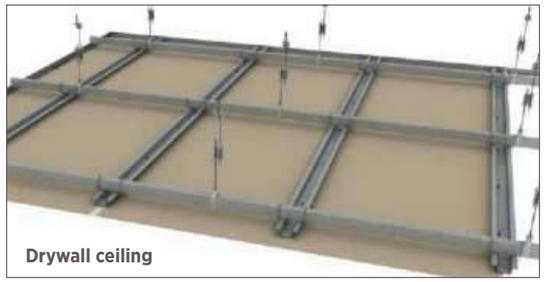
Drywall ceiling

DESCRIPTION

Adjustable rod hanger system consists of top and bottom rod hangers with butterfly adjustment clip. The system is used to hang the suspension systems for the exposed ceiling grid and Drywall ceiling.

MECHANICAL PROPERTIES

Rod Hangers Diameter (mm)	Section Area (mm^2)	Yield Strength (N/mm^2)	Steel Mechanical Properties Tensile Strength (N/mm^2)	Elongation (%)	Coating Weight (gms/m^2)
2.6	5.599	275-300	410.0	21.0	125.0
3.50	9.621	275-300	414.0	21.0	125.0
3.75	11.044	275-300	436.0	21.0	125.0

NUMBER OF HANGERS PER 100 M^2

- Space at 1200 x 1200mm 70 Sets for 100m^2 exposed ceiling grid.
- Space at 1200 x 600mm 140 Sets for 100m^2 exposed ceiling grid.

PACKAGING

- Top and Bottom Hanger 100 Pcs./ Bundle.
- Adjustable Butterfly Clip 500 Pcs./Box.

STORAGE

- Keep away from water dust and fire.
- Protect from corrosive chemicals.

ASTM & CODE STANDARDS

Adjustable Rod Hangers are designed, manufactured and installed in accordance with the requirements of ASTM 510, ASTM C635, ASTM636, ASTM 645 and ASTM E 580 (for seismic installs only)
Butterfly Clips are designed , manufactured and installed in full compliance with BS EN 13964:2014 A1:2006, Corrosion Protection to EN 2081:2008 Class D.

MATERIALS

Rod Hangers:
- Made from Galvanized Carbon Steel Wire
- Zinc Coating by Hot-Dip Process
- Wire Diameter 2.6, 3.5 and 3.75 mm
- Dynamic Load 250 N
- Length 250 mm to 3000 mm

Adjustable Butterfly Clip:
- Stainless Steel SUS 304H 0.50 mm (Gauge 25) thickness
- Size: 18 mm x 30 mm x 55 mm
- Holes Diameter: 4 mm

BEARING ALLOWANCE

Minimum bearing allowance for top and bottom hangers must be 10 mm at both ends.





GREEN BENEFITS AND RECYCLED CONTENT

LEED Credit MR 2 – USG products are manufactured from cold formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
LEED Credit MR 4 – USG's steel products have a minimum of 25.5% post-consumer recycled content, and 6.8% pre-consumer.

GRIDS AND SUSPENSIONS

SPRING T FOR METAL CEILING PANELS

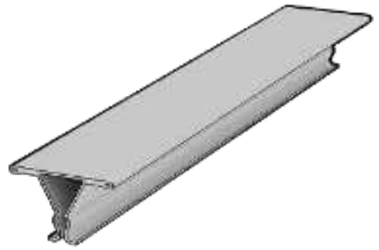



PRODUCT CATEGORY

Spring T Channels are concealed and attached to main primary channels through wire connecting clips. Their main role is to clamp the edge of the ceiling panels tightly at a defined interval.

MATERIAL PROPERTIES

Yield stress, FY 33 ksi Ultimate, with G40-G90 Zinc coating

DIMENSIONS

Thickness: 0.55 and 0.60 mm
Length: 3,000 mm standard
Width: 34 mm
Height: 25 mm

ASTM & CODE STANDARDS

- Spring T Channels are produced to meet or exceed ASTM C635 & ASTM C636
- Galvanized sheet steel meets or exceeds requirements of ASTM A-653

SECTION & MATERIAL PROPERTIES TABLE NOTES

									Steel Mechanical Properties		
Type	Thickness (mm)	Spring T Cross Section Height (mm)	Spring T Depth (mm)	Section Area (mm^2)	Centroid (mm)	Moment of Inertia(Ixx) (mm^4)	Section Modulus (Sx)(mm^3)	Radius of Gyration (mm)	Yield Strength N/mm^2	Tensile Strength N/mm^2	Elongation (%)
Spring T	0.55	25	25	69.3	8.76	5,524.00	315.80	8.93	297-308	366-372	30-31
	0.60		25	75.6	8.76	5,978.00	342.13	8.89	297-308	366-372	30-31

GREEN BENEFITS AND RECYCLED CONTENT


LEED Credit MR 2 – USG products are manufactured from cold formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
LEED Credit MR 4 – USG's steel products have a minimum of 25.5% post-consumer recycled content, and 6.8% pre-consumer.

GRIDS AND SUSPENSIONS
DONN® SUSPENSION SYSTEM LOADINGS

Use of Maximum Allowable Gross Ceiling Weight Charts:

- Determine the maximum allowable ceiling weight for the chosen Main Tee and hanger spacing from Graph.
- Determine the maximum allowable ceiling weight for the chosen Cross Tee spacing from table.
- The maximum allowable gross weight is the lower of the values from step 1 and 2.
- Note that any heavy lighting or other mechanical fixtures should be independently supported.
- Seismic considerations for in-plane loads may take precedence in determining the required section (refer USG ME Representative for details).

MAIN TEE

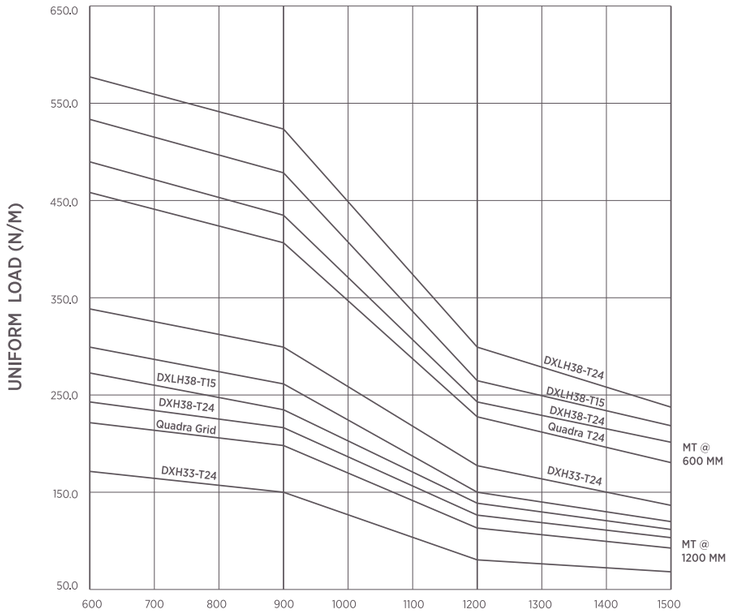

Minimum load carrying capabilities of main runners spaced at 1200mm and 600mm On Center.

DONN® DX Main Tee	Point Load KG hanger spacing - 600mm OC	Point Load KG hanger spacing - 1200mm OC
DX3600H38	15.65	7.9
DX3600H33	10.35	5.5

Point loads are loads that transfer to a Tee at a single point (or several points) over a very small area. The weakest point is assumed to be mid span. The maximum allowable point load is the lesser of either main or cross Tee values.

CROSS TEE

DONN® DX	Cross Tee Spacing	
Cross Tee Type	600mm	1200mm
DX600H25	40	20
DX1200H38	80	40
DX1200H25	40	20

Notes:

- *Values are based on simple span tests in accordance with recognized International Standard ASTM C635. Higher values can often be attained by allowing for the effect of continuous spans, the actual increase being subject to span arrangements.*
- *For cross-nogged configurations e.g.: where a 1200x600 mm panel runs parallel with the main tee, the spacing values should be used as for 1200x1200mm module.*
- *Main tees are based on a 1200mm span, creating a 600x600mm configuration does not significantly increase load carrying limits.*



DONN® SUSPENSION SYSTEM SEISMIC SOLUTIONS

CATEGORIES D, E, AND F CATEGORY C AS PER IBC

Since 1957 DONN® brand suspension systems have set the standard, using the strongest gauge steel to produce the tightest systems available with the greatest lateral and torsional stiffness. Building on this commitment to quality, USG teamed with the University at Buffalo (SUNY), the Department of Civil, Structural and Environmental Engineering – Structural Engineering and Earthquake Simulation Laboratory (SEESL) and the Earthquake Engineering Research Center (EERC) University of California, Berkeley to conduct full-scale seismic testing to evaluate and qualify the seismic performance of these systems. This testing proved that DONN® suspension systems provide a superior code-compliant solution to meeting International Building Code (IBC) requirements, including installations in Categories D, E and F, and Category C. USG is the only manufacturer to team with two separate earthquake engineering laboratories to qualify the performance of our systems.


When seismic requirements are a critical design issue, architects, contractors and building officials can rely on DONN® suspension systems to:

- Meet or exceed all national code requirements with 22mm wall molding.
- Fulfill requirements for IBC seismic design categories C, D, E, and F.
- Provide evidence of compliance (and greatly exceed) ICC Evaluation Service, Inc. (ICC-ES) AC156 and AC368 requirements.
- Offer an aesthetically attractive option to traditional 5mm angle molding.
- Provide approved solutions certified with the maximum m². weights accommodating complete ceilings systems.
- Offer compliant systems tested and verified by two separate earthquake engineering laboratories.
- Offer a seismic clip laboratory-tested to greatly exceed all structural requirements including tension, compression & tee fallout.

SEISMIC QUALIFICATION /SPECIFICATIONS

Seismic testing typically focuses primarily on the suspension system itself. Any ceiling panel can be installed in the test assembly regardless of how little it weighs, and components such as light fixtures and air handling equipment are usually excluded. In practical application, however, the suspension system must support and carry the weight of a fully functional ceiling system, including ceiling panels that can weigh as much as 1kg m²./sq. Therefore, USG tested suspension systems with weights commensurate with those found in real-world installations, including light fixtures and air handling equipment, using a wide variety of the ceiling panels that USG ME offers. Full-scale testing performed at the University at Buffalo (SUNY) the department of Civil, Structural and Environmental Engineering – Structural Engineering and Earthquake Simulation Laboratory (SEESL) and the Earthquake Engineering Research Center (EERC) University of California, Berkeley certifies that USG ME IBC-compliant assemblies are able to accommodate loads commensurate with those found in real-world installations.

Maximum Ceiling System Weight Tested

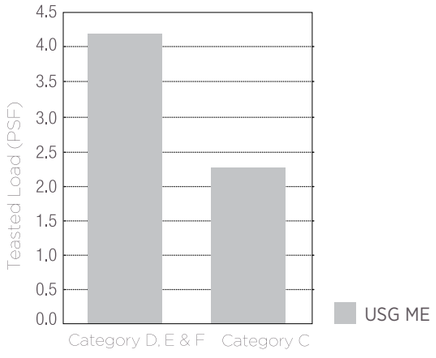


Seismic Design Category

The USG figures presented are based on full-scale testing and evaluation performed at the University at Buffalo (SUNY) the department of Civil, Structural and Environmental Engineering – Structural Engineering and Earthquake Simulation Laboratory (SEESL) and the Earthquake Engineering Research Center (EERC) University of California, Berkeley. Comparative data obtained from public sources includes ICC-ES Reports, product literature and Web sites.

TESTING

A complete range of USG ceiling systems was subjected to various levels of earthquake acceleration levels for the purpose of seismic qualification. The experimental studies were performed in the University at Buffalo (SUNY) the department of Civil, Structural and Environmental Engineering • Structural Engineering and Earthquake Simulation Laboratory (SEESL) and the Earthquake Engineering Research Center (EERC) University of California, Berkeley using an earthquake simulator. System performance was certified to tolerate forces in seismic Categories D, E and F that exceeded the minimum pass criterion of AC156 and AC368 by 42%.

USG ME Exceeds AC156 Test Criteria

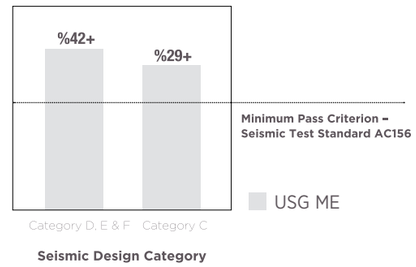

Seismic Design Category

Testing per ICC Evaluation Service, Inc. (ICC-ES) AC156 and AC368:

System Design	Seismic Design Category	Maximum Ceiling System Weight Tested	Allowed Suspension System Load Carrying Capacity	Test Result
System DXL-H	D,E,F	12.2 kg/m²	Heavy Duty	Passed
System DXL-I-C	C	11 kg/m²	Intermediate Duty	Passed

With these certified IBC-compliant assemblies, USG ME is the only manufacturer to offer:

- A seismic system that exceeds the minimum pass criterion of AC156 and AC368 by more than 42%.
- Seismic-system weights commensurate with typical ceiling systems.
- A seismic clip laboratory-tested to greatly exceed all structural and seismic requirements including tension, compression and tee fallout.
- Compliant systems tested and verified by two separate earthquake engineering laboratories.

CODE APPROVAL

Testing and evaluation performed at the University at Buffalo (SUNY), the Department of Civil, Structural and Environmental Engineering – Structural Engineering and Earthquake Simulation Laboratory (SEESL) and the Earthquake Engineering Research Center (EERC) University of California, Berkeley qualify the performance of these systems according to the AC156 – Seismic Qualification Specification, and AC368 – Acceptance Criteria for Suspended Ceiling Framing Systems. Several alternative materials, designs and methods of construction were evaluated and tested. Results of this investigation indicate that these tested alternative designs are at least the equivalent of that prescribed in the code for quality, strength, effectiveness, fire resistance, durability and safety. The data and test results presented provide technical evidence on which a code official can base approval. Construction details for these systems are shown on the following pages.

DONN® SUSPENSION SYSTEM SEISMIC SOLUTIONS

CATEGORIES D, E, AND F CATEGORY C AS PER IBC

SEISMIC TEST RESULTS

System Design	System DXL-H	System DXL-I-C
Seismic Category	D, E, F	D, E, F
Suspension System	DONN® double-web, galvanized steel meeting or hot-dipped exceeding ASTM C635	DONN® double-web, hot-dipped galvanized steel meeting or exceeding ASTM C635
Duty rating	Heavy Duty	Heavy Duty
Wall molding	22mm	22mm
Seismic Clip	ACM7	ACM7
Shake Table	Six degrees of freedom	Six degrees of freedom
Test Protocol	Simulated earthquake	Simulated earthquake
Qualification	AC156 and AC368	AC156 and AC368
Result	Passed	Passed
Minimum Acceleration Requirement	Exceeds by 42%	Exceeds by 42%
Two Adjacent Floating Sides – With Gap	Fastener attachment to tee through slot optional), no fastener through wall molding	Fastener attachment to tee through slot optional), no fastener through wall molding
Two Adjacent Fixed Sides – Tight, No Gap	Fastener attachment to tee (optional), one fastener through wall molding (optional)	Fastener attachment to tee (optional), one fastener through wall molding (optional)
Perimeter Wires	Yes	Yes
Stabilizer Bars	No	No
System Weight	12.2kg/m²	12.2kg/m²

Convenience holes located in the tee bulb may be used for any and all hanger wires. Load tests performed on 12-gauge hanger wires through convenience holes found the failure to be in excess of 180kg. This far exceeds the required 90kg. The performance of DONN® seismic systems is based on the specific combination of superior components, and design and installation methods shown. Components from other manufacturers were not evaluated, and their use or any mixed use is not recommended.

SYSTEMS SUMMARY

	Category D,E,F Alternate Seismic Application	Standard Seismic Application
	DXL-H	
	Heavy Duty DXL-H System 22mm Molding	**Heavy Duty System 5mm Molding**
Suspension System Duty Rating	Heavy	Heavy
Wall Molding	22mm	5mm
Seismic Clip	ACM7	None
Two Adjacent Floating Sides – With Gap	ACM7 seismic clip with fastener attachment to tee through slot (optional), and no fastener through wall molding	No attachment of tee to molding
Two Adjacent Fixed Sides – Tight, No Gap0	ACM7 seismic clip with fastener attachment to tee (optional), and one fastener through wall molding (optional)	Pop-rivet attachment of tee to molding
Perimeter Hanger Wires	Yes	Yes
Stabilizer Bars	None	Yes

	Category C Alternate Seismic Application	Standard Seismic Application
	DXL-I-C	
	intermediate Duty System 22mm Molding	**Intermediate Duty System 22mm Molding, Stabilizer Bars**
Suspension System Duty Rating	Heavy	Heavy
Wall Molding	22mm	5mm
Seismic Clip	ACM7	None (unless utilized in lieu of stabilizer bar)
Two Adjacent Floating Sides – With Gap	ACM7 seismic clip with fastener attachment to tee through slot (optional), and no fastener through wall molding	No attachment of tee to molding
Two Adjacent Fixed Sides – Tight, No Gap0	ACM7 seismic clip with fastener attachment to tee (optional), and one fastener through wall molding (optional)	Pop-rivet attachment of tee to molding
Perimeter Hanger Wires	Yes	None
Stabilizer Bars	None	Yes

Convenience holes located in the tee bulb may be used for any and all hanger wires. Load tests performed on 12-gauge hanger wires through convenience holes found the failure to be in excess of 180kg. This far exceeds the required 90kg. The performance of DONN® seismic systems is based on the specific combination of superior components, and design and installation methods shown. Components from other manufacturers were not evaluated, and their use or any mixed use is not recommended.


DONN® SUSPENSION SYSTEM SEISMIC SOLUTIONS

CATEGORIES D, E, AND F CATEGORY C AS PER IBC

SYSTEM SUMMARY

Suspension System Duty Rating	Heavy
Wall Molding	22mm
Seismic Clip	ACM7
Two Adjacent Floating Sides – With Gap	3/49 gap; ACM7 seismic clip with fastener attachment to tee through slot (optional), and no fastener through wall molding.
Two Adjacent Fixed Sides – Tight, No Gap	Tight, no gap; ACM7 seismic clip with fastener attachment to tee (optional), and one fastener through wall molding (optional)
Perimeter Hanger Wires	Yes
Stabilizer Bars	None

CONSTRUCTION DETAILS

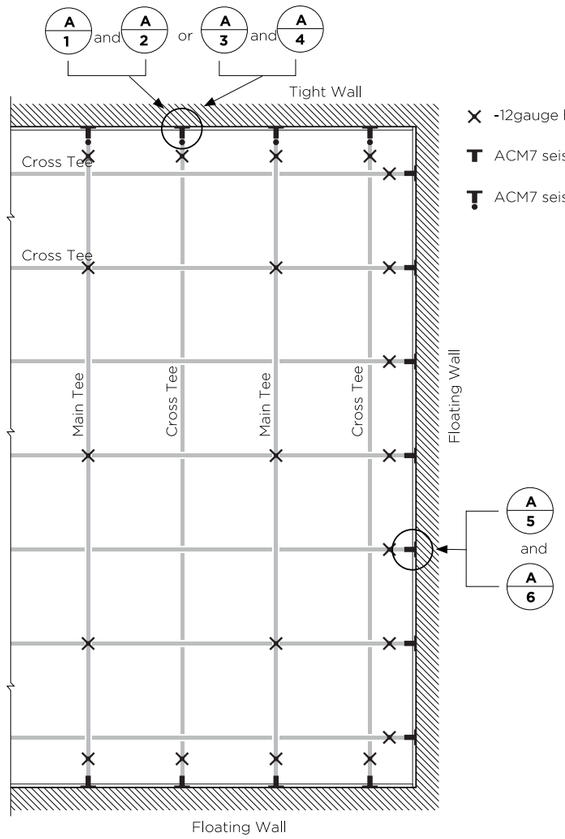

- ✕ -12gauge hanger wire
- T ACM7 seismic clip
- T ACM7 seismic clip or riveted

All main DONN® suspension systems – DX/DXL, Fineline DXF, Fineline 1/8 DXFF, Centricitee DXT/DXLT, CE, DXW, DXLA, and ZXLA – include the Code compliment and heavy-duty main tees for Seismic
Design Categories D, E, and F.


For ceiling areas exceeding (232 m²), a seismic separation joint may be required. See SC2496 for information on seismic separation joints.

The performance of DONN® seismic systems is based on the specific combination of superior components, and design and installation methods shown. Components from other manufacturers were not evaluated, and their use or any mixed use is not recommended.


Convenience holes located in the tee bulb may be used for any and all hanger wires.

ACM7 CLIP, TIGHT WALL


A 1

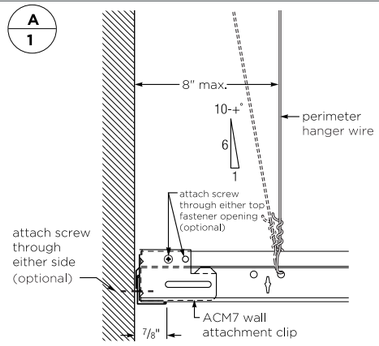


A 2

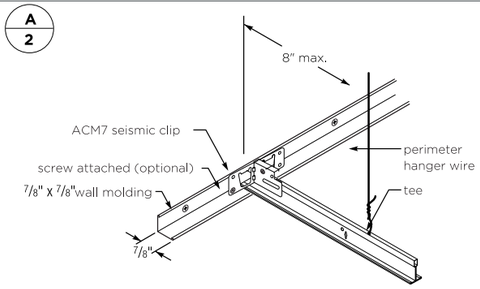


A 3

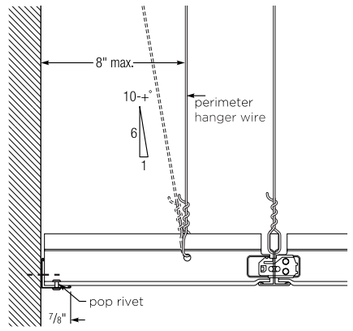


A 4

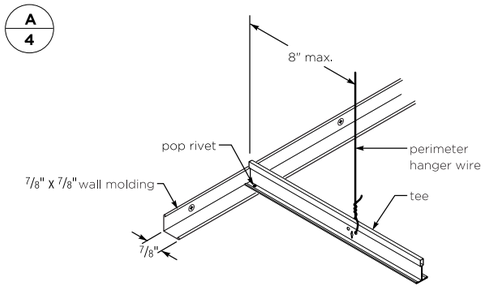

A 5



A 6

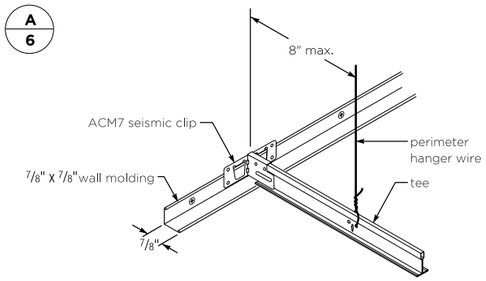


DONN® SUSPENSION SYSTEM SEISMIC SOLUTIONS

CATEGORIES D, E, AND F CATEGORY C AS PER IBC

SYSTEM SUMMARY

Suspension System Duty Rating	Heavy
Wall Molding	5mm
Seismic Clip	ACM7
Two Adjacent Floating Sides – With Gap	None (unless utilized in lieu of stabilizer bars)
Two Adjacent Fixed Sides – Tight, No Gap	19mm gap; no attachment of tee to molding
Perimeter Hanger Wires	Yes
Stabilizer Bars	Yes

CONSTRUCTION DETAILS

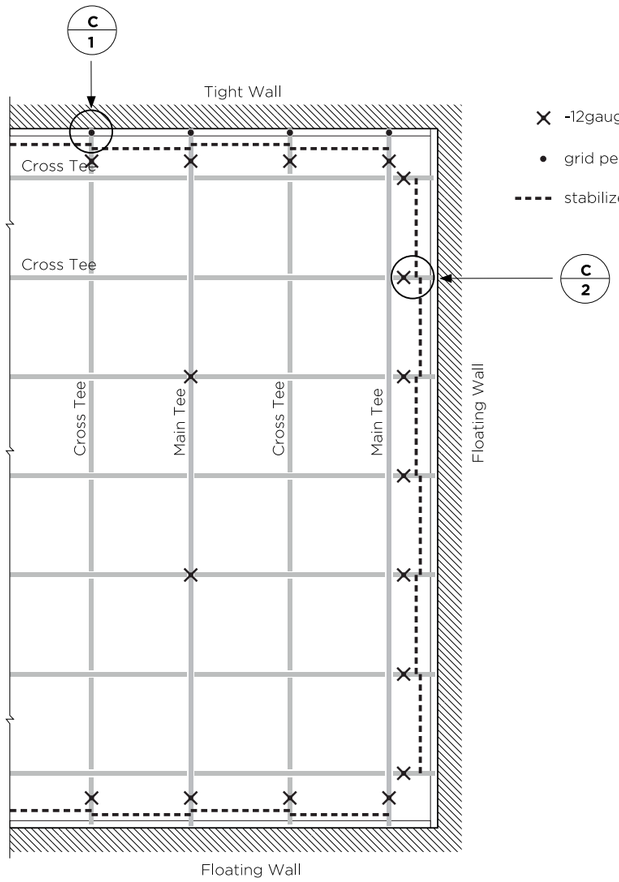

- ✕ -12gauge hanger wire
- • grid perimeter riveted
- ---- stabilizer bar

All main DONN® suspension systems – DX/DXL, Fineline DXF, Fineline 1/8 DXFF, Centricitee DXT/DXLT, CE, DXW, DXLA, and ZXLA – include the Code compliment heavy-duty main tees for Seismic Design Categories D, E, and F.


For ceiling areas exceeding 232 m², a seismic separation joint may be required. See SC2496 for information on seismic separation joints.

The performance of DONN® seismic systems is based on the specific combination of superior components, and design and installation methods shown. Components from other manufacturers were not evaluated, and their use or any mixed use is not recommended.


Convenience holes located in the tee bulb may be used for any and all hanger wires.

ACM7 CLIP, TIGHT WALL

Pop Rivet, Tight Wall

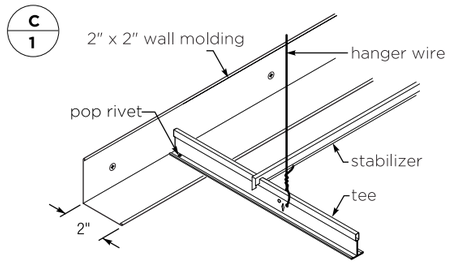


Tee Unattached, Floating Wall

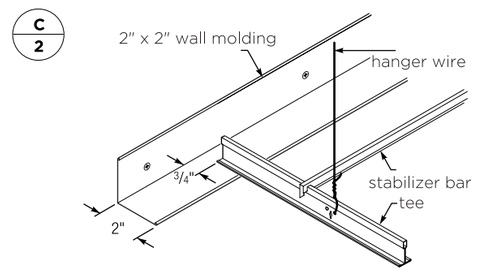

5MM SEISMIC SHADOW MOLDING


With a 19mm reveal located by the wall to disguise its width, 5mm shadow molding provides an aesthetically pleasing option to traditional 5mm seismic molding. Designed for use with 24mm exposed DONN® DX/DXL suspension systems, this seismic shadow molding meets or exceeds all national code requirements and fulfills requirements for Seismic Design Categories D, E, and F.

MS274

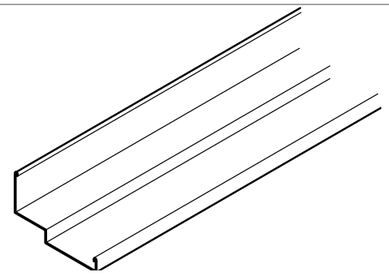


Preformed corners are available, eliminating the need to miter this molding.


Profile

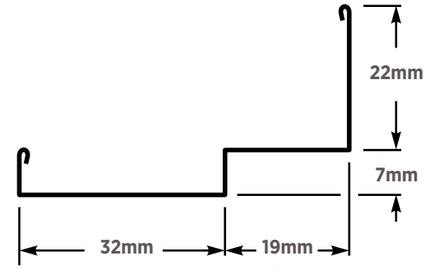

Inside Corner Molding



Outside Corner Molding



For more information about the MS274 5mm seismic shadow molding, see Seismic Mold data sheet (AC3184) or Ceiling Systems catalogue (SC2000).


CATEGORY C ALTERNATE SEISMIC APPLICATION

INTERMEDIATE DUTY DXL-I-C SYSTEM 22MM MOLDING

SYSTEM SUMMARY

Suspension System Duty Rating	Intermediate
Wall Molding	22mm
Seismic Clip	ACM7
Two Adjacent Floating Sides – With Gap	ACM7 seismic clip with fastener attachment to tee through slot (optional), and one fastener through wall molding (optional).
Two Adjacent Fixed Sides – Tight, No Gap	Tight, no gap; pop-rivet attachment of tee to molding
Perimeter Hanger Wires	None
Stabilizer Bars	None


CONSTRUCTION DETAILS

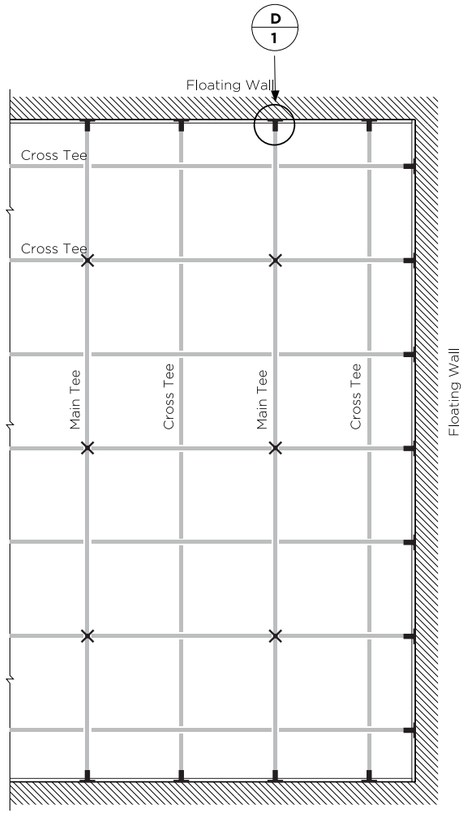

-12gauge hanger wire

ACM7 seismic clip

ACM 7 CLIP, FLOATING WALLS

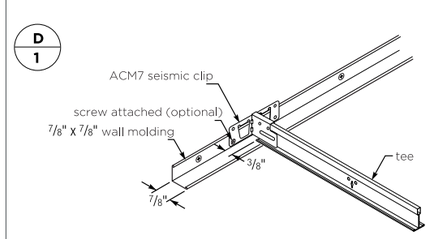

All main DONN® suspension systems – DX/DXL, Fineline DXF, Fineline 1/8 DXFF, Centricitee DXT/DXLT, CE, DXW, DXLA, and ZXLA – include the Code compliment intermediate-duty main tees for Seismic Design Categories A, B and C.

The performance of DONN® seismic systems is based on the specific combination of superior components, and design and installation methods shown. Components from other manufacturers were not evaluated, and their use or any mixed use is not recommended.

Convenience holes located in the tee bulb may be used for any and all hanger wires.
Alternate Seismic Application


CATEGORY C ALTERNATE SEISMIC APPLICATION

INTERMEDIATE DUTY SYSTEM 22MM MOLDING, STABILIZER BARS

SYSTEM SUMMARY

Suspension System Duty Rating	Intermediate
Wall Molding	22mm
Seismic Clip	None
Floating Sides	10mm gap; no attachment of tee to molding
Perimeter Hanger Wires	None
Stabilizer Bars	Yes

CONSTRUCTION DETAILS

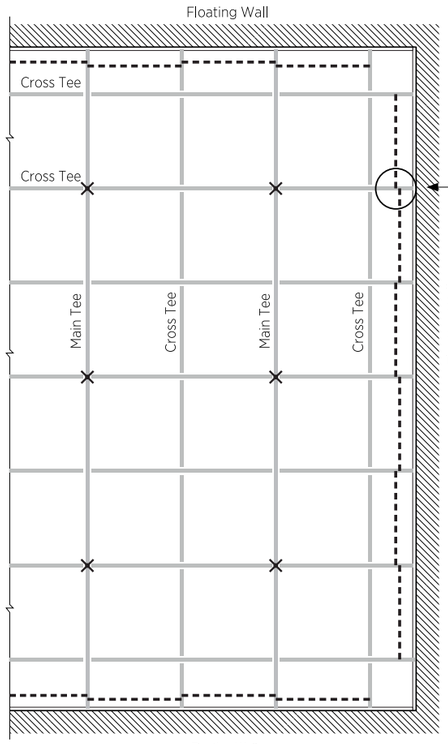


-12gauge hanger wire

stabilizer bar



ACM 7 CLIP, FLOATING WALLS

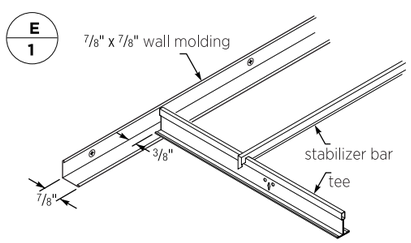

All main DONN® suspension systems – DX/DXL, Fineline DXF, Fineline 1/8 DXFF, Centricitee DXT/DXLT, CE, DXW, DXLA, and ZXLA – include the Code compliment intermediate-duty main tees for Seismic Design Categories A, B and C.

The performance of DONN® seismic systems is based on the specific combination of superior components, and design and installation methods shown. Components from other manufacturers were not evaluated, and their use or any mixed use is not recommended.

Convenience holes located in the tee bulb may be used for any and all hanger wires.
Standard Seismic Application

CEILING ASSETS:
WHERE EVERY DETAIL IS AN ASSET

12



> ***LEARN MORE ABOUT USG MIDDLE EAST'S CEILING ASSETS, DESIGNED FOR SUSTAINABILITY, FIRE SAFETY, HEALTHCARE COMPLIANCE, AND ACOUSTIC PERFECTION, CREATING REMARKABLE SPACES.***

A detailed curation of sustainable, fire-rated, and healthcare-compliant solutions aligned with acoustical excellence. Navigate into the intricate details of acoustical ceiling edge designs, which are proof of our commitment to perfecting the auditory environment. Uncover our installation procedures, which are made for efficiency and precision, ensuring seamless integration. Reveal the vast palette of finishes and colors, providing a spectrum for every design vision. With sustainability at our core, every asset reflects our dedication to creating spaces that are not just aesthetically pleasing but also environmentally responsible. Improve your ceilings with USG Middle East, where every detail is an asset, contributing to spaces that resonate with excellence, safety, and sustainability.







COMPLIANCE

1. SUSTAINABLE CEILINGS
2. ACOUSTICAL PERFORMANCE
3. SAFE SYSTEMS

4. ACOUSTICAL CEILING EDGE DETAILS



MODULAR CEILING INSTALLATION PROCEDURE

5. LAY-IN
6. CLIP-IN
7. D-BESK CONCEALED
8. S-BESK CONCEALED













FINISHES & PERFORATION

9 SKYROCK® SOUNDBLOCK
10 CELEBRETTO®

01



GREAT SOLUTIONS START FROM HERE

SUSTAINABLE CEILINGS

GREEN MANUFACTURING

Flexible and scalable production options with quicker delivery time. Our regional manufacturing facilities reduce supply chain costs, energy consumption, and transportation. USG ME is an excellent source of ceiling solutions for the regional community, helping the environment with fewer emissions and energy usage. We care about the earth: we provide green & sustainable products.

ENVIRONMENTAL PRODUCT DECLARATION

The Environmental Product Declaration (EPD) relies on the assessment tool—following ISO series 14040—to provide information on several environmental impacts of a product over its life cycle. EPDs facilitate business transactions with clients focused on sustainable environmental practices.

Since adhering to the ISO series 14040, we have improved our goals for sustainability and demonstrated our commitment to sound environmental practices and our customers.

GREENGUARD

GREENGUARD Certification Program is for Products that have scientifically been proven to meet many of the world's most rigorous third-party chemical emissions standards, helping to improve indoor air quality. Choosing products with GREENGUARD Certification creates a healthier indoor environment for your home, office, or institution and reduces chemical exposure. USG Middle East's Ceiling Systems are certified as GREENGUARD Gold per the UL 2818 – 2013 Gold Standard for Chemical Emissions for Building Materials, Finishes, and Furnishings.

HIGH RECYCLED CONTENT

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per Federal Trade Commission Environmental Marketing Guides (FTC guidelines).

Most USG Middle East's Mineral Fiber products can be produced with HRC formulas for optimized recycled content to help maximize LEED® recycled content contribution.


THERMAL RESISTANCE

Thermal Resistance is a material's Resistance to the flow of heat. For insulation purposes, high "R" values are the most desirable. The R-value is measured at an average temperature of 24°C (75°F) for each panel. The R-value of our ceiling panels is a combination of thermal conductivity, measured according to norms EN12667 & ASTM C518, and the thickness of the material.

The thermal conductivity of our Mineral Fiber Materials wet felted is up to λ =0.057 W/mK, λ = 0.034 W/mK for our glasswool base materials, λ = 0.036 W/mK for our Stonewool base materials, and λ = 0.066 W/mK for our Skynest® Woodwool base materials. The smaller the λ-value, the better the thermal insulation of the material.

The U-value (Thermal Transmittance) is the inverse of the R-value (Thermal Resistance). However, the U-value considers the whole system to evaluate heat loss and should not be calculated as a single component.

We produce and promote ceiling systems to help enhance thermal resistance performance, reducing overall energy consumption and optimizing the LEED® contribution.

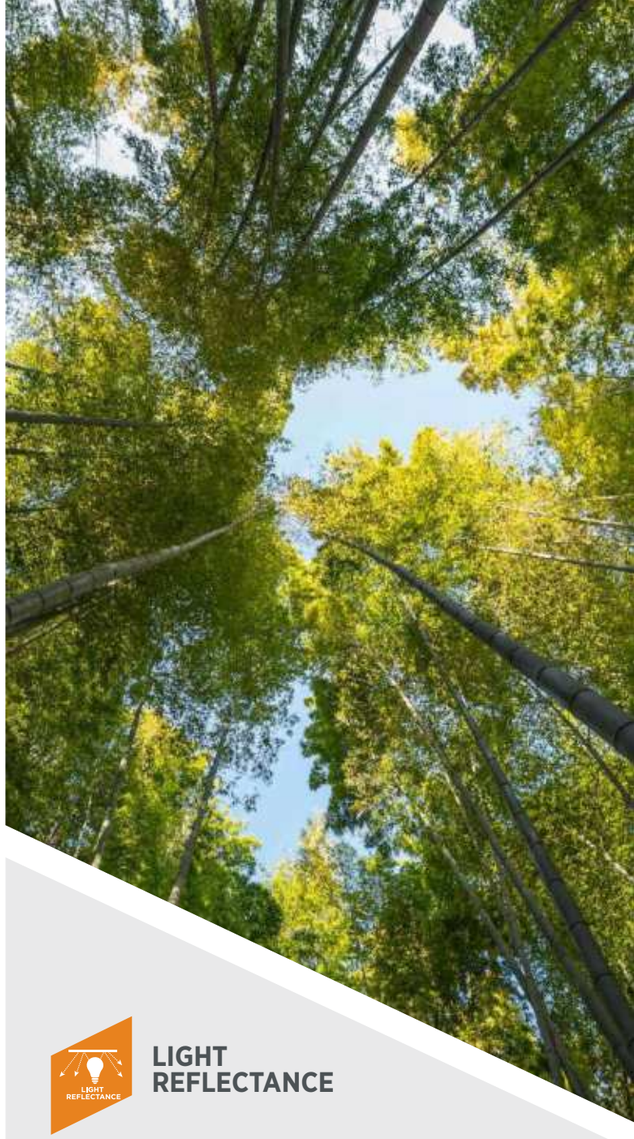


LIGHT REFLECTANCE

Ceiling systems are a key element of energy conservation. A well-designed ceiling with high light reflectance improves space illumination, which means fewer light fixtures, reduced electrical light output, lower maintenance costs, and reduced cooling costs. Ceilings with high light reflectance, which reflect up to 90% of the light back into space, can reduce energy consumption by up to 20%.

CERTIFIED FOR FSC AND PEFC

The Forest Stewardship Council (FSC) and The Programme for the Endorsement of Forest Certification (PEFC) set standards for responsible forest management. The FSC and PEFC aim to protect forests for future generations by ensuring sustainable harvest levels and regeneration after harvest, as well as through conservation initiatives that protect biodiversity, soil, and water quality. USG Middle East Wood Wool systems are FSC and PEFC certified.

02

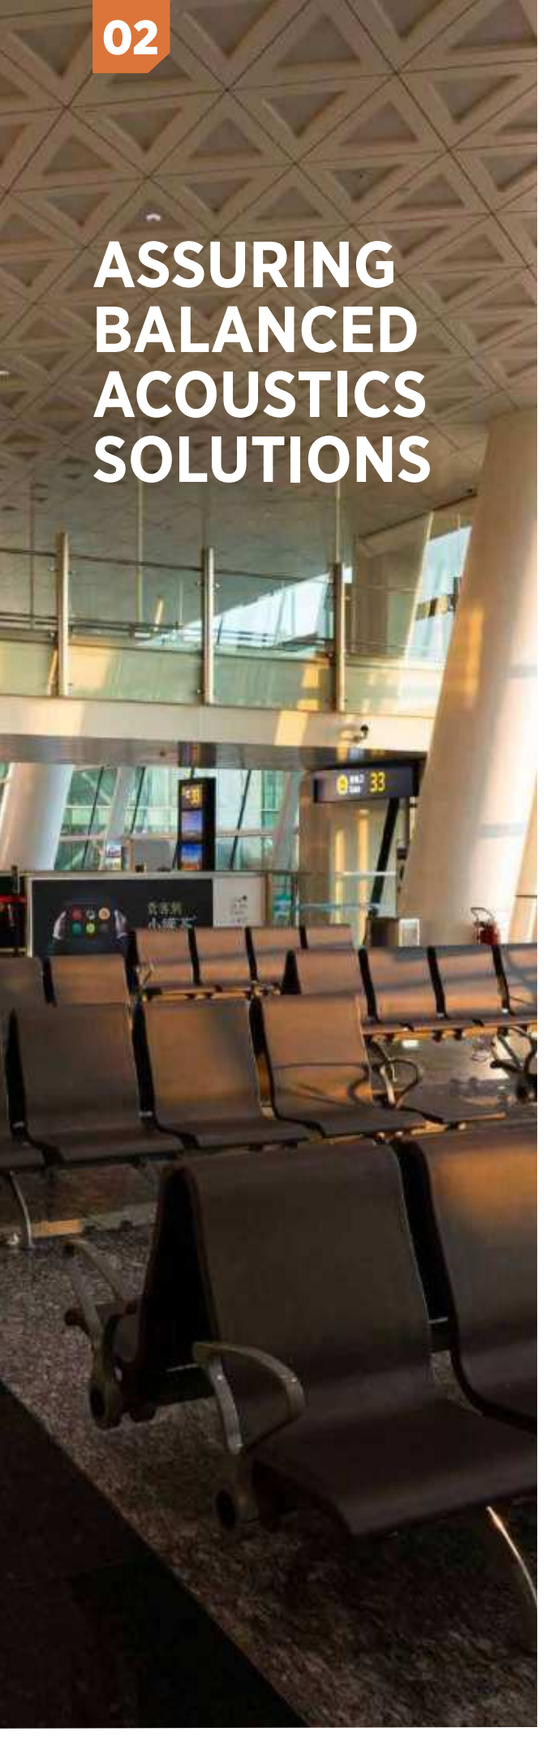

ASSURING BALANCED ACOUSTICS SOLUTIONS

ACOUSTICAL PERFORMANCE

A unique acoustic design is needed to create a suitable space for certain planned functions. There are two sound-related factors to consider when designing a building:

- Choose quiet equipment (e.g., elevators, pumps, heating and ventilation equipment).
- Reduce sound in the building using room acoustics and sound insulation.

It is essential to distinguish the terms sound insulation and sound absorption.

The sound may be absorbed, transmitted, or reflected. If a room's boundary—such as a roof, floor, or wall—is hit by a sound wave, some of the sound's energy will be reflected, some will be absorbed, and some will be transmitted through it.


The proportion reflected, absorbed, or transmitted depends on the shape of the material hit by the sound wave and the sound frequency. Based on this, three acoustical parameters can be defined.

- Absorption coefficient,α_w = (absorbed sound + transmitted sound)/(incident sound)
- Reflection coefficient, α_R = (reflected sound)/(incident sound)
- Transmission coefficient, α_T = (transmitted sound)/ (incident sound)

SOUND ABSORPTION (NRC, αw)

Noise Reduction Coefficient (NRC and αw) measures sound absorption.

0.70 means the material absorbs 70% of sound waves transmitted to the ceiling panel. This is important to consider when planning acoustics within a confined area. NRC tests are conducted according to ASTM C423, which is the Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method.



αw	Sound Absorption Class
0.90-1.0	A
0.80-0.85	B
0.60-0.75	C
0.30-0.55	D
0.15-0.25	E
0.00-0.10	Not classified

CEILING ATTENUATION CLASS (CAC, Dnfw)

Ceiling Attenuation Class (CAC) and Double Pass Sound Attenuation (Dnfw) apply to the sound attenuation of acoustical ceilings with a shared plenum between horizontally adjacent spaces and a common void above them.

A value of under 25dB is considered low, while a value of 35dB and above is exceptional. CAC tests are conducted per ASTM E1414 and classified per ASTM E413—the Standard Test Method for Airborne Sound Attenuation between rooms sharing a common ceiling plenum. ASTM E413 is a classification for rating Sound Insulation.

SOUND TRANSMISSION CLASS (STC) WEIGHTED SOUND REDUCTION INDEX (Rw)

Rw and STC are widely used to measure the level of sound-insulating abilities of walls, floors, windows, and doors. They are expressed in decibels (dB). The higher Rw or STC figures, the better the sound isolation.



REVERBERATION TIME

The length of time sound reverberates within a space indicates how long acoustic energy remains in it. It is usually defined as the time for the acoustic intensity to decrease by a factor of one million.

Sound absorption is directly related to reverberation time and is calculated using a formula called the Sabine formula. Reverberation time is dependent on the size and shape of the space and the amount, quality, and positioning of absorbing surfaces within the space. The more sound absorption in the room, the lower the reverberation time will be.





ADVANCED SOLUTIONS TO PROTECT YOU

SAFE SYSTEMS

FIRECODE

Flame Spread Classification
Interior wall and ceiling materials are classified in accordance with ASTM E84 or UL 723. Such interior finishing materials are grouped according to their flame spread and smoke-development indexes.

Classification	Flame Spread Index (FSI)	Smoke Development Index (SD)
Class 1 or A	0-25	450 maximum
Class 2 or B	26-75	450 maximum
Class 3 or C	76-200	450 maximum

Reaction To Fire Classification
The material reaction to fire is defined by Euro classes A1 to F. Classification is based on the tendency of a material to avoid flashover or promote flashover. Non-combustible materials and products (A1 and A2) will not cause flashover.
USG ME Mineral Fiber products are classified in Euro class A2-s1, d0 (as per EN ISO 13501-1 classification), which means they do not contribute to fire. The reaction to fire performance is tested in accordance with EN 13501-1:2007+A1: 2009.

Fire Behavior	Example	Smoke Production	Flaming Droplets
A1, A2	Mineral Fiber, Stonewool, Mineral Wool, Gypsum board	s1 (least smoke)	d0 (no burning droplets)
B	Painted gypsum board		
C	Gypsum board with wallpaper	s2	d1
D	Wood	s3	d2
E	Fire-retardant EPS		
F	Non-tested materials, EPS		

A2 s1 d0
1 2 3

1. Main class
2. Smoke production
3. Occurrence of flaming droplets/particles

Fire Resistance
Fire separating elements, such as fire walls and floor structures, are tested and evaluated in accordance with ASTM E 119 (Fire Tests of Building Construction and Materials).

ASTM E119 is an assembly test, not a product test carried out in full scale. The Fire-Resistance Rating of a Ceiling Assembly (ANSI UL 263 – ASTM E119 and NFPA 251) represents the degree to which (measured in hours) the entire assembly, not individual components, withstands fire and high temperatures.

ENVIRONMENTAL AIR QUALITY

USG ME's ceiling panels do not contain asbestos, carcinogens, mutagens, or toxic substances.

Our ceiling products are classified and certified to have low impact on indoor air quality. Even when installed in a fully furnished room with little fresh air, the concentration of VOCs and Formaldehyde are well below accepted standards.



HEALTHCARE

Our ceiling panels support healthy environments in all healthcare facilities according to the most stringent international standards:

Antibacterial Coating
Antimicrobial coating will provide lasting protection against microbes, harmful bacteria, mold, and fungus—ultimately helping to minimize stains, bad odors, and material degradation. Antimicrobial coating is more durable and lasts longer by making your ceiling systems less susceptible to mold growth and associated odors.

Clean Room Classification*
We provide ceiling panels Classified as Clean Room ISO 4 and ISO 5 as per ISO 14644-1


Water Absorbance
As per a project request, we provide a layer of absorbent material on our ceiling panels to resist a moderate amount of dripping water for up to 2 hours.

FGI Guidelines
The Facility Guidelines Institute (FGI) is a non-profit organization that works to develop guidelines for designing and building hospitals and other healthcare facilities.
USG Middle East has developed a selected ceiling systems that follow the latest FGI requirements.

Mold Prevention
Almost all of USG Middle East's ceiling panels are rated a 10 as per the ASTM D3273 scale for mold prevention applications.


*** Clean Room™ Classification**

FED STD 209D/209E		ISO 14644-1	Industry Application Areas			
English	**Metric**	**ISO Class**				
-	-	1				
-	-	2				
1	M1.5	3	**Micro-electronics**			
10	M2.5	4				
100	M3.5	5		**Pharmaceutical**		
1,000	M4.5	6			**Electronics and Food**	
10,000	M5.5	7				**Automotive and Space**
100,000	M6.5	8				
-	-	9				

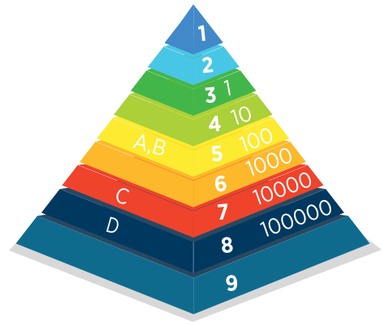


EDGE DETAILS


SQ Edge



SLT Edge




FL Edge




PEDESTAL Edge




SL Edge




FLB Edge




Concealed
BESK Edge



Concealed
S-BESK Edge



Concealed
D-BESK Edge



ACOUSTICAL CEILING TILE EDGE DETAILS



DONN® and Quadra are the most widely specified grids in Middle East. They include a wide range of profiles and colors and are fully compatible with all USG ME ceiling tiles as well as most third party brands. Precision design and quality manufacturing ensure both structural and aesthetic integrity in all ceiling designs.

USG ME offers the following suspension system and edge detail options. Select a suspension system and match it with a corresponding panel edge detail, or vice versa, to assure proper system fit and assembly.

EDGE DETAIL / GRID SYSTEM	SQ Edge	SLT Edge	SL Edge	FLB Edge	FL Edge	Pedestal	Concealed BESK Edge	Concealed S-BESK Edge	Concealed D-BESK Edge
DX®/DXL™ T24 QUADRA	●	●	●						
DX®/DXH™ 33 T24	●	●	●						
DX®/DXH™ 38 T24	●	●	●				●	●	●
DX®/DXL™ T24 FIRE RATED	●	●	●				●	●	●
DX®/DXL™ T15 CENTRICITEE	●			●	●	●			
AX™/AXCE™	●			●	●				
CE™	●								
FINELINE® DXF™/DXLF™				●	●				
IDENTITEE® DXI™				●	●				
DONN® CONCEALED T,Z								●	●
DONN CONCEALED C,L							●		

05


MODULAR CEILING INSTALLATION
LAY-IN

LAY-IN CEILING INSTALLATION PROCEDURE


The appearance of a suspended acoustical ceiling depends on the materials used and on the quality of the installation. USG ME manufactures components to meet ASTM C635, assuring that the material, structural, and quality standards are as prescribed. Install according to ASTM C636, ASTM E580, and USG ME requirements, assuring proper level and secure attachment as prescribed. To ensure an impeccable installation, it's imperative to maintain the cleanliness and dryness of the ceiling elements during transportation and storage and to have a flat, level surface to prevent any potential damage. It's important to note that USG ME tiles should only be installed once all plaster and screed work is completed.




COMPONENTS

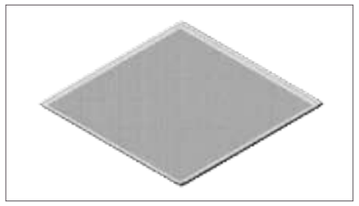

Ceiling Tile

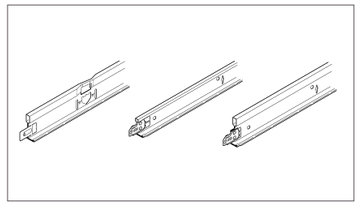

Main Tee, Long Cross Tee, Short Cross Tee

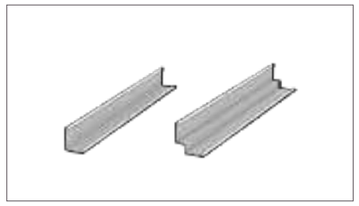


Perimeter Wall Angle (Shadowline Wall Angle, L Angle)

HANGING OPTIONS



Adjustable Hanger



Suspension Wire



Angle Section



Hanging Bracket

INSTALLATION





Measure the room & determine the reflected ceiling plan along with the visual layout for the ceiling. Start the layout from the room center, progressing in modules toward the perimeter based on the tile size as shown in figures 4.1 & 4.2.



Secure the perimeter wall angle at the specified ceiling height.

Ensure that none of the cut tiles at the perimeter are smaller than half the tile width or length to maintain an aesthetically pleasing appearance. You might need to move the grid by ½ module size to ensure this arrangement.

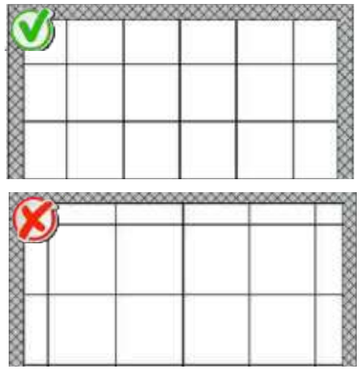


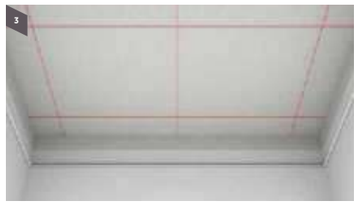


Mark and install hangers for the main profiles on the soffit according to the predetermined reflected ceiling plan spacing maximum at 1200 mm o.c using a laser for accuracy.



Fix hangers at 1200 mm o.c, requiring a minimum hanger height of 100 mm to facilitate tile installation.

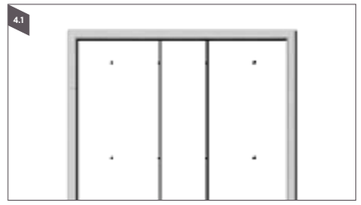

Start the layout from the center.

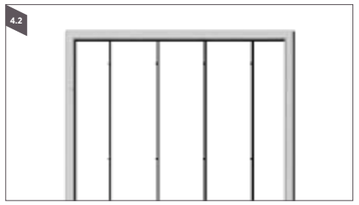

Progressing in modules towards the perimeter.



Fix the main tee at 1200 mm spacing and lay it on the wall angle.




Insert the long cross tee to the main tee in place at 600 mm spacing.




Insert the short cross tee to long tee in place.




Install the ceiling tile




DONN® brand audible click



L-angle



Grid installation at the Shadowline Wall Angel top leg for tapered tile edge



Grid installation at the Shadowline Wall Angel bottom leg for square tile edge

06


MODULAR CEILING INSTALLATION
CLIP-IN

CLIP-IN CEILING INSTALLATION PROCEDURE

The appearance of a suspended acoustical ceiling depends on the materials used and on the quality of the installation. USG ME manufactures components to meet ASTM C636, 2006 IBC (2007 CBC), CISCA Ceiling Systems Handbook (UL Design), and any applicable code requirement, assuring that the material, structural, and quality standards are as prescribed. Install according to ASTM C636, ASTM E580, and USG requirements, assuring proper level and secure attachment as prescribed. To ensure an impeccable installation, it's imperative to maintain the cleanliness and dryness of the ceiling elements during transportation and storage and to have a flat, level surface to prevent any potential damage. It's important to note that USG ME tiles should only be installed once all plaster and screed work is completed.



COMPONENTS

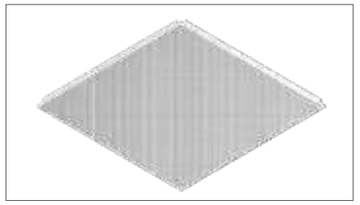

Ceiling Tile



Spring Tee



Primary Channel



Wire Connecting Clip- WCC

HANGING OPTIONS



Adjustable Hanger



Suspension Wire



Angle Section



Hanging Bracket


INSTALLATION




Measure the room & determine the reflected ceiling plan along with the visual layout for the ceiling. Start the layout from the room center, progressing in modules toward the perimeter based on the tile size as shown in figures 4.1 & 4.2.



Secure the perimeter wall angle at the specified ceiling height.

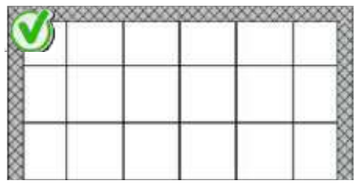

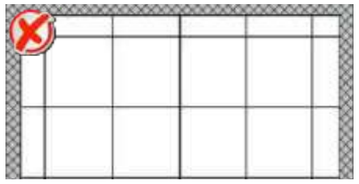


Ensure that none of the cut tiles at the perimeter are smaller than half the tile width or length to maintain an aesthetically pleasing appearance. You might need to move the grid by ½ module size to ensure this arrangement.




Mark and install hangers for the main profiles on the soffit according to the predetermined reflected ceiling plan spacing maximum at 1200 mm o.c using a laser for accuracy.



Fix hangers at 1200 mm o.c, requiring a minimum hanger height of 100 mm to facilitate tile installation.

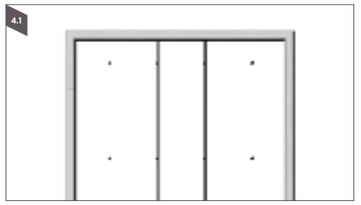

Start the layout from the center.

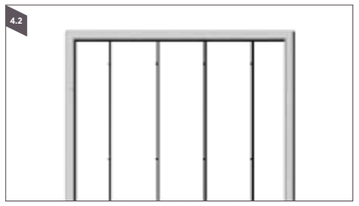


Progressing in modules towards the perimeter.



Fix the primary channel at 1200 mm spacing




Hang the wire connecting clip WCC to the primary channel

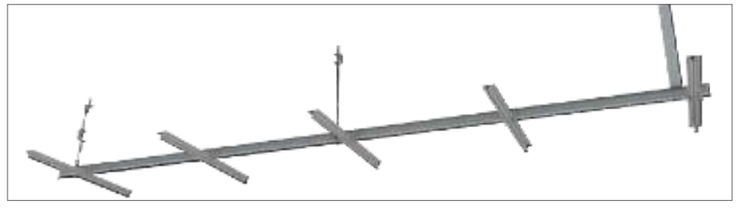



Connect the spring tee to the primary channel at 600 spacing using wire connecting clip WCC

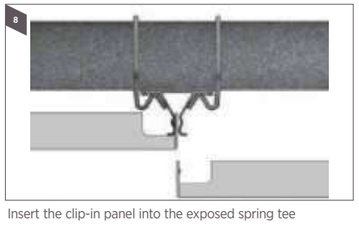

Insert the clip-in panel into the exposed spring tee



Important Tips:

- Ensure that the ceiling grid is level and straight throughout the installation process.
- Always use safety gear such as gloves and eye protection when handling the metal ceiling components.
- Cut the metal ceiling panels with the appropriate tools to ensure clean cuts and prevent damage to the panels.
- Do not apply excessive force when inserting the clip in the panel as this may cause damage to the ceiling components.

07


MODULAR CEILING INSTALLATION
D-BESK CONCEALED

D-BESK CONCEALED CEILING INSTALLATION PROCEDURE


The D-BESK concealed system boasts a sleek, monolithic aesthetic achieved through concealed ceiling profiles. Ceiling tiles are a demountable option that caters to various construction preferences. Depending on specific needs, the ceiling void can be made retrospectively accessible or permanently sealed. Every USG ME's D-BESK concealed system component is designed for individual demounting. To ensure an impeccable installation, it's imperative to maintain the cleanliness and dryness of the ceiling elements during transportation and storage and to have a flat, level surface to prevent any potential damage. It's important to note that USG ME tiles should only be installed once all plaster and screed work is completed.



D-BESK CONCEALED MINERAL FIBER

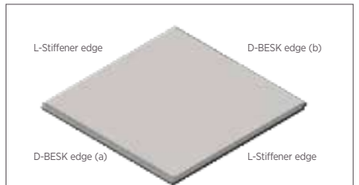


Top view

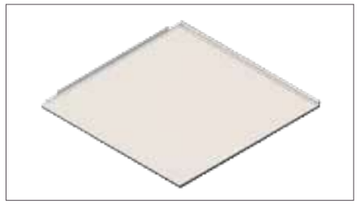

Bottom view: To preserve tile stability and prevent warping, fix L-Stiffener inside the mineral fiber slot.

D-BESK CONCEALED SOFT FIBER

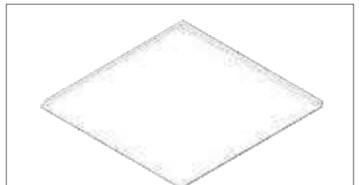

Top view




D-BESK concealed section.

CONCEALED GYPSUM TILE




Top view

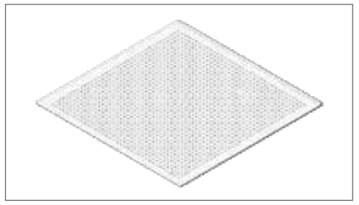

Bottom view


COMPONENTS

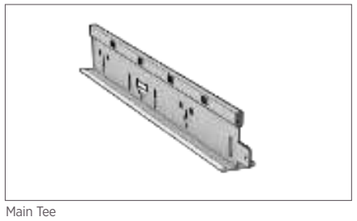

Main Tee



U-trim

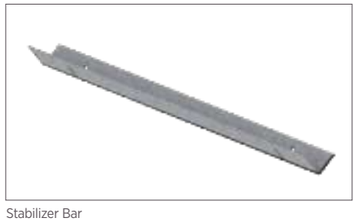


Stabilizer Bar



L-stiffener: required for D-BESK Mineral Fiber tiles only and is not required for Soft Fiber or Gypsum Tiles.



Butterfly Clip

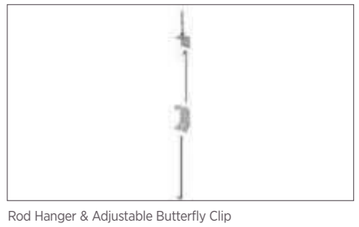


Rod Hanger & Adjustable Butterfly Clip

HANGING OPTIONS



Adjustable Hanger



Suspension Wire



Angle Section



Hanging Bracket

INSTALLATION





Measure the room & determine the reflected ceiling plan along with the visual layout for the ceiling. Start the layout from the room center, progressing in modules toward the perimeter based on the tile size as shown in figures 4.1 & 4.2.



Secure the perimeter wall angle at the specified ceiling height.

Ensure that none of the cut tiles at the perimeter are smaller than half the tile width or length to maintain an aesthetically pleasing appearance. You might need to move the grid by ½ module size to ensure this arrangement.

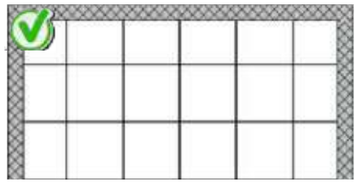

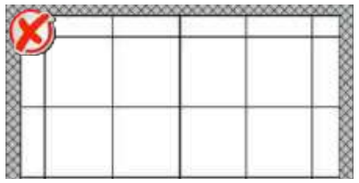





Mark and install hangers for the main profiles on the soffit according to the predetermined reflected ceiling plan spacing maximum at 600 mm o.c using a laser for accuracy.



Fix hangers at 600 mm o.c, requiring a minimum hanger height of 100 mm to facilitate tile installation.

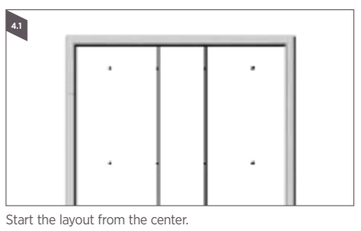


Start the layout from the center.

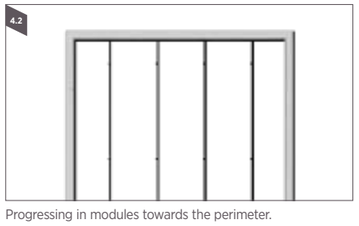


Progressing in modules towards the perimeter.



Install the main tee profiles at 600 mm spacing, positioning them higher than the lower leg of the perimeter U trim as shown in diagram #8.

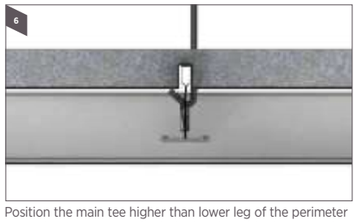

Position the main tee higher than lower leg of the perimeter U trim by 10 mm to perfectly fit the tile inside the U trim for concealed appearance.

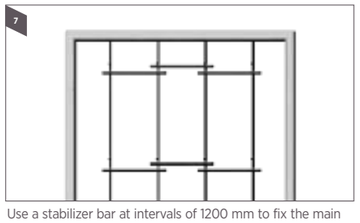

Use a stabilizer bar at intervals of 1200 mm to fix the main runners. Ensure the stabilizer bars are placed adjacent to the hangers, allowing every second tile to remain passable. The stabilizer bar should be placed in a way to maintain the tiles accessibility. Refer to the diagram.




Start tile installation starting from the center of the room towards the perimeter. Progress row by row until the ceiling is fully installed.



Section of D-BESK mineral fiber tiles installation on the U trim without L-Stiffener.

MODULAR CEILING INSTALLATION
D-BESK CONCEALED

D-BESK CONCEALED CEILING INSTALLATION

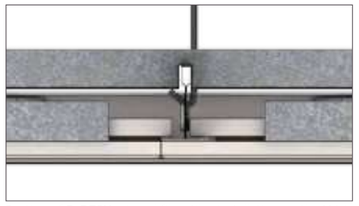


Section of D-BESK mineral fiber tiles installation on the U trim with L-Stiffener.



Section of D-BESK soft fiber tiles installation on the U trim.




Section of the concealed gypsum tiles installation on the U trim.

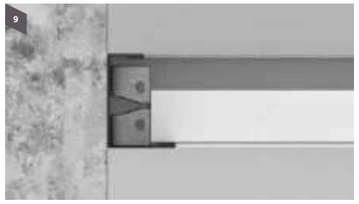

If the room requires cut-tiles at the perimeter, cut the tiles to be 10 mm smaller than the clearance between the tile and the wall.



Secure all perimeter tiles with U-Trim using butterfly clips, which will function as springs to push the tiles towards the grid.

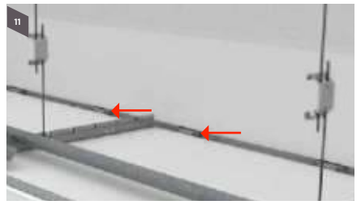

Method of fixing the butterfly clips and the stabilizer bar.



Individually demount each tile in this system for maintenance. To remove any tile, slightly raise the tiles on one side until they can be slid off the main profile.





08

MODULAR CEILING INSTALLATION
S-BESK CONCEALED

S-BESK CONCEALED CEILING INSTALLATION


The S-BESK concealed system boasts a sleek, monolithic aesthetic achieved through concealed ceiling profiles. Ceiling tiles are a demountable option that caters to various construction preferences. Depending on specific needs, the ceiling void can be made retrospectively accessible or permanently sealed. Every USG ME's S-BESK concealed system component is designed for individual demounting. To ensure an impeccable installation, it's imperative to maintain the cleanliness and dryness of the ceiling elements during transportation and storage and to have a flat, level surface to prevent any potential damage. It's important to note that USG ME tiles should only be installed once all plaster and screed work is completed.

COMPONENTS




S-BESK tiles are available in Soft Fiber, which come in a standard size of 600x600 mm with a thickness of 25 mm, and installed using the Donn® T24 grid system.



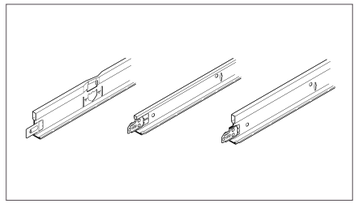

Main Tee, Long Cross Tee, Short Cross Tee

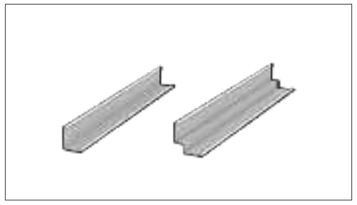


Perimeter Wall Angle (Shadowline Wall Angle, L Angle)

HANGING OPTIONS



Adjustable Hanger



Suspension Wire



Angle Section



Hanging Bracket

S-BESK CONCEALED CEILING INSTALLATION




Measure the room & determine the reflected ceiling plan along with the visual layout for the ceiling. Start the layout from the room center, progressing in modules towards the perimeter based on the tile size as shown in figures 4.1 & 4.2.



Secure the perimeter wall angle at the specified ceiling height.

Ensure that none of the cut tiles at the perimeter are smaller than half the tile width or length to maintain an aesthetically pleasing appearance. You might need to move the grid by ½ module size to ensure this arrangement.

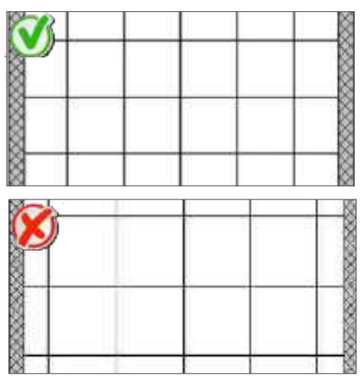


D-BESK CONCEALED CEILING INSTALLATION



Mark and install hangers for the main profiles on the soffit according to the predetermined reflected ceiling plan spacing maximum at 1200 mm o.c using a laser for accuracy.



Fix hangers at 1200 mm o.c, requiring a minimum hanger height of 100 mm to facilitate tile installation.

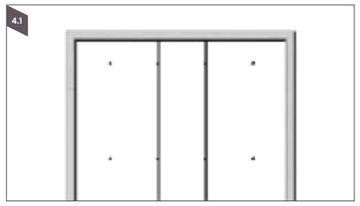

Start the layout from the center.



Progressing in modules towards the perimeter.




Fix the main tee at 1200 mm spacing and lay it on the wall angle. Fixing of the main tee should be higher than the lower leg of the perimeter wall angle.



Position the main tee higher than lower leg of the perimeter wall angle.



Insert the long cross tee to main tee in place at 600 mm spacing.

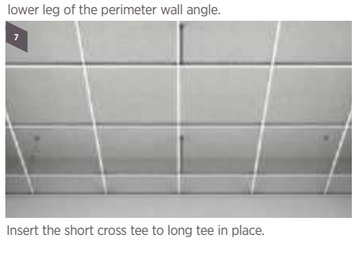

Insert the short cross tee to long tee in place.



Install the S-BESK tile.

Individually demount each tile in this system for maintenance. To remove any tile, slightly raise the tiles on one side until they can be slid off the main profile.




S-BESK section.



09

SKYROCK® SOUNDBLOCK
PERFORATION PATTERN


SOUNDBLOCK - H11



600x600mm		600x1200mm	
Actual Length (mm)	594	Actual Length (mm)	1194
Actual Width (mm)	594	Actual Width (mm)	594
Hole Type	Hexagon	Hole Type	Hexagon
Hole Size (mm)	ø11	Hole Size (mm)	ø11
Border (mm)	27	Border (mm)	27
Pitch (mm)	20	Pitch (mm)	30
Holes layout (L x W)	28 x 28	Holes layout (L x W)	28 x 58
Number of Holes	784	Number of Holes	1624
Perforation Rate (%)	17.5%	Perforation Rate (%)	18%

Additional patterns layouts are available upon request. Please contact USG ME nearest sales office.


SOUNDBLOCK - R6



600x600mm		600x1200mm	
Actual Length (mm)	594	Actual Length (mm)	1194
Actual Width (mm)	594	Actual Width (mm)	594
Hole Type	Round	Hole Type	Round
Hole Size (mm)	ø6	Hole Size (mm)	ø6
Border (mm)	33	Border (mm)	33
Pitch (mm)	16	Pitch (mm)	16
Holes layout (L x W)	34 x 34	Holes layout (L x W)	34 x 72
Number of Holes	1156	Number of Holes	2448
Perforation Rate (%)	9.3%	Perforation Rate (%)	9.8%

Additional patterns layouts are available upon request. Please contact USG ME nearest sales office.


SOUNDBLOCK - R12



600x600mm		600x1200mm	
Actual Length (mm)	594	Actual Length (mm)	1194
Actual Width (mm)	594	Actual Width (mm)	594
Hole Type	Round	Hole Type	Round
Hole Size (mm)	ø12	Hole Size (mm)	ø12
Border (mm)	47	Border (mm)	47
Pitch (mm)	25	Pitch (mm)	25
Holes layout (L x W)	21 x 21	Holes layout (L x W)	45 x 21
Number of Holes	441	Number of Holes	945
Perforation Rate (%)	14.1%	Perforation Rate (%)	15%

Additional patterns layouts are available upon request. Please contact USG ME nearest sales office.


SOUNDBLOCK - R8-15-20



600x600mm		600x1200mm	
Actual Length (mm)	594	Actual Length (mm)	1194
Actual Width (mm)	594	Actual Width (mm)	594
Hole Type	Round	Hole Type	Round
Hole Size (mm)	ø8, ø15, ø20	Hole Size (mm)	ø8, ø15, ø20
Border (mm)	27	Border (mm)	27
Pitch (mm)	N/A	Pitch (mm)	N/A
Holes layout (L x W)	N/A	Holes layout (L x W)	N/A
Number of Holes	R8: 321; R15: 117; R20: 72	Number of Holes	R8: 642, R15: 219, R20: 141
Perforation Rate (%)	16.8%	Perforation Rate (%)	16.2%

Additional patterns layouts are available upon request. Please contact USG ME nearest sales office.


SOUNDBLOCK - Q3



600x600mm		600x1200mm	
Actual Length (mm)	594	Actual Length (mm)	1194
Actual Width (mm)	594	Actual Width (mm)	594
Hole Type	Square	Hole Type	Square
Hole Size (mm)	3 x 3	Hole Size (mm)	3 x 3
Border (mm)	34.64	Border (mm)	34.64
Pitch (mm)	8.33	Pitch (mm)	8.33
Holes layout (L x W)	64 x 64	Holes layout (L x W)	64 x 134
Number of Holes	4096	Number of Holes	8576
Perforation Rate (%)	10.5%	Perforation Rate (%)	10.8%

Additional patterns layouts are available upon request. Please contact USG ME nearest sales office.


SOUNDBLOCK - Q9



600x600mm		600x1200mm	
Actual Length (mm)	594	Actual Length (mm)	1194
Actual Width (mm)	594	Actual Width (mm)	594
Hole Type	Square	Hole Type	Square
Hole Size (mm)	9 x 9	Hole Size (mm)	9 x 9
Border (mm)	27	Border (mm)	27
Pitch (mm)	20	Pitch (mm)	16
Holes layout (L x W)	28 x 28	Holes layout (L x W)	58 x 28
Number of Holes	784	Number of Holes	1624
Perforation Rate (%)	18%	Perforation Rate (%)	18.5%

Additional patterns layouts are available upon request. Please contact USG ME nearest sales office.

SOUNDBLOCK - Q12



600x600mm		600x1200mm	
Actual Length (mm)	594	Actual Length (mm)	1194
Actual Width (mm)	594	Actual Width (mm)	594
Hole Type	Square	Hole Type	Square
Hole Size (mm)	12 x 12	Hole Size (mm)	12 x 12
Border (mm)	47	Border (mm)	47
Pitch (mm)	25	Pitch (mm)	25
Holes layout (L x W)	21 x 21	Holes layout (L x W)	45 x 21
Number of Holes	441	Number of Holes	945
Perforation Rate (%)	18%	Perforation Rate (%)	19.1%

Additional patterns layouts are available upon request. Please contact USG ME nearest sales office.



10

CELEBRETTO®

COLORS, FINISHES AND PERFORATION PATTERNS

STANDARD FINISHES

RAL COLORS



RAL 9016 | RAL 9010 | RAL 9006 | RAL 9007 | RAL 9005

WOODEN FINISHES



WF1 | WF2 | WF3

PREMIUM FINISHES*


POWDER COATING COLORS



PF01 Infinity White — JF 1301 1007240
PF02 Sphinx Beige — JF 1301 1006930
PF03 Titanium Silver — JF1301 1006967
PF04 Grey — JF 1303 1203676PX20
PF05 Concord Grey — JF 1301 1006975
PF06 Champagne — JF 1301 100637
PF07 Grey — JF 1303 1203676PX20
PF08 RAL 9006 — JF 1308 1006824PX20
PF09 Grey (Bonded) — JF 1303 1210769PX20




PF10 Beige Grit — JF 5401 1214921PX20
PF11 RAL 9007 — JF 1301 1008530PX20
PF12 RAL 9022 — JF 308 1006822PX20
PF13 RAL 9007 — JF 1308 1006843PX20
PF14 Aztec Grey — JF 1301 1007042
PF15 Atlantis Grey — JF 1301 1006969
PF16 RAL 1035 — JF 1307 1224450PX20
PF17 RAL 7048 — JF 1308 1006842PX20
PF18 Grey (Bonded) — JF 1301 1214429PX20

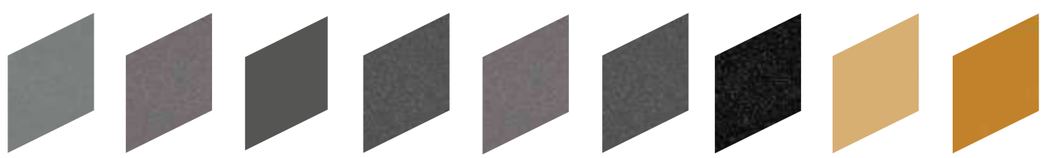


PF19 RAL 9023 — JF 1308 1006887PX20
PF20 Grey (Bonded) — JF 1303 120875PX20
PF21 Grey — JF 1301 1206593
PF22 Grey — JF 1301 1214211PX20
PF23 Black Grit — JF 5401 1214184PX20
PF24 Grey (Bonded) — JF 1303 1213891PX20
PF25 Black Sparkle Mettalic (Bonded) — JF 1308 1027743PX20
PF26 Gold (Bonded) — JF 1303 1210630PX20
PF27 RAL 1036 — JF 1303 1038505PX20


Printed colors may vary from the original. Always refer to actual samples.

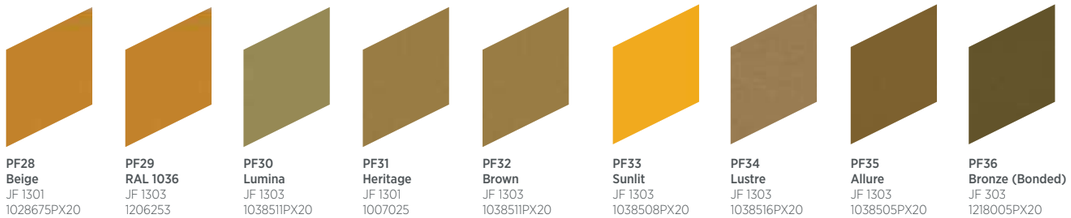

PF28 Beige — JF 1301 1028675PX20
PF29 RAL 1036 — JF 1303 1206253
PF30 Lumina — JF 1303 1038511PX20
PF31 Heritage — JF 1301 1007025
PF32 Brown — JF 1303 1038511PX20
PF33 Sunlit — JF 1303 1038508PX20
PF34 Lustre — JF 1303 1038516PX20
PF35 Allure — JF 1303 1038505PX20
PF36 Bronze (Bonded) — JF 303 1218005PX20

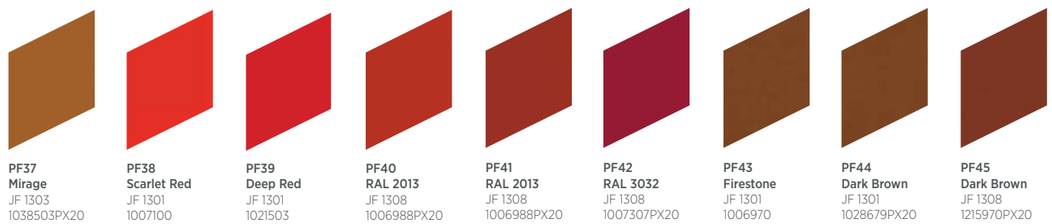

PF37 Mirage — JF 1303 1038503PX20
PF38 Scarlet Red — JF 1301 1007100
PF39 Deep Red — JF 1301 1021503
PF40 RAL 2013 — JF 1308 1006988PX20
PF41 RAL 2013 — JF 1308 1006988PX20
PF42 RAL 3032 — JF 1308 1007307PX20
PF43 Firestone — JF 1301 1006970
PF44 Dark Brown — JF 1301 1028679PX20
PF45 Dark Brown — JF 1308 1215970PX20

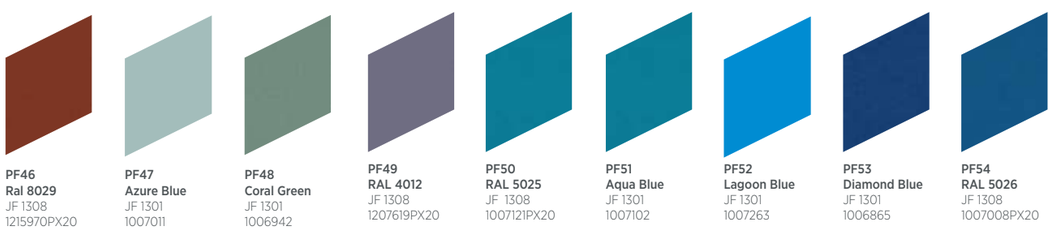

PF46 Ral 8029 — JF 1308 1215970PX20
PF47 Azure Blue — JF 1301 1007011
PF48 Coral Green — JF 1301 1006942
PF49 RAL 4012 — JF 1308 1207619PX20
PF50 RAL 5025 — JF 1308 1007121PX20
PF51 Aqua Blue — JF 1301 1007102
PF52 Lagoon Blue — JF 1301 1007263
PF53 Diamond Blue — JF 1301 1006865
PF54 RAL 5026 — JF 1308 1007008PX20



PF55 Jade Green — JF 1301 1006932
PF56 RAL 6035 — JF 1307 1007306PX20
PF57 RAL 6036 — JF 1308 1007394PX20
PF58 RAL 8014 — JF 1301 1212647
PF59 Hypnotic — JF 1303 1038515PX20
PF60 Ebony Black — JF 1301 1006929

** Available upon request. Check with our technical team for lead time delivery.*

SPECIAL COAT



ANTI BACTERIAL FINISH
Available for Standard RAL Colors only

UD1
Ultra Durable For Exterior Application

POLYVINYLIDENE FLUORIDE (PVDF) COATING
PVDF is a custom formulated system that provides extra durability, excellent weatherability, and high formability for exterior applications.
Available in RAL standard colors. Other colors may be available upon request.

Printed colors may vary from the original. Always refer to actual samples.

CELEBRETTO®

COLORS, FINISHES AND PERFORATION PATTERNS

WOODEN FINISHES

WFP01
BEECH 1



WFP02
BEECH2



WFP03
PINE



WFP04
OAK



WFP05
CHERRY 1



WFP06
CHERRY 2



WFP07
WALNUT



WFP08
ROSE WOOD

ANODIZED FINISHES



AZ01
G4 DARK GOLD



AZ02
G3 LIGHT GOLD



AZ03
E6 SILVER NATURAL



AZ04
3145 CHAMPAGNE BRONZE



AZ05
3165 LIGHT BRONZE



AZ06
3175 MEDIUM BRONZE




AZ07
3178 DARK BRONZE



AZ08
3178 DARK BRONZE

SPECIAL FINISHES






Printed colors may vary from the original. Always refer to actual samples.


STANDARD PERFORATION PATTERNS

PATTERN NO. 7E

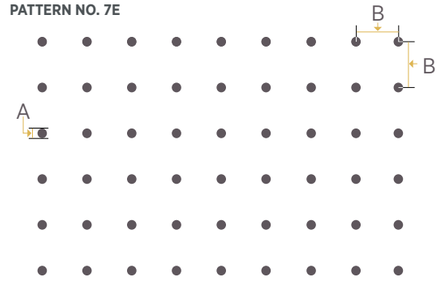


Even Pattern. **Hole Size Dia (A):** 0.75mm, **Pitch (B):** 5mm, **Open Area:** 1%

PATTERN NO. 15E

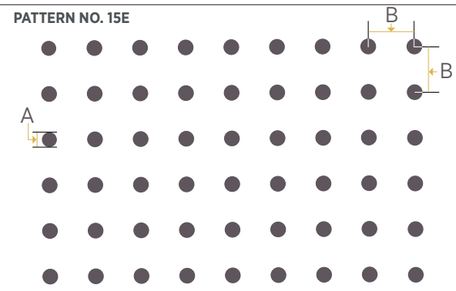


Even Pattern. **Hole Size Dia (A):** 1.5mm, **Pitch (B):** 4mm, **Open Area:** 11%

PATTERN NO. B1

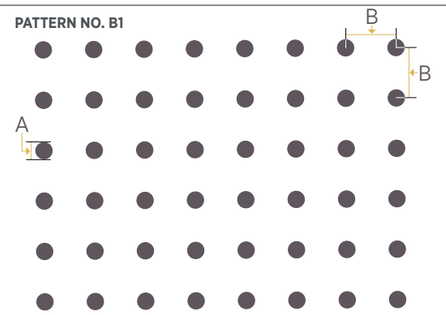


Even Pattern. **Hole Size Dia (A):** 1.8mm, **Pitch (B):** 5mm, **Open Area:** 10%

PATTERN NO. B2

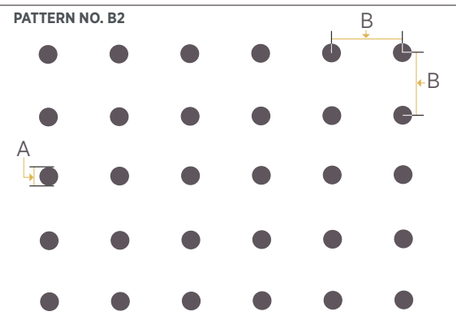


Even Pattern. **Hole Size Dia (A):** 2.5mm, **Pitch (B):** 5.5mm, **Open Area:** 16%

PATTERN NO. 15D

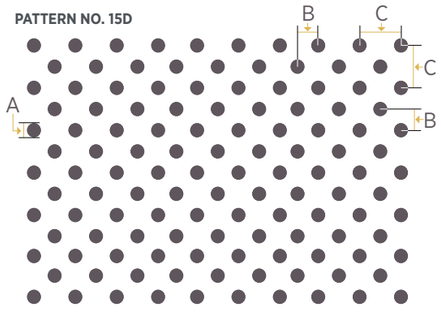

Diagonal Pattern. **Hole Size Dia (A):** 1.5mm, **Pitch(B):** 2mm **Pitch(C):** 4mm, **Open Area:** 22%

PATTERN NO. A1

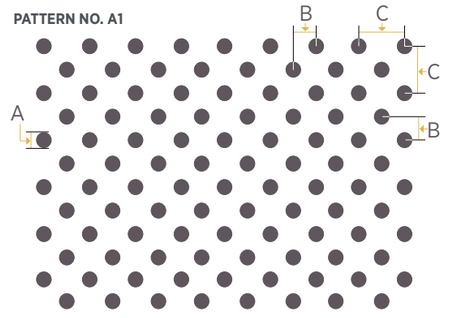

Diagonal Pattern. **Hole Size Dia (A):** 1.8mm, **Pitch (B):** 2.5mm **Pitch (C):** 5mm, **Open Area:** 20%


Printed colors may vary from the original. Always refer to actual samples.

CELEBRETTO®

COLORS, FINISHES AND PERFORATION PATTERNS


PREMIUM PERFORATION PATTERNS

PATTERN NO. 50D

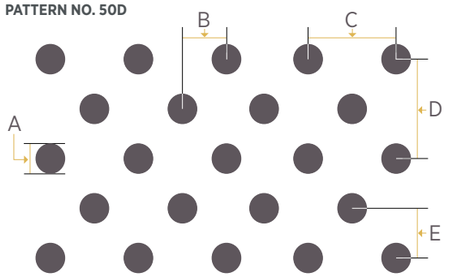


Diagonal Pattern. **Hole Size Dia (A):** 5mm, **Pitch (B):** 5mm, **Pitch (C):** 10mm, **Pitch (D):** 15mm, **Pitch (E):** 7.5mm, **Open Area:** 32%

PATTERN NO. BR30R

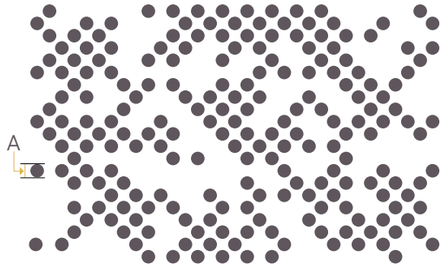


Braille Pattern. **Hole Size Dia (A):** 30mm, **Open Area:** 36%

PATTERN NO. BR321630

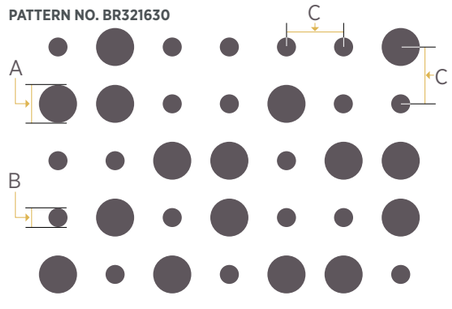


Braille Pattern. **Hole Size Dia (A):** 32mm, **Pitch (B):** 16mm, **Pitch (C):** 40mm, **Open Area:** 30%

PATTERN NO. HX5D

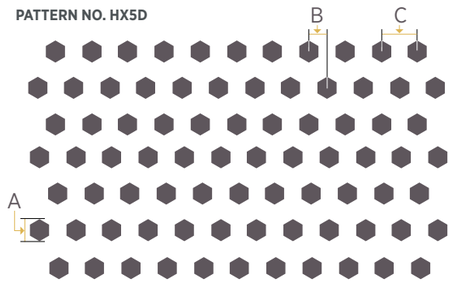


Hexagon Diagonal Pattern. **Hole Size (A):** 5mm, **Pitch (B):** 4mm, **Pitch (C):** 8mm, **Open Area:** 29%

PATTERN NO. SQ4E

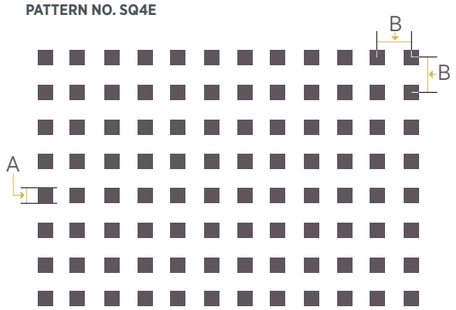


Straight Line Pattern. **Hole Size (A):** 4mm, **Pitch (B):** 9mm, **Open Area:** 20%

PATTERN NO. TR10

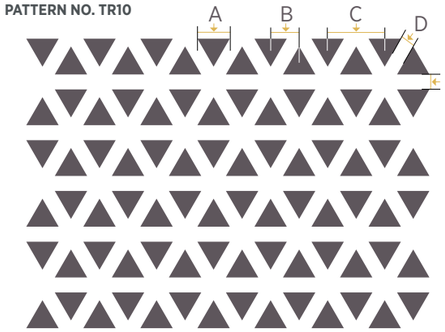

Triangular Pattern. **Triangle Size (A):** 10mm, **Pitch (B):** 9.16mm, **Pitch (C):** 18.32mm, **(D):** 4.8mm, **Open Area:** 30%

PATTERN NO. OB2014

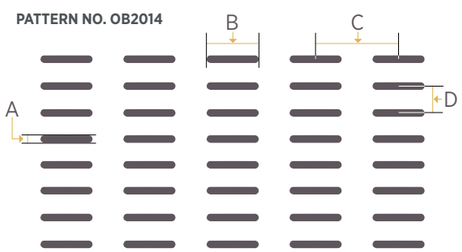

Oblong Pattern. **Hole Size (A):** 2mm, **(B):** 14mm, **Pitch (C):** 22mm, **Pitch (D):** 7mm, **Open Area:** 17%

CUSTOM PERFORATION PATTERNS ARE AVAILABLE UPON REQUEST

METAL CEILING ACOUSTICAL PERFORMANCE

USG Middle East supplies metal ceiling panels with a range of acoustical performance to meet the needs of all kinds of projects. A variety of sound-absorbing backing options are available with performance up to 1.0 NRC and 35dB CAC depending on ceiling type and infill option. Consult with the USG Middle East technical team for further guidance.

						Frequency Hz					
PATTERN	OPEN AREA%	CELEBRETTO® METAL CEILING INFILL OPTIONS	CAC	NRC	Class	125	250	500	1000	2000	4000
A1	20%	Acoustic fleece	-	0.75	B	0.70	0.95	0.75	0.75	0.80	0.80
A1	20%	19mm Soft Fiber infill	-	0.90	A	0.65	0.85	0.80	1.00	1.00	1.00
A1	20%	15mm Mineral Fiber infill	32	-	-	-	-	-	-	-	-
A1	20%	Acoustic fleece & 30mm Stonewool & 19mm Mineral Fiber infill	32	0.90	B	0.50	0.55	0.85	1.00	1.00	1.00
A1	20%	Acoustic fleece & 25mm Glasswool & 12mm Gypsum infill	30	0.85	C	0.55	0.45	0.75	1.00	1.00	1.00
A1	20%	Acoustic fleece & 30mm Stonewool & Aluminum Foil	34	1.00	A	0.70	0.90	1.00	1.00	1.00	1.00
B2	16%	Acoustic fleece	-	0.60	C	0.65	0.75	0.55	0.55	0.60	0.65
15D	22%	Acoustic fleece	-	0.60	C	0.70	0.65	0.55	0.55	0.60	0.55
15D	22%	Acoustic fleece & 30mm Stonewool & Aluminum Foil	30	0.80	B	0.70	0.85	0.75	0.75	0.80	0.70
15E	11%	Acoustic fleece	-	0.65	C	0.60	0.80	0.60	0.60	0.70	0.70
15E	11%	Acoustic fleece & 30mm Stonewool & Aluminum Foil	27	0.80	B	0.80	0.80	0.75	0.80	0.85	0.70
7E	1%	Acoustic fleece	-	0.65	C	0.80	0.75	0.65	0.65	0.60	0.50
7E	1%	Acoustic fleece & 30mm Stonewool & Aluminum Foil	26	0.90	C	0.80	0.85	0.85	0.95	0.85	0.55
A1	20%	Intersecto Metal Ceiling with Infill	35	0.70	C	0.50	0.60	0.65	0.75	0.70	0.70
A1	20%	Paraline Baffles 40X120 C120 with 38mm Soft Fiber infill	-	0.85	-	0.25	0.50	1.00	1.00	1.00	1.00
A1	20%	Paraline Baffles 50X100 C100 with 50mm Soft Fiber infill	-	0.60	D	0.15	0.35	0.50	0.75	0.70	0.60

LIGHT REFLECTANCE

Metal Tile Description	RAL 9006	RAL 9016	RAL 9010	RAL 7047
	LR	LR	LR	LR
Plain Metal Ceiling	32%	74%	82%	56%
Perforated Metal Ceiling, 1.8mm diameter hole, Diagonal Perforation (20%)	27%	59%	64%	45%

LR results as per ASTM E1477

USG ME CEILINGS ACOUSTIC PERFORMANCE

Mineral Fiber Tile Details	NRC	α_w	CLASS	CAC dB	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
Athena 16mm	0.70	0.65	Class C	35	0.30	0.35	0.65	0.90	1.00	0.95
Athena 19mm HNRC Concealed Edge	0.65	0.65	Class C	40	0.35	0.45	0.80	0.70	0.65	0.50
Auratone Designer Series 19mm QCFSR	0.60	0.60	Class C	35	0.45	0.40	0.50	0.70	0.70	0.60
Auratone Designer Series 19mm QOLPCR	0.65	0.70	Class C	37	0.30	0.45	0.70	0.70	0.70	0.60
Auratone Designer Series 19mm QRDSR	0.60	0.60	Class C	35	0.35	0.40	0.50	0.65	0.80	0.90
Auratone Designer Series 19mm QTPSR	0.70	0.65	Class C	35	0.35	0.40	0.65	0.85	0.85	0.70
Cleanroom™ 15mm Non-Perforated	0.10	0.15	Class E	37	0.35	0.15	0.10	0.10	0.15	0.25
Cleanroom™ 19mm Perforated	0.55	0.60	Class C	38	0.35	0.40	0.65	0.65	0.55	0.50
Cross Fissured 15mm	0.50	-	-	35	0.40	0.35	0.40	0.55	0.70	0.75
Cross Fissured 19mm	0.60	0.60	Class C	37	0.45	0.40	0.50	0.70	0.70	0.60
Favia 15mm	0.25	0.25	Class E	35	0.35	0.25	0.20	0.20	0.30	0.50
Favia Acoustic 16mm HNRC	0.65	0.60	Class C	35	0.30	0.35	0.60	0.80	0.90	0.85
Favia Acoustic 19mm	0.55	0.55	Class D	37	0.35	0.35	0.45	0.70	0.75	0.65
Olympia Micro™ 15mm ClimaPlus™	0.55	0.55	Class D	35	0.35	0.35	0.50	0.65	0.60	0.50
Olympia Micro™ 19mm	0.65	0.70	Class C	37	0.30	0.45	0.70	0.70	0.70	0.60
Olympia Micro™ 19mm HNRC	0.70	0.75	Class C	37	0.45	0.50	0.75	0.85	0.80	0.65
Olympia™ 15mm ClimaPlus™	0.15	0.20	Class E	33	0.35	0.25	0.15	0.15	0.20	0.30
Radar™ 12mm	0.50	0.50	Class D	35	0.30	0.30	0.40	0.45	0.75	0.85
Radar™ 15mm ClimaPlus™	0.50	0.55	Class D	36	0.40	0.35	0.45	0.60	0.70	0.70
Radar™ 19mm Firechief™	0.60	0.55	Class D	38	0.30	0.35	0.50	0.75	0.80	0.75
Radar™ 19mm HNRC	0.70	0.65	Class C	40	0.25	0.35	0.65	0.85	0.90	0.90
Radar™ 19mm Standard	0.60	0.60	Class C	38	0.35	0.40	0.50	0.65	0.80	0.90
Radar™ 22mm	0.80	0.75	Class C	39	0.35	0.50	0.75	0.95	1.00	0.90
Radar™ Ceramic 15mm	0.50	-	-	39	0.35	0.28	0.38	0.60	0.76	0.77
Skylite Acoustic 19mm	0.70	0.65	Class C	39	0.30	0.35	0.65	0.90	0.95	0.70
Skylite Clean 15mm	0.60	0.50	Class D	38	0.30	0.30	0.40	0.70	0.95	0.65
Skylite Clean 19mm	0.85	0.85	Class B	31	0.50	0.65	0.85	1.00	0.90	0.65
Sonata 19mm	0.75	0.65	Class C	37	0.40	0.40	0.65	0.95	1.00	1.00
Sonata 22mm	0.80	0.75	Class C	40	0.45	0.45	0.75	0.95	1.00	1.00
Sonata Healthcare 19mm	0.75	0.65	Class C	37	0.40	0.40	0.65	0.95	1.00	1.00
Sonata Healthcare 22mm	0.80	0.75	Class C	40	0.45	0.45	0.75	0.95	1.00	1.00
Taiga 15mm	0.15	0.15	Class E	33	0.35	0.25	0.10	0.15	0.20	0.45
Taiga 19mm - Chessboard Design	0.30	0.30	Class D	35	0.30	0.25	0.25	0.30	0.40	0.60
Taiga 19mm - Comet Line Design	0.30	0.30	Class D	35	0.25	0.25	0.25	0.30	0.35	0.50
Taiga Hygiene 15mm	0.15	0.15	Class E	33	0.35	0.25	0.10	0.15	0.20	0.45
Taiga Perforated 12mm	0.50	0.50	Class D	35	0.25	0.30	0.40	0.55	0.65	0.70
Taiga Perforated 15mm	0.45	0.50	Class D	35	0.35	0.40	0.40	0.55	0.55	0.55
Taiga Perforated 16mm HNRC	0.70	0.60	Class C	37	0.30	0.35	0.70	0.90	0.85	0.75
Taiga Perforated 19mm	0.70	0.65	Class C	37	0.35	0.40	0.65	0.85	0.85	0.70

Soft Fiber Tile Details	NRC	α_w	CLASS	CAC dB	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
Halcyon™ 15mm SQ Edge	0.85	0.80	Class B	-	0.45	0.85	1.00	0.75	0.80	0.75
Halcyon™ 19mm SQ Edge	0.95	0.95	Class A	24	0.50	0.90	1.00	0.90	0.95	0.90
Halcyon™ 19mm Concealed Edge	0.95	0.90	Class A	24	0.65	0.85	0.80	0.95	1.00	1.00
Halcyon™ 25mm SQ Edge	1.00	1.00	Class A	25	0.40	0.90	1.00	0.95	1.00	1.00
Halcyon™ 25mm Concealed Edge	1.00	0.95	Class A	25	0.75	0.85	0.85	1.00	1.00	1.00
Halcyon™ 38mm SQ Edge	1.00	1.00	Class A	31	0.60	0.90	1.00	1.00	1.00	1.00
Halcyon™ 40mm SQ Edge with Aluminum Foil	0.90	0.90	Class A	33	0.40	0.70	0.85	1.00	1.00	1.00
Halcyon™ 50mm SQ Edge	0.95	0.95	Class A	32	0.60	0.75	0.90	1.00	1.00	1.00
Louna™ Elegant 19mm Reveal Edge	0.85	0.85	Class B	27	0.55	0.80	0.75	0.90	1.00	1.00
Louna™ Elegant 19mm SQ Edge	0.90	0.95	Class A	25	0.60	0.85	0.85	0.95	1.00	1.00
Louna™ Elegant 25mm Reveal Edge	0.90	0.90	Class A	28	0.60	0.80	0.80	1.00	1.00	1.00
Louna™ Elegant 25mm SQ Edge	0.95	1.00	Class A	26	0.65	0.95	0.90	1.00	1.00	1.00
Louna™ Elegant 25mm SQ Edge Aluminium Foil	0.90	0.90	Class A	35	0.40	0.70	0.85	1.00	1.00	1.00
Louna™ Elegant 38mm SQ Edge Aluminium Foil	0.85	0.85	Class B	39	0.45	0.65	0.80	0.95	0.95	0.95
Louna™ Natural 15mm	0.90	0.90	Class A	-	0.60	0.85	0.80	0.95	1.00	1.00
Louna™ Natural 19mm	0.95	0.95	Class A	25	0.60	0.90	0.85	1.00	1.00	1.00
Louna™ HI CAC 43mm	0.85	0.80	Class B	42	0.45	0.50	0.85	1.00	1.00	1.00
Louna™ HI CAC 53mm	0.90	0.80	Class B	41	0.40	0.50	0.90	1.00	1.00	1.00
Louna™ Baffle 1800x300x40mm	0.70	0.60	Class C	-	0.20	0.30	0.65	0.90	0.85	0.80

USG ME CEILINGS ACOUSTIC PERFORMANCE

Celebretto® Metal Ceiling Perforation Pattern and Infill Option	Open Area%	NRC	CLASS	CAC dB	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
A1 Pattern with Acoustic fleece	20%	0.75	Class B	-	0.70	0.95	0.75	0.75	0.80	0.80
A1 Pattern with 19mm Soft Fiber infill	20%	0.90	Class A	-	0.65	0.85	0.80	1.00	1.00	1.00
A1 Pattern with 15mm Mineral Fiber infill	20%	-	-	32	-	-	-	-	-	-
A1 Pattern with Acoustic fleece & 30mm Stonewool & 19mm Mineral Fiber infill	20%	0.90	Class B	32	0.50	0.55	0.85	1.00	1.00	1.00
A1 Pattern with Acoustic fleece & 25mm Glasswool & 12mm Gypsum infill	20%	0.85	Class C	30	0.55	0.45	0.75	1.00	1.00	1.00
A1 Pattern with Acoustic fleece & 30mm Stonewool & Aluminum Foil	20%	1.00	Class A	34	0.70	0.90	1.00	1.00	1.00	1.00
B2 Pattern with Acoustic fleece	16%	0.60	Class C	-	0.65	0.75	0.55	0.55	0.60	0.65
15D Pattern with Acoustic fleece	22%	0.60	Class C	-	0.70	0.65	0.55	0.55	0.60	0.55
15D Pattern with Acoustic fleece & 30mm Stonewool & Aluminum Foil	22%	0.80	Class B	30	0.70	0.85	0.75	0.75	0.80	0.70
15E Pattern with Acoustic fleece	11%	0.65	Class C	-	0.60	0.80	0.60	0.60	0.70	0.70
15E Pattern with Acoustic fleece & 30mm Stonewool & Aluminum Foil	11%	0.80	Class B	27	0.80	0.80	0.75	0.80	0.85	0.70
7E Pattern with Acoustic fleece	1%	0.65	Class C	-	0.80	0.75	0.65	0.65	0.60	0.50
7E Pattern with Acoustic fleece & 30mm Stonewool & Aluminum Foil	1%	0.90	Class C	26	0.80	0.85	0.85	0.95	0.85	0.55
A1 Pattern-Intersecto Metal Ceiling with Infill	20%	0.70	Class C	35	0.50	0.60	0.65	0.75	0.70	0.70
A1 Pattern - Paraline Baffles 40X120, C120 with 38mm Soft Fiber infill	20%	0.85	-	-	0.25	0.50	1.00	1.00	1.00	1.00
A1 Pattern - Paraline Baffles 50X100, C100 with 50mm Soft Fiber infill	20%	0.60	Class D	-	0.15	0.35	0.50	0.75	0.70	0.60

Gypsum Tiles	OPEN AREA%	NRC	α_w	CLASS	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
H11	17.7%-19.7%	0.65	0.75	Class C	0.65	0.80	0.70	0.70	0.75	0.75
H11 with 19mm Soft Fiber Infill	17.7%-19.7%	0.90	0.90	Class A	0.70	1.00	0.85	0.95	0.90	0.80
R6	9.3%11.1%	0.70	0.65	Class C	0.55	0.75	0.70	0.65	0.60	0.55
R6 with 100mm Soft Fiber Infill	9.3%11.1%	0.85	0.55	Class D	0.75	0.95	0.95	0.80	0.55	0.40
R6 with 50mm Soft Fiber Infill	9.3%11.1%	0.75	0.60	Class C	0.70	0.90	0.85	0.70	0.55	0.45
R12	14.1%-18.1%	0.65	0.65	Class C	0.60	0.65	0.60	0.65	0.70	0.75
R12 with 19mm Soft Fiber Infill	14.1%-18.1%	0.85	0.80	Class B	0.70	0.90	0.80	0.90	0.75	0.65
R8-15-20	16.2%-20%	0.70	0.75	Class C	0.55	0.80	0.70	0.75	0.70	0.80
R8-15-20 with 19mm Soft Fiber Infill	16.2%-20%	0.80	0.80	Class B	0.70	0.95	0.80	0.90	0.75	0.65
Q3	10.5%-11.9%	0.55	0.55	Class D	0.55	0.60	0.55	0.50	0.60	0.70
Q3 with 19mm Soft Fiber Infill	10.5%-11.9%	0.80	0.65	Class C	0.70	0.95	0.75	0.80	0.60	0.50
Q9	18%-20.3%	0.60	0.55	Class D	0.65	0.80	0.55	0.55	0.55	0.55
Q9 with 19mm Soft Fiber Infill	18%-20.3%	0.85	0.80	Class B	0.80	0.95	0.80	0.90	0.80	0.65
Q12	18%-23%	0.70	0.75	Class C	0.65	0.75	0.70	0.70	0.75	0.75
Q12 with 19mm Soft Fiber Infill	18%-23%	0.85	0.80	Class B	0.70	0.95	0.80	0.85	0.80	0.65

Skynest™ Wood Wool	NRC	α_w	CLASS	CAC dB	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
Skynest™ Wood Wool 15mm	0.60	0.55	Class D	-	0.55	0.60	0.45	0.60	0.70	0.75
Skynest™ Wood Wool 15mm with Acoustical Infill	1.00	1.00	Class A	-	0.80	1.00	1.00	1.00	1.00	1.00
Skynest™ Wood Wool 25mm	0.65	0.65	Class C	-	0.60	0.60	0.55	0.65	0.85	0.95
Skynest™ Wood Wool 25mm with Acoustical Infill	1.00	1.00	Class A	-	0.85	1.00	1.00	1.00	1.00	1.00

PACKAGING:
READY TO TRANSFORM YOUR SPACE WITH EXCELLENCE

13



“ENSURING SECURE DELIVERY AND EFFORTLESS INSTALLATION EXPERIENCES.

ACOUSTICAL CEILING PACKAGING

Product Name	Item Code	Size (mm)	Edge Detail	Carton Volume		Pallet Volume		Weight	
				Number Of Tiles Per Carton	M² Per Carton	Number Of Carton Per Pallet	M² Per Pallet	Carton Weight Kg/Ctn	Pallet Weight Kg/Pallet
Athena Acoustical Ceiling	ATX666	600*600*16	SQ	12	4.32	40	172.80	23.5	942
Athena Acoustical Ceiling	ATX226	610*610*16	SQ	12	4.46	40	178.56	24.3	973
Athena Acoustical Ceiling	ATX626	600*1200*16	SQ	8	5.76	40	230.40	31.4	1,256
Athena Acoustical Ceiling	ATX246	610*1220*16	SQ	8	5.95	40	238.08	32.4	1,298
Athena Acoustical Ceiling	ATXR666	600*600*16	SLT	12	4.32	40	172.80	23.5	942
Athena Acoustical Ceiling	ATXR226	610*610*16	SLT	12	4.46	40	178.56	24.3	973
Athena Acoustical Ceiling	ATXRF666	600*600*16	FLB	12	4.32	40	172.80	23.5	942
Athena Acoustical Ceiling	ATXRF226	610*610*16	FLB	12	4.46	40	178.56	24.3	973
Athena Acoustical Ceiling	ATRFDC669-HNRC	600*600*19	D-BESK	10	3.60	32	115.20	23.2	743
Athena Acoustical Ceiling	ATRFDC229-HNRC	610*610*19	D-BESK	10	3.72	32	119.04	24.0	768
Athena Acoustical Ceiling	ATFC669-HNRC	600*600*19	BESK	10	3.60	52	187.20	23.2	1,207
Athena Acoustical Ceiling	ATFC229-HNRC	610*610*19	BESK	10	3.72	52	193.44	24.0	1,248
Chessboard Acoustical Ceiling	CHSR669	600*600*19	SLT	10	3.60	52	187.20	16.2	842
Chessboard Acoustical Ceiling	CHSR229	610*610*19	SLT	10	3.72	52	193.44	16.7	870
Clean Room™ Acoustical Ceiling	CLX665	600*600*15	SQ	12	4.32	40	172.80	22.7	907
Clean Room™ Acoustical Ceiling	CLX225	610*610*15	SQ	12	4.46	40	178.56	23.4	937
Clean Room™ Acoustical Ceiling	CLX625	600*1200*15	SQ	8	5.76	40	230.40	30.2	1,210
Clean Room™ Acoustical Ceiling	CLX245	610*1220*15	SQ	8	5.95	40	238.08	31.2	1,250
Clean Room™ Acoustical Ceiling	CLX669	600*600*19	SQ	10	3.60	40	144.00	23.9	958
Clean Room™ Acoustical Ceiling	CLX229	610*610*19	SQ	10	3.72	40	148.80	24.7	990
Clean Room™ Acoustical Ceiling	CLX629	600*1200*19	SQ	6	4.32	40	172.80	28.7	1,149
Clean Room™ Acoustical Ceiling	CLX249	610*1220*19	SQ	6	4.46	40	178.56	29.7	1,187
Clean Room™ Acoustical Ceiling	CLXP669	600*600*19	SQ	10	3.60	40	144.00	23.9	958
Clean Room™ Acoustical Ceiling	CLXP229	610*610*19	SQ	10	3.72	40	148.80	24.7	990
Clean Room™ Acoustical Ceiling	CLXP629	600*1200*19	SQ	6	4.32	40	172.80	28.7	1,149
Clean Room™ Acoustical Ceiling	CLXP249	610*1220*19	SQ	6	4.46	40	178.56	29.7	1,187
Comet Line Acoustical Ceiling	CSR669	600*600*19	SLT	10	3.60	52	187.20	16.2	842
Comet Line Acoustical Ceiling	CSR229	610*610*19	SLT	10	3.72	52	193.44	16.7	870
Cross Fissured Acoustical Ceiling	CFS665	600*600*15	SQ	12	4.32	56	241.92	15.6	871
Cross Fissured Acoustical Ceiling	CFS225	610*610*15	SQ	12	4.46	56	249.98	16.1	900
Cross Fissured Acoustical Ceiling	CFC665	600*600*15	SQ	12	4.32	56	241.92	15.6	871
Cross Fissured Acoustical Ceiling	CFC225	610*610*15	SQ	12	4.46	56	249.98	16.1	900
Cross Fissured Acoustical Ceiling	CFC625	600*1200*15	SQ	8	5.76	40	230.40	20.7	829
Cross Fissured Acoustical Ceiling	CFC245	610*1220*15	SQ	8	5.95	40	238.08	21.4	857
Cross Fissured Acoustical Ceiling	CFX665	600*600*15	SQ	12	4.32	40	172.80	15.6	622
Cross Fissured Acoustical Ceiling	CFX225	610*610*15	SQ	12	4.46	40	178.56	16.1	643
Cross Fissured Acoustical Ceiling	CFS669	600*600*19	SQ	10	3.60	52	187.20	18.4	955
Cross Fissured Acoustical Ceiling	CFS229	610*610*19	SQ	10	3.72	52	193.44	19.0	987
Cross Fissured Acoustical Ceiling	CFX669	600*600*19	SQ	10	3.60	40	144.00	18.4	734
Cross Fissured Acoustical Ceiling	CFX229	610*610*19	SQ	10	3.72	40	148.80	19.0	759
Cross Fissured Acoustical Ceiling	CFSR665	600*600*15	SLT	12	4.32	56	241.92	22.0	1,234
Cross Fissured Acoustical Ceiling	CFSR225	610*610*15	SLT	12	4.46	56	249.98	22.8	1,275
Cross Fissured Acoustical Ceiling	CFCR665	600*600*15	SLT	12	4.32	56	241.92	22.0	1,234
Cross Fissured Acoustical Ceiling	CFCR225	610*610*15	SLT	12	4.46	56	249.98	22.8	1,275
Cross Fissured Acoustical Ceiling	CFXR665	600*600*15	SLT	12	4.32	40	172.80	22.0	881
Cross Fissured Acoustical Ceiling	CFXR225	610*610*15	SLT	12	4.46	40	178.56	22.8	911
Designer Series Acoustical Ceiling	QCFSR669	600*600*19	SLT	10	3.60	52	187.20	16.2	842
Designer Series Acoustical Ceiling	QCFSR229	610*610*19	SLT	10	3.72	52	193.44	16.7	870
Designer Series Acoustical Ceiling	QTPSR669	600*600*19	SLT	10	3.60	52	187.20	16.2	842
Designer Series Acoustical Ceiling	QTPSR229	610*610*19	SLT	10	3.72	52	193.44	16.7	870
Designer Series Acoustical Ceiling	QTCR669	600*600*19	SLT	10	3.60	52	187.20	16.2	842
Designer Series Acoustical Ceiling	QTCR229	610*610*19	SLT	10	3.72	52	193.44	16.7	870
Designer Series Acoustical Ceiling	QTCR669 (36/15)	600*600*19	SLT	10	3.60	52	187.20	16.2	842
Designer Series Acoustical Ceiling	QTCR229 (36/15)	610*610*19	SLT	10	3.72	52	193.44	16.7	870
Designer Series Acoustical Ceiling	QOLPCR669	600*600*19	SLT	10	3.60	52	187.20	16.2	842
Designer Series Acoustical Ceiling	QOLPCR229	610*610*19	SLT	10	3.72	52	193.44	16.7	870
Designer Series Acoustical Ceiling	QRDSR669	600*600*19	SLT	10	3.60	52	187.20	16.2	842
Designer Series Acoustical Ceiling	QRDSR229	610*610*19	SLT	10	3.72	52	193.44	16.7	870
Designer Series Acoustical Ceiling	QRDCR669	600*600*19	SLT	10	3.60	52	187.20	16.2	842
Designer Series Acoustical Ceiling	QRDCR229	610*610*19	SLT	10	3.72	52	193.44	16.7	870
Favia Acoustical Ceiling	FNS665	600*600*15	SQ	12	4.32	56	241.92	15.6	871
Favia Acoustical Ceiling	FNS225	610*610*15	SQ	12	4.46	56	249.98	16.1	900
Favia Acoustical Ceiling	FNSR665	600*600*15	SLT	12	4.32	56	241.92	15.6	871

Product Name	Item Code	Size (mm)	Edge Detail	Carton Volume		Pallet Volume		Weight	
				Number Of Tiles Per Carton	M² Per Carton	Number Of Carton Per Pallet	M² Per Pallet	Carton Weight Kg/Ctn	Pallet Weight Kg/Pallet
Favia Acoustical Ceiling	FNSR225	610*610*15	SLT	12	4.46	56	249.98	16.1	900
Favia Acoustic Acoustical Ceiling	FAS666	600*600*16	SQ	12	4.32	52	224.64	15.6	796
Favia Acoustic Acoustical Ceiling	FAS226	610*610*16	SQ	12	4.46	52	232.13	16.1	821
Favia Acoustic Acoustical Ceiling	FAS669	600*600*19	SQ	10	3.60	52	187.20	13.0	674
Favia Acoustic Acoustical Ceiling	FAS229	610*610*19	SQ	10	3.72	52	193.44	13.4	696
Favia Acoustic Acoustical Ceiling	FASR666	600*600*16	SLT	12	4.32	52	224.64	15.6	809
Favia Acoustic Acoustical Ceiling	FASR226	610*610*16	SLT	12	4.46	52	232.13	16.1	836
Favia Acoustic Acoustical Ceiling	FASR669	600*600*19	SLT	10	3.60	52	187.20	13.0	674
Favia Acoustic Acoustical Ceiling	FASR229	610*610*19	SLT	10	3.72	52	193.44	13.4	696
Olympia™ Acoustical Ceiling	OLS665	600*600*15	SQ	12	4.32	56	241.92	15.6	871
Olympia™ Acoustical Ceiling	OLS225	610*610*15	SQ	12	4.46	56	249.98	16.1	900
Olympia™ Acoustical Ceiling	OLC665	600*600*15	SQ	12	4.32	56	241.92	15.6	871
Olympia™ Acoustical Ceiling	OLC225	610*610*15	SQ	12	4.46	56	249.98	16.1	900
Olympia™ Acoustical Ceiling	OLC625	600*1200*15	SQ	8	5.76	40	230.40	20.7	829
Olympia™ Acoustical Ceiling	OLC245	610*1220*15	SQ	8	5.95	40	238.08	21.4	857
Olympia™ Acoustical Ceiling	OLX665	600*600*15	SQ	12	4.32	40	172.80	22.0	881
Olympia™ Acoustical Ceiling	OLX225	610*610*15	SQ	12	4.46	40	178.56	22.8	911
Olympia™ Acoustical Ceiling	OLC325	300*1200*15	SQ	12	4.32	40	172.80	15.6	622
Olympia™ Acoustical Ceiling	OLC145	310*1220*15	SQ	12	4.54	40	181.54	16.3	654
Olympia™ Acoustical Ceiling	OLS669	600*600*19	SQ	10	3.60	52	187.20	16.2	842
Olympia™ Acoustical Ceiling	OLS229	610*610*19	SQ	10	3.72	52	193.44	16.7	870
Olympia™ Acoustical Ceiling	OLC669	600*600*19	SQ	10	3.60	52	187.20	16.2	842
Olympia™ Acoustical Ceiling	OLC229	610*610*19	SQ	10	3.72	52	193.44	16.7	870
Olympia™ Acoustical Ceiling	OLC359	300*1500*19	SQ	6	2.70	32	86.40	12.2	389
Olympia™ Acoustical Ceiling	OLC159	310*1520*19	SQ	6	2.83	32	90.47	12.7	407
Olympia™ Acoustical Ceiling	OLSR665	600*600*15	SLT	12	4.32	56	241.92	15.6	871
Olympia™ Acoustical Ceiling	OLSR225	610*610*15	SLT	12	4.46	56	249.98	16.1	900
Olympia™ Acoustical Ceiling	OLCR665	600*600*15	SLT	12	4.32	56	241.92	15.6	871
Olympia™ Acoustical Ceiling	OLCR225	610*610*15	SLT	12	4.46	56	249.98	16.1	900
Olympia™ Acoustical Ceiling	OLCR325	300*1200*15	SLT	12	4.32	40	172.80	15.6	622
Olympia™ Acoustical Ceiling	OLCR145	310*1220*15	SLT	12	4.54	40	181.54	16.3	654
Olympia™ Acoustical Ceiling	OLSR669	600*600*19	SLT	10	3.60	52	187.20	16.2	842
Olympia™ Acoustical Ceiling	OLSR229	610*610*19	SLT	10	3.72	52	193.44	16.7	870
Olympia™ Acoustical Ceiling	OLC629	600*1200*19	SLT	6	4.32	40	172.80	19.4	778
Olympia™ Acoustical Ceiling	OLC249	610*1220*19	SLT	6	4.46	40	178.56	20.1	804
Olympia™ Acoustical Ceiling	OLCR629	600*1200*19	SLT	6	4.32	40	172.80	19.4	778
Olympia™ Acoustical Ceiling	OLCR249	610*1220*19	SLT	6	4.46	40	178.56	20.1	804
Olympia™ Acoustical Ceiling	OLSRF665	600*600*15	FLB	12	4.32	56	241.92	15.6	871
Olympia™ Acoustical Ceiling	OLSRF225	610*610*15	FLB	12	4.46	56	249.98	16.1	900
Olympia™ Acoustical Ceiling	OLCRF665	600*600*15	FLB	12	4.32	56	241.92	15.6	871
Olympia™ Acoustical Ceiling	OLCRF225	610*610*15	FLB	12	4.46	56	249.98	16.1	900
Olympia™ Acoustical Ceiling	OLCRF325	300*1200*15	FLB	12	4.32	40	172.80	15.6	622
Olympia™ Acoustical Ceiling	OLCRF145	310*1220*15	FLB	12	4.54	40	181.54	16.3	654
Olympia™ Acoustical Ceiling	OLSRF669	600*600*19	FLB	10	3.60	52	187.20	16.2	842
Olympia™ Acoustical Ceiling	OLSRF229	610*610*19	FLB	10	3.72	52	193.44	16.7	870
Olympia™ Acoustical Ceiling	OLXR629	600*1200*19	FLB	6	4.32	40	172.80	27.9	1,115
Olympia™ Acoustical Ceiling	OLXR249	610*1220*19	FLB	6	4.46	40	178.56	28.8	1,152
Olympia™ Acoustical Ceiling	OLCRF629	600*1200*19	FLB	6	4.32	40	172.80	19.4	778
Olympia™ Acoustical Ceiling	OLCRF249	610*1220*19	FLB	6	4.46	40	178.56	20.1	804
Olympia™ Pedestal Acoustical Ceiling	DP1OLCRI669	600*600*19	Pedestal	10	3.60	52	187.20	16.2	842
Olympia™ Pedestal Acoustical Ceiling	DP1OLCRI229	610*610*19	Pedestal	10	3.60	52	187.20	16.2	842
Olympia™ Pedestal Acoustical Ceiling	DP4OLCRI669	600*600*19	Pedestal	10	3.60	52	187.20	16.2	842
Olympia™ Pedestal Acoustical Ceiling	DP4OLCRI229	610*610*19	Pedestal	10	3.60	52	187.20	16.2	842
Olympia Micro™ Acoustical Ceiling	OLPS665	600*600*15	SQ	12	4.32	56	241.92	19.4	1,089
Olympia Micro™ Acoustical Ceiling	OLPS225	610*610*15	SQ	12	4.46	56	249.98	20.1	1,125
Olympia Micro™ Acoustical Ceiling	OLPC665	600*600*15	SQ	12	4.32	56	241.92	19.4	1,089
Olympia Micro™ Acoustical Ceiling	OLPC225	610*610*15	SQ	12	4.46	56	249.98	20.1	1,125
Olympia Micro™ Acoustical Ceiling	OLPC625	600*1200*15	SQ	8	5.76	40	230.40	25.9	1,037
Olympia Micro™ Acoustical Ceiling	OLPC245	610*1220*15	SQ	8	5.95	40	238.08	26.8	1,071
Olympia Micro™ Acoustical Ceiling	OLPX665	600*600*15	SQ	12	4.32	40	172.80	22.0	881
Olympia Micro™ Acoustical Ceiling	OLPX225	610*610*15	SQ	12	4.46	40	178.56	22.8	911
Olympia Micro™ Acoustical Ceiling	OLPX625	600*1200*15	SQ	8	5.76	40	230.40	29.4	1,175
Olympia Micro™ Acoustical Ceiling	OLPX245	610*1220*15	SQ	8	5.95	40	238.08	30.4	1,214

ACOUSTICAL CEILING PACKAGING

Product Name	Item Code	Size (mm)	Edge Detail	Carton Volume		Pallet Volume		Weight	
				Number Of Tiles Per Carton	M² Per Carton	Number Of Carton Per Pallet	M² Per Pallet	Carton Weight Kg/Ctn	Pallet Weight Kg/Pallet
Olympia Micro™ Acoustical Ceiling	OLPC325	300*1200*15	SQ	12	4.32	40	172.80	19.4	778
Olympia Micro™ Acoustical Ceiling	OLPC145	310*1220*15	SQ	12	4.54	40	181.54	20.4	817
Olympia Micro™ Acoustical Ceiling	OLPC669-HNRC	600*600*19	SQ	10	3.60	52	187.20	18.4	955
Olympia Micro™ Acoustical Ceiling	OLPC229-HNRC	610*610*19	SQ	10	3.72	52	193.44	19.0	987
Olympia Micro™ Acoustical Ceiling	OLPS669	600*600*19	SQ	10	3.60	52	187.20	18.4	955
Olympia Micro™ Acoustical Ceiling	OLPS229	610*610*19	SQ	10	3.72	52	193.44	19.0	987
Olympia Micro™ Acoustical Ceiling	OLPC329	300*1200*19	SQ	10	3.60	40	144.00	18.4	734
Olympia Micro™ Acoustical Ceiling	OLPC149	310*1220*19	SQ	10	3.78	40	151.28	19.3	772
Olympia Micro™ Acoustical Ceiling	OLPC629-HNRC	600*1200*19	SQ	6	4.32	40	172.80	22.0	881
Olympia Micro™ Acoustical Ceiling	OLPC249-HNRC	610*1220*19	SQ	6	4.46	40	178.56	22.8	911
Olympia Micro™ Acoustical Ceiling	OLPSR665	600*600*15	SLT	12	4.32	56	241.92	19.4	1,089
Olympia Micro™ Acoustical Ceiling	OLPSR225	610*610*15	SLT	12	4.46	56	249.98	20.1	1,125
Olympia Micro™ Acoustical Ceiling	OLPCR665	600*600*15	SLT	12	4.32	56	241.92	19.4	1,089
Olympia Micro™ Acoustical Ceiling	OLPCR225	610*610*15	SLT	12	4.46	56	249.98	20.1	1,125
Olympia Micro™ Acoustical Ceiling	OLPSR669	600*600*19	SLT	10	3.60	52	187.20	18.4	955
Olympia Micro™ Acoustical Ceiling	OLPSR229	610*610*19	SLT	10	3.72	52	193.44	19.0	987
Olympia Micro™ Acoustical Ceiling	OLPCR669-HNRC	600*600*19	SLT	10	3.60	52	187.20	18.4	955
Olympia Micro™ Acoustical Ceiling	OLPCR229-HNRC	610*610*19	SLT	10	3.72	52	193.44	19.0	987
Olympia Micro™ Acoustical Ceiling	OLPXR629	600*1200*19	SLT	6	4.32	40	172.80	27.9	1,115
Olympia Micro™ Acoustical Ceiling	OLPXR249	610*1220*19	SLT	6	4.46	40	178.56	28.8	1,152
Olympia Micro™ Acoustical Ceiling	OLPCR629-HNRC	600*1200*19	SLT	6	4.32	40	172.80	22.0	881
Olympia Micro™ Acoustical Ceiling	OLPCR249-HNRC	610*1220*19	SLT	6	4.46	40	178.56	22.8	911
Olympia Micro™ Acoustical Ceiling	OLPSRF665	600*600*15	FLB	12	4.32	56	241.92	19.4	1,089
Olympia Micro™ Acoustical Ceiling	OLPSRF225	610*610*15	FLB	12	4.46	56	249.98	20.1	1,125
Olympia Micro™ Acoustical Ceiling	OLPCRF665	600*600*15	FLB	12	4.32	56	241.92	19.4	1,089
Olympia Micro™ Acoustical Ceiling	OLPCRF225	610*610*15	FLB	12	4.46	56	249.98	20.1	1,125
Olympia Micro™ Acoustical Ceiling	OLPCRF325	300*1200*15	FLB	12	4.32	40	172.80	19.4	778
Olympia Micro™ Acoustical Ceiling	OLPCRF145	310*1220*15	FLB	12	4.54	40	181.54	20.4	817
Olympia Micro™ Acoustical Ceiling	OLPSRF669	600*600*19	FLB	10	3.60	52	187.20	18.4	955
Olympia Micro™ Acoustical Ceiling	OLPSRF229	610*610*19	FLB	10	3.72	52	193.44	19.0	987
Olympia Micro™ Acoustical Ceiling	OLPCRF669-HNRC	600*600*19	FLB	10	3.60	52	187.20	18.4	955
Olympia Micro™ Acoustical Ceiling	OLPCRF229-HNRC	610*610*19	FLB	10	3.72	52	193.44	19.0	987
Olympia Micro™ Acoustical Ceiling	OLPCRF629-HNRC	600*1200*19	FLB	6	4.32	40	172.80	22.0	881
Olympia Micro™ Acoustical Ceiling	OLPCRF249-HNRC	610*1220*19	FLB	6	4.46	40	178.56	22.8	911
Olympia Micro™ Acoustical Ceiling	OLPCRF329	300*1200*19	FLB	10	3.60	40	144.00	18.4	734
Olympia Micro™ Acoustical Ceiling	OLPCRF349	310*1220*19	FLB	10	3.78	40	151.28	19.3	772
Olympia Micro™ Acoustical Ceiling	OLPXFC665	600*600*15	BESK	12	4.32	32	138.24	22.0	705
Olympia Micro™ Acoustical Ceiling	OLPXFC625	600*1200*15	BESK	8	5.76	32	184.32	29.4	940
Olympia Micro™ Acoustical Ceiling	OLPXFC669	600*600*19	BESK	10	3.60	32	115.20	23.2	743
Olympia Micro™ Acoustical Ceiling	OLPXFC629	600*1200*19	BESK	6	4.32	32	138.24	27.9	892
Olympia Micro™ Acoustical Ceiling	OLPXRFDC325	300*1200*15	BESK	12	4.32	32	138.24	22.0	705
Olympia Micro™ Acoustical Ceiling	OLPXRFDC355	300*1500*15	D-BESK	8	3.60	32	115.20	18.4	588
Olympia Micro™ Acoustical Ceiling	OLPXRFDC385	300*1800*15	D-BESK	8	4.32	32	138.24	22.0	705
Olympia Micro™ Acoustical Ceiling	OLPXRFDC625	600*1200*15	D-BESK	8	5.76	32	184.32	29.4	940
Olympia Micro™ Acoustical Ceiling	OLPXRFDC655	600*1500*15	D-BESK	8	7.20	30	216.00	36.7	1,102
Olympia Micro™ Acoustical Ceiling	OLPXRFDC685	600*1800*15	D-BESK	8	8.64	30	259.20	44.1	1,322
Olympia Micro™ Acoustical Ceiling	OLPXRFDC329	300*1200*19	D-BESK	10	3.60	32	115.20	23.2	743
Olympia Micro™ Acoustical Ceiling	OLPXRFDC359	300*1500*19	D-BESK	6	2.70	32	86.40	17.4	557
Olympia Micro™ Acoustical Ceiling	OLPXRFDC389	300*1800*19	D-BESK	6	3.24	32	103.68	20.9	669
Olympia Micro™ Acoustical Ceiling	OLPXRFDC629	600*1200*19	D-BESK	6	4.32	32	138.24	27.9	892
Olympia Micro™ Acoustical Ceiling	OLPXRFDC659	600*1500*19	D-BESK	6	5.40	30	162.00	34.8	1,045
Olympia Micro™ Acoustical Ceiling	OLPXRFDC689	600*1800*19	D-BESK	6	6.48	30	194.40	41.8	1,254
Omni Acoustical Ceiling	OMS665	600*600*15	SQ	12	4.32	56	241.92	15.6	871
Omni Acoustical Ceiling	OMS225	610*610*15	SQ	12	4.46	56	249.98	16.1	900
Omni Acoustical Ceiling	OMC625	600*1200*15	SQ	8	5.76	40	230.40	20.7	829
Omni Acoustical Ceiling	OMC245	610*1220*15	SQ	8	5.95	40	238.08	21.4	857
Omni Acoustical Ceiling	OMX665	600*600*15	SQ	12	4.32	40	172.80	22.0	881
Omni Acoustical Ceiling	OMX225	610*610*15	SQ	12	4.46	40	178.56	22.8	911
Omni Acoustical Ceiling	OMS669	600*600*19	SQ	10	3.60	52	187.20	16.2	842
Omni Acoustical Ceiling	OMS229	610*610*19	SQ	10	3.72	52	193.44	16.7	870
Omni Acoustical Ceiling	OMX669	600*600*19	SQ	10	3.60	40	144.00	23.2	929
Omni Acoustical Ceiling	OMX229	610*610*19	SQ	10	3.72	40	148.80	24.0	960
Omni Acoustical Ceiling	OMSR665	600*600*15	SLT	12	4.32	56	241.92	15.6	871

ACOUSTICAL CEILING PACKAGING

Product Name	Item Code	Size (mm)	Edge Detail	Carton Volume		Pallet Volume		Weight	
				Number Of Tiles Per Carton	M² Per Carton	Number Of Carton Per Pallet	M² Per Pallet	Carton Weight Kg/Ctn	Pallet Weight Kg/Pallet
Omni Acoustical Ceiling	OMSR225	610*610*15	SLT	12	4.46	56	249.98	16.1	900
Radar™ Acoustical Ceiling	RDS662	600*600*12	SQ	16	5.76	52	299.52	16.4	854
Radar™ Acoustical Ceiling	RDS222	610*610*12	SQ	16	5.95	52	309.50	17.0	882
Radar™ Acoustical Ceiling	RDS665	600*600*15	SQ	12	4.32	56	241.92	15.6	871
Radar™ Acoustical Ceiling	RDS225	610*610*15	SQ	12	4.46	56	249.98	16.1	900
Radar™ Acoustical Ceiling	RDC665	600*600*15	SQ	12	4.32	56	241.92	15.6	871
Radar™ Acoustical Ceiling	RDC225	610*610*15	SQ	12	4.46	56	249.98	16.1	900
Radar™ Acoustical Ceiling	RDX665	600*600*15	SQ	12	4.32	40	172.80	22.0	881
Radar™ Acoustical Ceiling	RDX225	610*610*15	SQ	12	4.46	40	178.56	22.8	911
Radar™ Acoustical Ceiling	RDX625	600*1200*15	SQ	8	5.76	40	230.40	29.4	1,175
Radar™ Acoustical Ceiling	RDX245	610*1220*15	SQ	8	5.95	40	238.08	30.4	1,214
Radar™ Acoustical Ceiling	RDX669	600*600*19	SQ	10	3.60	40	144.00	23.2	929
Radar™ Acoustical Ceiling	RDX229	610*610*19	SQ	10	3.72	40	148.80	24.0	960
Radar™ Acoustical Ceiling	RDC325	300*1200*15	SQ	12	4.32	40	172.80	15.6	622
Radar™ Acoustical Ceiling	RDC145	310*1220*15	SQ	12	4.54	40	181.54	16.3	654
Radar™ Acoustical Ceiling	RDS669	600*600*19	SQ	10	3.60	52	187.20	16.2	842
Radar™ Acoustical Ceiling	RDS229	610*610*19	SQ	10	3.72	52	193.44	16.7	870
Radar™ Acoustical Ceiling	RDC669-HNRC	600*600*19	SQ	10	3.60	52	187.20	16.2	842
Radar™ Acoustical Ceiling	RDC229-HNRC	610*610*19	SQ	10	3.72	52	193.44	16.7	870
Radar™ Acoustical Ceiling	RDC329	300*1200*19	SQ	10	3.60	40	144.00	16.2	648
Radar™ Acoustical Ceiling	RDC149	310*1220*19	SQ	10	3.78	40	151.28	17.0	681
Radar™ Acoustical Ceiling	RDC669	600*600*19	SQ	10	3.60	52	187.20	16.2	842
Radar™ Acoustical Ceiling	RDC229	610*610*19	SQ	10	3.72	52	193.44	16.7	870
Radar™ Acoustical Ceiling	RDC6622	600*600*22	SQ	8	2.88	56	161.28	15.1	847
Radar™ Acoustical Ceiling	RDC2222	610*610*22	SQ	8	2.98	56	166.66	15.6	875
Radar™ Acoustical Ceiling	RDSR665	600*600*15	SLT	12	4.32	56	241.92	15.6	871
Radar™ Acoustical Ceiling	RDSR225	610*610*15	SLT	12	4.46	56	249.98	16.1	900
Radar™ Acoustical Ceiling	RDCR665	600*600*15	SLT	12	4.32	56	241.92	15.6	871
Radar™ Acoustical Ceiling	RDCR225	610*610*15	SLT	12	4.46	56	249.98	16.1	900
Radar™ Acoustical Ceiling	RDXR669	600*1200*19	SLT	10	3.60	40	144.00	23.2	929
Radar™ Acoustical Ceiling	RDXR229	610*1220*19	SLT	10	3.72	40	148.80	24.0	960
Radar™ Acoustical Ceiling	RDCR325	300*1200*15	SLT	12	4.32	40	172.80	15.6	622
Radar™ Acoustical Ceiling	RDCR145	310*1220*15	SLT	12	4.54	40	181.54	16.3	654
Radar™ Acoustical Ceiling	RDSR669	600*600*19	SLT	10	3.60	52	187.20	16.2	842
Radar™ Acoustical Ceiling	RDSR229	610*610*19	SLT	10	3.72	52	193.44	16.7	870
Radar™ Acoustical Ceiling	RDCR669-HNRC	600*600*19	SLT	10	3.60	52	187.20	16.2	842
Radar™ Acoustical Ceiling	RDCR229-HNRC	610*610*19	SLT	10	3.72	52	193.44	16.7	870
Radar™ Acoustical Ceiling	RDCR329	300*1200*19	SLT	10	3.60	40	144.00	16.2	648
Radar™ Acoustical Ceiling	RDCR149	310*1220*19	SLT	10	3.78	40	151.28	17.0	681
Radar™ Acoustical Ceiling	RDCR669	600*600*19	SLT	10	3.60	52	187.20	16.2	842
Radar™ Acoustical Ceiling	RDCR229	610*610*19	SLT	10	3.72	52	193.44	16.7	870
Radar™ Acoustical Ceiling	RDCR6622	600*600*22	SLT	8	2.88	56	161.28	15.1	847
Radar™ Acoustical Ceiling	RDCR2222	610*610*22	SLT	8	2.98	56	166.66	15.6	875
Radar™ Acoustical Ceiling	RDSRF665	600*600*15	FLB	12	4.32	56	241.92	15.6	871
Radar™ Acoustical Ceiling	RDSRF225	610*610*15	FLB	12	4.46	56	249.98	16.1	900
Radar™ Acoustical Ceiling	RDCRF665	600*600*15	FLB	12	4.32	56	241.92	15.6	871
Radar™ Acoustical Ceiling	RDCRF225	610*610*15	FLB	12	4.46	56	249.98	16.1	900
Radar™ Acoustical Ceiling	RDCRF325	300*1200*15	FLB	12	4.32	40	172.80	15.6	622
Radar™ Acoustical Ceiling	RDCRF145	310*1220*15	FLB	12	4.54	40	181.54	16.3	654
Radar™ Acoustical Ceiling	RDCRF329	300*1200*19	FLB	10	3.60	40	144.00	16.2	648
Radar™ Acoustical Ceiling	RDCRF149	310*1220*19	FLB	10	3.78	40	151.28	17.0	681
Radar Ceramic™ Acoustical Ceiling	RDXX665	600*600*15	SQ	12	4.32	40	172.80	35.6	1,426
Radar Ceramic™ Acoustical Ceiling	RDXX225	610*610*15	SQ	12	4.46	40	178.56	36.8	1,473
Skylite Acoustic	SKAX669-R6	600*600*19	SQ	10	3.60	52	187.20	25.2	1,310
Skylite Acoustic	SKAX229-R6	610*610*19	SQ	10	3.72	52	193.44	26.0	1,354
Skylite Acoustic	SKAX629-R6	600*1200*19	SQ	6	4.32	40	172.80	30.2	1,210
Skylite Acoustic	SKAX249-R6	610*1220*19	SQ	6	4.46	40	178.56	31.2	1,250
Skylite Acoustic	SKAXR669-R6	600*600*19	SQ	10	3.60	52	187.20	25.2	1,310
Skylite Acoustic	SKAXR229-R6	610*610*19	SQ	10	3.72	52	193.44	26.0	1,354
Skylite Acoustic	SKAXR629-R6	600*1200*19	SQ	6	4.32	40	172.80	30.2	1,210
Skylite Acoustic	SKAXR249-R6	610*1220*19	SQ	6	4.46	40	178.56	31.2	1,250
Skylite Acoustic	SKAXRF669-R6	600*600*19	SL	10	3.60	52	187.20	25.2	1,310
Skylite Acoustic	SKAXRF229-R6	610*610*19	SL	10	3.72	52	193.44	26.0	1,354

ACOUSTICAL CEILING PACKAGING

Product Name	Item Code	Size (mm)	Edge Detail	Carton Volume		Pallet Volume		Weight	
				Number Of Tiles Per Carton	M² Per Carton	Number Of Carton Per Pallet	M² Per Pallet	Carton Weight Kg/Ctn	Pallet Weight Kg/Pallet
Skylite Acoustic	SKAXRF629-R6	600*1200*19	SL	6	4.32	40	172.80	30.2	1,210
Skylite Acoustic	SKAXRF249-R6	610*1220*19	SL	6	4.46	40	178.56	31.2	1,250
Skylite Clean	SKCX665-R6	600*600*15	SQ	12	4.32	40	172.80	22.7	907
Skylite Clean	SKCX225-R6	610*610*15	SQ	12	4.46	40	178.56	23.4	937
Skylite Clean	SKCX625-R6	600*1200*15	SQ	8	5.76	40	230.40	30.2	1,210
Skylite Clean	SKCX245-R6	610*1220*15	SQ	8	5.95	40	238.08	31.2	1,250
Skylite Clean	SKCX669-R6	600*600*19	SQ	12	4.32	40	172.80	28.7	1,149
Skylite Clean	SKCX229-R6	610*610*19	SQ	12	4.46	40	178.56	29.7	1,187
Skylite Clean	SKCX629-R6	600*1200*19	SQ	8	5.76	40	230.40	38.3	1,532
Skylite Clean	SKCX249-R6	610*1220*19	SQ	8	5.95	40	238.08	39.6	1,583
Sonata Acoustical Ceiling	SC669	600*600*19	SQ	10	3.60	52	187.20	17.1	889
Sonata Acoustical Ceiling	SC229	610*610*19	SQ	10	3.72	52	193.44	17.7	919
Sonata Acoustical Ceiling	SC629	600*1200*19	SQ	6	4.32	40	172.80	20.5	821
Sonata Acoustical Ceiling	SC249	610*1220*19	SQ	6	4.46	40	178.56	21.2	848
Sonata Acoustical Ceiling	SC6622	600*600*22	SQ	8	2.88	56	161.28	15.8	887
Sonata Acoustical Ceiling	SC2222	610*610*22	SQ	8	2.98	56	166.66	16.4	917
Sonata Acoustical Ceiling	SCR669	600*600*19	SLT	10	3.60	52	187.20	17.1	889
Sonata Acoustical Ceiling	SCR229	610*610*19	SLT	10	3.72	52	193.44	17.7	919
Sonata Acoustical Ceiling	SCR629	600*1200*19	SLT	6	4.32	40	172.80	20.5	821
Sonata Acoustical Ceiling	SCR249	610*1220*19	SLT	6	4.46	40	178.56	21.2	848
Sonata Acoustical Ceiling	SCR6622	600*600*22	SLT	8	2.88	56	161.28	15.8	887
Sonata Acoustical Ceiling	SCR2222	610*610*22	SLT	8	2.98	56	166.66	16.4	917
Sonata Acoustical Ceiling	SCRF669	600*600*19	FLB	10	3.60	52	187.20	17.1	889
Sonata Acoustical Ceiling	SCRF229	610*610*19	FLB	10	3.72	52	193.44	17.7	919
Sonata Acoustical Ceiling	SCRF629	600*1200*19	FLB	6	4.32	40	172.80	20.5	821
Sonata Acoustical Ceiling	SCRF249	610*1220*19	FLB	6	4.46	40	178.56	21.2	848
Sonata Acoustical Ceiling	SCRF6622	600*600*22	FLB	8	2.88	56	161.28	15.8	887
Sonata Acoustical Ceiling	SCRF2222	610*610*22	FLB	8	2.98	56	166.66	16.4	917
Sonata Acoustical Ceiling	SXFC669	600*600*19	BESK	10	3.60	32	115.20	23.2	743
Sonata Acoustical Ceiling	SXRFDC669	600*600*19	D-BESK	10	3.60	32	115.20	23.2	743
Sonata Healthcare Acoustical Ceiling	SC669HC	600*600*19	SQ	10	3.60	52	187.20	17.1	889
Sonata Healthcare Acoustical Ceiling	SC229HC	610*610*19	SQ	10	3.72	52	193.44	17.7	919
Sonata Healthcare Acoustical Ceiling	SC629HC	600*1200*19	SQ	6	4.32	40	172.80	20.5	821
Sonata Healthcare Acoustical Ceiling	SC249HC	610*1220*19	SQ	6	4.46	40	178.56	21.2	848
Sonata Healthcare Acoustical Ceiling	SC6622HC	600*600*22	SQ	8	2.88	40	115.20	15.8	634
Sonata Healthcare Acoustical Ceiling	SC2222HC	610*610*22	SQ	8	2.98	40	119.04	16.4	655
Sonata Healthcare Acoustical Ceiling	SCR669HC	600*600*19	SLT	10	3.60	52	187.20	17.1	889
Sonata Healthcare Acoustical Ceiling	SCR229HC	610*610*19	SLT	10	3.72	52	193.44	17.7	919
Sonata Healthcare Acoustical Ceiling	SCR629HC	600*1200*19	SLT	6	4.32	40	172.80	20.5	821
Sonata Healthcare Acoustical Ceiling	SCR249HC	610*1220*19	SLT	6	4.46	40	178.56	21.2	848
Sonata Healthcare Acoustical Ceiling	SCR6622HC	600*600*22	SLT	8	2.88	40	115.20	15.8	634
Sonata Healthcare Acoustical Ceiling	SCR2222HC	610*610*22	SLT	8	2.98	40	119.04	16.4	655
Sonata Healthcare Acoustical Ceiling	SCRF669HC	600*600*19	FLB	10	3.60	52	187.20	17.1	889
Sonata Healthcare Acoustical Ceiling	SCRF229HC	610*610*19	FLB	10	3.72	52	193.44	17.7	919
Sonata Healthcare Acoustical Ceiling	SCRF629HC	600*1200*19	FLB	6	4.32	40	172.80	20.5	821
Sonata Healthcare Acoustical Ceiling	SCRF249HC	610*1220*19	FLB	6	4.46	40	178.56	21.2	848
Sonata Healthcare Acoustical Ceiling	SCRF6622HC	600*600*22	FLB	8	2.88	40	115.20	15.8	634
Sonata Healthcare Acoustical Ceiling	SCRF2222HC	610*610*22	FLB	8	2.98	40	119.04	16.4	655
Sparta Acoustical Ceiling	LPW665	600*600*15	SQ	12	4.32	56	241.92	16.2	907
Sparta Acoustical Ceiling	LPW225	610*610*15	SQ	12	4.46	56	249.98	16.7	937
Sparta Acoustical Ceiling	LPW669	600*600*19	SQ	10	3.60	52	187.20	17.1	889
Sparta Acoustical Ceiling	LPW229	610*610*19	SQ	10	3.72	52	193.44	17.7	919
Taiga Acoustical Ceiling	TS665	600*600*15	SQ	12	4.32	56	241.92	15.6	871
Taiga Acoustical Ceiling	TS225	610*610*15	SQ	12	4.46	56	249.98	16.1	900
Taiga Acoustical Ceiling	TS669	600*600*19	SQ	10	3.60	52	187.20	16.2	842
Taiga Acoustical Ceiling	TS229	610*610*19	SQ	10	3.72	52	193.44	16.7	870
Taiga Acoustical Ceiling	TSR665	600*600*15	SLT	12	4.32	56	241.92	15.6	871
Taiga Acoustical Ceiling	TSR225	610*610*15	SLT	12	4.46	56	249.98	16.1	900
Taiga Acoustical Ceiling	TSR669	600*600*19	SLT	10	3.60	52	187.20	16.2	842
Taiga Acoustical Ceiling	TSR229	610*610*19	SLT	10	3.72	52	193.44	16.7	870
Taiga Acoustical Ceiling	TSRF665	600*600*15	FLB	12	4.32	56	241.92	15.6	871
Taiga Acoustical Ceiling	TSRF225	610*610*15	FLB	12	4.46	56	249.98	16.1	900
Taiga Hygiene Acoustical Ceiling	THS665	600*600*15	SQ	12	4.32	56	241.92	15.6	871

ACOUSTICAL CEILING PACKAGING

Product Name	Item Code	Size (mm)	Edge Detail	Carton Volume		Pallet Volume		Weight	
				Number Of Tiles Per Carton	M² Per Carton	Number Of Carton Per Pallet	M² Per Pallet	Carton Weight Kg/Ctn	Pallet Weight Kg/Pallet
Taiga Hygiene Acoustical Ceiling	THS225	610*610*15	SQ	12	4.46	56	249.98	16.1	900
Taiga Hygiene Acoustical Ceiling	THS669	600*600*19	SQ	10	3.60	52	187.20	16.2	842
Taiga Hygiene Acoustical Ceiling	THS229	610*610*19	SQ	10	3.72	52	193.44	16.7	870
Taiga Hygiene Acoustical Ceiling	THSR665	600*600*15	SLT	12	4.32	56	241.92	15.6	871
Taiga Hygiene Acoustical Ceiling	THSR225	610*610*15	SLT	12	4.46	56	249.98	16.1	900
Taiga Hygiene Acoustical Ceiling	THSR669	600*600*19	SLT	10	3.60	52	187.20	16.2	842
Taiga Hygiene Acoustical Ceiling	THSR229	610*610*19	SLT	10	3.72	52	193.44	16.7	870
Taiga Hygiene Acoustical Ceiling	THSRF669	600*600*19	FLB	10	3.60	52	187.20	16.2	842
Taiga Hygiene Acoustical Ceiling	THSRF229	610*610*19	FLB	10	3.72	52	193.44	16.7	870
Taiga Perforated Acoustical Ceiling	TPS662	600*600*12	SQ	16	5.76	52	299.52	16.4	854
Taiga Perforated Acoustical Ceiling	TPS222	610*610*12	SQ	16	5.95	52	309.50	17.0	882
Taiga Perforated Acoustical Ceiling	TPS665	600*600*15	SQ	12	4.32	56	241.92	15.6	871
Taiga Perforated Acoustical Ceiling	TPS225	610*610*15	SQ	12	4.46	56	249.98	16.1	900
Taiga Perforated Acoustical Ceiling	TPC665	600*600*15	SQ	12	4.32	56	241.92	15.6	871
Taiga Perforated Acoustical Ceiling	TPC225	610*610*15	SQ	12	4.46	56	249.98	16.1	900
Taiga Perforated Acoustical Ceiling	TPC625	600*1200*15	SQ	8	5.76	40	230.40	20.7	829
Taiga Perforated Acoustical Ceiling	TPC245	610*1220*15	SQ	8	5.95	40	238.08	21.4	857
Taiga Perforated Acoustical Ceiling	TPC666-HNRC	600*600*16	SQ	12	4.32	52	224.64	16.6	865
Taiga Perforated Acoustical Ceiling	TPC226-HNRC	610*610*16	SQ	12	4.46	52	232.13	17.2	894
Taiga Perforated Acoustical Ceiling	TPC669	600*600*19	SQ	10	3.60	52	187.20	16.2	842
Taiga Perforated Acoustical Ceiling	TPC229	610*610*19	SQ	10	3.72	52	193.44	16.7	870
Taiga Perforated Acoustical Ceiling	TPSR665	600*600*15	SLT	12	4.32	56	241.92	15.6	871
Taiga Perforated Acoustical Ceiling	TPSR225	610*610*15	SLT	12	4.46	56	249.98	16.1	900
Taiga Perforated Acoustical Ceiling	TPCR665	600*600*15	SLT	12	4.32	56	241.92	15.6	871
Taiga Perforated Acoustical Ceiling	TPCR225	610*610*15	SLT	12	4.46	56	249.98	16.1	900
Taiga Perforated Acoustical Ceiling	TPCR625	600*1200*15	SLT	8	5.76	40	230.40	20.7	829
Taiga Perforated Acoustical Ceiling	TPCR245	610*1220*15	SLT	8	5.95	40	238.08	21.4	857
Taiga Perforated Acoustical Ceiling	TPCR666-HNRC	600*600*16	SLT	12	4.32	52	224.64	16.6	865
Taiga Perforated Acoustical Ceiling	TPCR226-HNRC	610*610*16	SLT	12	4.46	52	232.13	17.2	894
Taiga Perforated Acoustical Ceiling	TPCR669	600*600*19	SLT	12	4.32	52	224.64	19.4	1,011
Taiga Perforated Acoustical Ceiling	TPCR229	610*610*19	SLT	12	4.46	52	232.13	20.1	1,045
Taiga Perforated Acoustical Ceiling	TPSRF665	600*600*15	FLB	12	4.32	56	241.92	15.6	871
Taiga Perforated Acoustical Ceiling	TPSRF225	610*610*15	FLB	12	4.46	56	249.98	16.1	900
Taiga Perforated Acoustical Ceiling	TPCRF665	600*600*15	FLB	12	4.32	56	241.92	15.6	871
Taiga Perforated Acoustical Ceiling	TPCRF225	610*610*15	FLB	12	4.46	56	249.98	16.1	900
Taiga Perforated Acoustical Ceiling	TPCRF625	600*1200*15	FLB	8	5.76	40	230.40	20.7	829
Taiga Perforated Acoustical Ceiling	TPCRF245	610*1220*15	FLB	8	5.95	40	238.08	21.4	857
Taiga Perforated Acoustical Ceiling	TPCRF666-HNRC	600*600*16	FLB	12	4.32	52	224.64	16.6	865
Taiga Perforated Acoustical Ceiling	TPCRF226-HNRC	610*610*16	FLB	12	4.46	52	232.13	17.2	894
Taiga Perforated Acoustical Ceiling	TPSRF669	600*600*19	FLB	10	3.60	52	187.20	16.2	842
Taiga Perforated Acoustical Ceiling	TPSRF229	610*610*19	FLB	10	3.72	52	193.44	16.7	870
Halcyon™ Acoustical Ceiling	HC669	600*600*19	SQ	10	3.60	40	144.00	6.7	266
Halcyon™ Acoustical Ceiling	HC229	610*610*19	SQ	10	3.72	40	148.80	6.9	275
Halcyon™ Acoustical Ceiling	HC629	600*1200*19	SQ	6	4.32	40	172.80	8.0	320
Halcyon™ Acoustical Ceiling	HC249	610*1220*19	SQ	6	4.46	40	178.56	8.3	330
Halcyon™ Acoustical Ceiling	HC6625	600*600*25	SQ	8	2.88	40	115.20	6.9	276
Halcyon™ Acoustical Ceiling	HC2225	610*610*25	SQ	8	2.98	40	119.04	7.1	286
Halcyon™ Acoustical Ceiling	HC6638	600*600*38	SQ	6	2.16	40	86.40	9.4	378
Halcyon™ Acoustical Ceiling	HC2238	610*610*38	SQ	6	2.23	40	89.28	9.8	390
Halcyon™ Acoustical Ceiling	HCR6625	600*600*25	SL	8	2.88	40	115.20	8.3	331
Halcyon™ Acoustical Ceiling	HCR2225	610*610*25	SL	8	2.98	40	119.04	8.5	342
Halcyon™ Acoustical Ceiling	HCR6225	600*1200*25	SL	8	5.76	20	115.20	16.5	331
Halcyon™ Acoustical Ceiling	HCR2425	610*1220*25	SL	8	5.95	20	119.04	17.1	342
Halcyon™ Acoustical Ceiling	HCR6638	600*600*38	SL	6	2.16	40	86.40	9.4	378
Halcyon™ Acoustical Ceiling	HCR2238	610*610*38	SL	6	2.23	40	89.28	9.8	390
Halcyon™ Acoustical Ceiling	HCR6238	600*1200*38	SL	6	4.32	20	86.40	18.9	378
Halcyon™ Acoustical Ceiling	HCR2438	610*1220*38	SL	6	4.46	20	89.28	19.5	390
Halcyon™ Acoustical Ceiling	HCRF6625	600*600*25	FL	8	2.88	40	115.20	8.3	331
Halcyon™ Acoustical Ceiling	HCRF2225	610*610*25	FL	8	2.98	40	119.04	8.5	342
Halcyon™ Acoustical Ceiling	HCRF6225	600*1200*25	FL	8	5.76	20	115.20	16.5	331
Halcyon™ Acoustical Ceiling	HCRF2425	610*1220*25	FL	8	5.95	20	119.04	17.1	342
Halcyon™ Acoustical Ceiling	HCRF6638	600*600*38	FL	6	2.16	40	86.40	9.4	378
Halcyon™ Acoustical Ceiling	HCRFDC669	600*600*19	D-BESK	10	3.60	32	115.20	9.9	317

ACOUSTICAL CEILING PACKAGING

Product Name	Item Code	Size (mm)	Edge Detail	Carton Volume		Pallet Volume		Weight	
				Number Of Tiles Per Carton	M² Per Carton	Number Of Carton Per Pallet	M² Per Pallet	Carton Weight Kg/Ctn	Pallet Weight Kg/Pallet
Halcyon™ Acoustical Ceiling	HCRFDC629	600*1200*19	D-BESK	6	4.32	32	138.24	11.9	380
Halcyon™ Acoustical Ceiling	HCRFDC6625	600*600*25	D-BESK	8	2.88	32	92.16	10.4	334
Halcyon™ Acoustical Ceiling	HCRFDC6225	600*1200*25	D-BESK	8	5.76	32	184.32	20.9	667
Halcyon™ Acoustical Ceiling	HCDSC6625	600*600*25	S-BESK	8	2.88	32	92.16	10.4	334
Halcyon™ Acoustical Ceiling	HCDSC6225	600*1200*25	S-BESK	8	5.76	32	184.32	20.9	667
Halcyon™ Healthcare Acoustical Ceiling	HC669HC	600*600*19	SQ	10	3.60	40	144.00	6.7	266
Halcyon™ Healthcare Acoustical Ceiling	HC229HC	610*610*19	SQ	10	3.72	40	148.80	6.9	275
Halcyon™ Healthcare Acoustical Ceiling	HC629HC	600*1200*19	SQ	6	4.32	40	172.80	8.0	320
Halcyon™ Healthcare Acoustical Ceiling	HC249HC	610*1220*19	SQ	6	4.46	40	178.56	8.3	330
Halcyon™ Healthcare Acoustical Ceiling	HC6625HC	600*600*25	SQ	8	2.88	40	115.20	6.9	276
Halcyon™ Healthcare Acoustical Ceiling	HC2225HC	610*610*25	SQ	8	2.98	40	119.04	7.1	286
Halcyon™ Healthcare Acoustical Ceiling	HC6225HC	600*1200*25	SQ	8	5.76	20	115.20	13.8	276
Halcyon™ Healthcare Acoustical Ceiling	HC2425HC	610*1220*25	SQ	8	5.95	20	119.04	14.3	286
Halcyon™ Healthcare Acoustical Ceiling	HC6638HC	600*600*38	SQ	6	2.16	40	86.40	9.4	378
Halcyon™ Healthcare Acoustical Ceiling	HC2238HC	610*610*38	SQ	6	2.23	40	89.28	9.8	390
Halcyon™ Healthcare Acoustical Ceiling	HC6238HC	600*1220*38	SQ	6	4.32	20	86.40	18.9	378
Halcyon™ Healthcare Acoustical Ceiling	HC2238HC	610*1220*38	SQ	6	4.46	20	89.28	19.5	390
Halcyon™ Healthcare Acoustical Ceiling	HCRF6625HC	600*600*25	FL	8	2.88	40	115.20	8.3	331
Halcyon™ Healthcare Acoustical Ceiling	HCRF2225HC	610*610*25	FL	8	2.98	40	119.04	8.5	342
Halcyon™ Healthcare Acoustical Ceiling	HCRF6225HC	600*1200*25	FL	8	5.76	20	115.20	16.5	331
Halcyon™ Healthcare Acoustical Ceiling	HCRF2425HC	610*1220*25	FL	8	5.95	20	119.04	17.1	342
Halcyon™ Healthcare Acoustical Ceiling	HCR6625HC	600*600*25	SL	8	2.88	40	115.20	8.3	331
Halcyon™ Healthcare Acoustical Ceiling	HCR2225HC	610*610*25	SL	8	2.98	40	119.04	8.5	342
Halcyon™ Healthcare Acoustical Ceiling	HCR6225HC	600*1200*25	SL	8	5.76	20	115.20	16.5	331
Halcyon™ Healthcare Acoustical Ceiling	HCR2425HC	610*1220*25	SL	8	5.95	20	119.04	17.1	342
Halcyon™ Black Acoustical Ceiling	HC669B	600*600*19	SQ	10	3.60	40	144.00	6.7	266
Halcyon™ Black Acoustical Ceiling	HC229B	610*610*19	SQ	10	3.72	40	148.80	6.9	275
Halcyon™ Black Acoustical Ceiling	HC629B	600*1200*19	SQ	6	4.32	40	172.80	8.0	320
Halcyon™ Black Acoustical Ceiling	HC249B	610*1220*19	SQ	6	4.46	40	178.56	8.3	330
Halcyon™ Black Acoustical Ceiling	HC6625B	600*600*25	SQ	8	2.88	40	115.20	6.9	276
Halcyon™ Black Acoustical Ceiling	HC2225B	610*610*25	SQ	8	2.98	40	119.04	7.1	286
Halcyon™ Black Acoustical Ceiling	HC6238B	600*1200*38	SQ	6	4.32	20	86.40	18.9	378
Halcyon™ Black Acoustical Ceiling	HC2438B	610*1220*38	SQ	6	4.46	20	89.28	19.5	390
Halcyon™ Black Acoustical Ceiling	HC6638B	600*600*38	SQ	6	2.16	40	86.40	9.4	378
Halcyon™ Black Acoustical Ceiling	HC2238B	610*610*38	SQ	6	2.23	40	89.28	9.8	390
Halcyon™ Black Acoustical Ceiling	HCE6240B-AF	600*1200*40	SQ	6	4.32	20	86.40	20.5	410
Halcyon™ Black Acoustical Ceiling	HCE2440B-AF	610*1220*40	SQ	6	4.46	20	89.28	21.2	424
Halcyon™ Black Acoustical Ceiling	HCE6640B-AF	600*600*40	SQ	8	2.88	40	115.20	13.7	547
Halcyon™ Black Acoustical Ceiling	HCE2240B-AF	610*610*40	SQ	8	2.98	40	119.04	14.1	565
Halcyon™ Black Acoustical Ceiling	HCE6650B	600*600*50	SQ	4	1.44	40	57.60	8.6	346
Halcyon™ Black Acoustical Ceiling	HCE2250B	610*610*50	SQ	4	1.49	40	59.52	8.9	357
Halcyon™ Black Acoustical Ceiling	HCE6250B	600*1200*50	SQ	4	2.88	20	57.60	17.3	346
Halcyon™ Black Acoustical Ceiling	HCE2450B	610*1220*50	SQ	4	2.98	20	59.52	17.9	357
Louna™ Elegant Acoustical Ceiling	LC669	600*600*19	SQ	10	3.60	40	144.00	7.2	288
Louna™ Elegant Acoustical Ceiling	LC229	610*610*19	SQ	10	3.72	40	148.80	7.4	298
Louna™ Elegant Acoustical Ceiling	LC6625	600*600*25	SQ	8	2.88	40	115.20	7.5	300
Louna™ Elegant Acoustical Ceiling	LC2225	610*610*25	SQ	8	2.98	40	119.04	7.7	310
Louna™ Elegant Acoustical Ceiling	LC3225	300*1200*25	SQ	8	2.88	40	115.20	7.5	300
Louna™ Elegant Acoustical Ceiling	LC1425	310*1220*25	SQ	8	3.03	40	121.02	7.9	315
Louna™ Elegant Acoustical Ceiling	LC6625-AF	600*600*25	SQ	8	2.88	40	115.20	7.5	300
Louna™ Elegant Acoustical Ceiling	LC2225-AF	610*610*25	SQ	8	2.98	40	119.04	7.7	310
Louna™ Elegant Acoustical Ceiling	LC6638-AF	600*600*38	SQ	6	2.16	40	86.40	8.6	346
Louna™ Elegant Acoustical Ceiling	LC2238-AF	610*610*38	SQ	6	2.23	40	89.28	8.9	357
Louna™ Elegant Acoustical Ceiling	LCR669	600*600*19	SL	10	3.60	40	144.00	9.9	396
Louna™ Elegant Acoustical Ceiling	LCR229	610*610*19	SL	10	3.78	40	151.28	10.4	416
Louna™ Elegant Acoustical Ceiling	LCR6625	600*600*25	SL	8	2.88	40	115.20	10.4	415
Louna™ Elegant Acoustical Ceiling	LCR2225	610*610*25	SL	8	2.98	40	119.04	10.7	429
Louna™ Elegant Acoustical Ceiling	LCR3225	300*1200*25	SL	8	2.88	40	115.20	10.4	415
Louna™ Elegant Acoustical Ceiling	LCR1425	310*1220*25	SL	8	3.03	40	121.02	10.9	436
Louna™ Elegant Acoustical Ceiling	LCR6225	600*1200*25	SL	8	5.76	20	115.20	20.7	415
Louna™ Elegant Acoustical Ceiling	LCR2425	610*1220*25	SL	8	5.95	20	119.04	21.4	429
Louna™ Elegant Acoustical Ceiling	LCRF669	600*600*19	FL	10	3.60	40	144.00	9.9	396
Louna™ Elegant Acoustical Ceiling	LCRF229	610*610*19	FL	10	3.72	40	148.80	10.2	409

ACOUSTICAL CEILING PACKAGING

Product Name	Item Code	Size (mm)	Edge Detail	Carton Volume		Pallet Volume		Weight	
				Number Of Tiles Per Carton	M² Per Carton	Number Of Carton Per Pallet	M² Per Pallet	Carton Weight Kg/Ctn	Pallet Weight Kg/Pallet
Louna™ Elegant Acoustical Ceiling	LCRF6625	600*600*25	FL	8	2.88	40	115.20	10.4	415
Louna™ Elegant Acoustical Ceiling	LCRF2225	610*610*25	FL	8	2.98	40	119.04	10.7	429
Louna™ Elegant Acoustical Ceiling	LCRF6225	600*1200*25	FL	8	2.88	20	57.60	10.4	207
Louna™ Elegant Acoustical Ceiling	LCRF2425	610*1220*25	FL	8	2.98	20	59.52	10.7	214
Louna™ Elegant Acoustical Ceiling	LCRF3225	300*1200*25	FL	8	2.88	40	115.20	10.4	415
Louna™ Elegant Acoustical Ceiling	LCRF1425	310*1220*25	FL	8	3.03	40	121.02	10.9	436
Louna™ Elegant Acoustical Ceiling	LCRFDC669	600*600*19	D-BESK	10	3.60	32	115.20	12.6	403
Louna™ Elegant Acoustical Ceiling	LCRFDC6625	600*600*25	D-BESK	10	3.72	32	119.04	17.1	548
Louna™ Elegant Acoustical Ceiling	LCDSC6625	600*600*25	S-BESK	8	2.88	32	92.16	13.2	424
Louna™ Elite Acoustical Ceiling	LEC665	600*600*15	SQ	12	4.32	40	172.80	6.7	268
Louna™ Elite Acoustical Ceiling	LEC225	610*610*15	SQ	12	4.46	40	178.56	6.9	277
Louna™ Elite Acoustical Ceiling	LEC625	600*1200*15	SQ	8	5.76	40	230.40	8.9	357
Louna™ Elite Acoustical Ceiling	LEC245	610*1220*15	SQ	8	5.95	40	238.08	9.2	369
Louna™ Elite Acoustical Ceiling	LEC669	600*600*19	SQ	10	3.60	40	144.00	7.2	288
Louna™ Elite Acoustical Ceiling	LEC229	610*610*19	SQ	10	3.72	40	148.80	7.4	298
Louna™ Elite Acoustical Ceiling	LEC629	600*1200*19	SQ	6	4.32	40	172.80	8.6	346
Louna™ Elite Acoustical Ceiling	LEC249	610*1220*19	SQ	6	4.46	40	178.56	8.9	357
Louna™ Elite Acoustical Ceiling	LECR669	600*600*19	SL	10	3.60	40	144.00	9.9	396
Louna™ Elite Acoustical Ceiling	LECR229	610*610*19	SL	10	3.72	40	148.80	10.2	409
Louna™ Elite Acoustical Ceiling	LECR629	600*1200*19	SL	6	4.32	40	172.80	11.9	475
Louna™ Elite Acoustical Ceiling	LECR249	610*1220*19	SL	6	4.46	40	178.56	12.3	491
Louna™ Elite Acoustical Ceiling	LECRF669	600*600*19	FL	10	3.60	40	144.00	9.9	396
Louna™ Elite Acoustical Ceiling	LECRF229	610*610*19	FL	10	3.72	40	148.80	10.2	409
Louna™ Elite Acoustical Ceiling	LECRF629	600*1200*19	FL	6	4.32	40	172.80	11.9	475
Louna™ Elite Acoustical Ceiling	LECRF249	610*1220*19	FL	6	4.46	40	178.56	12.3	491
Louna™ Natural Acoustical Ceiling	LNC665	600*600*15	SQ	12	4.32	40	172.80	6.7	268
Louna™ Natural Acoustical Ceiling	LNC225	610*610*15	SQ	12	4.46	40	178.56	6.9	277
Louna™ Natural Acoustical Ceiling	LNC625	600*1200*15	SQ	8	5.76	40	230.40	8.9	357
Louna™ Natural Acoustical Ceiling	LNC245	610*1220*15	SQ	8	5.95	40	238.08	9.2	369
Louna™ Natural Acoustical Ceiling	LNC669	600*600*19	SQ	10	3.60	40	144.00	7.2	288
Louna™ Natural Acoustical Ceiling	LNC229	610*610*19	SQ	10	3.72	40	148.80	7.4	298
Louna™ Natural Acoustical Ceiling	LNC629	600*1200*19	SQ	6	4.32	40	172.80	8.6	346
Louna™ Natural Acoustical Ceiling	LNC249	610*1220*19	SQ	6	4.46	40	178.56	8.9	357
Louna™ Hygiene Acoustical Ceiling	LC669H	600*600*19	SQ	10	3.60	40	144.00	7.2	288
Louna™ Hygiene Acoustical Ceiling	LC229H	610*610*19	SQ	10	3.72	40	148.80	7.4	298
Louna™ Hygiene Acoustical Ceiling	LC6625H	600*600*25	SQ	8	2.88	40	115.20	7.5	300
Louna™ Hygiene Acoustical Ceiling	LC2225H	610*610*25	SQ	8	2.98	40	119.04	7.7	310
Louna™ Hygiene Acoustical Ceiling	LC3225H	300*1200*25	SQ	8	2.88	40	115.20	7.5	300
Louna™ Hygiene Acoustical Ceiling	LC1425H	310*1220*25	SQ	8	3.03	40	121.02	7.9	315
Louna™ Hygiene Acoustical Ceiling	LC6625-AFH	600*600*25	SQ	8	2.88	40	115.20	7.5	300
Louna™ Hygiene Acoustical Ceiling	LC2225-AFH	610*610*25	SQ	8	2.98	40	119.04	7.7	310
Louna™ Hygiene Acoustical Ceiling	LC6638-AFH	600*600*38	SQ	6	2.16	40	86.40	8.6	346
Louna™ Hygiene Acoustical Ceiling	LC2238-AFH	610*610*38	SQ	6	2.23	40	89.28	8.9	357
Louna™ Hygiene Acoustical Ceiling	LCR669H	600*600*19	SL	10	3.60	40	144.00	9.9	396
Louna™ Hygiene Acoustical Ceiling	LCR229H	610*610*19	SL	10	3.72	40	148.80	10.2	409
Louna™ Hygiene Acoustical Ceiling	LCR6625H	600*600*25	SL	8	2.88	40	115.20	10.4	415
Louna™ Hygiene Acoustical Ceiling	LCR2225H	610*610*25	SL	8	2.98	40	119.04	10.7	429
Louna™ Hygiene Acoustical Ceiling	LCR3225H	300*1200*25	SL	8	2.88	40	115.20	10.4	415
Louna™ Hygiene Acoustical Ceiling	LCR1425H	310*1220*25	SL	8	3.03	40	121.02	10.9	436
Louna™ Hygiene Acoustical Ceiling	LCR6225H	600*1200*25	SL	8	5.76	20	115.20	20.7	415
Louna™ Hygiene Acoustical Ceiling	LCR2425H	610*1220*25	SL	8	5.95	20	119.04	21.4	429
Louna™ Hygiene Acoustical Ceiling	LCRF669H	600*600*19	FL	10	3.60	40	144.00	9.9	396
Louna™ Hygiene Acoustical Ceiling	LCRF229H	610*610*19	FL	10	3.72	40	148.80	10.2	409
Louna™ Hygiene Acoustical Ceiling	LCRF6625H	600*600*25	FL	8	2.88	40	115.20	10.4	415
Louna™ Hygiene Acoustical Ceiling	LCRF2225H	610*610*25	FL	8	2.98	40	119.04	10.7	429
Louna™ Hygiene Acoustical Ceiling	LCRF6225H	600*1200*25	FL	8	2.88	20	57.60	10.4	207
Louna™ Hygiene Acoustical Ceiling	LCRF2425H	610*1220*25	FL	8	3.03	20	60.51	10.9	218
Louna™ Hygiene Acoustical Ceiling	LCRF3225H	300*1200*25	FL	8	2.88	40	115.20	10.4	415
Louna™ Hygiene Acoustical Ceiling	LCRF1425H	310*1220*25	FL	8	3.03	40	121.02	10.9	436
Louna™ Hygiene Acoustical Ceiling	LCRFDC669H	600*600*19	D-BESK	10	3.60	32	115.20	12.6	403
Louna™ Hygiene Acoustical Ceiling	LCRFDC6625H	600*600*25	D-BESK	10	3.72	32	119.04	17.1	548
Louna™ Hygiene Acoustical Ceiling	LCDSC6625H	600*600*25	S-BESK	8	2.88	32	92.16	13.2	424
Louna™ Hi CAC Acoustical Ceiling	LCX6643	600*600*43	SQ	4	1.44	40	57.60	12.7	510

ACOUSTICAL CEILING PACKAGING

Product Name	Item Code	Size (mm)	Edge Detail	Carton Volume		Pallet Volume		Weight	
				Number Of Tiles Per Carton	M² Per Carton	Number Of Carton Per Pallet	M² Per Pallet	Carton Weight Kg/Ctn	Pallet Weight Kg/Pallet
Louna™ Hi CAC Acoustical Ceiling	LCX2243	610*610*43	SQ	4	1.49	40	59.52	13.2	527
Louna™ Hi CAC Acoustical Ceiling	LCX6243	600*1200*43	SQ	4	2.88	20	57.60	25.5	510
Louna™ Hi CAC Acoustical Ceiling	LCX2443	610*1220*43	SQ	4	2.98	20	59.52	26.3	527
Louna™ Hi CAC Acoustical Ceiling	LCXX6253	600*600*53	SQ	4	1.44	40	57.60	13.4	536
Louna™ Hi CAC Acoustical Ceiling	LCXX2453	610*610*53	SQ	4	1.49	40	59.52	13.8	554
Louna™ Hi CAC Acoustical Ceiling	LCXX6253	600*1200*53	SQ	4	2.88	20	57.60	26.8	536
Louna™ Hi CAC Acoustical Ceiling	LCXX2453	610*1220*53	SQ	4	2.98	20	59.52	27.7	554
Louna™ Hi CAC Acoustical Ceiling	LCXRF6643	600*600*43	FL	4	1.44	40	57.60	12.7	510
Louna™ Hi CAC Acoustical Ceiling	LCXRF2243	610*1220*43	FL	4	2.98	20	59.52	26.3	527
Louna™ Hi CAC Acoustical Ceiling	LCXRF6243	600*1200*43	FL	4	2.88	20	57.60	25.5	510
Louna™ Hi CAC Acoustical Ceiling	LCXRF2443	610*1220*43	FL	4	2.98	20	59.52	26.3	527
Louna™ Hi CAC Acoustical Ceiling	LCXXRF6253	600*600*53	FL	4	1.44	40	57.60	13.4	536
Louna™ Hi CAC Acoustical Ceiling	LCXXRF2453	610*1220*53	FL	4	2.98	20	59.52	27.7	554
Louna™ Hi CAC Acoustical Ceiling	LCXXRF6653	600*1200*53	FL	4	2.88	20	57.60	26.8	536
Louna™ Hi CAC Acoustical Ceiling	LCXXRF2253	610*1220*53	FL	4	2.98	20	59.52	27.7	554
Louna™ Hi CAC Black Acoustical Ceiling	LCX6643B	600*600*43	SQ	4	1.44	40	57.60	12.7	510
Louna™ Hi CAC Black Acoustical Ceiling	LCX2243B	610*610*43	SQ	4	1.49	40	59.52	13.2	527
Louna™ Hi CAC Black Acoustical Ceiling	LCX6243B	600*1200*43	SQ	4	2.88	20	57.60	25.5	510
Louna™ Hi CAC Black Acoustical Ceiling	LCX2443B	610*1220*43	SQ	4	2.98	20	59.52	26.3	527
Louna™ Hi CAC Black Acoustical Ceiling	LCXX6653B	600*600*53	SQ	4	1.44	40	57.60	13.4	536
Louna™ Hi CAC Black Acoustical Ceiling	LCXX2253B	610*610*53	SQ	4	1.49	40	59.52	13.8	554
Louna™ Hi CAC Black Acoustical Ceiling	LCXX6253B	600*1200*53	SQ	4	2.88	20	57.60	26.8	536
Louna™ Hi CAC Black Acoustical Ceiling	LCXX2453B	610*1220*53	SQ	4	2.98	20	59.52	27.7	554
Painted Gypsum Ceiling	GT-BS6609	600*600*9.5	SQ	8	2.88	64	184.32	17.8	1,137
Painted Gypsum Ceiling	GT-BS2209	610*610*9.5	SQ	8	2.98	64	190.46	18.4	1,175
Painted Gypsum Ceiling	GT-BS662	600*600*12.5	SQ	6	2.16	64	138.24	17.5	1,123
Painted Gypsum Ceiling	GT-BS222	610*610*12.5	SQ	6	2.23	64	142.85	18.1	1,160
Painted Gypsum Ceiling	GT-BS622	600*1200*12.5	SQ	6	4.32	32	138.24	35.1	1,123
Painted Gypsum Ceiling	GT-BS242	610*1220*12.5	SQ	6	4.46	32	142.85	36.2	1,160
Painted Gypsum Ceiling	GT-BSR662	600*600*12.5	SL	6	2.16	64	138.24	22.9	1,465
Painted Gypsum Ceiling	GT-BSR222	610*610*12.5	SL	6	2.23	64	142.85	23.7	1,514
Painted Gypsum Ceiling	GT-BSR622	600*1200*12.5	SL	6	4.32	32	138.24	45.8	1,465
Painted Gypsum Ceiling	GT-BSR242	610*1220*12.5	SL	6	4.46	32	142.85	47.3	1,514
Painted Gypsum Ceiling	GT-BSRF662	600*600*12.5	FL	6	2.16	64	138.24	22.9	1,465
Painted Gypsum Ceiling	GT-BSRF222	610*610*12.5	FL	6	2.23	64	142.85	23.7	1,514
Painted Gypsum Ceiling	GT-BSRF622	600*1200*12.5	FL	6	4.32	32	138.24	45.8	1,465
Painted Gypsum Ceiling	GT-BSRF242	610*1220*12.5	FL	6	4.46	32	142.85	47.3	1,514
Painted Gypsum Ceiling	GT-BSDC662	600*600*12.5	Concealed	6	2.16	64	138.24	22.9	1,465
Painted Gypsum Ceiling	GT-BSDC622	600*1200*12.5	Concealed	6	2.16	64	138.24	22.9	1,465
Shades Gypsum Ceiling	LGAE-S6609	600*600*9.5	SQ	8	2.88	64	184.32	1,777.0	113,725
Shades Gypsum Ceiling	LGAE-S2209	610*610*9.5	SQ	8	2.98	64	190.46	18.4	1,175
Shades Gypsum Ceiling	LGAE-S662	600*600*12.5	SQ	6	2.16	64	138.24	17.5	1,123
Shades Gypsum Ceiling	LGAE-S222	610*610*12.5	SQ	6	2.23	64	142.85	18.1	1,160
Shades Gypsum Ceiling	LGAE-S622	600*1200*12.5	SQ	6	4.32	32	138.24	35.1	1,123
Shades Gypsum Ceiling	LGAE-S242	610*1220*12.5	SQ	6	4.46	32	142.85	36.2	1,160
Shades Gypsum Ceiling	LGAE-SR662	600*600*12.5	SL	6	2.16	64	138.24	22.9	1,465
Shades Gypsum Ceiling	LGAE-SR222	610*610*12.5	SL	6	2.23	64	142.85	23.7	1,514
Shades Gypsum Ceiling	LGAE-SRF662	600*600*12.5	FL	6	2.16	64	138.24	22.9	1,465
Shades Gypsum Ceiling	LGAE-SRF222	610*610*12.5	FL	6	2.23	64	142.85	23.7	1,514
Shades Gypsum Ceiling	LGAE-SR622	600*1200*12.5	FL	6	4.32	32	138.24	45.8	1,465
Shades Gypsum Ceiling	LGAE-SR242	610*1220*12.5	FL	6	4.46	32	142.85	47.3	1,514
Shades Gypsum Ceiling	LGAE-SRF622	600*1200*12.5	FL	6	4.32	32	138.24	45.8	1,465
Shades Gypsum Ceiling	LGAE-SRF242	610*1220*12.5	FL	6	4.46	32	142.85	47.3	1,514
Shades Gypsum Ceiling	LGAE-SDC662	600*600*12.5	Concealed	6	2.16	64	138.24	22.9	1,465
Shades Gypsum Ceiling	LGAE-SDC622	600*1200*12.5	Concealed	6	2.16	64	138.24	22.9	1,465
Perforated Gypsum Ceiling - R6	GT-PS6609-R6	600*600*9.5	SQ	8	2.88	64	184.32	16.1	1,032
Perforated Gypsum Ceiling - R6	GT-PS2209-R6	610*610*9.5	SQ	8	2.98	64	190.46	16.7	1,067
Perforated Gypsum Ceiling - R6	GT-PS662-R6	600*600*12.5	SQ	6	2.16	64	138.24	15.9	1,017
Perforated Gypsum Ceiling - R6	GT-PS222-R6	610*610*12.5	SQ	6	2.23	64	142.85	16.4	1,051
Perforated Gypsum Ceiling - R6	GT-PS622-R6	600*1200*12.5	SQ	6	4.32	32	138.24	31.8	1,017
Perforated Gypsum Ceiling - R6	GT-PS242-R6	610*1220*12.5	SQ	6	4.46	32	142.85	32.9	1,051
Perforated Gypsum Ceiling - R6	LGAE-PS6609-R6	600*600*9.5	SQ	8	2.88	64	184.32	16.1	1,032
Perforated Gypsum Ceiling - R6	LGAE-PS2209-R6	610*610*9.5	SQ	8	2.98	64	190.46	16.7	1,067

ACOUSTICAL CEILING PACKAGING

Product Name	Item Code	Size (mm)	Edge Detail	Carton Volume		Pallet Volume		Weight	
				Number Of Tiles Per Carton	M² Per Carton	Number Of Carton Per Pallet	M² Per Pallet	Carton Weight Kg/Ctn	Pallet Weight Kg/Pallet
Perforated Gypsum Ceiling - R6	LGAE-PS662-R6	600*600*12.5	SQ	6	2.16	64	138.24	15.9	1,017
Perforated Gypsum Ceiling - R6	LGAE-PS222-R6	610*610*12.5	SQ	6	2.23	64	142.85	16.4	1,051
Perforated Gypsum Ceiling - R6	LGAE-PS622-R6	600*1200*12.5	SQ	6	4.32	32	138.24	31.8	1,017
Perforated Gypsum Ceiling - R6	LGAE-PS242-R6	610*1220*12.5	SQ	6	4.46	32	142.85	32.9	1,051
Perforated Gypsum Ceiling - R6	GT-PSR662-R6	600*600*12.5	SL	6	2.16	64	138.24	18.4	1,175
Perforated Gypsum Ceiling - R6	GT-PSR622-R6	600*1200*12.5	SL	6	4.32	32	138.24	36.7	1,175
Perforated Gypsum Ceiling - R6	LGAE-PSR662-R6	600*600*12.5	SL	6	2.16	64	138.24	18.4	1,175
Perforated Gypsum Ceiling - R6	LGAE-PSR622-R6	600*1200*12.5	SL	6	4.32	32	138.24	36.7	1,175
Perforated Gypsum Ceiling - R6	GT-PSRF662-R6	600*600*12.5	FL	6	2.16	64	138.24	18.4	1,175
Perforated Gypsum Ceiling - R6	GT-PSRF622-R6	600*1200*12.5	FL	6	4.32	32	138.24	36.7	1,175
Perforated Gypsum Ceiling - R6	LGAE-PSRF662-R6	600*600*12.5	FL	6	2.16	64	138.24	18.4	1,175
Perforated Gypsum Ceiling - R6	LGAE-PSRF622-R6	600*1200*12.5	FL	6	4.32	32	138.24	36.7	1,175
Perforated Gypsum Ceiling - R6	GT-PSDC662-R6	600*600*12.5	Concealed	6	2.16	64	138.24	18.4	1,175
Perforated Gypsum Ceiling - R6	LGAE-PSDC662-R6	600*600*12.5	Concealed	6	2.16	64	138.24	18.4	1,175
Perforated Gypsum Ceiling - R6	GT-PSDC622-R6	600*1200*12.5	Concealed	6	4.32	32	138.24	36.7	1,175
Perforated Gypsum Ceiling - R6	LGAE-PSDC622-R6	600*1200*12.5	Concealed	6	4.32	32	138.24	36.7	1,175
Perforated Gypsum Ceiling - R12	GT-PS6609-R12	600*600*9.5	SQ	8	2.88	64	184.32	15.3	979
Perforated Gypsum Ceiling - R12	LGAE-PS6609-R12	600*600*9.5	SQ	8	2.88	64	184.32	15.3	979
Perforated Gypsum Ceiling - R12	GT-PS662-R12	600*600*12.5	SQ	6	2.16	64	138.24	19.7	1,262
Perforated Gypsum Ceiling - R12	GT-PS622-R12	600*1200*12.5	SQ	6	4.32	32	138.24	39.4	1,262
Perforated Gypsum Ceiling - R12	LGAE-PS662-R12	600*600*12.5	SQ	6	2.16	64	138.24	19.7	1,262
Perforated Gypsum Ceiling - R12	LGAE-PS622-R12	600*1200*12.5	SQ	6	4.32	32	138.24	39.4	1,262
Perforated Gypsum Ceiling - R12	GT-PSR662-R12	600*600*12.5	SL	6	2.16	64	138.24	19.7	1,262
Perforated Gypsum Ceiling - R12	GT-PSR622-R12	600*1200*12.5	SL	6	4.32	32	138.24	39.4	1,262
Perforated Gypsum Ceiling - R12	LGAE-PSR662-R12	600*600*12.5	SL	6	2.16	64	138.24	19.7	1,262
Perforated Gypsum Ceiling - R12	LGAE-PSR622-R12	600*1200*12.5	SL	6	4.32	32	138.24	39.4	1,262
Perforated Gypsum Ceiling - R12	GT-PSRF662-R12	600*600*12.5	FL	6	2.16	64	138.24	19.7	1,262
Perforated Gypsum Ceiling - R12	GT-PSRF622-R12	600*1200*12.5	FL	6	4.32	32	138.24	39.4	1,262
Perforated Gypsum Ceiling - R12	LGAE-PSRF662-R12	600*600*12.5	FL	6	2.16	64	138.24	19.7	1,262
Perforated Gypsum Ceiling - R12	LGAE-PSRF622-R12	600*1200*12.5	FL	6	4.32	32	138.24	39.4	1,262
Perforated Gypsum Ceiling - R12	GT-PSDC662-R12	600*600*12.5	Concealed	6	2.16	64	138.24	19.7	1,262
Perforated Gypsum Ceiling - R12	LGAE-PSDC662-R12	600*600*12.5	Concealed	6	2.16	64	138.24	19.7	1,262
Perforated Gypsum Ceiling - R12	GT-PSDC622-R12	600*1200*12.5	Concealed	6	4.32	32	138.24	39.4	1,262
Perforated Gypsum Ceiling - R12	LGAE-PSDC622-R12	600*1200*12.5	Concealed	6	4.32	32	138.24	39.4	1,262
Perforated Gypsum Ceiling - R8-15-20	GT-PS6609-R8-15-20	600*600*9.5	SQ	8	2.88	64	184.32	14.8	946
Perforated Gypsum Ceiling - R8-15-20	GT-PS662-R8-15-20	600*600*12.5	SQ	6	2.16	64	138.24	14.6	935
Perforated Gypsum Ceiling - R8-15-20	GT-PS622-R8-15-20	600*1200*12.5	SQ	6	4.32	32	138.24	29.2	935
Perforated Gypsum Ceiling - R8-15-20	LGAE-PS6609-R8-15-20	600*600*9.5	SQ	8	2.88	64	184.32	14.8	946
Perforated Gypsum Ceiling - R8-15-20	LGAE-PS662-R8-15-20	600*600*12.5	SQ	6	2.16	64	138.24	14.6	935
Perforated Gypsum Ceiling - R8-15-20	LGAE-PS622-R8-15-20	600*1200*12.5	SQ	6	4.32	32	138.24	29.2	935
Perforated Gypsum Ceiling - R8-15-20	GT-PSR662-R8-15-20	600*600*12.5	SL	6	2.16	64	138.24	16.8	1,078
Perforated Gypsum Ceiling - R8-15-20	GT-PSR622-R8-15-20	600*1200*12.5	SL	6	4.32	32	138.24	33.7	1,078
Perforated Gypsum Ceiling - R8-15-20	LGAE-PSR662-R8-15-20	600*600*12.5	SL	6	2.16	64	138.24	16.8	1,078
Perforated Gypsum Ceiling - R8-15-20	LGAE-PSR622-R8-15-20	600*1200*12.5	SL	6	4.32	32	138.24	33.7	1,078
Perforated Gypsum Ceiling - R8-15-20	GT-PSRF662-R8-15-20	600*600*12.5	FL	6	2.16	64	138.24	16.8	1,078
Perforated Gypsum Ceiling - R8-15-20	GT-PSRF622-R8-15-20	600*1200*12.5	FL	6	4.32	32	138.24	33.7	1,078
Perforated Gypsum Ceiling - R8-15-20	LGAE-PSRF662-R8-15-20	600*600*12.5	FL	6	2.16	64	138.24	16.8	1,078
Perforated Gypsum Ceiling - R8-15-20	LGAE-PSRF622-R8-15-20	600*1200*12.5	FL	6	4.32	32	138.24	33.7	1,078
Perforated Gypsum Ceiling - R8-15-20	GT-PSDC662-R8-15-20	600*600*12.5	Concealed	6	2.16	64	138.24	16.8	1,078
Perforated Gypsum Ceiling - R8-15-20	LGAE-PSDC662-R8-15-20	600*600*12.5	Concealed	6	2.16	64	138.24	16.8	1,078
Perforated Gypsum Ceiling - R8-15-20	GT-PSDC622-R8-15-20	600*1200*12.5	Concealed	6	4.32	32	138.24	33.7	1,078
Perforated Gypsum Ceiling - R8-15-20	LGAE-PSDC622-R8-15-20	600*1200*12.5	Concealed	6	4.32	32	138.24	33.7	1,078
Perforated Gypsum Ceiling - Q3	GT-PS662-Q3	600*600*12.5	SQ	6	2.16	64	138.24	20.5	1,313
Perforated Gypsum Ceiling - Q3	GT-PS622-Q3	600*1200*12.5	SQ	6	4.32	32	138.24	41.0	1,313
Perforated Gypsum Ceiling - Q3	LGAE-PS662-Q3	600*600*12.5	SQ	6	2.16	64	138.24	20.5	1,313
Perforated Gypsum Ceiling - Q3	LGAE-PS622-Q3	600*1200*12.5	SQ	6	4.32	32	138.24	41.0	1,313
Perforated Gypsum Ceiling - Q3	GT-PSR662-Q3	600*600*12.5	SL	6	2.16	64	138.24	20.5	1,313
Perforated Gypsum Ceiling - Q3	GT-PSR622-Q3	600*1200*12.5	SL	6	4.32	32	138.24	41.0	1,313
Perforated Gypsum Ceiling - Q3	LGAE-PSR662-Q3	600*600*12.5	SL	6	2.16	64	138.24	20.5	1,313
Perforated Gypsum Ceiling - Q3	LGAE-PSR622-Q3	600*1200*12.5	SL	6	4.32	32	138.24	41.0	1,313
Perforated Gypsum Ceiling - Q3	GT-PSRF662-Q3	600*600*12.5	FL	6	2.16	64	138.24	20.5	1,313
Perforated Gypsum Ceiling - Q3	GT-PSRF622-Q3	600*1200*12.5	FL	6	4.32	32	138.24	41.0	1,313
Perforated Gypsum Ceiling - Q3	LGAE-PSRF662-Q3	600*600*12.5	FL	6	2.16	64	138.24	20.5	1,313

ACOUSTICAL CEILING PACKAGING

Product Name	Item Code	Size (mm)	Edge Detail	Carton Volume		Pallet Volume		Weight	
				Number Of Tiles Per Carton	M² Per Carton	Number Of Carton Per Pallet	M² Per Pallet	Carton Weight Kg/Ctn	Pallet Weight Kg/Pallet
Perforated Gypsum Ceiling - Q3	LGAE-PSRF622-Q3	600*1200*12.5	FL	6	4.32	32	138.24	41.0	1,313
Perforated Gypsum Ceiling - Q3	GT-PSDC662-Q3	600*600*12.5	Concealed	6	2.16	64	138.24	20.5	1,313
Perforated Gypsum Ceiling - Q3	LGAE-PSDC662-Q3	600*600*12.5	Concealed	6	2.16	64	138.24	20.5	1,313
Perforated Gypsum Ceiling - Q3	GT-PSDC622-Q3	600*1200*12.5	Concealed	6	4.32	32	138.24	41.0	1,313
Perforated Gypsum Ceiling - Q3	LGAE-PSDC622-Q3	600*1200*12.5	Concealed	6	4.32	32	138.24	41.0	1,313
Perforated Gypsum Ceiling - Q9	GT-PS6609-Q9	600*600*9.5	SQ	8	2.88	64	184.32	15.9	1,017
Perforated Gypsum Ceiling - Q9	GT-PS662-Q9	600*600*12.5	SQ	6	2.16	64	138.24	18.8	1,203
Perforated Gypsum Ceiling - Q9	GT-PS622-Q9	600*1200*12.5	SQ	6	4.32	32	138.24	37.6	1,203
Perforated Gypsum Ceiling - Q9	LGAE-PS6609-Q9	600*600*9.5	SQ	8	2.88	64	184.32	15.9	1,017
Perforated Gypsum Ceiling - Q9	LGAE-PS662-Q9	600*600*12.5	SQ	6	2.16	64	138.24	18.8	1,203
Perforated Gypsum Ceiling - Q9	LGAE-PS622-Q9	600*1200*12.5	SQ	6	4.32	32	138.24	37.6	1,203
Perforated Gypsum Ceiling - Q9	GT-PSR662-Q9	600*600*12.5	SL	6	2.16	64	138.24	18.8	1,203
Perforated Gypsum Ceiling - Q9	GT-PSR622-Q9	600*1200*12.5	SL	6	4.32	32	138.24	37.6	1,203
Perforated Gypsum Ceiling - Q9	LGAE-PSR662-Q9	600*600*12.5	SL	6	2.16	64	138.24	18.8	1,203
Perforated Gypsum Ceiling - Q9	LGAE-PSR622-Q9	600*1200*12.5	SL	6	4.32	32	138.24	37.6	1,203
Perforated Gypsum Ceiling - Q9	GT-PSRF662-Q9	600*600*12.5	FL	6	2.16	64	138.24	18.8	1,203
Perforated Gypsum Ceiling - Q9	GT-PSRF622-Q9	600*1200*12.5	FL	6	4.32	32	138.24	37.6	1,203
Perforated Gypsum Ceiling - Q9	LGAE-PSRF662-Q9	600*600*12.5	FL	6	2.16	64	138.24	18.8	1,203
Perforated Gypsum Ceiling - Q9	LGAE-PSRF622-Q9	600*1200*12.5	FL	6	4.32	32	138.24	37.6	1,203
Perforated Gypsum Ceiling - Q9	GT-PSDC662-Q9	600*600*12.5	Concealed	6	2.16	64	138.24	18.8	1,203
Perforated Gypsum Ceiling - Q9	LGAE-PSDC662-Q9	600*600*12.5	Concealed	6	2.16	64	138.24	18.8	1,203
Perforated Gypsum Ceiling - Q9	GT-PSDC622-Q9	600*1200*12.5	Concealed	6	4.32	32	138.24	37.6	1,203
Perforated Gypsum Ceiling - Q9	LGAE-PSDC622-Q9	600*1200*12.5	Concealed	6	4.32	32	138.24	37.6	1,203
Perforated Gypsum Ceiling - Q12	GT-PS662-Q12	600*600*12.5	SQ	6	2.16	64	138.24	18.8	1,203
Perforated Gypsum Ceiling - Q12	GT-PS622-Q12	600*1200*12.5	SQ	6	4.32	32	138.24	37.6	1,203
Perforated Gypsum Ceiling - Q12	LGAE-PS662-Q12	600*600*12.5	SQ	6	2.16	64	138.24	18.8	1,203
Perforated Gypsum Ceiling - Q12	LGAE-PS622-Q12	600*1200*12.5	SQ	6	4.32	32	138.24	37.6	1,203
Perforated Gypsum Ceiling - Q12	GT-PSR662-Q12	600*600*12.5	SL	6	2.16	64	138.24	18.8	1,203
Perforated Gypsum Ceiling - Q12	GT-PSR622-Q12	600*1200*12.5	SL	6	4.32	32	138.24	37.6	1,203
Perforated Gypsum Ceiling - Q12	LGAE-PSR662-Q12	600*600*12.5	SL	6	2.16	64	138.24	18.8	1,203
Perforated Gypsum Ceiling - Q12	LGAE-PSR622-Q12	600*1200*12.5	SL	6	4.32	32	138.24	37.6	1,203
Perforated Gypsum Ceiling - Q12	GT-PSRF662-Q12	600*600*12.5	FL	6	2.16	64	138.24	18.8	1,203
Perforated Gypsum Ceiling - Q12	GT-PSRF622-Q12	600*1200*12.5	FL	6	4.32	32	138.24	37.6	1,203
Perforated Gypsum Ceiling - Q12	LGAE-PSRF662-Q12	600*600*12.5	FL	6	2.16	64	138.24	18.8	1,203
Perforated Gypsum Ceiling - Q12	LGAE-PSRF622-Q12	600*1200*12.5	FL	6	4.32	32	138.24	37.6	1,203
Perforated Gypsum Ceiling - Q12	GT-PSDC662-Q12	600*600*12.5	Concealed	6	2.16	64	138.24	18.8	1,203
Perforated Gypsum Ceiling - Q12	LGAE-PSDC662-Q12	600*600*12.5	Concealed	6	2.16	64	138.24	18.8	1,203
Perforated Gypsum Ceiling - Q12	GT-PSDC622-Q12	600*1200*12.5	Concealed	6	4.32	32	138.24	37.6	1,203
Perforated Gypsum Ceiling - Q12	LGAE-PSDC622-Q12	600*1200*12.5	Concealed	6	4.32	32	138.24	37.6	1,203
Perforated Gypsum Ceiling - H11	GT-PS6609-H11	600*600*9.5	SQ	8	2.88	64	184.32	14.7	938
Perforated Gypsum Ceiling - H11	GT-PS662-H11	600*600*12.5	SQ	6	2.16	64	138.24	18.9	1,211
Perforated Gypsum Ceiling - H11	GT-PS622-H11	600*1200*12.5	SQ	6	4.32	32	138.24	37.8	1,211
Perforated Gypsum Ceiling - H11	LGAE-PS6609-H11	600*600*9.5	SQ	8	2.88	64	184.32	14.7	938
Perforated Gypsum Ceiling - H11	LGAE-PS662-H11	600*600*12.5	SQ	6	2.16	64	138.24	18.9	1,211
Perforated Gypsum Ceiling - H11	LGAE-PS622-H11	600*1200*12.5	SQ	6	4.32	32	138.24	37.8	1,211
Perforated Gypsum Ceiling - H11	GT-PSR662-H11	600*600*12.5	SL	6	2.16	64	138.24	18.9	1,211
Perforated Gypsum Ceiling - H11	GT-PSR622-H11	600*1200*12.5	SL	6	4.32	32	138.24	37.8	1,211
Perforated Gypsum Ceiling - H11	LGAE-PSR662-H11	600*600*12.5	SL	6	2.16	64	138.24	18.9	1,211
Perforated Gypsum Ceiling - H11	LGAE-PSR622-H11	600*1200*12.5	SL	6	4.32	32	138.24	37.8	1,211
Perforated Gypsum Ceiling - H11	GT-PSRF662-H11	600*600*12.5	FL	6	2.16	64	138.24	18.9	1,211
Perforated Gypsum Ceiling - H11	GT-PSRF622-H11	600*1200*12.5	FL	6	4.32	32	138.24	37.8	1,211
Perforated Gypsum Ceiling - H11	LGAE-PSRF662-H11	600*600*12.5	FL	6	2.16	64	138.24	18.9	1,211
Perforated Gypsum Ceiling - H11	LGAE-PSRF622-H11	600*1200*12.5	FL	6	4.32	32	138.24	37.8	1,211
Perforated Gypsum Ceiling - H11	GT-PSDC662-H11	600*600*12.5	Concealed	6	2.16	64	138.24	18.9	1,211
Perforated Gypsum Ceiling - H11	LGAE-PSDC662-H11	600*600*12.5	Concealed	6	2.16	64	138.24	18.9	1,211
Perforated Gypsum Ceiling - H11	GT-PSDC622-H11	600*1200*12.5	Concealed	6	4.32	32	138.24	37.8	1,211
Perforated Gypsum Ceiling - H11	LGAE-PSDC622-H11	600*1200*12.5	Concealed	6	4.32	32	138.24	37.8	1,211

METAL CEILING STANDARD PACKAGING

Item Code	Item Description	No Of PCS/Box	Weight/ Box (KGS/ BOX)	No Of Box/ Pallet
AC-3003006R16	Clip-in panel 300x300MM-0.50MM thick, Alum, Plain, RAL 9016	18	3.25	75
ACPA1-3003006R16	Clip-in panel 300x300MM-0.50MM thick, Alum, diagonal round hole OD 1.8, RAL 9016	18	2.75	75
AC-3003007R16	Clip-in panel 300x300MM-0.60MM thick, Alum, Plain, RAL 9016	18	4.45	75
ACPA1-3003007R16	Clip-in panel 300x300MM-0.60MM thick, Alum, diagonal round hole OD 1.8, RAL 9016	18	3.75	75
AC-6006006R16	Clip-in panel 600x600MM-0.50MM thick, Alum, Plain, RAL 9016	18	13.00	24
ACPA1-6006006R16	Clip-in panel 600x600MM-0.50MM thick, Alum, diagonal round hole OD 1.8, RAL 9016	18	11.50	24
AC-6006008R16	Clip-in panel 600x600MM-0.70MM thick, Alum, Plain, RAL 9016	18	20.00	24
ACPA1-6006008R16	Clip-in panel 600x600MM-0.70MM thick, Alum, diagonal round hole OD 1.8, RAL 9016	18	17.50	24
ALW-3003006R16	Lay-in panel 300x300MM-0.50MM thick, Alum, Plain, RAL 9016, Revealed T24	20	2.75	75
ALPA1W-3003006R16	Lay-in panel 300x300MM-0.50MM thick, Alum, diagonal round hole OD 1.8, RAL 9016,T24	20	2.45	75
ALW-3003007R16	Lay-in panel 300x300MM-0.60MM thick, Alum, Plain, RAL 9016, Revealed T24	20	3.75	75
ALPA1W-3003007R16	Lay-in panel 300x300MM-0.60MM thick, Alum, diagonal round hole OD 1.8, RAL 9016,T24	20	3.35	75
ALW-6006006R16	Lay-in panel 600x600MM-0.50MM thick, Alum, Plain, RAL 9016, Revealed T24	20	1.45	24
ALPA1W-6006006R16	Lay-in panel 600x600MM-0.50MM thick, Alum, diagonal round hole OD 1.8, RAL 9016,T24	20	9.25	24
ALW-6006008R16	Lay-in panel 600x600MM-0.70MM thick,Alum, Plain, RAL 9016, Revealed T24	20	14.45	24
ALPA1W-6006008R16	Lay-in panel 600x600MM-0.70MM thick,Alum, diagonal round hole OD 1.8, RAL 9016, T24	20	12.75	24
ALN-3003006R16	Lay-in panel 300x300MM-0.50MM thick, Alum, Plain, RAL 9016, Revealed T15	20	2.75	75
ALPA1N-3003006R16	Lay-in panel 300x300MM-0.50MM thick, Alum, diagonal round hole OD 1.8, RAL 9016, T15	20	2.45	75
ALN-3003007R16	Lay-in panel 300x300MM-0.60MM thick, Alum, Plain, RAL 9016, Revealed T15	20	3.75	75
ALPA1N-3003007R16	Lay-in panel 300x300MM-0.60MM thick, Alum, diagonal round hole OD 1.8, RAL 9016,T15	20	3.35	75
ALN-6006006R16	Lay-in panel 600x600MM-0.50MM thick, Alum, Plain, RAL 9016, Revealed T15	20	1.45	24
ALPA1N-6006006R16	Lay-in panel 600x600MM-0.50MM thick, Alum, diagonal round hole OD 1.8, RAL 9016, T15	20	9.25	24
ALN-6006008R16	Lay-in panel 600x600MM-0.70MM thick, Alum, Plain, RAL 9016, Revealed T15	20	14.45	24
ALPA1N-6006008R16	Lay-in panel 600x600MM-0.70MM thick, Alum, diagonal round hole OD 1.8, RAL 9016, T15	20	12.75	24
AC-30012009R16	Clip-in panel 300x1,200MM-0.90MM thick, Alum, Plain, RAL 9016	18	20	20.0
ACPA1-30012009R16	Clip-in panel 300x1,200MM-0.90MM thick, Alum, diagonal round hole OD 1.8, RAL 9016	18	17	20.0
AC-30015009R16	Clip-in panel 300x1,500MM-0.90MM thick, Alum, Plain, RAL 9016	18	27	20.0
ACPA1-30015009R16	Clip-in panel 300x1,500MM-0.90MM thick, Alum, diagonal round hole OD 1.8, RAL 9016	18	22	20.0
ALW-60012008R16	Lay-in panel 600x1,200MM-0.80MM thick, Alum, Plain, RAL 9016, Revealed T24	28	42	12.0
ALPA1W-60012008R16	Lay-in panel 600x1,200MM-0.80MM thick, Alum, diagonal round hole OD 1.8, RAL 9016,T24	28	38	12.0
ALW-60012009R16	Lay-in panel 600x1,200MM-0.90MM thick, Alum, Plain, RAL 9016, Revealed T24	28	47	12.0
ALPA1W-60012009R16	Lay-in panel 600x1,200MM-0.90MM thick, Alum, diagonal round hole OD 1.8, RAL 9016,T24	28	42	12.0
ALW-600120010R16	Lay-in panel 600x1,200MM-1.0MM thick, Alum, Plain, RAL 9016, Revealed T24	28	53	12.0
ALPA1W-600120010R16	Lay-in panel 600x1,200MM-1.0MM thick, Alum, diagonal round hole OD 1.8, RAL 9016,T24	28	45	12.0
AC-60012009R16	Clip-in panel 600x1,200MM-0.90MM thick, Alum, Plain, RAL 9016	18	38	12.0
ACPA1-60012009R16	Clip-in panel 600x1,200MM-0.90MM thick, Alum, diagonal round hole OD 1.8, RAL 9016	18	34	12.0
ACPA1-1200120014R16	Clip-in panel 1,200x1,200MM-1.30MM thick, Alum, diagonal round hole OD 1.8, RAL 9016	18	94	4.0
AC-1200120014R16	Clip-in panel 1,200x1,200MM-1.30MM thick, Alum, Plain, RAL 9016	18	104	4.0
SLN-6006005R16	Lay-in panel 600x600MM-0.50MM thick, Steel, Plain, RAL 9016, Revealed T15	20	30	24.0
SLW-6006005R16	Lay-in panel 600x600MM-0.50MM thick, Steel, Plain, RAL 9016, Revealed T24	20	30	24.0
SLPA1N-6006005R16	Lay-in panel 600x600MM-0.50MM thick, Steel, diagonal round hole OD 1.8, RAL 9016,T15	20	24	24.0
SLPA1W-6006005R16	Lay-in panel 600x600MM-0.50MM thick, Steel, diagonal round hole OD 1.8, RAL 9016,T24	20	24	24.0
SCPA1-6006005R16	Clip-in panel 600x600MM-0.50MM thick, Steel, diagonal round hole OD 1.8, RAL 9016	20.0	24	24.0
ST2534-45	Spring T for concealed Suspension system, 0.45 mm thick	500 PCS/Pallet		650KGS/Pallet
ST2534-50	Spring T for concealed Suspension system, 0.50 mm thick	500 PCS/Pallet		740KGS/Pallet
ST2534-60	Spring T for concealed Suspension system, 0.60 mm thick	500 PCS/Pallet		845KGS/Pallet



SUSPENDED CEILING GRID PACKAGING

Product Name	Item Code	Total LM Per Cartoon	Total Pcs Per Cartoon	Total LM Per Pallet	Total Cartoons Per Pallet	Weight Per Pc (Kg)	Cartoon Weight (Kg)	Pallet Weight (Kg)
Main Runner								
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T24 Intermediate Duty 3.6m	801DX3600H33	90.0	25	3,600	40	0.924	24.4	979
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T24 Intermediate Duty 3.66m	801DX3660H33	91.5	25	3,660	40	0.938	24.7	993
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T24 Heavy Duty 3.6m	801DX3600H38	90.0	25	3,600	40	1.045	27.4	1,101
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T24 Heavy Duty 3.66m	801DX3660H38	91.5	25	3,660	40	1.062	27.8	1,118
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T24 Heavy Duty - Fire Rated 3.6m	801DXL3600	90.0	25	3,600	40	1.255	32.7	1,311
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T24 Heavy Duty - Fire Rated 3.66m	801DXL3660	91.5	25	3,660	40	1.276	33.2	1,332
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T15 Centricitee 3.6m	801DXLT15-3600	72.0	20	2,880	40	1.094	23.0	926
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T15 Centricitee 3.66m	801DXLT15-3660	73.2	20	2,928	40	1.112	23.4	941
Long Cross Tee								
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T24 Intermediate Duty 1.2m	803DX1200H25	90.00	75	4,320	48	0.269	20.7	1,006
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T24 Intermediate Duty 1.22m	803DX1220H25	91.50	75	4,392	48	0.275	21.1	1,028
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T24 Heavy Duty 1.2m	803DX1200H38	60.00	50	2,880	48	0.349	17.9	875
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T24 Heavy Duty 1.22m	803DX1220H38	61.00	50	2,928	48	0.355	18.2	890
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T15 Centricitee 1.2m	803DXT15-1200H38	72.00	60	3,456	48	0.294	18.0	880
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T15 Centricitee 1.22m	803DXT15-1220H38	73.20	60	3,514	48	0.299	18.3	895
Short Cross Tee								
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T24 Intermediate Duty 0.6m	804DX60025	45.00	75	4,320	96	0.131	10.3	1,006
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T24 Intermediate Duty 0.61m	804DX610H25	45.75	75	4,392	96	0.135	10.6	1,034
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T24 Heavy Duty 0.6m	804DX600H38	30.00	50	2,880	96	0.175	9.2	901
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T24 Heavy Duty 0.61m	804DX610H38	30.50	50	2,928	96	0.178	9.4	916
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T15 Centricitee 0.6m	804DXT15-600H38	36.00	60	3,456	96	0.149	9.3	911
USG ME DONN® Brand Acoustical Suspension System DX®/DXL™ T15 Centricitee0.61m	804DXT15-610H38	36.60	60	3,514	96	0.151	9.5	923
Wall Angle								
Wall Angle Regular 3.6m	802MT3600	144.0	40	5,760	40	0.585	24.2	973
Wall Angle Shadowline 3.6m	802MS3600	180.0	50	4,320	24	0.765	39.5	952
Wall Angle Centricitee 3.6m	802MT15-3600	144.0	40	5,760	40	0.553	22.9	922
Wall Angle Shadowline 3.6m	802MS164L	180.0	50	2880	16	0.952	47	752



WARRANTY & MAINTENANCE:

USG ME PRIORITIZES CUSTOMER SATISFACTION

14

Ceiling Products with 30-Year Limited Warranty

USG Middle East understands the importance of after-sales services that ensure our customers get as much use and value as possible from our systems. Our mission of being a customer-centric company continues! Happier customers are repeat customers!

USG Middle East is closer to its customers than ever before. We have real-time online support, including a WhatsApp bot, social media chat, and a hotline for instant support. Automated Customer Service Lines offer advice and solutions to simple and complex issues and questions.

MESSAGE US

+966 92 003 5672



TERMS AND CONDITIONS

DELIVERY OF MATERIALS

All materials shall be delivered in original unopened packages and stored in an enclosed shelter, protecting them from damage and exposure to the elements. Never open cartons and keep boards in standing position. This will increase the possibility of tile warpage.

STORAGE

Panels: Storage time of materials at the job site should be as short as possible. Environmental conditions should be as close as possible to those specified for occupancy (see Environmental Conditions below).
Excess humidity during storage can cause material expansion and possible warp, sag, or poor fit after installation. Chemical changes in the mat and coatings can be aggravated by excess humidity and cause discoloration during storage, even in unopened cartons. Cartons should be removed from pallets and stringers to prevent material distortion. Long-term (6- 12 months) storage under uncontrolled environmental conditions should be avoided.
Suspension System: Store in a manner that will prevent warping, scratches, or damage

- Handling: Handle in such a manner to ensure against racking, distortion, or physical damage of any kind.
- Damaged or deteriorated materials should be removed from the premises. Immediately before installation, to stabilize tile and panels, store them at a location where temperature and humidity are consistent with conditions during installation and anticipated for occupancy. In this case, refer to USG Middle East's nearest sales office within three days of receiving the material (provide signed delivery documentation).

ENVIRONMENTAL CONDITIONS

- Installation of acoustical panels shall begin once the building is enclosed, permanent heating and cooling equipment is in operation, and residual moisture from plaster, concrete, or terrazzo work has dissipated.
- Do not use ceiling panels in extreme or continuous high humidity or areas exposed directly to weather or water. Ceiling panels are sized and designed within the standard occupancy range of temperature and humidity, 15-30 °C, no more than 70% RH (relative humidity). Humidity can significantly affect product dimensional stability and sag resistance. Sag can become noticeable during periods of high humidity, lasting only a few hours. ClimaPlus™ ceilings, if used with DONN® Brand Suspension Systems, can withstand temperatures from 30-40 °C and relative humidity up to 95%-100% RH. See USG ME for specific warranty information.
- Allow time for dimensional changes in ceiling panels stored at temperature/humidity conditions well outside those recommended for service. With increases in temperature/humidity, these products expand up to 4mm/m at 30 °C/90% RH and may not fit into a fixed grid. Conversely, these products will be undersized with decreases but expand to normal when standard ambient conditions return.
- For some pattern edge details, if perimeter panels must be cut smaller, the cut edge must be field-rabbited, or the wall angle must be lowered by 6mm-10mm (Reveal Depth).
- Formaldehyde & VOC Classification, as tested per ASTM D5116 and according to standards established by the Collaborative for High-Performance Schools (CHPS), the California Office of Environmental Health Hazard Assessment (OEHHA), and the USGBC LEED for Schools.

Products are classified as zero- or low-emitting for formaldehyde and VOC emissions as defined:
a. "Zero-Emitting"
Materials producing concentration levels below the test-chamber background level specified by the "Standard Practice for Testing Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers," including the 2004 addendum. Section 3.8.4.3 states, "Background concentrations in the empty chamber ventilated at 1.0 air changes per hour shall not exceed two µg m-3 (1.6 ppb) for any individual VOC, including formaldehyde" and all VOCs with chronic inhalation Reference Exposure Levels adopted by California EPA COEHHA for Proposition 65 chemicals.
b. "Low-Emitting"
1. Materials passing CHPS requirements as established in the «Standard Practice for Testing Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers,» including the 2004 addendum. In addition, these products produce formaldehyde concentration levels below nine µg m-3 & contribute no more than one-half of the chronic inhalation Reference Exposure Level adopted by California EPA COEHHA for all other VOCs identified by Proposition 65.
2. Must be tested by an independent lab per these standards, along with product submittals.
3. Documentation of laboratory tests must indicate product and item number if test results differ from other facility manufacturing locations for supplied products.

QUALITY ASSURANCE

- Single Source Responsibility: To obtain combined warranty for the DONN® Brand suspension system and the acoustical panel, color match or ceiling panel and suspension system compatibility, all acoustical panel and suspension system components shall be produced and supplied by one manufacturer. Materials supplied by more than one manufacturer are not acceptable.
- Subcontractor qualifications: Installer shall have adequate experience in the installation of suspended ceiling systems on projects similar to those specified. They must also be qualified and approved by USG Middle East's technical department.
- Requirements of regulatory agencies: Codes and regulations of authorities having jurisdiction.

Source quality control:

- Test reports: Manufacturer will provide test certification for minimum requirements in accordance with applicable industry standards and/or to meet performance standards specified by various agencies.
- Changes from system: System performance following any substitution of materials or change in assembly design must be certified by the manufacturer.

PROJECT CONDITIONS

- **Existing conditions:** (include specific alteration work requirements for project).
- **Environmental requirements for interior installation:** Building shall be enclosed with windows and exterior doors in place and glazed. Roof must be watertight before installation of ceiling system and related ceiling components. Climatic Condition Range for panels used on this project are as follows: 1. ClimaPlus™ Ceilings: 15-30 °C with a max 99% RH. ClimaPlus™ ceilings used with DONN® Brand Suspension Systems can be used when building is not enclosed and in higher temperature and humid areas.
- **Coordination with other work:**
  1. General: Coordinate with other work supported by or penetrating through the ceiling, including mechanical and electrical work and partition systems.
  2. Mechanical work: Ductwork above ceiling shall be completed and permanent heating and cooling systems operating to climate conditions prior to installation of ceiling components.
  3. Electrical work: Installation of conduit above ceiling shall be complete before installation of ceiling components.
  4. Fire protection work: Fire protection lines and/or equipment occurring above ceiling shall be completed and tested before ceiling components are installed.
- **Protection:**
  1. Personnel: Follow good safety and industrial hygiene practices during handling and installing all products and systems. Take necessary precaution and wear appropriate personal protective equipment as needed. Read material safety data sheets and related literature for important information on products before installation. Contractor to be solely responsible for all personal safety issues during and subsequent to installation; architect, specifier, owner, and manufacturer will rely on contractor's performance in such regard.
  2. Protect completed work above ceiling system from damage during installation of ceiling components.

INSPECTION

- Examine areas to receive ceiling panels for conditions that will adversely affect installation. Provide written report of discrepancies.
- Do not start work until unsatisfactory conditions are corrected.
- Work to be concealed: Verify work above ceiling is completed and installed in manner that will not affect layout and installation of ceiling panels.
- Beginning of installation shall signify acceptance of conditions in areas to receive ceiling panels.

PREPARATION

- Field dimensions must be verified prior to installation.

INSTALLATION

- **Standard reference:** Install ceiling panels and suspension system, including necessary hangers, grillage, splines, and other supporting hardware, in accordance with ASTM C636, 2006 IBC (2007 CBC), CISCA Ceiling Systems Handbook, (UL Design) and any applicable code requirement.
- **Manufacturer's reference:** Install ceiling panels in exposed grid systems, supported on all edges, in accordance with manufacturer's warranty.
- **Drawing reference:** Install ceiling panels in accordance with approved shop drawings.
- **Hanger Wires:**
  1. Spacing: Space hanger wires on main tees not more than 1200mm o.c. a maximum of 1200mm o.c., attaching hangers directly to the structure above, or as required to support loads.
  2. Limitations: Do not support wires from mechanical and/or electrical equipment, piping or other equipment occurring above ceiling.

TERMS AND CONDITIONS

- **Ceiling Perimeter:** Install edge moldings (50mm minimum) and trim of type indicated at perimeter of acoustical ceiling area and where necessary to conceal acoustical panel edges.
  1. Tee ends shall be tied together with USG ME specified accessories or other approved means to prevent the tees from spreading apart.
  2. Mechanically attach the terminal ends of the ceiling suspension members to the perimeter molding of two adjoining walls using pop-rivets or other approved means.
  3. Maintain a 20mm clearance between the opposite ends of the suspension members and the wall. The unattached ends of the suspension members shall rest upon and be free to slide perpendicularly to the perimeter molding.
- **Alternate Perimeter Attachment:** When required by local code, install 22mm edge molding with ACM7 Seismic Clip.
- **Accessories:** Install accessories as applicable to meet project requirements.
  1. Install edge moldings and trim of type indicated at perimeter of acoustical ceiling area and where necessary to conceal acoustical tile edges.
  2. Install suspension system runners so they are square and securely interlocked with one another. Remove and replace dented, bent, or kinked members.
- **Install acoustical tiles in coordination with suspension system.**
  1. Fit adjoining tile to form flush, tight joints. Scribe and cut tile for accurate fit at borders and around penetrations through tile.
  2. Remove and replace any damaged tiles.
- **Lighting Fixtures:**
  1. All light fixtures shall be mechanically attached to the suspension system per NEC 410-16 (two per fixture unless the fixture is independently supported).
  2. Support of rigid lay-in or can light fixtures:
     a. Each fixture less than 4.5 Kg shall have a single wire (wire may be slack) attached from the fixture to structure.
     b. Each fixture that weighs between 4.5 and 25 Kg shall have two wires (wires may be slack) attached at diagonal corners of the fixture to structure.
     c. Each fixture greater than 25 Kg shall be directly supported to structure by approved hangers.
     d. Pendant light fixtures shall be directly supported from structure with 9-gauge wire (or approved alternative).
- **Air Terminals:**
  1. Air terminals less than 9 Kg shall be positively attached to the suspension system
  2. Air terminals that weigh between 9 Kg and 25 Kg shall be mechanically attached to the suspension system. Two slack wires shall be attached from the housing to structure.
  3. Air terminals in excess of 25kg. shall be directly supported to structure by approved hangers.
- **Sprinkler heads** and other penetrations shall have 10mm clearance on all sides.

CEILING PRODUCTS 30-YEAR LIMITED WARRANTY

WHAT IS COVERED?

USG Middle East warrants that the following ceiling products will be free from defects in materials and workmanship at the time of manufacture:
USG Middle East Donn® Brand and Quadra suspension systems
USG Middle East ceiling panels
USG Middle East Celebretto Specialty Ceiling range
In addition, USG ME provides the following performance warranties for these products:

- USG ME Donn® Suspension Systems are applied with a four-step coating process that outperforms in paint adhesion and corrosion resistance, as proven by industry-standard salt spray tests conducted by an independent laboratory.
- USG ME ceiling panels and tiles with ClimaPlus™ performance shall not show visible sag when installed in a USG ME Donn® Suspension System (“Sag Warranty”).
- USG ME ceiling panels with ClimaPlus™ performance shall be free from the growth of mold and mildew (“Mold and Mildew Warranty”).
- USG Radar™ Ceramic ceiling panels with ClimaPlus™ performance will withstand corrosive chemical fumes (“USG Radar™ Corrosive Chemical Warranty”).

HOW LONG DOES COVERAGE LAST?

The warranty periods vary depending upon whether the USG ME Donn® Suspension System is used with USG ME ceiling panels, or the products are used separately. Below are the periods of coverage, which run from the date of original purchase:

Defects in Materials and Workmanship at Time of Manufacture	Panel or Tile	Suspension System
USG ME Donn® Brand Suspension System and USG ME Soft Fiber or Mineral Fiber panels with ClimaPlus™ performance, *when used together*	30 years	30 years
USG ME Donn® Brand Suspension System and USG ME Gypsum Ceiling panels or Skynest® Wood Wool panels, *when used together*	1 year	30 years
USG ME Donn® Brand Suspension System and Quadra Safe Ceiling Carrier *alone*	_	10 years
USG ME panels with *ClimaPlus™* performance *alone*	10 years	_
USG ME Celebretto® Specialty Ceilings and USG ME Acoustical Drywall Ceiling *alone*	5 years	_
Rust Warranty for USG ME Donn® Brand Suspension System	_	30 years
Sag Warranty for panels with ClimaPlus™ performance when used in a USG ME Donn® Brand Suspension System	30 years	_
Mold and Mildew Warranty for USG ME ceiling panels with ClimaPlus™ performance	30 years	_
USG Radar™ Corrosive Chemical Warranty	30 years	_

WHO IS COVERED?

This limited warranty covers the original owner of the building at the time of installation and any subsequent owner of the building during the applicable warranty period.

WHAT WILL USG ME DO?

USG ME’s liability under this limited warranty shall be, at USG ME’s election, to replace the nonconforming products under warranty. Replacement of nonconforming products under warranty shall constitute the sole and total obligation of USG ME. USG ME shall not be responsible for any labor charges or other installation or replacement costs or for incidental or consequential damages of any nature whatsoever.

WHAT ARE THE CONDITIONS OF THIS WARRANTY?

- All products must be installed and maintained in accordance with current USG ME written instructions in effect at the time of installation and with best industry practice, including the CISCA Handbook and ASTM C636, Standard Practice for Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-In Panels. **Refer to quality assurance mentioned previously under USG Middle East Terms and conditions.**
- The products must always be protected from vibration, direct contact with water (including condensation), exposure to chemical fumes, excessive humidity, and excessive dust or dirt buildup, both before and after installation. Please note that USG ME Radar Ceramic ceiling panels with ClimaPlus™ performance can withstand exposure to chemical fumes.
- The products may not be used in exterior applications unless and to the extent explicitly permitted in USG ME’s written literature at the time of installation.
- The products may not be exposed to temperature or humidity conditions prior to, during, and after installation that are outside the following limitations:

CEILING PRODUCTS 30-YEAR LIMITED WARRANTY

Product	Environmental Limitations
USG ME Radar™ Ceramic	16-40°C up to 100% RH*
ClimaPlus™ Performance Ceilings	16-40°C up to 95% RH
Standard Commercial Ceilings and Celebretto Specialty Ceilings	16-29°C up to 70% RH
USG Donn® Brand suspension system	16-40°C up to 95% RH
USG Donn® Brand AX™, ZXLA™ and the USG Drywall Suspension System	16-40°C up to 100% RH

*Please note that the Radar™ Ceramic Acoustical Ceiling Panels with ClimaPlus™ performance can withstand the referenced humidity conditions and exposure to steam so long as the product is installed with either AX™ or AXCE™ suspension systems.
For swimming pools, install only with AX™ or AXCE™ suspension systems. For outdoor soffits, canopies and parking garages, install with AXCE™ suspension system (wind uplift should be considered).

- Ceiling panels must not be used to support any material, including insulation. Where insulation must be used, it should be no heavier than the following:
  — 12.7 kg/m² for USG Sheetrock® and USG ME Skyrock Gypsum Panels Lay-In Gypsum Ceiling Panels
  — 1.3 kg/m² for all other USG ME panels
- Application of insulation should follow USG ME recommendations. Insulation must be applied perpendicular to the suspension cross tees with the suspension system supporting the weight of the insulation. Insulation is also not recommended for use in Firechief™ applications unless specified and permitted by Underwriters Laboratories, Inc. Mold or mildew growth on insulation is not covered by this warranty.
- For all ceiling tiles with ClimaPlus™ performance (excluding USG Clean Room™ which is not covered by the Mold and Mildew Warranty), the ceilings must be maintained to avoid excessive dirt or dust buildup that would provide a medium for microbial growth on these panels or tiles. Microbial protection does not extend beyond the treated surface as received from the factory, and does not protect other materials that contact the treated surface such as insulation materials.
- You must make a warranty claim within the time limits and manner described in the here after “How Do I Make A Warranty Claim?”

WHAT IS NOT COVERED?

- Damage or loss due to the failure to follow the terms and conditions of this limited warranty.
- USG Sheetrock® and USG ME Skyrock Gypsum Panels used with the USG ME Drywall Suspension System are not covered.
- Except for the Mold and Mildew Warranty on USG ME ceiling tiles and panels with ClimaPlus™
- performance, the growth of mold or bacteria is not covered by this warranty and is not the responsibility of USG ME. USG ME Clean Room and USG Sheetrock® and USG ME Skyrock Gypsum lay-in panels are not covered under the Mold and Mildew Warranty.
- Damage or loss caused by fire, water, accident, or by any form of abuse except normal wear and tear.
- Damage or loss from vibrations or chemical fumes or where moisture comes in contact with the ceiling panel or tile as a result of a leaking roof, a sweating pipe, a leaking radiator, a flood, condensation on windows, other sources of condensation where dew points are reached, humidified air from the HVAC system, or any other similar causes.
- Rusting that occurs from building leaks or condensation.

Other important information about the Sag Warranty for panels and tile with ClimaPlus™ performance when used in a USG ME Donn® Suspension System: Sag resistance is measured under Standard Test Method for Strength Properties of Pre-fabricated Architectural Acoustical Tile or Lay-In Ceiling Panels (ASTM C367-05). The Test Method cautions (Section 17.3) that it “is not designed to establish the expected performance of the ceiling panels under field conditions of use, but only the sag properties for the specific temperature, humidity, exposure time and mounting conditions used in the test.”

Neither this Test Method nor any other laboratory test we are aware of can predict long-term sag resistance. We do know that the higher the relative humidity and temperature, and the longer the time these conditions prevail, the more susceptible the ceiling panels are to sag. Nevertheless, USG ME has offered sag resistant ceiling panels for more than 10 years. This excellent field performance is expected because the formulations of both core and/or backing, depending on the particular panel, inherently impart sag resistance. Avoidance of extreme temperature and humidity conditions and regular cleaning will enhance sag resistance and all other performance attributes of the ceiling panels.

HOW DO I MAKE A WARRANTY CLAIM?

To make a claim under this limited warranty, you must give USG ME written notice of your warranty claim no later than 3 days from the date the claimed problem or defect was discovered or by reasonable inspection should have been discovered. In addition, no claim may be brought more than 3 days after the end of the applicable warranty period regardless of the date of discovery of the alleged problem or defect. Your written warranty claim should include a brief description of the problem, photographs if available, and any sales receipts, invoices, or other information indicating the date of purchase and installation. Please send this information to Factory Of USG Middle East LTD. Co. 7410 (Wasil), Street #23, Cross 76, 2nd Industrial City, Dammam 3426-4201, Kingdom of Saudi Arabia / marketing@usgme.com, info@usgme.com

Except to the extent expressly inconsistent with the terms of this limited warranty, USG ME’s terms and conditions of sale to the direct buyer of the products, including without limitation, any arbitration provision, shall apply to all claims made by the direct buyer under this limited warranty.

WARRANTY INFORMATION

This warranty applies to products manufactured by Factory of USG Middle East that are used in the Kingdom of Saudi Arabia.

WARRANTY INFORMATION FOR PRODUCTS USED OUTSIDE OF THE KINGDOM OF SAUDI ARABIA

To the extent permitted by applicable law, any controversy, claim, or dispute arising out of or in connection with any USG ME product warranty shall be settled with finality under the Rules of Arbitration of the International Chamber of Commerce. The seat of the arbitration and the location of the arbitration shall be Saudi Arabia. All arbitrations shall be conducted in Arabic.
The USG ME product warranty does not apply to USG ME products that are sold to, delivered to, or used by countries, governments, or persons in violation of KSA Trade law.

PROJECTS DETAIL

Project Details:

Project Name: _____

Address: _____

Country: _____

Products:
Ceiling Panels _____ Grids _____

Date of Installation: _____

Ceiling System Contractor Details:

Name: _____

Address: _____

Date: _____ Signature _____ Title _____

Factory of USG Middle East

Name: _____

Date: _____ Signature _____ Title _____

CEILING PANEL MAINTENANCE GUIDE

Choosing the best ceiling for your project can make all the difference. When maintenance is necessary, certain procedures should be followed to protect the appearance and high performance of acoustical panels.

CLEANING AND MAINTENANCE

CELEBRETTO® METAL CEILING SOLUTIONS

PRODUCTS	CLEANING AND MAINTENANCE
Hook-On Corridor System - Hook On Island Hook On Intersecto Linear Track Torsion Spring Strip Ceiling Paraline Metal Baffles Crossing Baffles Quadra Cell Metal Canopies Expanded Metal Mesh ceilings Allure Geometrix Lay-In Metal Ceiling Clip-In Metal Ceiling	Panel can be cleaned easily with microfiber feather dust brush or vacuum to remove the visible dust. Use clean cloth and mild detergent and little water. Remove any obvious dirt before applying liquid cleaner. After cleaning each tile with the solution, the tile should be quickly dried with a dry and clean cloth before moving to the next tile. Do not clean with a damp sponge, and do not use acetate ammonia or highly concentrated chlorine, bromide or other harsh chemicals.

ACOUSTICAL DRYWALL CEILING

PRODUCTS	CLEANING AND MAINTENANCE
MAC-Ensemble™ Monosilent Skyrock Ecoblock - H11 Skyrock Ecoblock - R6 Skyrock Ecoblock - R12 Skyrock Ecoblock - R8-15-20 Skyrock Ecoblock - Q9 Skyrock Ecoblock - Q12	General cleaning of dust and loose dirt may be easily achieved using a soft brush or vacuum cleaner. Panels can be cleaned with an art gum eraser or dampened cloth or sponge containing as little water as possible. Panels should never be soaked or immersed in water. Cleaning can also be carried out by specialist contractors using proprietary methods and chemicals. It is strongly recommended that a trial area be cleaned to ensure that there is no detrimental effect on the ceiling panel.

SOFT FIBER PANEL LAMINATED WITH FACTORY APPLIED PAINTED FIBERGLASS SCRIM

PRODUCTS	CLEANING AND MAINTENANCE
Halcyon™ Canopies Tranquille Halcyon™ Louna™ Elite Louna™ Natural Louna™ Hi CAC	Panel can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with warm water or a mild detergent and wipe panel surface. Do not use acetate ammonia or highly concentrated chlorine, bromide or other harsh chemicals.

SOFT FIBER PANEL LAMINATED WITH PREPAINTED FIBERGLASS SCRIM

PRODUCTS	CLEANING AND MAINTENANCE
Halcyon™ Black Louna™ Baffle Louna™ Elegant Louna™ Hi CAC Black	Panel can be cleaned easily with a soft brush or vacuum. To clean panel, use HEPA vacuum filter to minimize air borne dust during the cleaning process. Care must be taken while vacuuming to avoid excessive pressure. Use a blotting action to minimize potential damage of surface texture on ceiling and wall panels.

WOOD WOOL PANEL FINISHED WITH FACTORY APPLIED FINISH PAINT

PRODUCTS	CLEANING AND MAINTENANCE
Skynest Wood Wool Baffles Skynest Wood Wool Canopies Skynest Wood Wool Exposed Grid Skynest Wood Wool Ceiling Direct Mounting	Panel can be cleaned easily with a soft brush or vacuum. Do not use liquid cleaning solution as it may harm the wood wool fiber. Care must be taken while vacuuming to avoid excessive pressure. Use a blotting action to minimize potential damage of surface texture on ceiling panels. Use HEPA vacuum filter to minimize airborne dust during the cleaning process.

MINERAL FIBER PANEL FINISHED WITH FACTORY-APPLIED WATER-BASED PAINT

PRODUCTS	CLEANING AND MAINTENANCE
Athena Cross Fissured Auratone Designer Series Favia Favia Acoustic Olympia™ Olympia Micro™ Omni Radar™ Skylite Acoustic Taiga Taiga Perforated	Clean with a soft brush or vacuum gently. Any dusting concerns for Mineral Fiber panels caused by punched perforations can be resolved by using a microfiber feather dust brush. Be certain to clean the mineral fiber panels in one direction only. This will prevent rubbing dust into the surface of the ceiling panel. May be cleaned with a moist cloth or a sponge dampened in water containing mild soap. The cloth or sponge should contain as little soapy water solution as possible. After washing panel face, any moisture remaining should be wiped off with a dry cloth.

MINERAL FIBER PANEL LAMINATED WITH FIBERGLASS MEMBRANE AND FINISHED WITH FACTORY-APPLIED LATEX PAINT

PRODUCTS	CLEANING AND MAINTENANCE
Sonata	Panel can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with warm water or a mild detergent and wipe panel surface.

MINERAL FIBER PANEL LAMINATED WITH EMBOSSED VINYL-FACED MEMBRANE

PRODUCTS	CLEANING AND MAINTENANCE
Sparta	Clean with a damp sponge, mild detergent and water. Do not use acetate ammonia or highly concentrated chlorine, bromide or other harsh chemicals. May be cleaned with a moist cloth or a sponge dampened in water containing mild soap. The cloth or sponge should contain as little soapy water solution as possible. After washing panel face, any moisture remaining should be wiped off with a dry cloth.

CERAMIC BONDED MINERAL FIBER PANEL FINISHED WITH FACTORY-APPLIED WATER-BASED PAINT

PRODUCTS	CLEANING AND MAINTENANCE
Radar™ Ceramic	Radar™ Ceramic panels are less affected by moisture and will withstand repeated washings with mild detergents or germicidal cleaners. Clean with a soft brush or vacuum gently. Any dusting concerns for Ceramic Bonded Mineral Fiber panels caused by punched perforations can be resolved by using a microfiber feather dust brush.

CEILING PANEL MAINTENANCE GUIDE

GYPSUM CEILING PANEL FINISHED WITH FACTORY-APPLIED WATER-BASED PAINT

PRODUCTS	CLEANING AND MAINTENANCE
Painted Soundblock - H11 Soundblock - R6 Soundblock - R8-15-20 Soundblock - R12 Soundblock - Q3 Soundblock - Q9 Soundblock - Q12	Clean with a damp sponge, mild detergent and water. Do not use acetate ammonia or highly concentrated chlorine, bromide or other harsh chemicals.

GYPSUM CEILING PANEL LAMINATED WITH EMBOSSED VINYL-FACED MEMBRANE

PRODUCTS	CLEANING AND MAINTENANCE
Shades Soundblock - H11 Soundblock - R6 Soundblock - R8-15-20 Soundblock - R12 Soundblock - Q3 Soundblock - Q9 Soundblock - Q12	Clean with a damp sponge, mild detergent and water. Do not use acetate ammonia or highly concentrated chlorine, bromide or other harsh chemicals. May be cleaned with a moist cloth or a sponge dampened in water containing mild soap. The cloth or sponge should contain as little soapy water solution as possible. After washing panel face, any moisture remaining should be wiped off with a dry cloth.

HEALTHCARE CEILINGS

PRODUCTS	CLEANING AND MAINTENANCE
Clean Room™ Skylite Clean Taiga Hygiene Halcyon™ Healthcare Sonata Healthcare Louna™ Hygiene	Remove any obvious dirt before applying liquid cleaner. Panel can be disinfected by lightly spraying the surface and wiping with a clean white cloth. Acceptable colorless disinfectants include Hydrogen peroxide, Isopropyl alcohol, quaternary ammonium or sodium hypochlorite. Do not mix cleaning solutions and follow the cleaner manufacturer's instructions. Do not use acetate ammonia or highly concentrated chlorine, bromide or other harsh chemicals. Always follow the EPA's and CDC's latest Release Guidance for Cleaning and Disinfecting ceilings panels for healthcare applications.

SUSPENDED CEILING SYSTEM

PRODUCTS	CLEANING AND MAINTENANCE
DONN® Brand Acoustical Suspension System Quadra Safe Ceiling Carrier	Remove panel material and perform any necessary cleaning maintenance with non-solvent based commercial cleaner. Immediately remove any corrosive substances or chemicals that would harm painted finishes (i.e. wallpaper adhesives). Clean with a damp sponge, mild detergent and water. Do not use acetate ammonia or highly concentrated chlorine, bromide or other harsh chemicals.

PAINTING AND RETOUCHING

PANELS:

Ceiling panels may be touched-up by spraying a thinned, non-bridging vinyl-acrylic flat wall paint. However, USG ME cannot be responsible for the finished appearance or performance for the field-painted ceiling's panels. USG ME cannot guarantee that the published surface burning characteristics, fire resistance ratings, acoustical performance, dimensional stability, sag, or light reflectance performance will remain the same after repainting.

All warranties will be voided by field painting. When painting acoustical materials, the painter should be very careful not to close up the perforations or fissures in the material. It is through these openings in the surface that sound waves enter the body of the acoustical material and are absorbed. Care should be taken that these perforations are not clogged. Spray painting will result in a more uniform coating on embossed or irregular surfaces.

Field painting of vinyl-faced products is not recommended.

Please consult the USG ME Technical Department for expert advice and recommendations.

GRIDS AND SUSPENSIONS:

Touch up all minor scratches and spots, as acceptable, or replace damaged sections when touch-up is not permitted. Repainting of suspension member shall be with a high-quality solvent base enamel paint and applied as recommended by paint manufacturer.

DISCLAIMER

- Cleaning conditions and aesthetics may be impacted by additional site conditions. These instructions pertain only to the maintenance of the aesthetics and integrity of USG Middle East ceiling systems. Please consult the manufacturer's instructions and guidance regarding any cleaning product or disinfectant product for use and efficacy.
- It is recommended that only clear cleaners be used, as dyed liquids can permanently discolor the finish of the ceiling tiles.
- Cleaning is only recommended for the finished face of the board.
- The panels should never be soaked in water or other liquids, as this can have an adverse effect on board integrity.
- Use the safety recommendations for gloves and eye protection that are given by the manufacturer of the cleaner and cleaning equipment.

MAC CEILING MAINTENANCE GUIDE

The USG ME MAC Spray-Applied Finish can be damaged during or after the installation. Repairing a textured surface is not always easy but if done properly, the end-result will be an aesthetically pleasing repair that blends in well with the adjacent areas.

PART 1

DIRT AND STAIN REMEDIATION (SMALLER THAN 15CM)

1. Do not use water or cleaning solutions.
2. Try to clean the surface with a dry soft brush such as a 5cm nylon bristle paint brush (not wire).
3. For persistent staining, use a slightly stiffer brush, such as a vinyl bristle scrub brush (not wire). Brush the area briskly in both directions.
4. If the discoloration persists, refer to Part 4: Fingerprint and Soiling Removal by Spray Application.

PART 2A

DEEP SCRATCH OR GOUGE (SMALLER THAN 15CM)

1. Use small amounts of the MAC Spray-Applied Finish to spot-fill the gouge. Do not sand the surface.
2. Work the material during the setting time with a vinyl bristle scrub brush or nylon bristle paint brush to pull and blend the texture to match the surrounding surface.
3. If the area becomes discolored follow Part 4: Fingerprint and Soiling Removal by Spray Application.

PART 2B

DISCOLORATION OR VERY IRREGULAR TEXTURE

1. If the area is persistently discolored and the texture is very irregular, the coating can be applied with a hopper sprayer and a very high volume of air (90 PSI @ 10-14 CFM). Use the 245924 – Graco TexSpray Air Spray Trigger Gun with Hopper 4mm tip. Practice on a scrap piece of plasterboard first to test your settings and technique.

PART 3

FINGERPRINT REMOVAL



This image represents USG ME Mac Spray-Applied Finish before the ceiling gets damaged and requires repairs



Dirty finger prints on the finished ceiling is one common issue requiring maintenance



Step 1
Try to brush the soiled area with a soft brush such as a 5cm nylon bristly paint brush



Step 2
Try lightly sanding the soiled area with a sanding sponge such as a very fine grade sanding hand pad



Step 3
For deep soiling, use a utility knife to lightly scrape away the soiled areas



If there are still signs of soiling, the next step is to use a spray application to mask the discoloration

PART 4

FINGERPRINT AND SOILING REMOVAL VIA SPRAY APPLICATION



An aerosol spray-applicator can be found in the paint aisle at any home improvement or hardware store



Step 1
Mix a small batch of 50% water and 50% MAC Spray-Applied Finish



Step 2
Mix well with a drill and mixing blade



Step 3
Pour the mixed batch into the glass jar



Step 4
Before inserting the straw into the glass jar, remove the small filter at the bottom of the straw



Step 5
Attach the aerosal spray dispenser to the glass jar



Step 6
Test-spray on something disposable before spraying on the ceiling



Step 7
Once the spray is coming out consistently, lightly coat the soiled area in a cross-hatch pattern. Hold the tip 300 to 350mm away from the target. Allow ample time to dry between coats. Circulating the air by using fans can significantly help decrease dry time



Step 8
Between coats, remove the aerosol top from the bottom jar and place it in water. Place the cap that comes with the kit on the jar



Step 9
The mixture of water and MAC Spray-Applied Finish will separate if left sitting for an extended period. Place the cap that comes with the kit on the glass jar and shake well before using it again

Step 10
Repeat Step 7 until the desired aesthetic has been achieved


PART 5

SCUFFING, SCRATCHING AND SMALL SURFACE IRREGULARITY REPAIR

The following repair recommendation covers scuffing, scratching, and small surface irregularities, and is limited to coating damage (not substrate damage). It describes a method to repair a very small area of a damaged finished ceiling without the need to reapply coating over the entire ceiling area.



This area was damaged by a door. The impression goes deep into the surface and it flattened the area around it

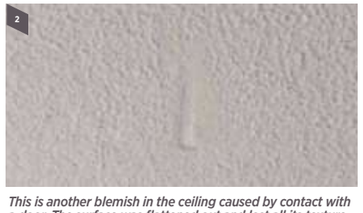

This is another blemish in the ceiling caused by contact with a door. The surface was flattened out and lost all its texture in the damaged area



Step 1
Using a putty knife, fill the damaged area with the acoustically transparent coating that was used to spray the ceiling

MAC CEILING MAINTENANCE GUIDE



Step 2

Fill each damaged area as close to the same level of the surrounding textured area



Step 3

Smooth out the coating with a larger knife using light pressure so you do not flatten out or scrape off the texture that is not damaged



Step 4

Use a squeegee to remove any excess material in the textured area around the repair. You won't be able to make it perfectly smooth, but that is fine



Step 5

Once you have put on enough material to make the surface flush with the textured area around the patch, allow it to fully dry



Step 6:

After several hours of drying, you may be able to begin the texturing process. The more material you put on the patch, the longer it will take to fully dry. If possible, allow it to dry overnight. If the material is not fully dry when you begin to re-texture the damaged area, the material will come off and you will need to start over



Step 7

For the re-texturing process, you can use a range of tools to make impressions in the smooth area so it will match the surrounding textured area. A single screw can be used but tightly wrapped screws work best for a broader area and takes less time to finish the damaged area



Step 8

Cut the heads off several screws and wrap them tightly together with tape, keeping the points as even as possible. This is an effective way to retexture a small repair



Step 9

Another effective tool is a common dog brush with several small pointy bristles



Step 10

Lightly press your tool of choice into the smooth area until it matches the surrounding area



Step 11

It may take several passes in the same area to make the texture match the existing area around it. Go slowly to ensure you do not overdo the texturing of an area or remove too much material, leaving a hole in your repair



You will easily notice the difference in texture when you are close to the area that has been re-textured



Once you are satisfied with the texture of the repaired area, step back to see how well it blends in with the whole ceiling.

If the repair is done properly it will appear as though the ceiling was never damaged

PART 6

LARGE PATCH REPAIR

The following recommendation covers the repair of a large section of ceiling, including replacing a section of the substrate. It describes a method to repair a limited area of damaged ceiling without the need to reapply coating over the entire ceiling area.



Step 1

Remove the affected area of the ceiling. Make all cuts as straight as possible so the new boards will fit tight to the existing boards



Step 2

Sand the existing coating off, down to the front veil, on the board around the entire perimeter of the area to be patched by an offset of 400mm maximum



Step 3

Sand at least 400mm wider than the area to be patched



Step 4

Score the veil and paper 40mm from the edge around the area to be patched



Step 5

Peel off the paper and veil to create room for the tape



Step 6

Repeat this on all the sides of the area to be patched



Step 7

After the new panel is cut to size, score the paper and veil 40mm from the perimeter, to make room for the tape on the joint



Step 8

Repeat this on all the sides of the new panel



Step 9

Add additional framing as needed to support the new boards



Step 10

Cut new acoustical backer panels to size and insert them where needed



Step 11

Install the replacement panel, and be sure to insert additional screws around the perimeter of the existing ceiling at 150mm centers



Step 12

Use a long straight edge to make sure the new panel is flush with the existing ceiling



Step 13

Pre-fill all the gaps as tightly as possible with USG ME MAC Joint Compound. Spot all screws with USG ME Joint Compound



Step 14

Use USG ME or Sheetrock® branded paper or mesh tape or equivalent on all joints



Step 15

Fill all joints and spot all screws with USG ME MAC Joint Compound



Step 16

Feather out joints flat from the new patch and the existing ceiling using USG ME MAC Finishing Compounds



Step 17

Sand all the joints level/flat with the existing ceiling



Step 18

Spray four coats of the USG ME MAC Spray-Applied Finish to bring the newly patched area to the same thickness as the existing ceiling. On the last coat, widen the spray area to blend out the ceiling

USG ME'S HANDBOOKS TO ARCHITECTS AND BUILDERS



DOWNLOAD OUR
HEALTHCARE ARCHITECTURAL HANDBOOK

A vital resource for designers and contractors, this Healthcare Architectural Handbook follows 2018 FGI Guidelines, offering complete ceilings and wall solutions for healthcare facility spaces.

DOWNLOAD OUR
CINEMA & THEATER ARCHITECTURAL HANDBOOK

A guide for developers, designers and contractors, the Cinema & Theater Architectural Handbook adheres to the latest industry standards, with solutions, case studies, and references. USG ME leads in Cinema & Theater acoustic systems.





DOWNLOAD OUR
HOSPITALITY, HOTELS AND RESORTS ARCHITECTURAL HANDBOOK

A comprehensive guide for interior designers, architects, and fit-out contractors, this Hospitality Architectural Handbook details hotel types, acoustic requirements, and design solutions for seamless project implementation.



DOWNLOAD OUR
EDUCATIONAL FACILITIES ARCHITECTURAL HANDBOOK

This handbook empowers architects and contractors to create inspiring, safe, and functional educational spaces. Focused on acoustical, fire, and safety design, it offers practical guidance for diverse learning environments.

OUR LATEST EDITION



DOWNLOAD OUR
PROJECTS SHOWCASE UAE EDITION

Unveiling our debut Projects Showcase UAE Edition, spotlighting 30+ iconic projects and showcasing our prestigious contributions in the UAE. Anticipate the upcoming KSA edition for more revelations.

You Can Find Us On Social Media

SEE US ON LINKEDIN
/usgme

FIND US ON FACEBOOK
/usgme

FOLLOW US ON INSTAGRAM
/usg_me

FOLLOW US ON X
/usg_me

SEE US ON YOUTUBE
/USG Middle East

MESSAGE US ON WHATSAPP
/+966 92 003 5672

USG ME
INNOVATIVE SOLUTIONS. EVERYTIME.

FACTORY OF USG MIDDLE EAST LTD. CO.
7410 (Wasil), Street #23, Cross 76,
2nd Industrial City, Dammam 34326-4201,
Kingdom of Saudi Arabia

CUSTOMER SERVICE
t +966 13 812 0995
f +966 13 812 1029
info@usgme.com

WEBSITE
www.usgme.com

WHATSAPP
+966 92 003 5672