METAL
FRAMING



USG MIDDLE EAST
METAL FRAMING

©2023 Factory of USG Middle East LTD. Co. All rights reserved.

USG ME™
INNOVATIVE SOLUTIONS. EVERYTIME.

INNOVATIVE SOLUTIONS. EVERYTIME.



SMART INNOVATION FIRST.

USG Middle East (USGME) is a Joint Venture between USG (a Knauf Subsidiary) and Juman Industrial Investment Company-Saudi investor in the Building Materials segment (juman.sa). Since being founded in Dammam, Saudi Arabia in 1985, USGME has been a leading manufacturer of Ceiling, Interior Finishing, and Drywall Partitions. Our products are supplied to more than 45 countries through 4 regional manufacturing plants via a wide network of sales and technical offices and distributors. Our product range is trusted for use in homes, offices, hospitals, schools, universities, cinemas, and retail spaces, as well as in many of the world's most iconic projects.

Our mission is to deliver innovation that helps you work smarter, do more, and build better. Architect and construction companies need safer, faster, less costly ways to build. Owners need buildings with lower operating costs. There is a rapidly growing need for sustainable construction to address global environmental challenges. That is why throughout USG ME's combined history, we have continually developed innovative wall and ceiling products and systems for our customers.

INNOVATION AND SUPPORT YOU CAN TRUST.

USG Middle East's ever-growing portfolio of groundbreaking products and end-to-end solutions is backed by unparalleled quality service. With an extensive distribution and sales network operating for more than 35 years across the MENA Region, our dedicated teams provide local expertise and high levels of support in finding the right solutions for your needs. USG Middle East's main product categories are:

Ceilings: With over 35 years of experience, we are a premier acoustic panel and specialty ceilings innovator that enhances the overall aesthetic of our customers' projects. Our portfolio includes acoustical, gypsum tile, metal, and specialty ceilings, as well as both standard and seismically rated suspension systems.

Plasterboard: Used to make interior walls and ceilings, our plasterboards are the result of over 100 years of scientific experimentation and success. Cleaner, faster, and more easily handled by fewer workers, we have installed more than 725 million square meters of plasterboard worldwide.


Substrates: Compared to traditional wet wall solutions, our substrates are versatile and lightweight—thereby reducing installation costs while speeding up construction. This is ideal for unique building designs as they can be curved and applied to various finishes, including paint, tile, stone, and textured.

Metal framing: Our range of metal components and profiles allows the construction of drywall and ceilings to be completed faster, more accurately, and cleaner than conventional methods. This state-of-the-art framing can be engineered to suit a job site's requirements while achieving industry standards.

Interior Finishes: Used for jointing, bonding, skimming, and creating textured finishes for building interiors. We boast a broad range of products for compounds, along with our extensive capability to formulate solutions according to your needs.




DRYWALL PARTITION SUSPENSION




DRYWALL STUDS - C SHAPE

- Used as vertical C channels inserted between the top and bottom tracks to hold up wall boards in both interior and exterior applications.
- Available in regular flange stud and deep flange stud.



DRYWALL TRACK - U SHAPE

- Used in framing applications as the top and bottom channels for securing wall studs at floor and ceiling junctions.
- Available in regular flange track, deep flange track and extra deep track.




INCLINED TRACK

- Used in special elevated framing applications as the top and bottom channels for securing wall studs at floor and ceiling junctions, used in framing application for constructing Inclined Walls.
- Radius can vary as per the project requirement.




CURVED TRACK

- Used in special curved framing applications as the top and bottom channels for securing wall studs at floor and ceiling junctions, used in framing application for constructing curved walls and ceilings domes.
- Curve radius can be adjustable on site as per the project requirement.



DEFLECTION SLOTTED TRACK U SHAPE


- Used in wall assemblies allowing for vertical deflection of floor beams or floor decks above the interior partitions.
- Custom made flange depth varying from 50 to 100mm suitable for vertical deflection movement exceeding 30 mm.
- Used for a wall height which above of 3.5m.



DEFLECTION TRACK - T SHAPE


- Used in Fire Rated wall assemblies allowing for vertical deflection of floor beams or floor decks above the interior partitions.
- Custom made Flange depth varying from 60 to 100 mm is suitable for vertical deflection movement exceeding 30 mm.
- Used for a wall height that is above 3.5m.
- Used to achieve 1, 2 and 3 hours fire rated in wall assemblies.

DRYWALL CEILING SUSPENSION

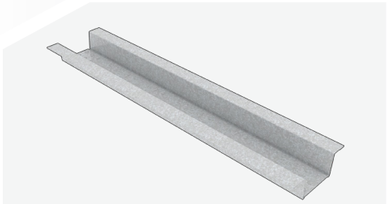


FURRING CHANNEL DRYWALL SUSPENSION

- Furring Channels are hat channels used to hold wall boards in Drywall ceiling and wall lining applications. It is also used as framings for drop down ceiling.




PRIMARY CHANNEL- DRYWALL SUSPENSION

- Used as main carrying channels in the Drywall Ceiling suspension systems where it is suspended from the overhead structure using different types of hangers.
- It also forms along with the perimeter angles a solid horizontal bridging to resist rotation and axial loads.
- Optional used as suspension hangers.

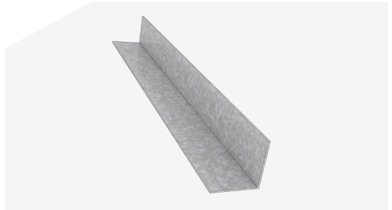

PERIMETER ANGLE- DRYWALL SUSPENSION

- Used on the perimeter of the Drywall ceiling suspension systems and optional as suspension hangers.
- Also it is used along with primary channels to provide horizontal bridging to resist rotation and axial loads in wall applications.



Z CHANNEL

- Easily accommodates rigid insulation and provides for the attachment of gypsum wallboard, veneer or plaster to the interior of masonry walls.



WIRE CONNECTING CLIP (WCC)


- The 2.5 mm wire connecting clips (WCC) are widely used to fasten the furring channels to the primary channels of 38 mm width. WCC are mainly used in the Drywall ceiling and the Clip-in ceiling applications.



PRIMARY CHANNEL HANGING BRACKET

- Primary Channel Hanging Bracket (PCHB) is suspended by wire hanger used to fix the primary channel into the Adjustable Wire Connecting Clip. The bracket is used as any alternative option for the Primary Channel C Bracket with threaded rod suspension system in ceiling assemblies.
- USG Middle East recommends using the Primary Channel Hanging Bracket when single layer gypsum board is installed.

SHAFTWALL SUSPENSION

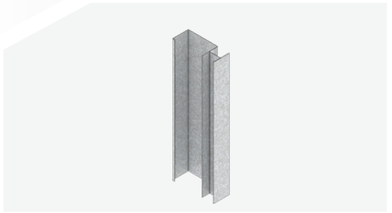


SHAFTWALL FRAMING SYSTEMS - CH STUD

- Used to construct elevator shafts, mechanical shafts, stair shafts, services risers, air return shafts and horizontal shaft wall ceiling.
- Used as vertical C channels inserted between the top and bottom tracks to hold up adjacent Shaftwall boards in the H profile as friction fit sliding.
- Wallboard can be directly fixed at the C profile outer face.




SHAFTWALL FRAMING SYSTEMS - E STUD

- Used as vertical C channels inserted between the top and bottom tracks to hold up Shaftwall boards in the E profile at the start and the end of the wall as friction fit sliding.
- Wallboard can be directly fixed at the C profile outer face.

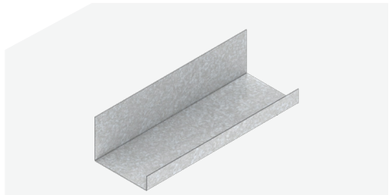

SHAFTWALL FRAMING SYSTEMS - J RUNNER

- Used in Shaftwall framing applications as the top and bottom channels for securing the CH and the E wall studs at floor and ceiling junctions.

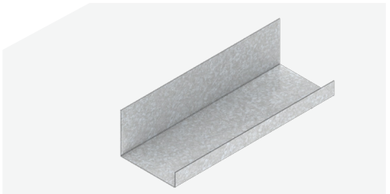

SHAFTWALL FRAMING SYSTEMS - JAMB STRUT

- Used in Shaftwall framing applications as the top and bottom channels for securing the CH and the E wall studs at floor and ceiling junctions.
- Available in deep flange track and extra deep track.

SUSPENSION ACCESSORIES





RESILIENT CHANNEL SINGLE LIP

- Used in Drywall framing applications to improve the STC rate in Wall Partition.




DRYWALL FLAT STRIPS (WALL BRACING)

- Used in framing applications as wall bracing which provides significant resistance to lateral loads.
- Used as X - Bracing in wall assembly to resist racking and comply with seismic requirements.
- System applies for walls height above 3.5m.




DEFLECTION CLIP

- Used in place or in combination with deflection track and allowing for vertical movement above wall partitions.




DRYWALL FIXING BRACKET

- Used in wall assemblies allowing for supporting a vertical load or providing lateral bracing CRC connections and floor joist hangers.




DRYWALL CONTROL JOINT

- Allowing for expansion in both walls and ceilings, control joint has been designed for movement of up to 6mm in each direction.




TWO PIECES EXPANSION JOINT

- Two pieces Expansion joint is a joint that ends two adjacent panels and is designed to relieve the stress in a wall or a ceiling and allow for multidirectional movement. It is widely used where two dissimilar farming materials meet.

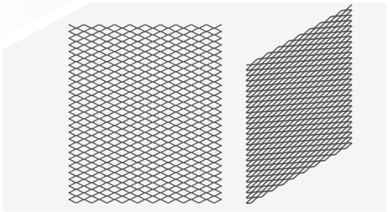


STRIP LATH

- It is an expanded flat mesh product used to fill voids in wire lath construction and a base for wire lath patches. It is commonly used diagonally at the openings and protects the edges.

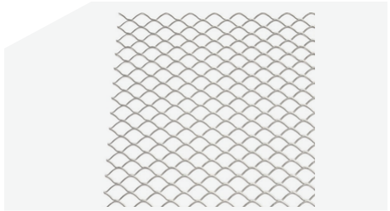

EXPANDED DIAMOND METAL LATH

- Expanded diamond metal lath is a hot dip galvanized sheet with a multipurpose use used for exterior plaster applications and provides an excellent plaster base. It is corrosion resistant and easily cut and formed. It could be stapled, nailed or screwed to the substrate.
- It has exceptional strength and flexibility and preferred by many of the contractors worldwide.

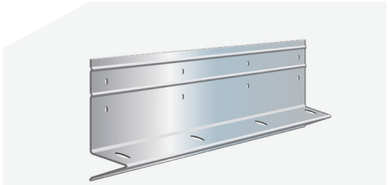


FOUNDATION WEEP SCREED

- It is an unperforated design to remove moisture from stucco installations at a frame construction in the foundation.




WAFER HEAD SCREW 13DH

- Wafer head screws are drill point fasteners for fixing drywall profiles one to the other providing a large holding surface or for accessory mountings on steel structures up to 2.5 mm thickness.

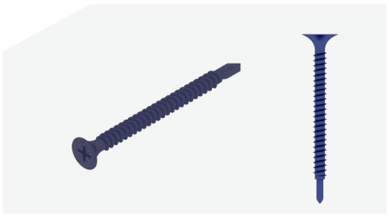

SELF DRILLING SCREW

- Substrates and plasterboard screws are fasteners for single-layer and multi-layer drywall planking, insulation and accessory mountings on steel structures made of heavy gauge metal. Designed for Durock®, Solidrock, Securock® and Fiberock® wallboards. Up to 75mm length.

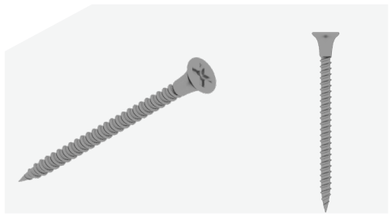


SELF TAPPING SCREW

- Plasterboard screws are fasteners for single-layer and multi-layer drywall planking, insulation and accessory mountings on steel structures made of light gauge steel up to 0.6mm thickness. Up to 75mm length.




ACOUSTIC ISOLATION HANGER

- Designed to decouple wall framing and ceiling systems. The resilient Anti-Vibration rubber used in the Hanger, absorb energy and improve STC (airborne) and IIC (impact) acoustic ratings.
- The Hangers used in a variety of wall and mainly in ceiling mass barrier applications, where structural support combined with vibration isolation is required.

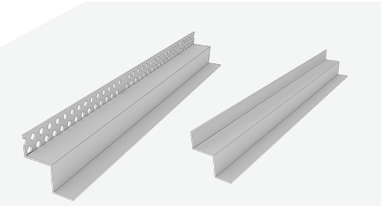


DRYWALL W ANGLE

Create a reveal edge look at ceiling perimeter installations whilst helping to hide imperfections in the abutting walls. The W angle concidered as part of the Drywall ceiling attached to the wall.

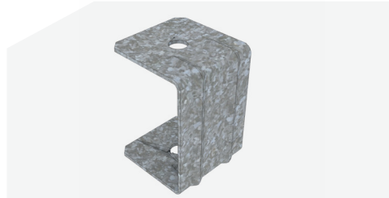


PRIMARY CHANNEL C-BRACKET

- C-Brackets are steel accessories used to fasten the Primary Channel into the threaded rod (M6) suspension hanger that is anchored in the ceiling soffit above.

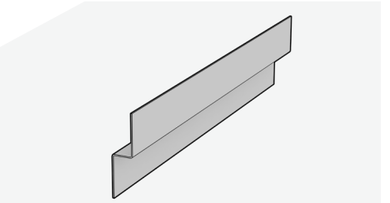


SHADOWLINE Z-STOPPAGE ANGLE

- Create a reveal edge look at ceiling perimeter installations whilst helping to hide imperfections in the abutting walls. The Z-stoppage angle concidered as part of the grid and suspension system attached to the wall.

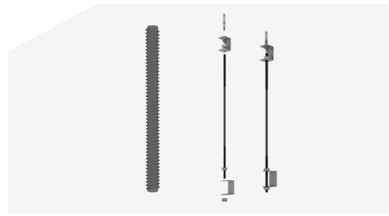

THREADED ROD HANGERS

- The Threaded Rods are designed to be used in high tension due to being relatively long rods and being threaded. They are used as a ceiling suspension by being fixed to hard point on one end such as soffit of concrete slab/beam or steel structure with appropriate fasteners and ceiling frame on the other.

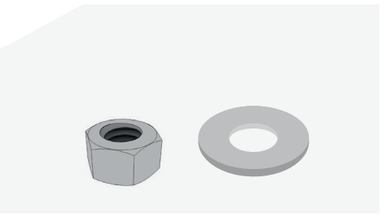

HEX NUT AND WASHER

- Hex Nut is a strong fastner in various applications made of hot dipped galvanized steel (HDG).
- The accessory is an excellent choice for all USG ME hanging systems.
- Available in 6, 8 and 10 mm size.

METAL SUSPENSION SAFETY DATASHEET



1. IDENTIFICATION

Product identifier
USG Middle East Drywall/Steel Framed Systems
Additional Products
Regular Wall Track, Deep Flange Wall Track, Curved Wall Track, Inclined Flange Wall Track, Regular and Deep Flange Wall Stud, Perimeter Angle, Primary Channel, Furring Channel, Deflection Fire Track, Deflection Clip, J Trims, Corner Beads, W Shape Shadow line Angle, Z Shape Shadow line Stoppage Angle, Z Furring Channel, Wall Bracing Flat Strip, Single Lip Resilient Channel, Wire Connection Clip, Threaded Rod Hanger, Rod Hangers & Adjustable Butterfly Clip, Wafer Head Screw and Drywall Screw.
Synonym(s)
Drywall Steel Frame System
Recommended use
Interior use.
Recommended restrictions
Use in accordance with manufacturer's recommendations.
Manufacturer / Importer / Supplier / Distributor information/Company name
USG Middle East Ltd
7410 (WASIL) Street #23, Cross 76 (Right)
Second Industrial City
Dammam 34326 – 4201, Kingdom of Saudi Arabia
Tel: +966 13 812 0995 / Fax: +966 13 812 1029
E-mail: info@usgme.com / marketing@usgme.com
Website: https://www.usgme.com

2. HAZARD(S) IDENTIFICATION

Physical hazards
Not classified.
Health hazards
Not classified.
OSHA defined hazards
Not classified.
Label elements
- **Hazard symbol**
  None.
- **Signal word**
  None
- **Hazard statement**
  None.
- **Precautionary statement**
  - **Prevention**
    Observe good industrial hygiene practices.
  - **Response**
    Get medical attention/advice if you feel unwell.
  - **Storage**
    Store as indicated in Section 7.
  - **Disposal**
    Dispose of in accordance with local, state, and federal regulations.

Hazard(s) not otherwise classified (HNOC)
Not classified.

3. COMPOSITION/ INFORMATION ON INGREDIENTS

Mixtures

Chemical name	CAS number	%
Zinc	7440-66-6	1-20%
Aluminium	7429-90-5	1-10%
Iron	7439-89-6	Balance

Composition comments
Low carbon steel strip with hot dipped zinc or zinc/aluminium coating with painted and/or laminated polymer finish. The following list identifies those elements which may exist in steel or which may comprise compounds present in steel or alloy steels. Aluminum, beryllium, boron, calcium, carbon, cerium, chromium, cobalt, copper, hafnium, iron, lanthanum, lead, magnesium, manganese, molybdenum, nickel, niobium, nitrogen, oxygen, phosphorus, selenium, silicon, sulfur, tantalum, tin, titanium, tungsten, vanadium, yttrium, zinc, zirconium.

4. FIRST-AID MEASURES

Inhalation
Due to the physical nature of this product, inhalation is unlikely. There are no known health effects due to inhalation.
Skin contact
Edges and notches (where present) may be sharp and can cut skin. Cuts or abrasions should be treated promptly with thorough cleansing of the affected area. Seek medical attention for severe cuts or abrasions
Eye contact
Sharp edges and notches (where present) may cause cuts and irritation. If eye is cut or otherwise damaged, seek medical attention.
Ingestion
Due to the physical nature of this product, ingestion is unlikely. There are no known health effects due to ingestion.
Most important symptoms/effects, acute and delayed
Under normal conditions of intended use, this material does not pose a risk to health.
Indication of immediate medical attention and special treatment needed
Provide general supportive measures and treat symptomatically.
General information
Ensure that medical personnel are aware of the material(s) involved.

5. FIRE-FIGHTING MEASURES

Suitable extinguishing media
Use fire-extinguishing media appropriate for surrounding materials.
Unsuitable extinguishing media
Not applicable.
Specific hazards arising from the chemical
Not a fire hazard.
Special protective equipment and precautions for firefighters
Selection of respiratory protection for firefighting: follow the general fire precautions indicated in the workplace. Self-contained breathing apparatus and full protective clothing must be worn in case of fire.
Fire-fighting equipment/instructions
Use standard firefighting procedures & consider the hazards of other involved materials.
Specific methods
Cool material exposed to heat with water spray and remove it if no risk is involved.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures
See Section 8 of the SDS for Personal Protective Equipment.
Methods and materials for containment and cleaning up
No specific clean-up procedure noted. For waste disposal, see Section 13 of the SDS. Avoid discharge to drains, sewers, and other water systems.
Environmental precautions
None.

7. HANDLING AND STORAGE

Precautions for safe handling
Edges and notches (where present) may be sharp and can cut skin. Unload from package with caution and handle carefully. Observe good industrial hygiene practices.
Conditions for safe storage, including any incompatibilities
Falling pieces can pose an injury hazard. Do not store open boxes or individual pieces above chest level. Store away from incompatible materials.

8. EXPOSURE CONTROLS/ PERSONAL PROTECTION

Exposure Standards
No exposure standard has been established for the product as supplied.
During welding or cutting operations the following Worksafe Exposure Standards should be applied;
Zinc oxide fume - 5 mg/m³ TWA
Iron oxide fume - 5 mg/m³ TWA as Fe
Other Exposure Standards may apply during welding or cutting operations, but are determined by the type of welding or cutting process (ARC, MIG, TIG, gas or plasma) and the electrode(s) used. Each individual operation must be separately assessed for hazards by an experienced Occupational Hygienist.
Occupational exposure limits
No exposure limits noted for ingredient(s).
Biological limit values
No biological exposure limits noted for the ingredient(s).
Appropriate engineering controls
Ventilation is not normally required.
Individual protection measures, such as personal protective equipment
Eye/face protection
Wear approved safety goggles.
Skin protection
Hand protection
It is a good industrial hygiene practice to minimize skin contact. For prolonged or repeated skin contact use suitable protective gloves.
Other
Normal work clothing (long sleeved shirts and long pants) is recommended.
Respiratory protection
Not necessary under normal conditions.
Thermal hazards
None
General hygiene considerations
Handle in accordance with good industrial hygiene and safety practices.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance
Physical state
Solid.
Form
C profile, U profile, L profile, Z profile, Omega profile, Strip profile
Color
Various.
Odor
Low to no odor.
Odor threshold
Not applicable.
pH
Not applicable.
Melting point/freezing point
1315.56 - 1537.78 °C (base metal (steel))
Specific Gravity
7.86
Initial boiling point and boiling range
Not applicable.
Flash point
Not applicable.
Evaporation rate
Not applicable.
Flammability (solid, gas)
Not applicable.
Solubility(ies)
Not soluble in water.
Upper/lower flammability or explosive limits
Flammability limit - lower (%)
Not applicable.
Flammability limit - upper (%)
Not applicable.
Explosive limit - lower (%)
Not applicable.
Explosive limit - upper (%)
Not applicable.
Vapor pressure
Not applicable.
Vapor density
Not applicable.
Relative density
7 - 8 (H^2O = 1)
Partition coefficient (n-octanol/water)
Not applicable.
Auto-ignition temperature
Not applicable.
Decomposition temperature
Not applicable.
Viscosity
Not applicable.
Other information
Bulk density
7688.8 - 8009.2 kg/m³
VOC (Weight %)
0 %

10. STABILITY AND REACTIVITY

Reactivity
The product is stable & non reactive under normal conditions of use, storage & transport.
Chemical stability
Material is stable under normal conditions.
Possibility of hazardous reactions
Hazardous polymerization does not occur.
Conditions to avoid
Contact with incompatible materials.
Incompatible materials
Strong oxidizing agents.
Hazardous decomposition products
No hazardous decomposition products are known.

11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure
Ingestion
Not likely, due to the form of the product.
Inhalation
Not likely, due to the form of the product.
Skin contact
Edges and notches (where present) may be sharp and can cut skin. Under normal conditions of intended use, this product does not pose a skin hazard.
Eyes contact
Contact with sharp edges and notches (where present) may cut the eye and cause eye damage.
Symptoms related to the physical, chemical and toxicological characteristics
Sharp edges and notches (where present) may cause cuts and irritation.
Information on toxicological effects
Acute toxicity
None.
Skin corrosion/irritation
Edges and notches (where present) may be sharp and can cut skin.
Serious eye damage/eye irritation
Contact with sharp edges and notches (where present) may cut the eye and cause eye damage.
Respiratory or skin sensitization
Respiratory sensitization
No data available.
Skin sensitization
This product is not expected to cause skin sensitization.
Germ cell mutagenicity
Not expected to be mutagenic.
Carcinogenicity
Not expected.
Reproductive toxicity
Not expected to be a reproductive hazard.
Specific target organ toxicity-single exposure
No data available, but none expected.
Specific target organ toxicity -repeated exposure
No data available, but none expected.
Aspiration hazard
Due to the physical form of the product it is not an aspiration hazard.
Further information
No other specific acute or chronic health impact noted.

METAL SUSPENSION SAFETY
DATASHEET

12. ECOLOGICAL INFORMATION

Ecotoxicity
Not expected to be harmful to aquatic organisms.
Persistence and degradability
No data is available on the degradability of this product.
Bioaccumulative potential
Bioaccumulation is not expected.
Mobility in soil
Not available.
Other adverse effects
No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. DISPOSAL CONSIDERATIONS

Disposal instruction
Dispose in accordance with applicable federal, state, and local regulations.
Recycle responsibly.
Local disposal regulations
Dispose of in accordance with local regulations.
Hazardous waste code
Not regulated.
Waste from residues / unused products
Dispose of in accordance with local regulations.
Contaminated packaging
Dispose of in accordance with local regulations.

14. TRANSPORT INFORMATION

DOT
Not regulated as dangerous goods.
IATA
Not regulated as a dangerous good.
IMDG
Not regulated as a dangerous good.
Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code
Not applicable.


15. REGULATORY INFORMATION

Saudi Arabian Inventory of Chemical Substance:

CAS #	7440-66-6	Zinc
CAS #	7429-90-5	Aluminium
CAS #	7439-89-6	Iron

16. OTHER INFORMATION, INCLUDING DATE OF PREPARATION OR LAST REVISION

Issue date
1-July-2018
Revision date
1-December-2022
Version #
02
Further information
NFPA Ratings:
Health: 0
Flammability: 0
Physical hazard: 0
Hazard Scale: 0 = Minimal 1 = Slight 2 = Moderate 3 = Serious 4 = Severe



List of abbreviations Disclaimer
NFPA: National Fire Protection Association.
This information is provided without warranty. The information is believed to be correct.
This information should be used to make an independent determination of the methods to safeguard workers and the environment



SEE US ON LINKEDIN
/usgme

FIND US ON FACEBOOK
/usgme

FOLLOW US ON INSTAGRAM
/usg_me

FOLLOW US ON TWITTER
/usg_me

SEE US ON YOUTUBE
/USG Middle East

MESSAGE US ON WHATSAPP
/+966 92 003 5672

FACTORY OF USG MIDDLE EAST LTD. CO.
7410 (Wasil), Street #23, Cross 76
2nd Industrial City, Dammam 34326-4201
Kingdom of Saudi Arabia

CUSTOMER SERVICE
t +966 13 812 0995
f +966 13 812 1029
info@usgme.com
www.usgme.com

WEBSITE
www.usgme.com

WHATSAPP
+966 92 003 5672

USG ME
INNOVATIVE SOLUTIONS. EVERYTIME.