
Product data sheet

raised floor system type **111 - 38 - 3 kN**

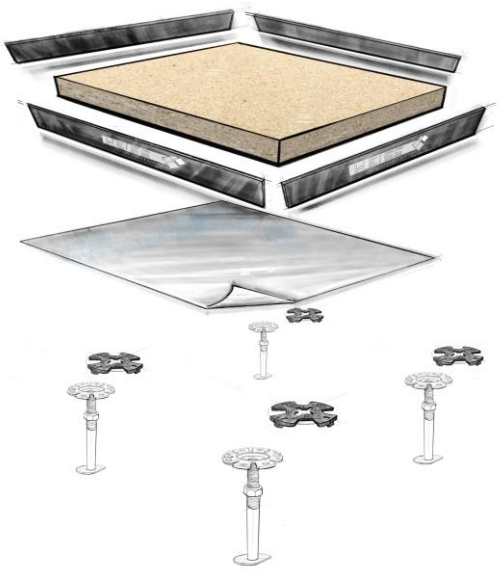

Static

Loading values

Concentread load	3000 N
Accrd. DIN EN 12826	Class 2
Ultimate load	6000 N

Proof

verification acc. To DIN EN 12825	SFE certificate

Distributed load

No nomartive references	ca. 12000 N/m²

Panel

Material	chipboard high density
Dimensions	600 x 600 mm
Panel thickness raw	38 mm
Topside	optional
Bottom	aluminiumfoil
Systemgewicht (bei 500mm Bodenhöhe)	ca. 71,6 kg/m²

Substructure

Stützen

M 16 (tube 18x2) FFH up to	430 mm
M 20 (tube 24x2) FFH up to	1360 mm
M 20 (tube 26x3) FFH up to	1760 mm
M 20 (tube 24x2 + o-tube 33,7x3,2)FFH up to	1870 mm
M 20 (tube 26x3 + o-tube 33,7x3,2)FFH up to	1870 mm

Fire protection

Build material	B - S2,D0 acc. to DIN EN 13501
Fire resistance class	REI 30 acc. to DIN EN 13501-2*

Acoustic

Standard edge impact sound level	Ln,f,w [dB]
no topping	63
with topping	56
carpet	51

Sustainability

Regulation or Protocoll	EN 14915
Blue Angel	Proof of conformity with DE-UZ 176*

PLADIS - Complexe Futuris Logistic Lotissement Ennouala, Lot N°2, Dépôt A3, Bd My Ismaïl - Casablanca
Tél : (+212) 5 22 34 44 59 // (+212) 5 20 16 30 11
Zone industrielle Gzenaya 341 - Tanger
Tél : (+212) 5 39 39 52 84
Email : contact@pladis.ma Site Web : www.pladis.ma

* Conditions for fire resistance class REI30: Minimum tube diameter of pedestals: 22x2mm, clear height: ≤ 622 mm. For details see abP / classification report.

*Blue Angel: test report availabe, application in progress.

Greater heights can be achieved by using larger tube diameters or, if necessary, by using overthrust tubes.

The information in this data sheet has been compiled to the best of our knowledge. The information is subject to change at any time. No liability is assumed for the topicality, correctness and completeness of the information provided.

Status 2024