
SECO LITE®

The Future of Cement Board

TECHNICAL DATASHEET

SECOLITE® Joint Tape

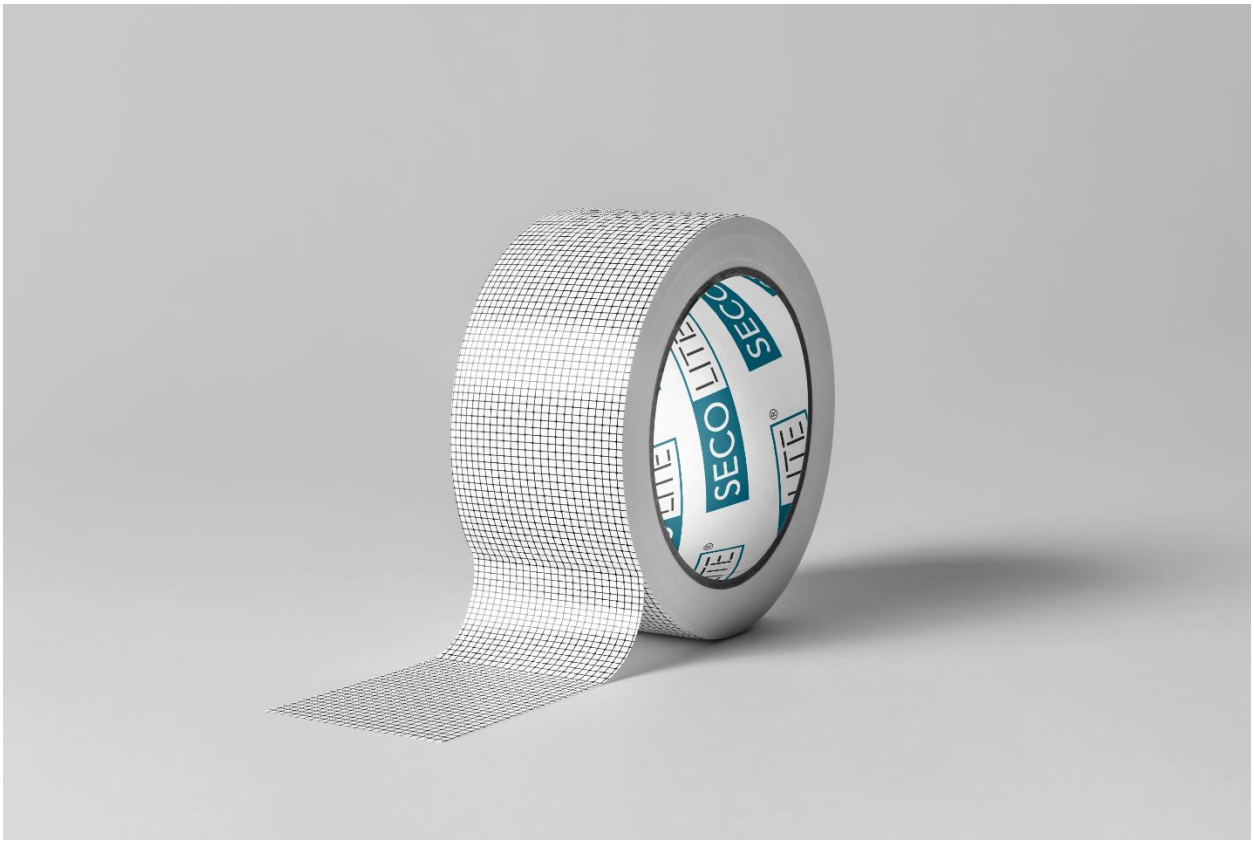

Cofinanciado por:

COMPETE 2020
PROGRAMA OPERACIONAL COMPETITIVIDADE E INTERNACIONALIZAÇÃO

PORTUGAL 2020

UNIÃO EUROPEIA
Fundos Europeus
Estruturais e de Investimento

CE

SECO LITE®

The Future of Cement Board

Product Description

Secolite® Joint Tape is made from high strength fiberglass mesh coated with alkali resistant polymers. It is the ideal reinforcement for finishing the joints between Secolite® Cement Boards.

Technical Data

Characteristic	Value	Tolerance	Test Method
Basis Weight (g/m²)	160	+/- 5%	EN 12127:1997
Coating Weight (g/m²)	21	+/- 5%	ISO 1887:2014
Coating Type	SBR Latex		
	Warp / Weft		
Aperture Size (mmxmm)	4.4/4.4	+/- 5%	ETAG 0004 C 3.3
Yarn Count (yarns/10 cm)	20 / 17	+/- 5%	EN 1049-2:1999
Tensile Strength (N/5cm)	2000 / 2200	+/- 5%	ISO 4606:1995
Elongation (%)	<5 / <5		
Weave	Tricot		
Standard Measurement (cmxcm)	100 / 50	+/- 0.5%	DIN 6101-1, DIN ISO 9354
Thickness (mm)	0.54		ISO 4603:1993
Width (mm)	125	+/- 0.5%	
Length (m)	50	+/- 0.5%	

Packaging and Storage

Secolite® Joint Tape is available in 6.25 m² rolls (125 mm wide X 50 m long) packaged 240 rolls to a pallet. Product should be stored in a cool dry place. Avoid prolonged exposure to direct sunlight. Please refer to the SDS for health and safety information.

PLADIS - Complexe Futuris Logistic Lotissement Ennouala, Lot N°2, Dépôt A3, Bd My Ismaïl - Casablanca
Tél : (+212) 5 22 34 44 59
Tanger : Zone industrielle Gzenaya 341 Tél : (+212) 5 39 39 52 84
Email : contact@pladis.ma Site Web : www.pladis.ma

Cofinanciado por:
COMPETE 2020 PROGRAMA OPERACIONAL COMPETITIVIDADE E INTERNACIONALIZAÇÃO
PORTUGAL 2020
UNIÃO EUROPEIA
Fundos Europeus Estruturais e de Investimento

CE