

RoHS 2015/863/EU REACH compliant Conflict minerals free

GEYER quartz technology

GEYER KXO-V99 Features and Applications:

- Oscillator with supply voltage range +1.2 V ~ +3.6 V
- Package size: 5.0 x 3.2 x 1.3 mm, 4 pad footprint
- Frequency range: 0.5 ~ 200.0 MHz
- Moisture Sensitivity Level, MSL Level 1
- Recommended for Industrial Automation, Embedded Systems, Networking, etc.
- For further requirements, please contact us

Clock Oscillator

SMD-version

+1.8


part no.	12.94761
model	KXO-V99
frequency	40.0 MHz
frequency stability at -20° ~ +70°C	±18 ppm
operating temperature	-20° ~ +70°C
storage temperature	-55° ~ +125°C
supply voltage V_{DD}	+1.8 V DC ±5 %
supply current max	6 mA
symmetry	45 % ~ 55 % at 50 % V_{DD} level
rise & fall time max.	5 ns
"O" level max.; "1" level min.	VOL: 10 % V_{DD}; VOH: 90 % V_{DD}
tri-state control voltage (Pin#1)	VIH: V_{DD} x 0.7 min.; VIL: V_{DD} x 0.3 max.
output load	15 pF
start up time max.	10 ms
disable / enable delay time	200 ns max. / 10 ms max.
standby current max.	20 µA
jitter max.	deterministic jitter 5 ps norm 1-sigma 7 ps random jitter 7 ps peak to peak 40 ps
contents of reel	1000 pcs.




RoHS 2015/863/EU | REACH compliant | Conflict minerals free

GEYER quartz technology

Dimensions (mm):

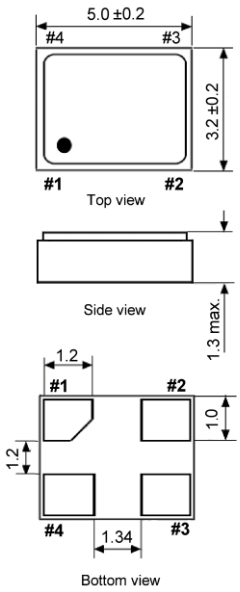


Suggested soldering pad:



PIN	Connection	
1	"L" (0V)	"H" or OPEN
2	GND	
3	Z	OUTPUT
4	V_{DD}	


Z: high impedance

Test circuit:




CL: including fixture and probe capacitance.


Output waveform:

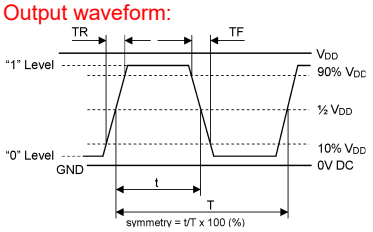

Reflow soldering condition:

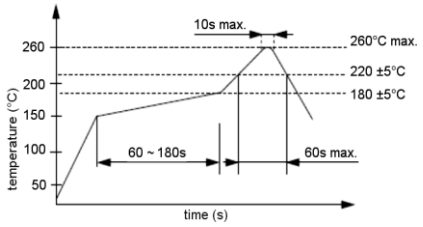

Tape specification:

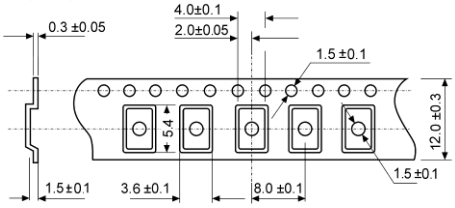

reel diameter 178mm