


PART NUMBER
SEE NOTE 6

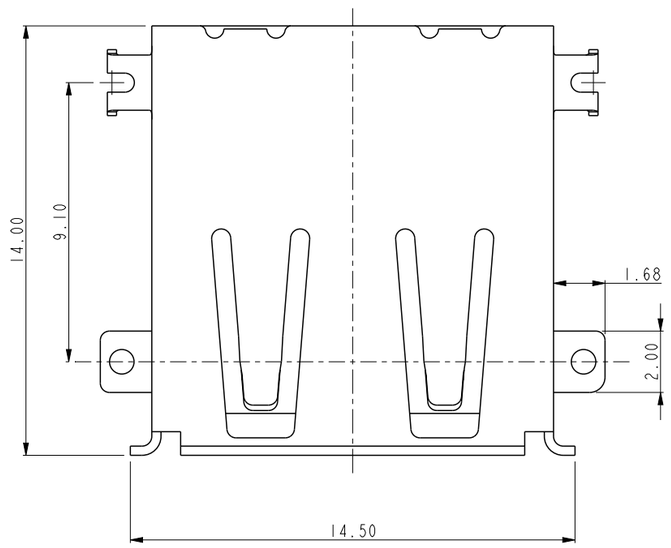


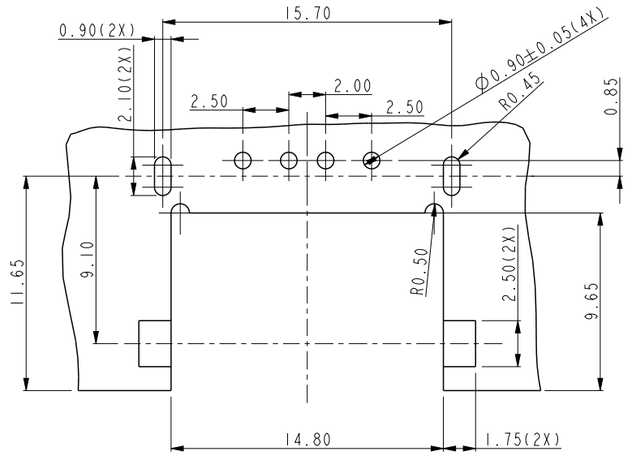


SCALE
3.000

RECOMMENDED PCB LAYOUT (THICKNESS=1.2MM)
TOLERANCE ±0.05

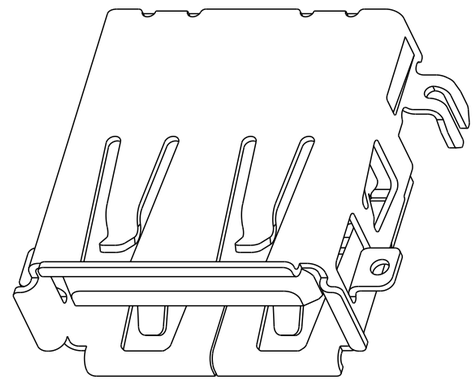

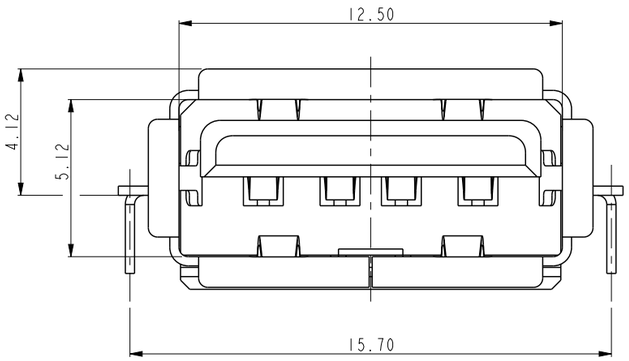

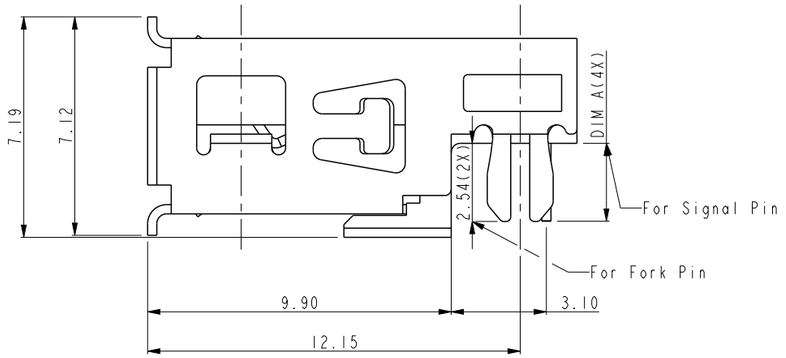

NOTES:
1. MATERIAL:
   HOUSING: HIGH TEMPERATURE THERMAL PLASTIC, UL94V-0, BLACK.
   TERMINAL: COPPER ALLOY.
   SHELL: COPPER ALLOY.
2. FINISH:
   TERMINAL:
   30u" GXT/Au ON CONTACT AREA.
   100u" MATTE TIN ON SOLDER TAIL.
   UNDER PLATING: 50u" Ni MIN. OVER ALL.
   SHELL:
   MATTE TIN OVER 50u" Ni OVER ALL.
   100u" MATTE TIN MIN ON SOLDER TAIL OVER 50u" Ni.
3. THIS PRODUCT WILL WITHSTAND EXPOSURE TO 260°C PEAK TERMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN;
4. FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
5. THE PRODUCT CAN BE USED FOR PIP PROCESS.
6. PART NUMNER DEFINITION:
   10126196 - X 0X X LF
   - LEAD FREE
   - PACKING TYPE
     B: TUBE
     R: TAPE & REEL
   - 01: DIM A=2.54
     02: DIM A=2.00
   - PLATING CODE
     1: 30u" GXT ON CONTACT AREA
     2: 30u" Au ON CONTACT AREA

spec ref	-			dr	John Han	2013/07/17	projection	MM
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Li-Qing Lei	2023/03/02		
				chr	-	-		
				appr	Tim Yao	2023/03/06	product family	-
surface - ISO 1302	linear	0.X	±0.3	Amphenol FCi	title	USB 2.0 A TYPE RECEPTACLE OFFSET TYPE	dwg no	10126196
		0.XX	±0.20					
		0.XXX	±0.10					
	angular	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw	

size	scale	rev
A3	1.000	D
ecn no	ELX-N-47655-1	
rel level	Released	
sheet 1 of 1		

© 2020 Amphenol Corporation