






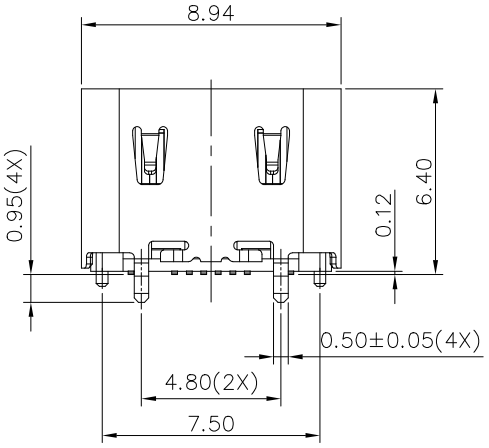





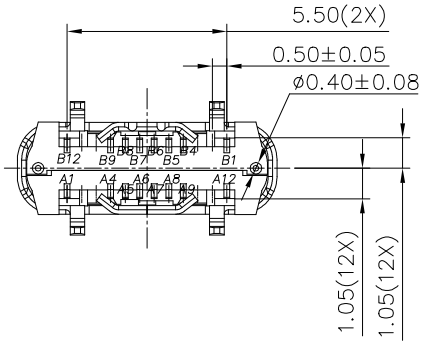

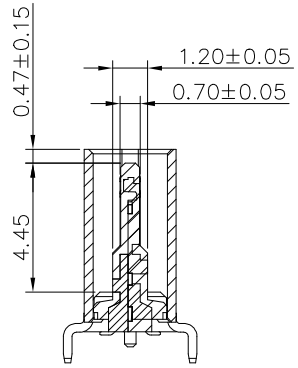

SECTION: A−A

NOTE:
1.MATERIAL SPECIFICATION:
1.HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V−0.
2.TERMINAL: COPPER ALLOY
3.MID PLATE: STAINLESS STEEL
4.FRONT SHELL: STAINLESS STEEL

2.PLATING SPECIFICATION:
2−1.TERMINAL:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE NUMBER)
Au 1u" PLATING SPECIFICATIONS OF THE SOLDER AREA.
2−2.FRONT SHELL:
Ni 50u" MIN. UNDER PLATED OVER ALL.
2−3.MID PLATE:
CLEAR ONLY

3.MECHANICAL PERFORMANCE,
3−1.INSERTION FORCE: 0.5~2.0kgf.
3−2.REMOVAL FORCE: 0.8kgf~2.0kgf.
3−3.DURABILITY: 10000 CYCLES.

4.ELECTRICAL PERFORMANCE,
4−1. VOLTAGE RATING: 5 V DC/AC (RMS. max)
CURRENT RATING: 5 AMPS. FOR TOTAL VBUS/GND PINS;
1.25AMPS FOR CC PIN,0.25 AMPS. FOR ALL OTHER CONTACT.
4−2. LLCR:
VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
SHIELD: 50mΩ/MAX.
LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
4−3.INSULATION RESISTANCE: 100MΩ MIN
4−4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.

5. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: −25°C~+85°C.

6.IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.


7. PART NUMBER DESCRIPTION
10168207−00 0 X X LF
PACKAGING
1. TAPE AND REEL
CONTACT PLATING
1. GOLD FLASH
2. 15u" GOLD
3. 30u" GOLD


mat'l. code				surface ISO 1302 √		tolerance ISO 406 ISO		projection 1101	product family USB		
ltr	ecn no	dr	date	tolerances unless otherwise				specified	title		
A	New release	YY	2022/11/18	angles	linear	.0±.30		mm	USB TYPE C RECEPTACLE		
B	ELX−N−290110	TY	2026/03/06			.00±.20			16PIN VERTICAL SMT TYPE		
				0°±2°		.000±.10		scale 1:1			
				dr	Y−Y Bao	2022/11/18			dwg no 10168207	sheet 1 of 3	size A3
				engr	Y−Y Bao	2022/11/18		Amphenol FCi			
				chr	L−Q Lei	2022/11/18					
				appd	Tim Yao	2022/11/18			type Product Customer Drawing		
sheet index	revision sheet										

© 2016 AFCI


USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

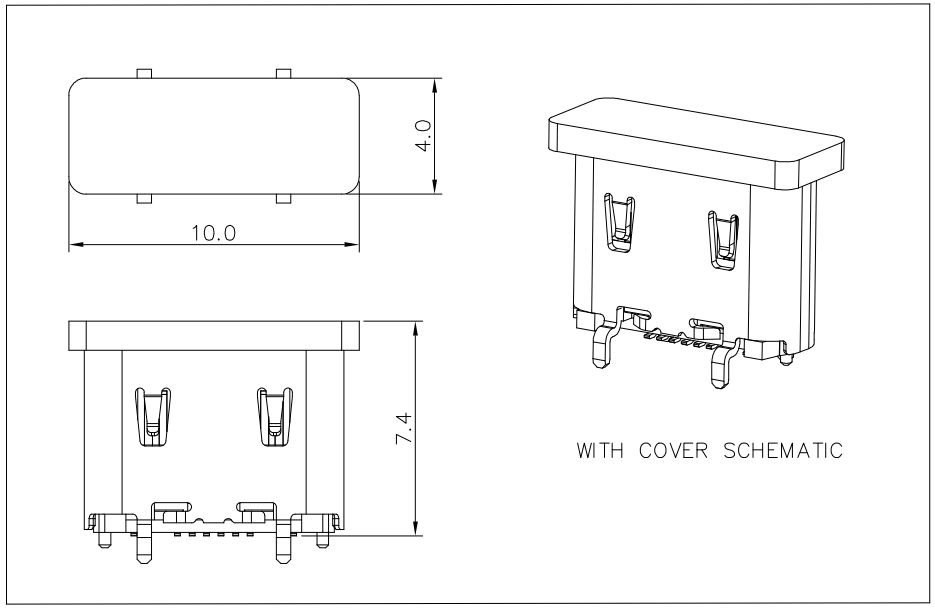

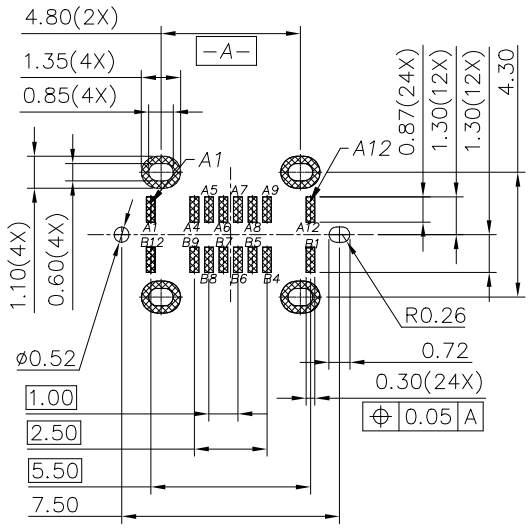


RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.8±0.10MM;DEFAULT TOLERANCE: ±0.05

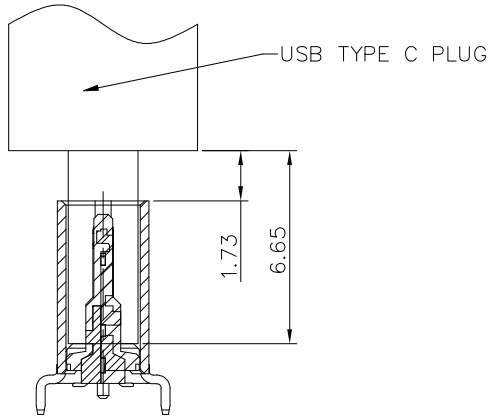



FEMALE AND MALE MATCHING DRAWING


mat'l. code				surface ISO 1302		tolerance ISO 406 ISO 1101		projection		product family USB	
ltr	ecn no	dr	date	tolerances unless otherwise specified						title	
B				angles	linear	.0±.30		mm		USB TYPE C RECEPTACLE 16PIN VERTICAL SMT TYPE	
				0°±2°		.00±.20					
						.000±.10		scale 1:1			
				dr	Y-Y Bao	2022/11/18				dwg no 10168207	sheet 2 of 3 / size A3
				engr	Y-Y Bao	2022/11/18					
				chr	L-Q Lei	2022/11/18					
				appd	Tim Yao	2022/11/18				type Product Customer Drawing	
sheet index	revision sheet										

© 2016 AFCI

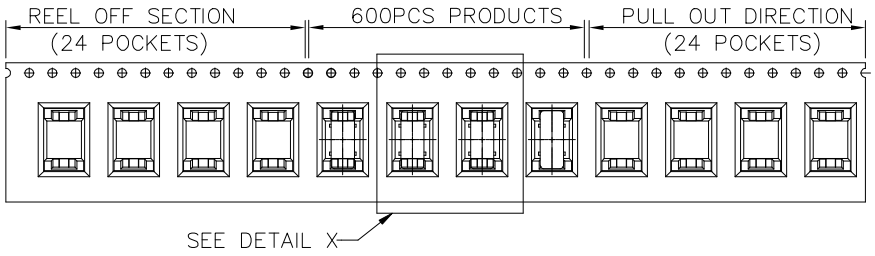

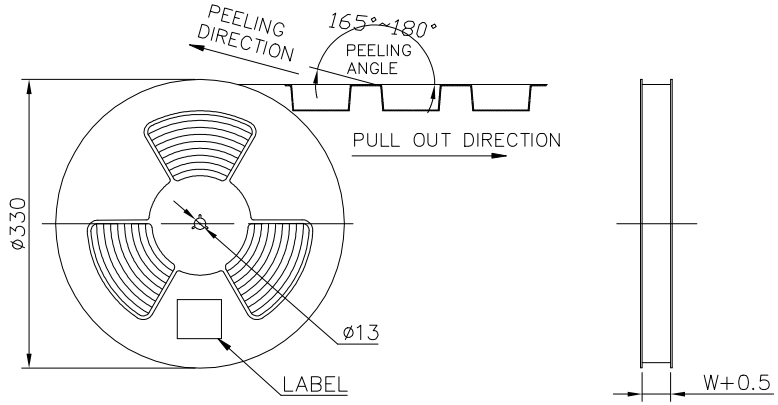

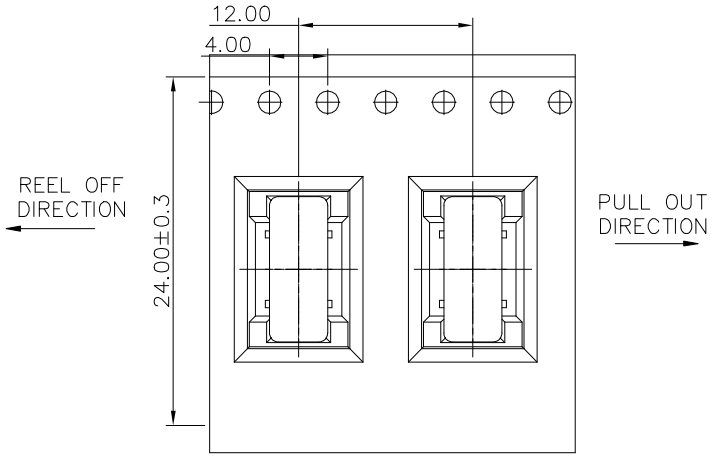

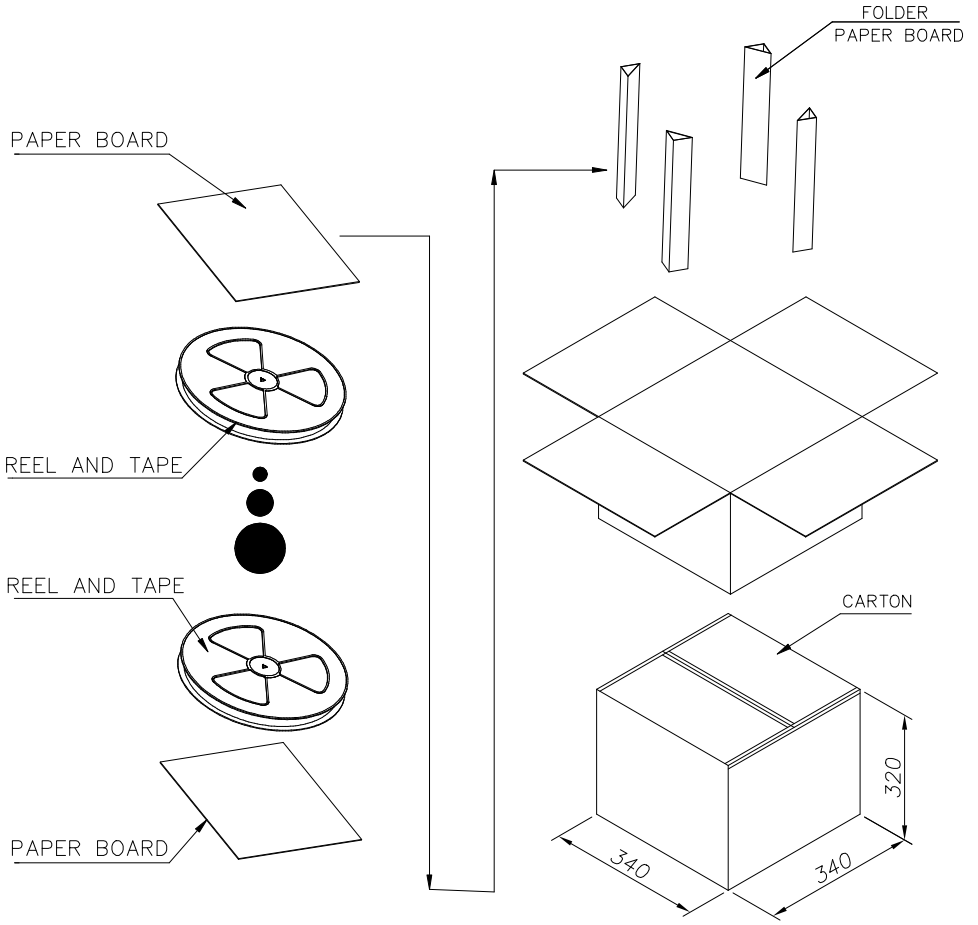

	REEL/TRAY	CARTON
CONNECTOR (PCS)	600	6000

mat'l. code				surface ISO 1302 √		tolerance ISO 406 ISO 1101		projection	product family USB			
ltr	ecn no	dr	date	tolerances unless otherwise specified					title			
B				angles	linear	.0±.30		mm	USB TYPE C RECEPTACLE			
				0°±2°		.00±.20			16PIN VERTICAL SMT TYPE			
						.000±.10		scale 1:1				
				dr	Y-Y Bao	2022/11/18			dwg no	sheet 3 of 3	size	
				engr	Y-Y Bao	2022/11/18		Amphenol FCi	10168207		A3	
				chr	L-Q Lei	2022/11/18			type Product Customer Drawing			
				appd	Tim Yao	2022/11/18						
sheet index	revision sheet											

© 2016 AFCI