













A−A

NOTE:

1.MATERIAL SPECIFICATION:
 1.HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V−0 BLACK.
 2.TERMINAL: COPPER ALLOY
 3.MID PLATE: STAINLESS STEEL
 4.FRONT SHELL: STAINLESS STEEL

2.PLATING SPECIFICATION:
 2−1.TERMINAL:
  Ni 50u" MIN. UNDER PLATED OVER ALL.
  THE FUNCTIONAL AREA OF CONTACT: REFER THE PART NUMBER
  0.8u" MIN GOLD PLATING OF THE SOLDER AREA
 2−2.FRONT SHELL:
  Ni 30u" MIN. UNDER PLATED OVER ALL.
 2−3.MID PLATE
  CLEAR ONLY

3.MECHANICAL PERFORMANCE,
 3−1.INSERTION FORCE: 0.5~2.0kgf.
 3−2.REMOVAL FORCE: 0.8kgf~2.0kgf.
 3−3.DURABILITY: 10000 CYCLES.

4.ELECTRICAL PERFORMANCE,
 4−1. VOLTAGE RATING: 5 V DC/AC (RMS. max)
  CURRENT RATING: 3A
  1.5AMPS MIN FOR VBUS PIN,
  0.25 AMPS. FOR ALL OTHER CONTACT.
 4−2. LLCR:
  VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
  SHIELD: 50mΩ/MAX.
  LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
 4−3.INSULATION RESISTANCE: 100MΩ MIN
 4−4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.

5. ENVIRONMENTAL PERFORMANCE:
 OPERATING TEMPERATURE: −25°C~+85°C.

6.IR REFLOW:
 THE PEAK TEMPERATURE ON THE BOARD SHALL
 BE MAINTAINED FOR 10 SECONDS AT 260°C.

7. PRODUCT PART NUMBER DESCRIPTION:
 10173568 − 0 0 0 X X LF
  LF: LEAD FREE
  X: PACKING TYPE:
   1: TAPE AND REEL
  X: CONTACT AREA PLATING
   1: 0.8u" MIN GOLD

mat'l. code

surface ISO 1302 √
tolerance ISO 406 ISO 1101
projection specified

ltr	ecn no	dr	date
A	−	TY	2024/02/28

tolerances unless otherwise
angles 0°±2°
linear .X±.35 .XX±.25 .XXX±.15
mm
scale 1:1

dr	Tian−Yu Tang	2022/08/15
engr	Tian−Yu Tang	2022/08/15
chr	L−Q Lei	2022/08/15
appd	Tim Yao	2022/08/15

product family
USB

title
USB TYPE C VERTICAL
6PIN SMT TYPE

dwg no 10173568
sheet 1 of 2
size A3
type Product Customer Drawing

sheet index
revision sheet

© 2016 AFCI

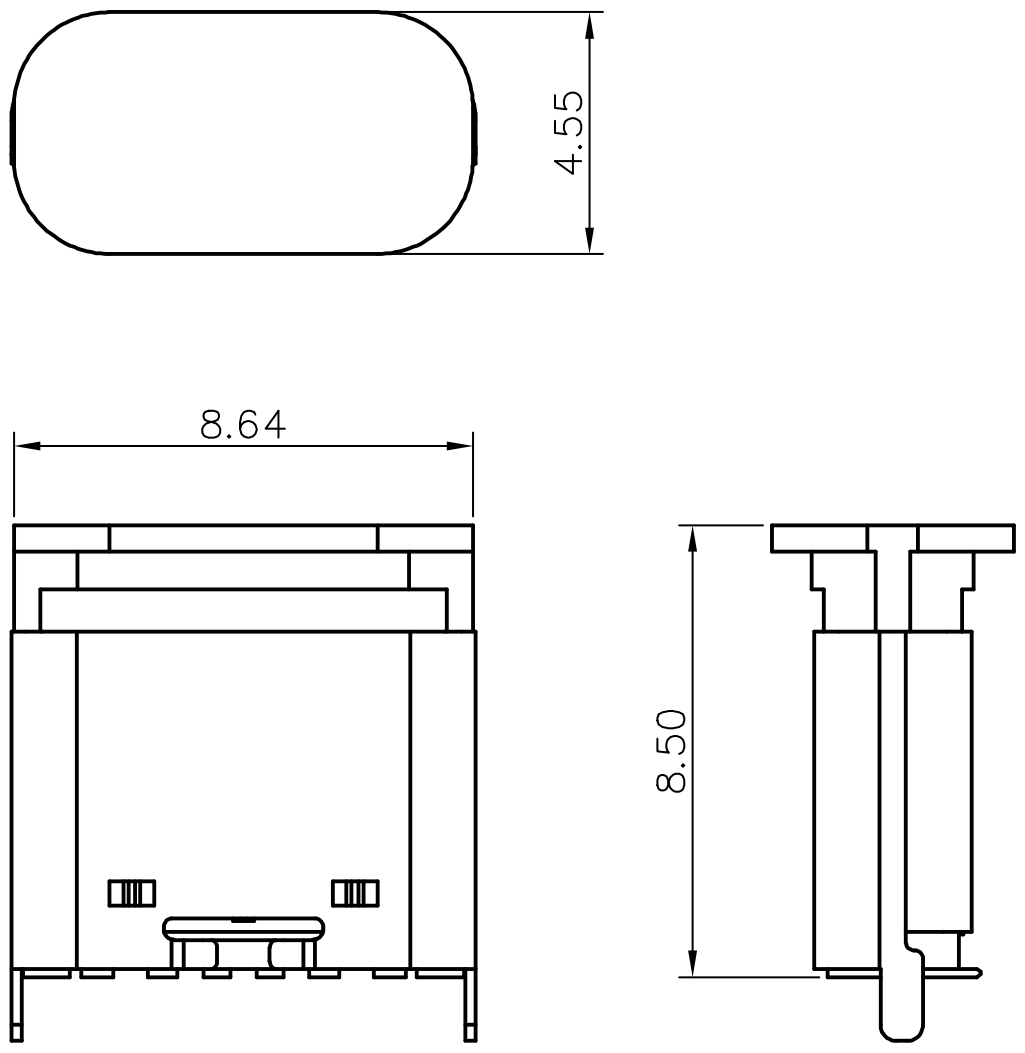

WITH COVER SCHEMATIC

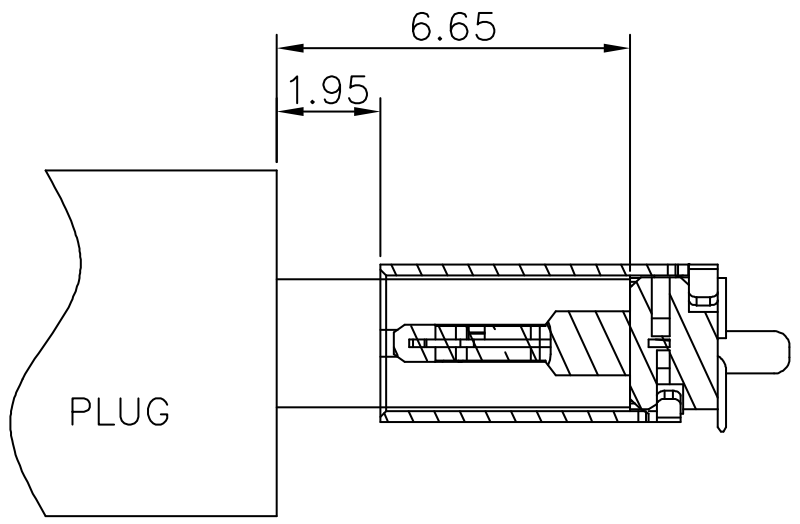
6.65
1.95
PLUG

AFTER MATING

PIN ASSIGNMENTS

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

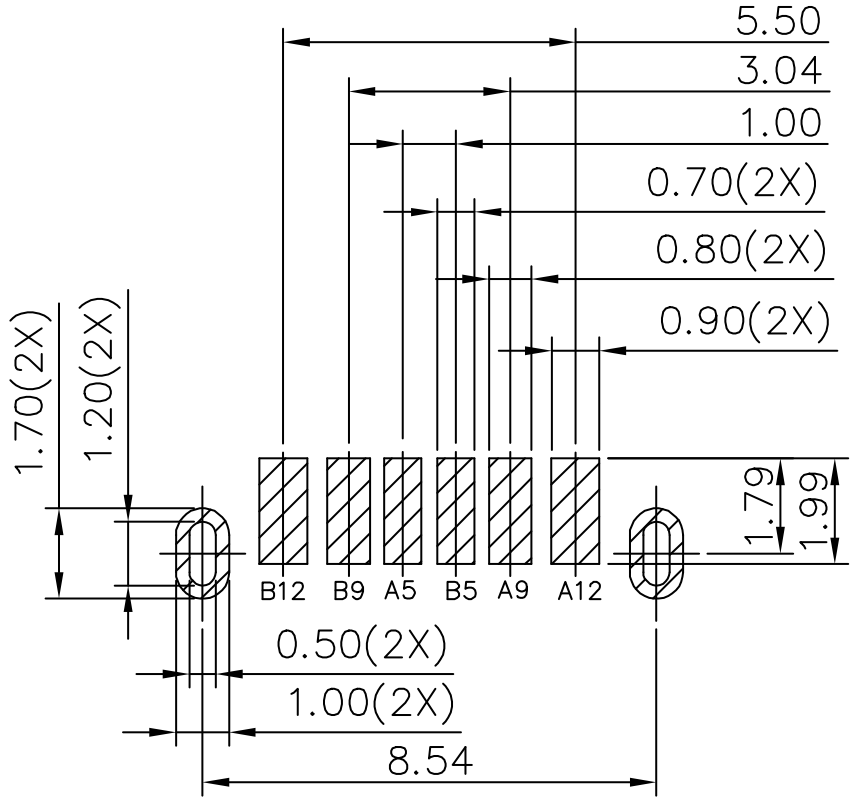
5.50
3.04
1.00
0.70(2X)
0.80(2X)
0.90(2X)
1.70(2X)
1.20(2X)
1.79
1.99
B12
B9
A5
B5
A9
A12
0.50(2X)
1.00(2X)
8.54

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS 1.00±0.10MM;DEFAULT TOLERANCE:±0.05

© 2016 AFCI

mat'l. code				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection
ltr	ecn no	dr	date	tolerances unless otherwise specified		
A				angles	linear .X±.35	mm
					.XX±.25	
				0°±2°	.XXX±.15	scale 1:1
				dr	Tian-Yu Tang	2022/08/15
				engr	Tian-Yu Tang	2022/08/15
				chr	L-Q Lei	2022/08/15
				appd	Tim Yao	2022/08/15
sheet index	revision sheet					

product family
USB

title
USB TYPE C VERTICAL
6PIN SMT TYPE

dwg no 10173568
sheet2 of 2
size A3

type Product Customer Drawing