



SECTION: A–A

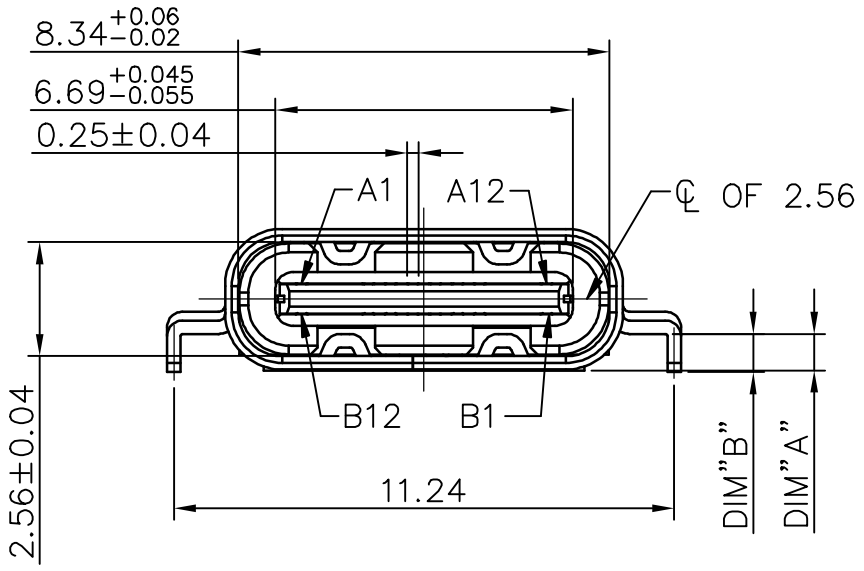

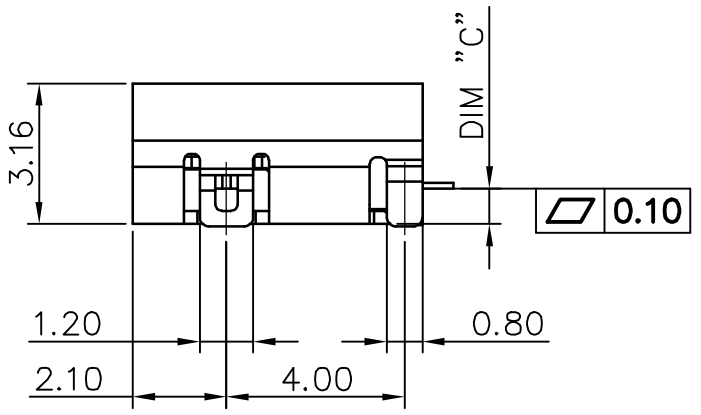

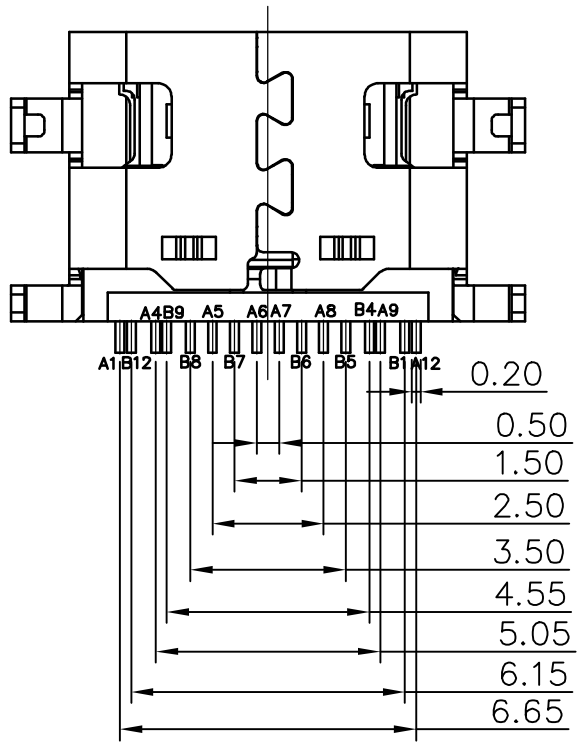

NOTE:

1. MATERIAL SPECIFICATION:
   1. HOUSING:HIGH TEMPERATURE PLASTIC,UL94 V-0,BLACK.
   2. TERMINAL: COPPER ALLOY
   3. MID PLATE: STAINLESS STEEL
   4. FRONT SHELL: STAINLESS STEEL
2. PLATING SPECIFICATION:
   2-1. TERMINAL:
   Ni 50u" MIN. UNDER PLATED OVER ALL.
   THE FUNCTIONAL AREA OF CONTACT: REFER THE PART NUMBER.
   Au 1u" PLATING SPECIFICATIONS OF THE SOLDER AREA
   2-2. FRONT SHELL:
   Ni 50u" PLATING
   2-3. MID PLATE:
   CLEAR ONLY
3. MECHANICAL PERFORMANCE,
   3-1. INSERTION FORCE: 0.5kgf~2.0kgf.
   3-2. REMOVAL FORCE: 0.8kgf~2.0kgf.
   3-3. DURABILITY: 10000 CYCLES.
4. ELECTRICAL PERFORMANCE,
   4-1. VOLTAGE RATING:5 V DC/AC (RMS. max)
   CURRENT RATING:5 AMPS. FOR TOTAL VBUS/GND PINS;
   1.25AMPS FOR CC PIN,0.25 AMPS.FOR ALL OTHER CONTACT.
   4-2. LLCR:
   VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
   LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
   4-3. INSULATION RESISTANCE: 100MΩ MIN
   4-4. DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
   OPERATING TEMPERATURE: -25° C~+85° C.
6. IR REFLOW:
   THE PEAK TEMPERATURE ON THE BOARD SHALL
   BE MAINTAINED FOR 10 SECONDS AT 260° C.
7. PRODUCT PART NUMBER DESCRIPTION:
   10174570 - 0 0 X X X LF

LEAD FREE

STYLE:
A,B,C,(REFER THE TABLE)

PACKING TYPE:
1: TAPE/REEL

CONTACT AREA PLATING
1: 3u" GOLD
2: 15u" GOLD
3: 30u" GOLD

STYLE	DIM "A"	DIM "B"	DIM "C"
A	0.82	0.85	0.80
B	1.02	0.85	1.00
C	1.62	0.70	1.60


STYLE A


STYLE B


STYLE C

mat'l. code		surface ISO 1302 √	tolerance ISO 406 ISO 1101		projection	product family USB
ltr	ecn no	dr	date	tolerances unless otherwise specified		
A	–	TY Tang	2024/02/28	angles	linear 0.X±0.35	mm	title
B	ELX-N-309670	TY Tang	2026/10/07		linear 0.XX±0.25		USB TYPE C 16P SINK SMT TYPE
				0°±x°	0.XXX±0.15	scale 1:1	
				dr	Tian–Yu Tang	2026/10/07	dwg no 10174570 sheet 1 of 2 size A3
				engr	Tian–Yu Tang	2026/10/07	
				chr	L–Q Lei	2026/10/07	
				appd	Tim Yao	2026/10/07	type Product Customer Drawing
sheet index	revision B					
	sheet 1					

Amphenol FCi

© 2016 AFCI

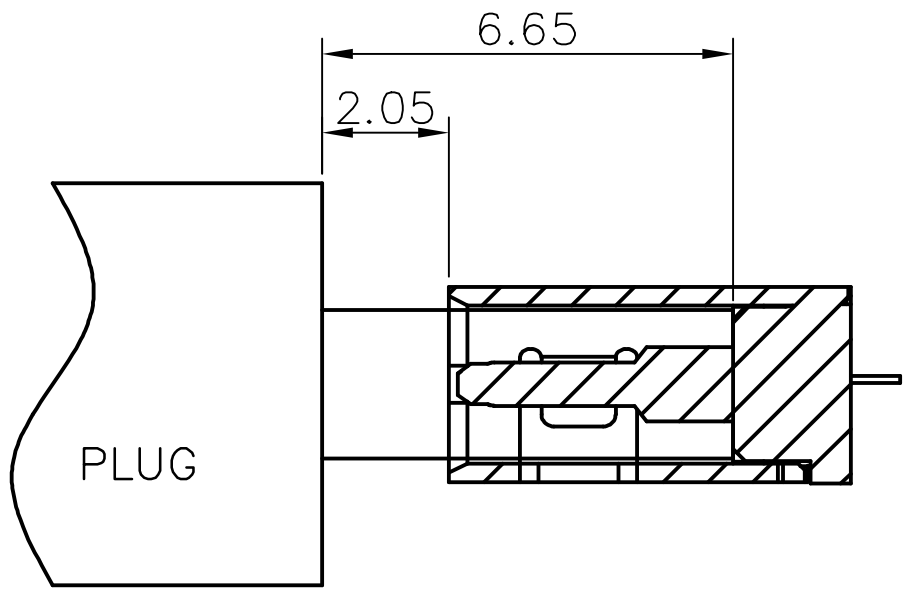

AFTER MATING

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME
A1	GND
A4	VBUS
A5	CC1
A6	Dp1
A7	Dn1
A8	SBU1
A9	VBUS
A12	GND

PIN NUMBER	SIGNAL NAME
B12	GND
B9	VBUS
B8	SBU2
B7	Dn2
B6	Dp2
B5	CC2
B4	VBUS
B1	GND

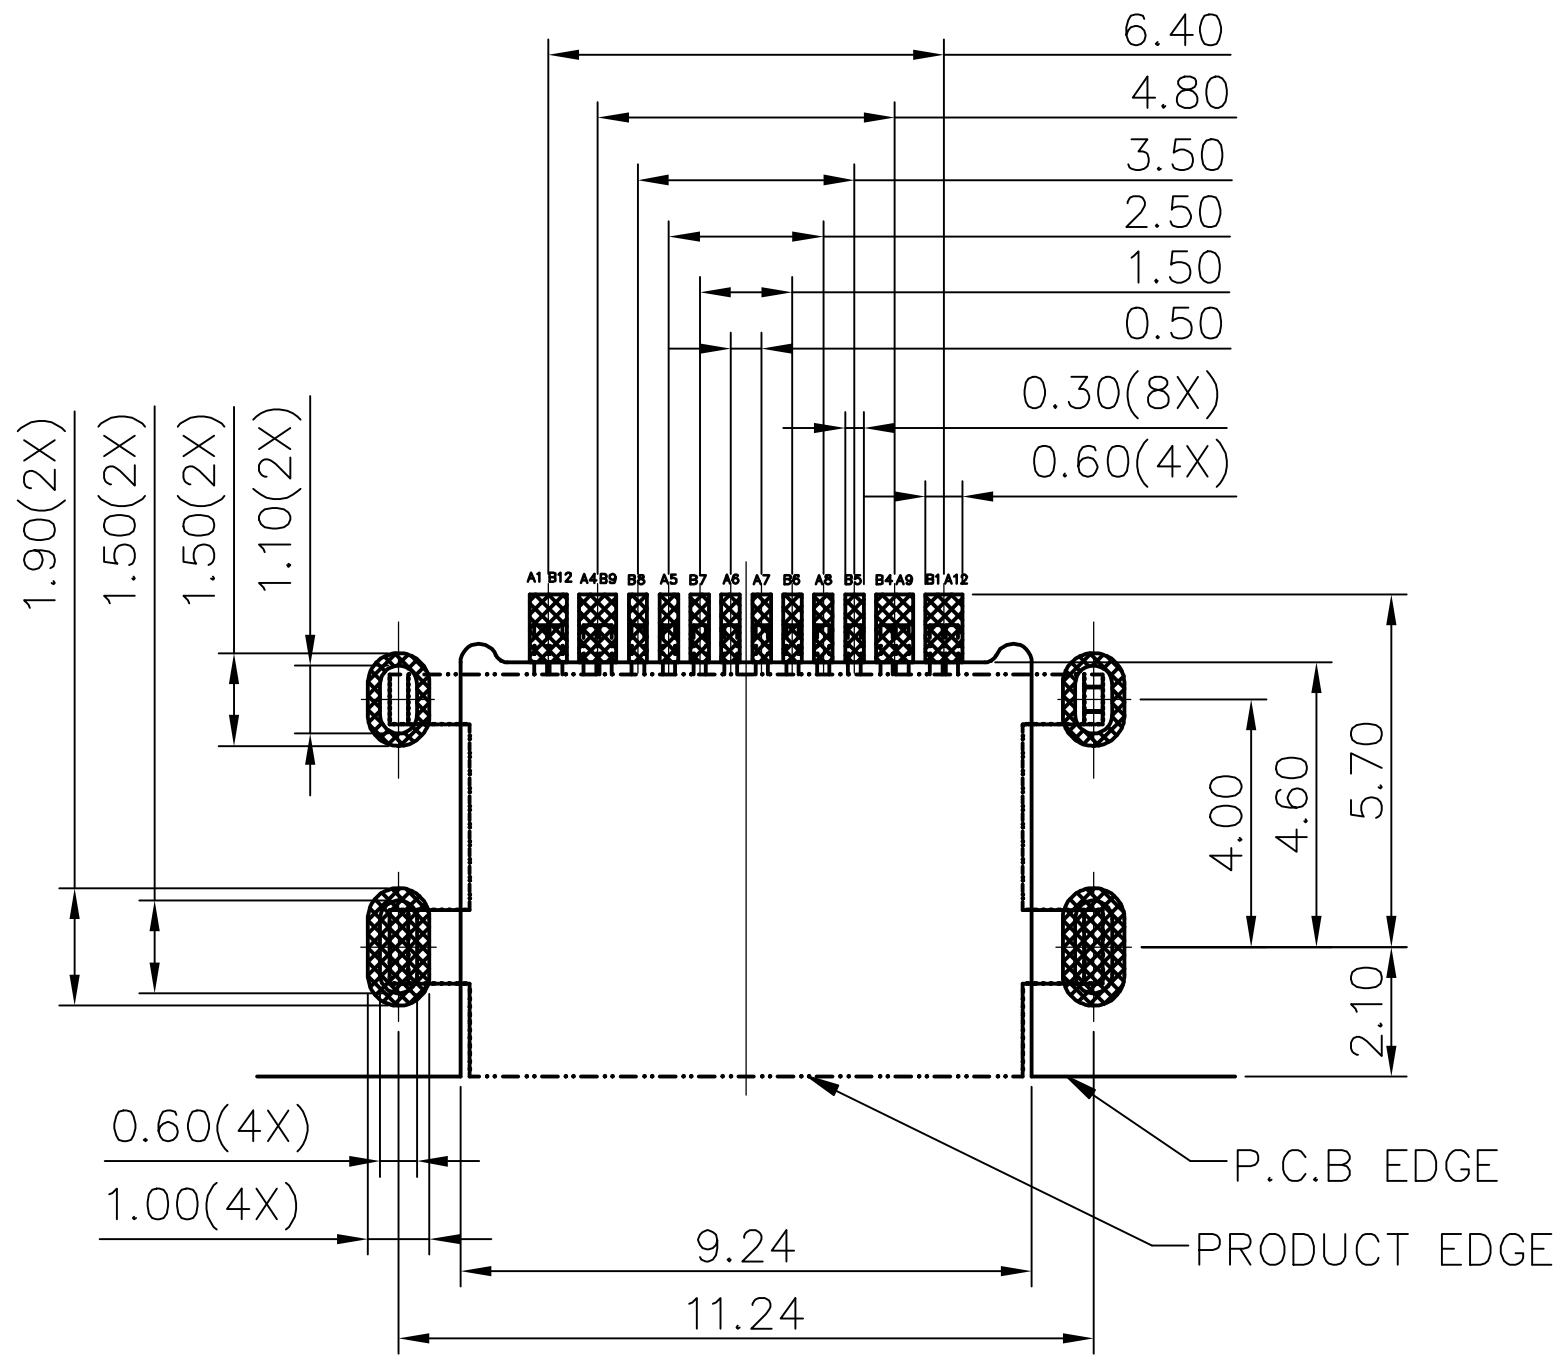

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS 0.80MM; DEFAULT TOLERANCE: ±0.05

mat'l. code				surface ISO 1302 √	tolerance ISO 406 ISO 1101		projection	product family USB
ltr	ecn no	dr	date	tolerances unless otherwise specified				
B				angles	linear	0.X±0.35	mm	title USB TYPE C 16P SINK SMT TYPE
						0.XX±0.25		
				0°±x°		0.XXX±0.15	scale 1:1	
				dr	Tian-Yu Tang	2026/10/07	Amphenol FCi	dwg no sheet2 of 2 10174570
				engr	Tian-Yu Tang	2026/10/07		size A3
				chr	L-Q Lei	2026/10/07		
				appd	Tim Yao	2026/10/07		type Product Customer Drawing
sheet index	revision	B						
	sheet	2						

© 2016 AFCI