



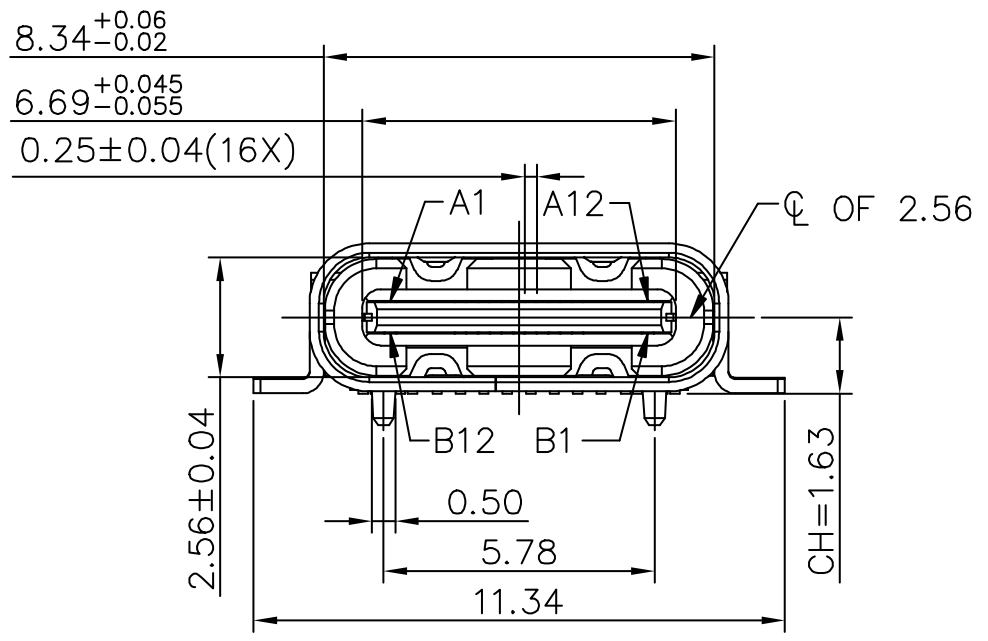



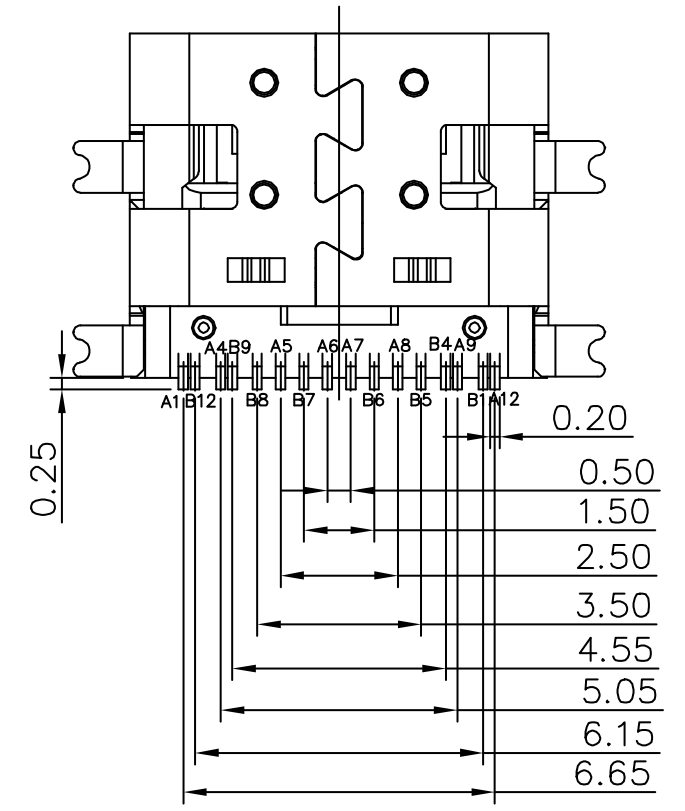

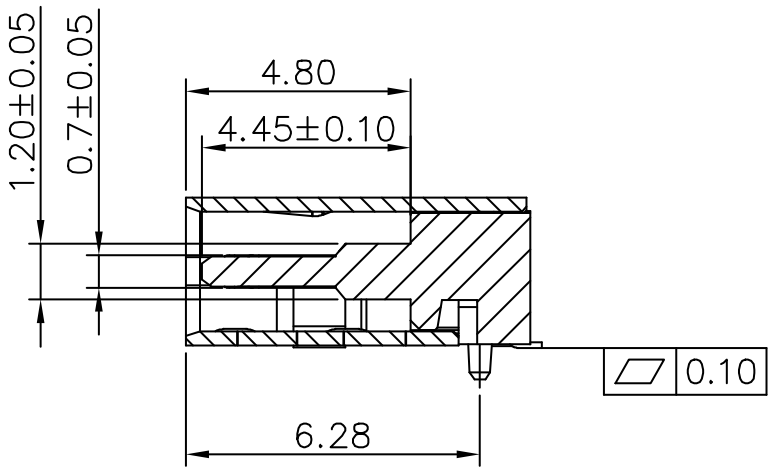

SECTION: A—A

NOTE:

1.MATERIAL SPECIFICATION:

1.HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V—0.

2.TERMINAL: COPPER ALLOY

3.MID PLATE: STAINLESS STEEL

4.FRONT SHELL: STAINLESS STEEL

2.PLATING SPECIFICATION:

2—1.TERMINAL:

Ni 50u" MIN. UNDER PLATED OVER ALL.

Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.

(GOLD PLATING THICKNESS FOLLOW THE NUMBER)

Au 1u" PLATING SPECIFICATIONS OF THE SOLDER AREA

2—2.FRONT SHELL:

Ni PLATING SPECIFICATIONS

2—3.MID PLATE PLATE:

CLEAR ONLY

3.MECHANICAL PERFORMANCE,

3—1.INSERTION FORCE: 0.5~2.0kgf.

3—2.REMOVAL FORCE: 0.8kgf~2.0kgf.

3—3.DURABILITY: 10000 CYCLES.

4.ELECTRICAL PERFORMANCE,

4—1. VOLTAGE RATING: 5 V DC/AC (RMS. max)

CURRENT RATING: 5 AMPS. FOR TOTAL VBUS/GND PINS;

1.25AMPS FOR CC PIN,0.25 AMPS. FOR ALL OTHER CONTACT.

4—2. LLCR:

VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.

LLCR MAX. CHANGE OF ALL PINS: 10mΩ.

4—3.INSULATION RESISTANCE: 100MΩ MIN

4—4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.

5. ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: —25℃~+85℃.

6.IR REFLOW:

THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260℃.

7.PRODUCT PART NUMBER DESCRIPTION:

10174739 — 0 0 X X X LF

LEAD FREE

HOUSING OPTION
1: PA9T
2: LCP

PACKING TYPE:
1: TAPE/REEL

CONTACT AREA PLATING
1: GOLD FLASH
2: 15u" GOLD
3: 30u" GOLD

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| mat'l. code | | | | surface ISO 1302 √ | | tolerance ISO 406 ISO 1101 | projection | product family USB |
| ltr | ecn no | dr | date | tolerances unless otherwise specified | | | | title USB TYPE C 16P SMT TYPE |
| A | — | TY | 2025/06/27 | angles | linear | .X±.35 | mm | |
| | | | | | | .XX±.25 | | |
| | | | | 0°±2° | | .XXX±.15 | scale 1:1 | |
| | | | | dr | Tian—Yu Tang | 2023/11/14 | Amphenol FCi | dwg no 10174739 sheet 1 of 2 size A3 |
| | | | | engr | Tian—Yu Tang | 2023/11/14 | | |
| | | | | chr | L—Q Lei | 2023/11/14 | | |
| | | | | appd | Tim Yao | 2023/11/14 | | type Product Customer Drawing |
| sheet index | revision | A | | | | | | |
| | sheet | 1 | | | | | | |

© 2016 AFCI

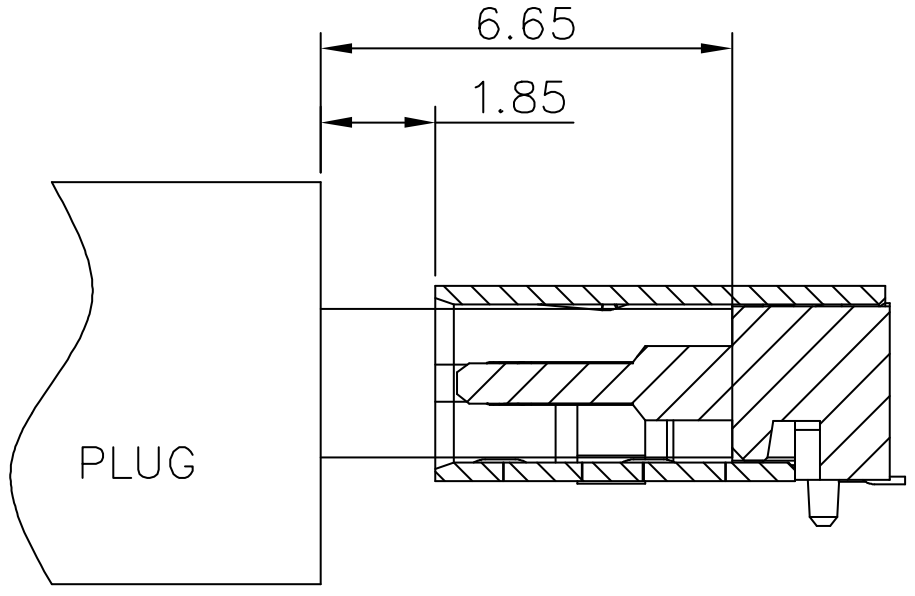

AFTER MATING

USB TYPE-C PIN ASSIGNMENTS

| PIN NUMBER | SIGNAL NAME |
|---|---|
| A1 | GND |
| A4 | VBUS |
| A5 | CC1 |
| A6 | Dp1 |
| A7 | Dn1 |
| A8 | SBU1 |
| A9 | VBUS |
| A12 | GND |

| PIN NUMBER | SIGNAL NAME |
|---|---|
| B12 | GND |
| B9 | VBUS |
| B8 | SBU2 |
| B7 | Dn2 |
| B6 | Dp2 |
| B5 | CC2 |
| B4 | VBUS |
| B1 | GND |

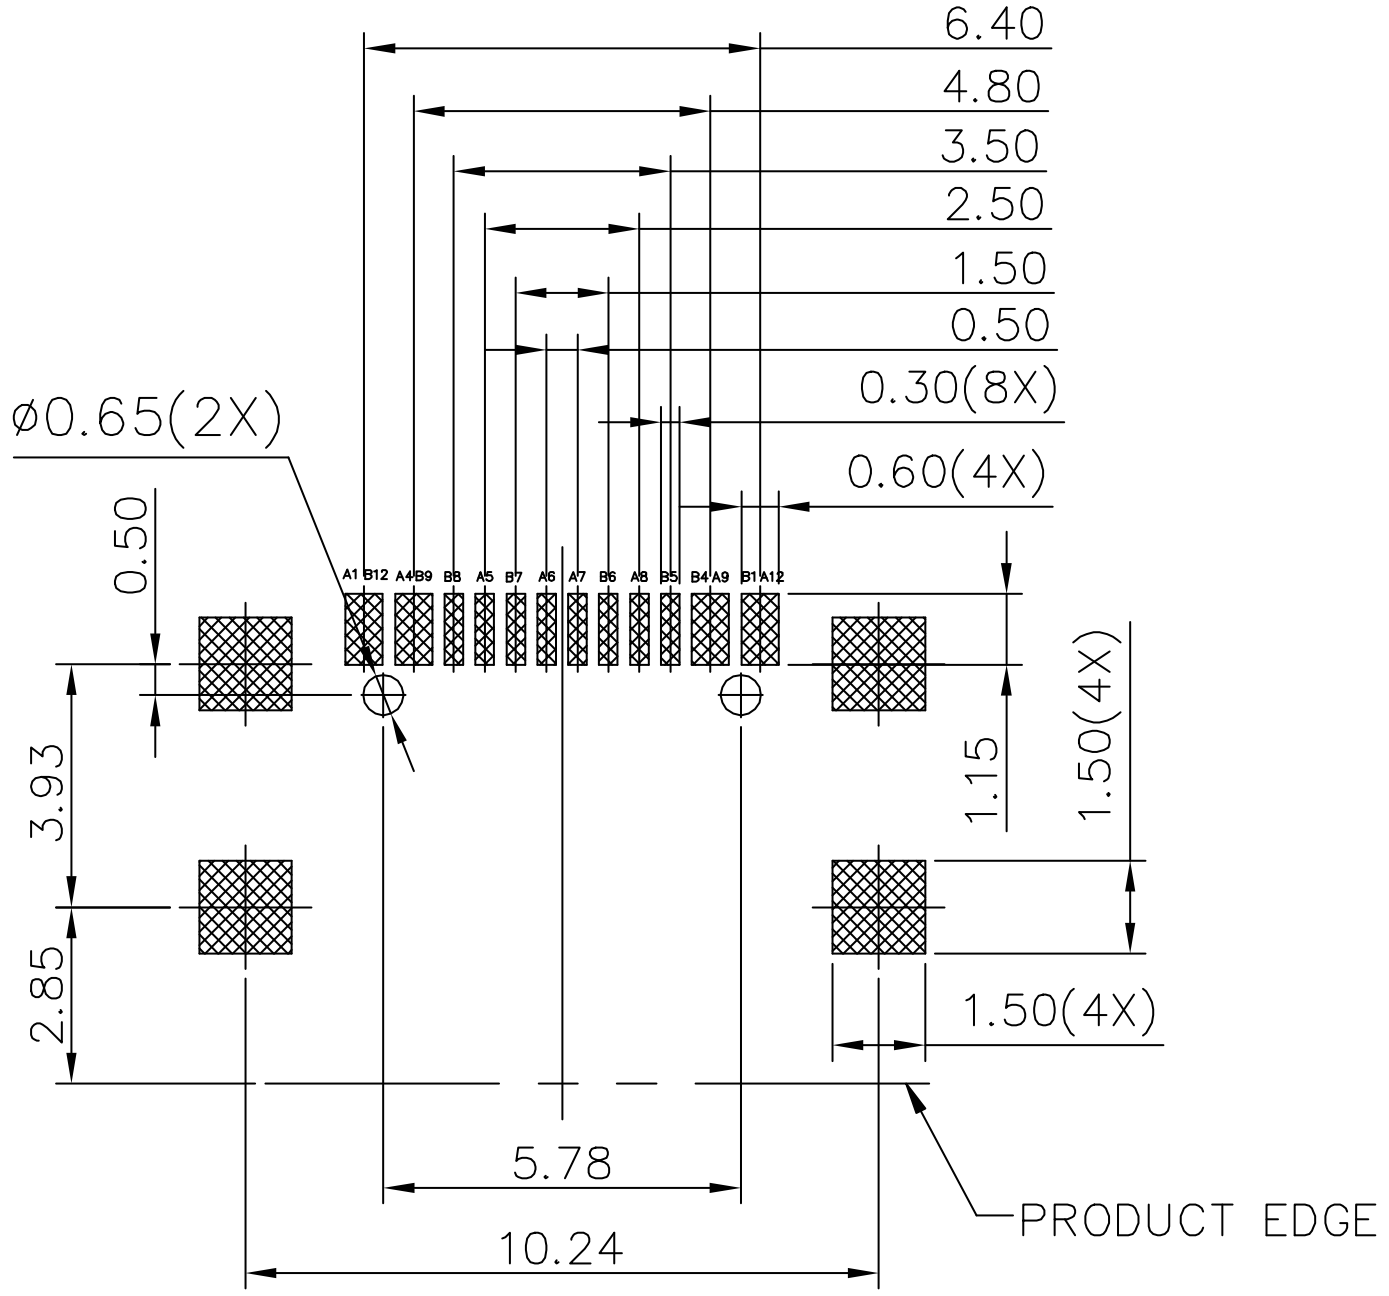

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS 0.80MM;DEFAULT TOLERANCE:±0.05

| | | | | | | |
|---|---|---|---|---|---|---|
| mat'l. code | | surface<br>ISO 1302 √ | tolerance<br>ISO 406 ISO | projection<br>1101 | product family<br>USB | |
| ltr | ecn no | dr | date | tolerances unless otherwise specified | | title |
| A | | | | angles | linear .X±.35 | mm | USB TYPE C<br>16P SMT TYPE |
| | | | | | .XX±.25 | | |
| | | | | 0°±2° | .XXX±.15 | scale 1:1 | |
| | | | | dr Tian-Yu Tang | 2023/11/14 | Amphenol FCi | dwg no 10174739 | sheet2 of 2 | size A3 |
| | | | | engr Tian-Yu Tang | 2023/11/14 | | | | |
| | | | | chr L-Q Lei | 2023/11/14 | | | | |
| | | | | appd Tim Yao | 2023/11/14 | | type Product Customer Drawing | | |
| sheet index | revision | A | | | | |
| | sheet | 2 | | | | |

Amphenol FCi

© 2016 AFCI