




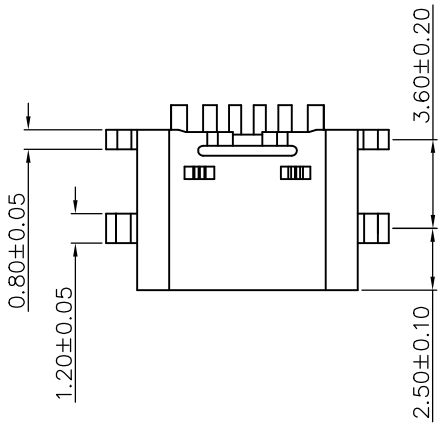




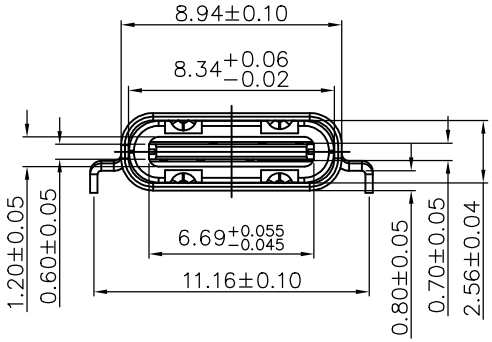

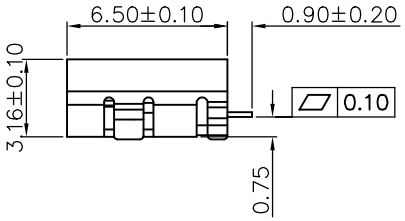



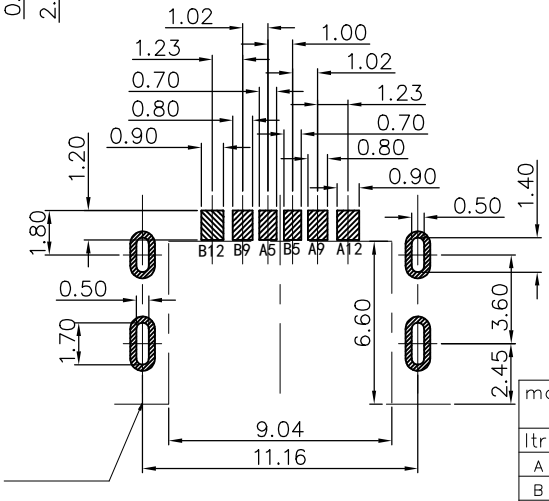

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

NOTE:

1.MATERIAL SPECIFICATION:
- 1.HOUSING: HIGH TEMPERATURE PLASTIC,UL94 V-0.
- 2.TERMINAL: COPPER ALLOY
- 3.SHELL: STAINLESS STEEL(REFER THE PN)

2.PLATING SPECIFICATION:
- 2-1.TERMINAL:
  Ni 30u" MIN. UNDER PLATED OVER ALL.
  THE FUNCTIONAL AREA OF CONTACT: REFER THE PART NUMBER.
  100u" Tin ON THE SOLDER AREA
- 2-2.SHELL:
  Ni 50u" PLATING

3.MECHANICAL PERFORMANCE,
- 3-1.INSERTION FORCE: 0.5kgf~2.0kgf.
- 3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.

4.ELECTRICAL PERFORMANCE,
- 4-1. VOLTAGE RATING: 20V MAX
  CURRENT RATING: 3 AMPS. FOR VBUS;
  1.25AMPS FOR GND PIN,0.25 AMPS.FOR ALL OTHER CONTACT.
- 4-2.LLCR: 40mΩ MAX
- 4-3.INSULATION RESISTANCE: 100MΩ MIN
- 4-4.WITHSTANDING VOLTAGE: 100V AC

5. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.

6.PRODUCT PART NUMBER DESCRIPTION:

10174819 - 0 0 X X X LF
- LF: LEAD FREE
- X: PACKING TYPE: 1: TAPE/REEL
- X: CONTACT AREA PLATING 1: GOLD FLASH
- X: SHELL OPTION 0: SUS201 1: SUS304

PIN	SIGNAL NAME
B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND

ltr	ecn no	dr	date
A	-	TY Tang	2024/01/08
B	ELX-N-53529	TY Tang	2024/11/15
C	ELX-N-306711	TY Tang	2026/09/16

mat'l. code	surface ISO 1302	tolerance ISO 406 ISO 1101
tolerances unless otherwise specified		
angles 0°±x°	linear 0.X±0.35	0.XX±0.25	0.XXX±0.15
projection	mm	scale 1:1
product family: USB		
title: USB TYPE C 6P SINK SMT TYPE		
dwg no: 10174819	sheet 1 of 1	size A3
type: Product Customer Drawing		

dr	Tian-Yu Tang	2026/09/16
engr	Tian-Yu Tang	2026/09/16
chr	L-Q Lei	2026/09/16
appd	Tim Yao	2026/09/16

sheet index	revision	C
	sheet	1