



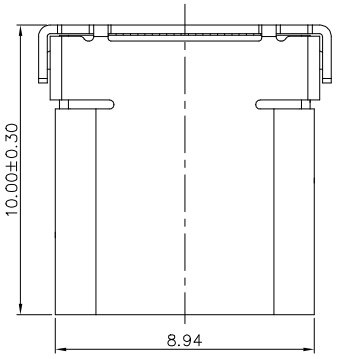


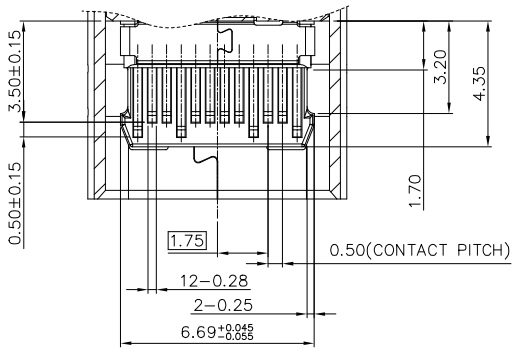


SECTION B-B
SCALE 1:1

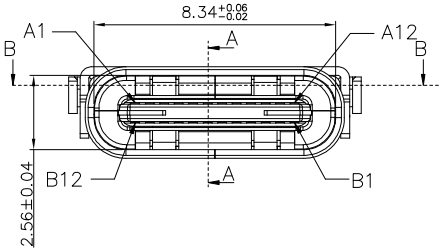

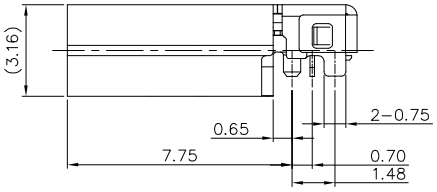

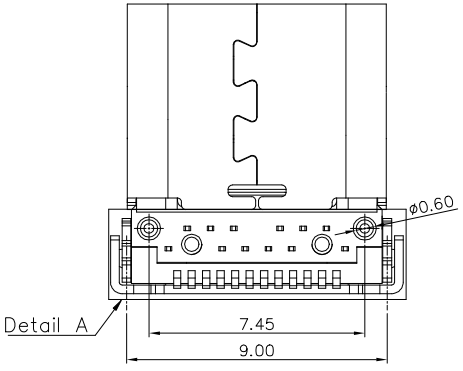

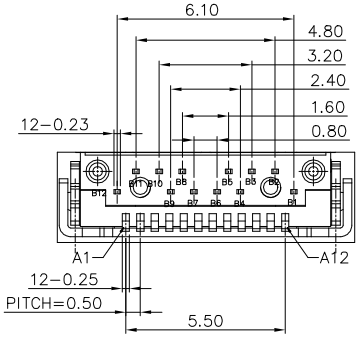

Detail A


NOTE:
1.MATERIAL SPECIFICATION:
 1.HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V−0.
 2.CONTACTS: COPPER ALLOY
 3.EMI PLATE: STAINLESS STEEL
 4. SHELL: STAINLESS STEEL
 5. SHIELD: STAINLESS STEEL
2.PLATING SPECIFICATION:
 2−1.TERMINAL:
  Ni 30u" MIN. UNDER PLATED OVER ALL.
  Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
  (GOLD PLATING THICKNESS FOLLOW THE P/N)
  Tin 100u" ON SOLDER AREA
 2−2.SHELL:
  50u" Ni PLATING SPECIFICATIONS
 2−3.EMI PLATE&SHIELD:
  CLEAR ONLY
3.MECHANICAL PERFORMANCE,
 3−1.INSERTION FORCE: 0.5~2.0kgf.
 3−2.REMOVAL FORCE: 0.8kgf~2.0kgf.
 3−3.DURABILITY: 10000 CYCLES.
4.ELECTRICAL PERFORMANCE,
 4−1. CURRENT RATING: 3A FOR VBUS; 1.25A FOR GND; 0.25A FOR OTHER
  VOLTAGE RATING: 5.0V
 4−2. LLCR:
  VBUS & GND PINS AND OTHER PINS: 40mΩ MAX.
 4−3.INSULATION RESISTANCE: 100MΩ MIN
 4−4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
 OPERATING TEMPERATURE: −55°C~+85°C.
6. PRODUCT PART NUMBER DESCRIPTION:
 10176592 − 0 0 0 X X LF
  LF — LEAD FREE
  X — PACKING TYPE: 1: TAPE/REEL
  X — CONTACT AREA PLATING 1: GOLD FLASH


mat'l. code				surface ISO 1302		tolerance ISO 406 ISO		projection 1101	product family USB		
ltr	ecn no	dr	date	tolerances unless otherwise				specified	title		
A	−	TY	2025/06/27	angles	linear	.X±.35		mm	USB TYPE C		
						.XX±.25			24P SINK TYPE		
				0°±2°		.XXX±.15		scale 1:1			
				dr	Tian-Yu Tang	2024/03/13		Amphenol FCi	dwg no 10176592	sheet 1 of 2	size A3
				engr	Tian-Yu Tang	2024/03/13					
				chr	L-Q Lei	2024/03/13					
				appd	Tim Yao	2024/03/13			type Product Customer Drawing		
sheet	revision	A									
index	sheet	1									


© 2016 AFCI


USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	VBUS	Bus Power	B9	VBUS	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use(SBU)	B5	CC2	Configuraation Channel
A9	VBUS	Bus Power	B4	VBUS	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

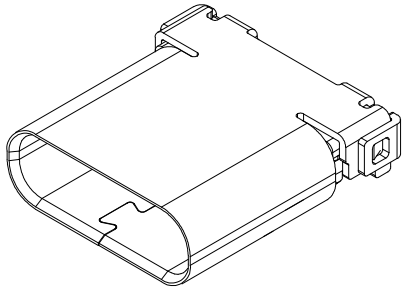

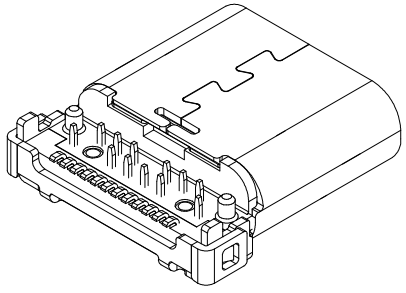

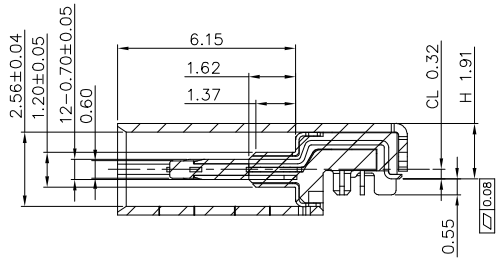

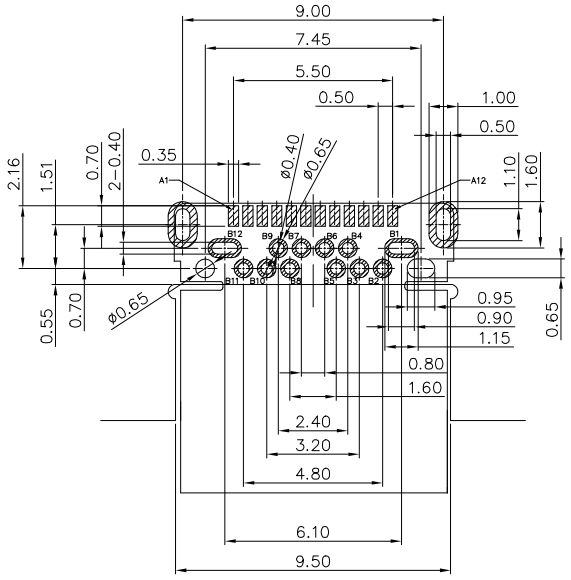

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05

KEEP OUT AREA

mat'l. code				surface ISO 1302		tolerance ISO 406 ISO		projection 1101	product family USB		
ltr	ecn no	dr	date	tolerances unless otherwise				specified	title		
A				angles	linear	.X±.35		mm	USB TYPE C 24P SINK TYPE		
				0°±2°		.XX±.25					
						.XXX±.15		scale 1:1			
				dr	Tian-Yu Tang	2024/03/13			dwg no 10176592	sheet2 of 2	size A3
				engr	Tian-Yu Tang	2024/03/13		Amphenol FCi			
				chr	L-Q Lei	2024/03/13					
				appd	Tim Yao	2024/03/13			type Product Customer Drawing		
sheet index	revision sheet	A 2									

© 2016 AFCI