




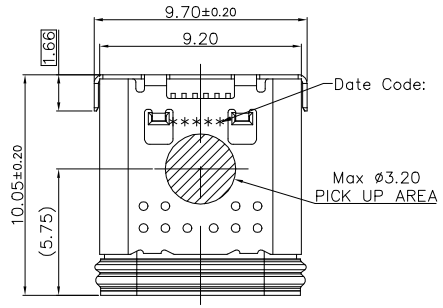




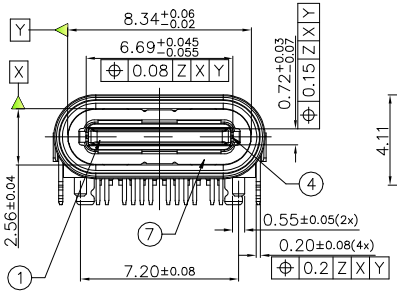

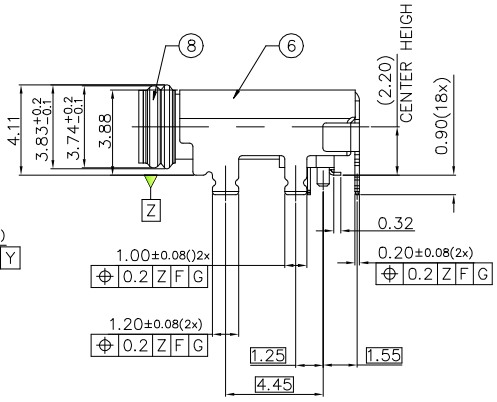

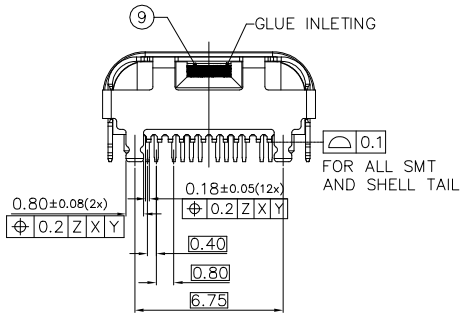

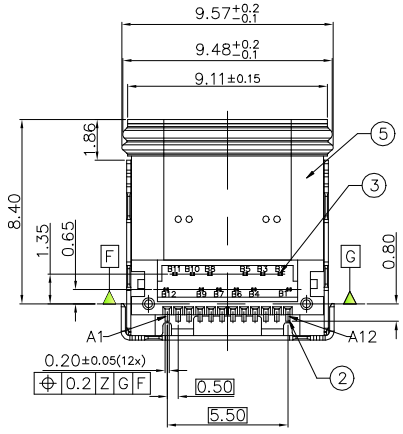

Date Code:

** ** *

Year (H=2021; I=2022...)

Day

Month

NOTE:
1.MATERIAL SPECIFICATION AND PLATING:
REFER THE TABLE
2.MEET WATERPROOF STANDARD SPECIFICATION :
IPX7
3.MECHANICAL PERFORMANCE,
3-1.INSERTION FORCE: 0.5~2.0kgf.
3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
3-3.DURABILITY: 10000 CYCLES.
4.ELECTRICAL PERFORMANCE,
4-1. CURRENT RATING: 1.25A FOR GND AND VBUS;
PARALLELED FOR A TOTAL OF 5A
VOLTAGE RATING: 5.0V
4-2. LLCR:
VBUS & GND PINS AND OTHER PINS: 40mΩ MAX.
4-3.INSULATION RESISTANCE: 100MΩ MIN
4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -55°C~+85°C.
6. PRODUCT PART NUMBER DESCRIPTION:
10176593 - 0 0 0 X X LF
LF = LEAD FREE
X = PACKING TYPE: 1: TAPE/REEL
X = CONTACT AREA PLATING 1: GOLD FLASH


ITEM	PART NAME	TERMINAL	QTY	MATERIAL	REMARK
⑨	BOND	————	1PCS	————	————
⑧	O-RING	————	1PCS	RUBBER	————
⑦	IP1	————	1PCS	STAINLESS STEEL	————
⑥	SHELL-2	————	1PCS	STAINLESS STEEL	Ni plating
⑤	SHELL-1	————	1PCS	STAINLESS STEEL	————
④	MIDDLE METAL	————	1PCS	STAINLESS STEEL	Ni plating
③	CONTACT-2	B1~B12	1SET	COPPER ALLOY	Under plating: Ni plating Contact area: Gold plating Soldering area: Gold plating
②	CONTACT-1	A1~A12	1SET	COPPER ALLOY	Under plating: Ni plating Contact area: Gold plating Soldering area: Sn plating
①	MOLDING	————	1PCS	PLASTIC	UL 94V-0

mat'l. code		surface ISO 1302 √	tolerance ISO 406 ISO	projection 1101	product family: USB
ltr A	ecn no –	dr TY	date 2025/06/27	tolerances unless otherwise specified	title: USB TYPE C 24P TH+SMT TYPE
				angles 0°±2° / linear .X±.35, .XX±.25, .XXX±.15	mm, scale 1:1
				dr Tian-Yu Tang 2024/03/13	dwg no 10176593, sheet 1 of 2, size A3
				engr Tian-Yu Tang 2024/03/13	Amphenol FCi
				chr L-Q Lei 2024/03/13	
				appd Tim Yao 2024/03/13	type Product Customer Drawing
sheet index	revision sheet				

© 2016 AFCI

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSTXp1
A3	SSTXn1	B10	SSTXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSRXn2
A11	SSRXp2	B2	SSRXp2
A12	GND	B1	GND

FOUR GND PIN(A1,A12,B1,B12) ARE CONNECTOR.
FOUR VBUS PIN(A4,A9,B4,B9) ARE CONNECTOR.

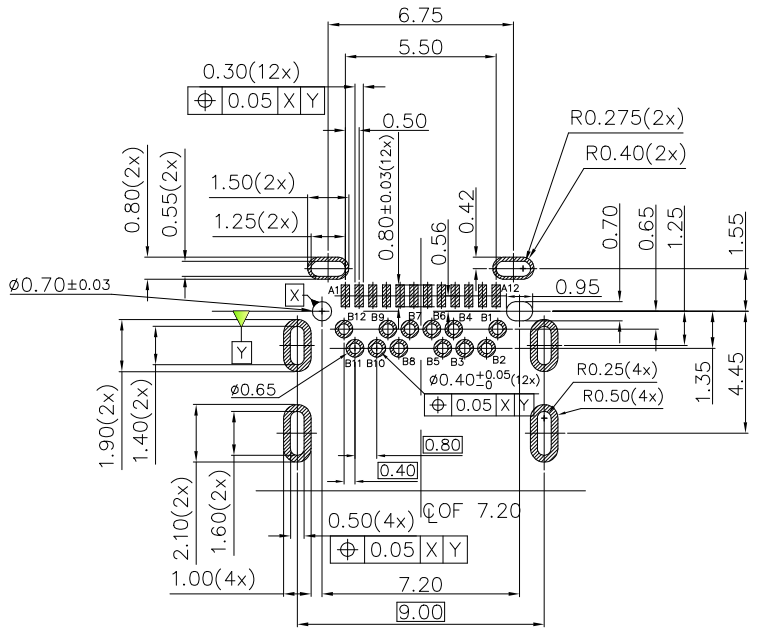

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.8mm;DEFAULT TOLERANCE:±0.05

mat'l. code				surface ISO 1302	tolerance ISO 406 ISO	projection 1101	product family: USB
ltr	ecn no	dr	date	tolerances unless otherwise specified			title: USB TYPE C 24P TH+SMT TYPE
A				angles	linear .X±.35 .XX±.25 .XXX±.15	mm	
				0°±2°		scale 1:1	
				dr Tian-Yu Tang 2024/03/13			dwg no 10176593 sheet 2 of 2 size A3
				engr Tian-Yu Tang 2024/03/13		Amphenol FCi	
				chr L-Q Lei 2024/03/13			
				appd Tim Yao 2024/03/13			type Product Customer Drawing
sheet index	revision sheet						

© 2016 AFCI