
This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.


REFERENCE DRAWING


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
X1	1504****	NEW RELEASE	04/24/15	Tom
X2	1602****	UPDATE	02/25/16	Tom
X3	1609****	UPDATE	09/06/16	Tom


Pin No	Signal Name	Mating Sequence
A1	GND	First
A2	TX1+	Second
A3	TX1−	Second
A4	VBUS	First
A5	CC1	Second
A6	D+	Second
A7	D−	Second
A8	SBU1	Second
A9	VBUS	First
A10	RX2−	Second
A11	RX2+	Second
A12	GND	First
SHELL		GND


Pin No	Signal Name	Mating Sequence
B12	GND	First
B11	RX1+	Second
B10	RX1−	Second
B9	VBUS	First
B8	SBU2	Second
B7	D−	Second
B6	D+	Second
B5	CC2	Second
B4	VBUS	First
B3	TX2−	Second
B2	TX2+	Second
B1	GND	First
SHELL		GND

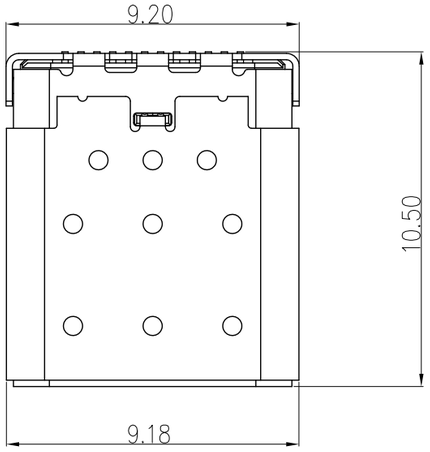




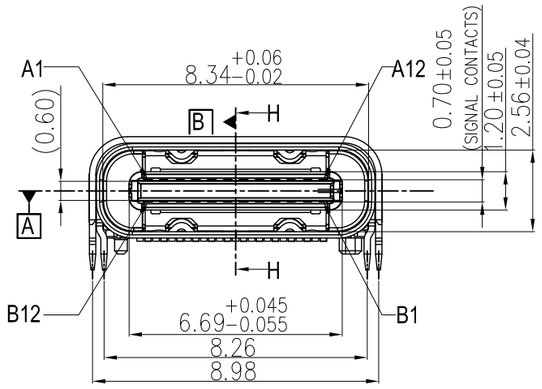


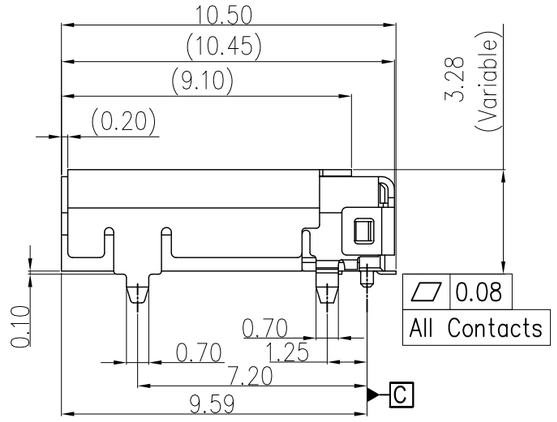


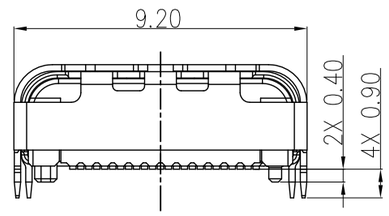

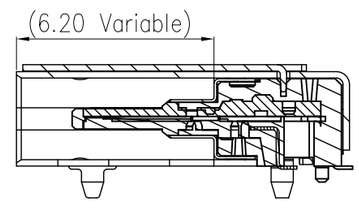

SECTION H–H

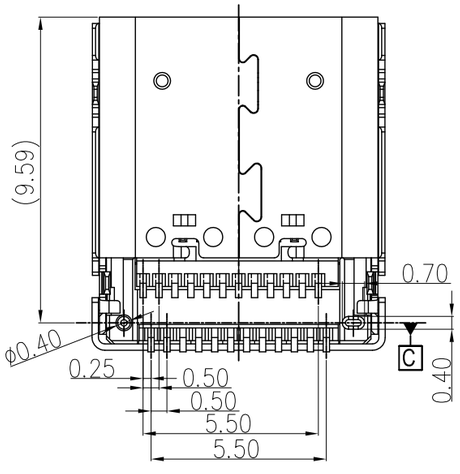

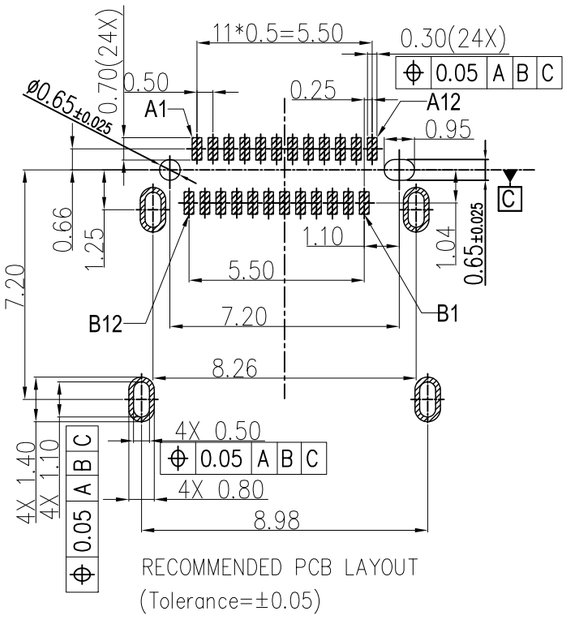

RECOMMENDED PCB LAYOUT
(Tolerance=±0.05)

Notes:
1,Material :
Contacts : copper alloy
Shell : Stainless steel.
Housing : High−temperature polymer UL94V−0, black.
2,Plating :
Contacts: contact area 30u" Au, Solder tail gold flash or matte tin, nickel overall.
Shell : Nickel Plating
3.Coplanarity : 0.08Max.
4.P/N : 12401610E4#2A.
5.Packaging type: carrier tape.
6.Material should be fulfilled Amphenol spec# SSN002 AND Customer Requirements,for halogen free products, also need to meet SSN004

UNLESS OTHERWISE SPECIFIED TOLERANCES	U.S.	METRIC
.X +/−		±0.30
.XX +/−		±0.25
.XXX +/−		±0.20
FRACTIONS +/−		
ANGLES +/−		
FOR MATERIALS AND FINISHES SEE NOTES		
REMOVE SHARP EDGES		
DIMENSIONS		
U.S.	~~INCHES~~	
(METRIC)	(MM)	

APPROVAL		DATE
DRAWN	Howie.Li	09/06/16
CHECKED	Weison.Lu	09/06/16
CHECKED		
DRAWING FILE :		

ANGLE OF PROJECTION

Amphenol

TITLE
USB TYPE C CONNECTOR
RIGHT ANGLE DUAL ROW SMT

SIZE	DRAWING NO.	REV.
A3	12401610E4#2A	X3
SCALE	NONE	SHEET 1 OF 1