

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	***	FIRST RELEASE	2019.03.06	Michael.ip
2	***	Add tongue to iron case opening dimensions	2019.04.22	Michael.ip
3	***	Increase the size of the iron shell foot position	2019.05.07	Michael.ip
4	***	Update package drawing	2019.05.07	Michael.ip
5	***	Extended the length dimension of solder tail; Modify the dimension 2.0±0.20; add the spring structure.	2019.06.28	Michael.ip
6	***	Change the length dimension of solder tail; Modify the solder width of mid plate.	2019.07.11	Michael.ip
7	***	Add Pick Area	2021.03.09	Michael.ip
8	***	Update package quantity	2021.06.25	Michael.ip
9	***	Soldering Area Plating Matte Tin Change Gold Flash	2021.07.29	Michael.ip
10	***	Add Operating Temperature	2023.08.30	Michael.Qin

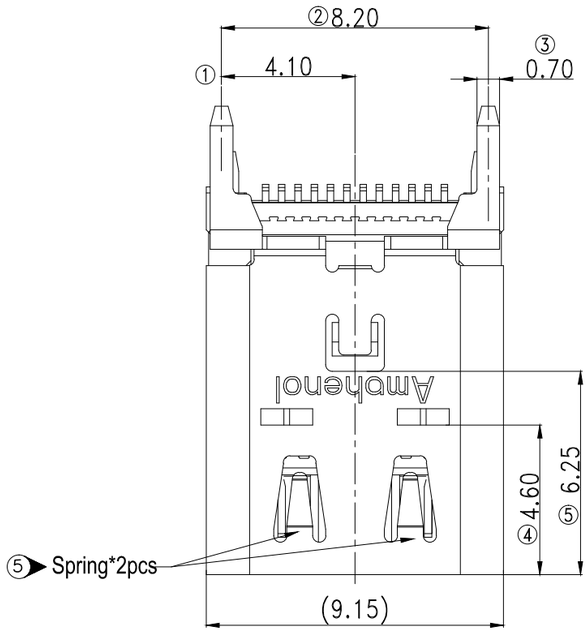


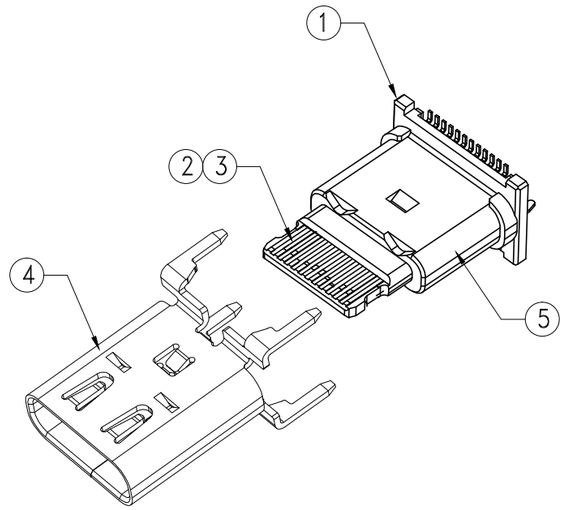



Pin No	Signal Name	Mating Sequence
A1	GND	First
A2	TX1+	Second
A3	TX1−	Second
A4	VBUS	First
A5	CC1	Second
A6	D+	Second
A7	D−	Second
A8	SBU1	Second
A9	VBUS	First
A10	RX2−	Second
A11	RX2+	Second
A12	GND	First


Pin No	Signal Name	Mating Sequence
B12	GND	First
B11	RX1+	Second
B10	RX1−	Second
B9	VBUS	First
B8	SBU2	Second
B7	D−	Second
B6	D+	Second
B5	CC2	Second
B4	VBUS	First
B3	TX2−	Second
B2	TX2+	Second
B1	GND	First

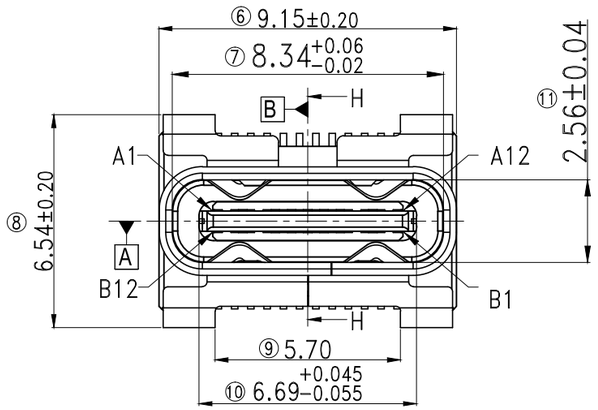

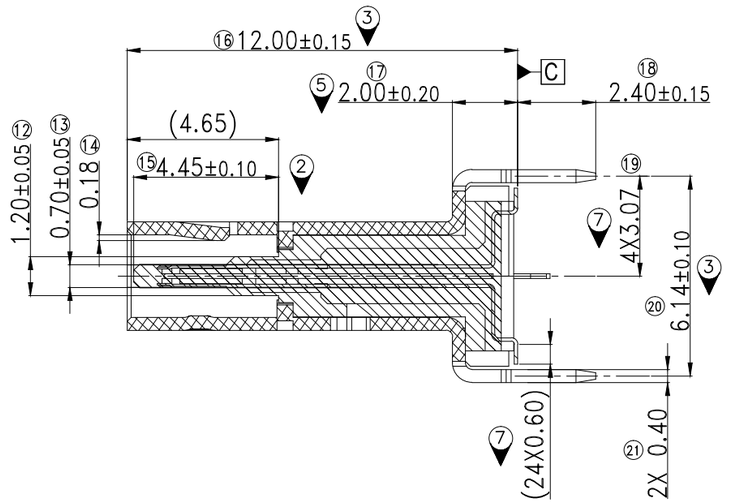

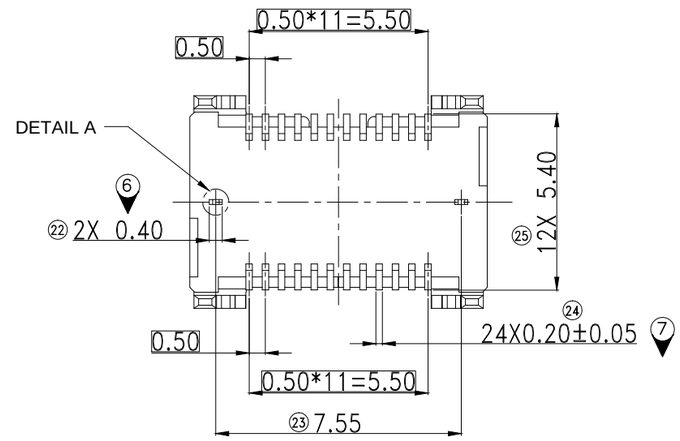

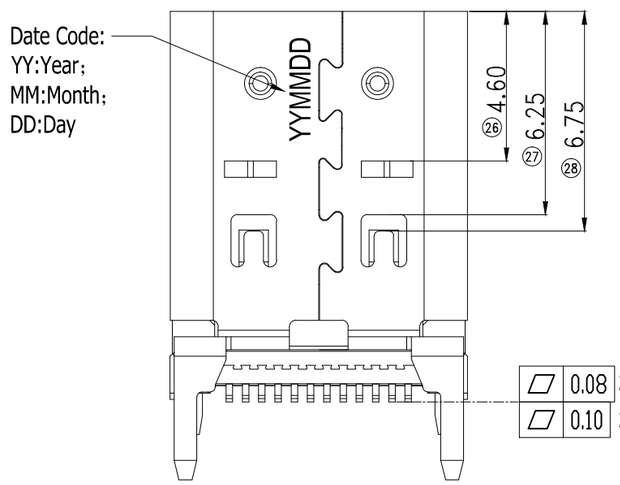



0.08	24X SMT Tails (Before IR)	29
0.10	24X SMT Tails (After IR)	30

6	Cap	1	High Temperature Plastic	Black,UL 94V-0
5	Mid Plate	1	Stainless Steel	Nickel : 50u" min
4	Main Shell	1	Stainless Steel	Solder Nickel : 50u" min
3	Bottom Terminal	12	Copper Alloy	See NOTES
2	Top Terminal	12	Copper Alloy	See NOTES
1	Molding Housing	1	High Temperature Plastic	Black,UL 94V-0
Item	Description	Q'TY	Material	

Bill Of Material

HF(无卤)	√
Non-HF(有卤)	

UNLESS OTHERWISE SPECIFIED
TOLERANCES

	U.S.	METRIC
.X +/−		0.50
.XX +/−		0.15
.XXX +/−		0.10
FRACTIONS +/−		
ANGLES +/−		3°

FOR MATERIALS AND FINISHES SEE NOTES
REMOVE SHARP EDGES
DIMENSIONS U.S. / INCHES (METRIC) / (MM)

APPROVAL		DATE
DRAWN	Allan.Lai	08/30/23
CHECKED	Michael.Qin	08/30/23
CHECKED	Michael.Qin	

DRAWING FILE :

ANGLE OF PROJECTION

Amphenol
Amphenol East Asia Limited


TITLE Customer Drawing For
USB 3.1 ,Type C socket connector,
Vertical type, L=12mm, No Water proof

SIZE	DRAWING NO.	REV.
A3	C 12401951	10
SCALE	NONE	SHEET 1 OF 2


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		please see sheet 1/2		

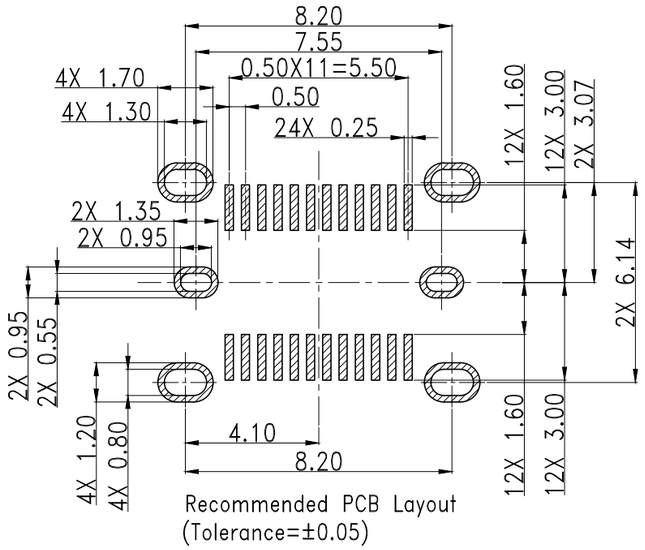

Recommended PCB Layout
(Tolerance=±0.05)

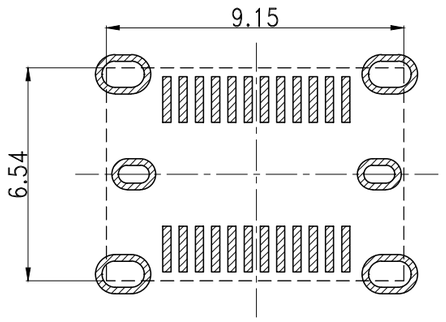



Keep out zone
(Connector mounted layer)

NOTES:
1.Material : See Bill Of Material
2.Waterproof : No Waterproof
3.Electrical Characteristics:
  Low Level Contact Resistance: 40mΩ Max
  Insulation resistance :100MΩ Min
  Dielectric Withstanding Voltage:100 VAC
  Contact Current Rating ::5A Max
4.Mechanical Characteristics:
  Insertion Force: 5~20N
  Extraction Force: 8~20N
  After Durability Extraction Force: 6~20N
5.Durability: 10000 Cycles
6.Packaging Type: Carrier Reel.
7.Material Should Be Fulfilled Amphenol SPEC# SSN002
  And Customer Requirements, For HALOGEN FREE Products,
  Also Need To Meet SSN004
⑩ 8.OPERATING TEMPERATURE/工作温度: -40°~+105°
9.Part Number:12401951XX12A

⑨ Plating Spec:
E4: Mating Area: Au 30u" Min
Solder Area: Gold Flash
50u"Min Nickel Under Plating Over All


A:HF
Package Spec.
2:Reel
Date Code Description
1:With D/C

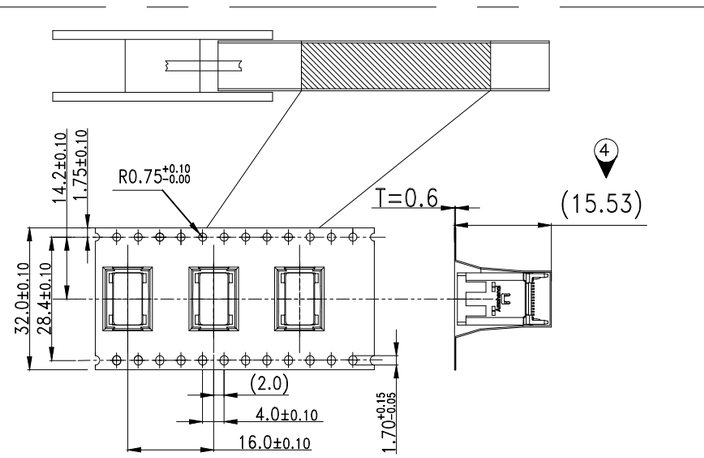


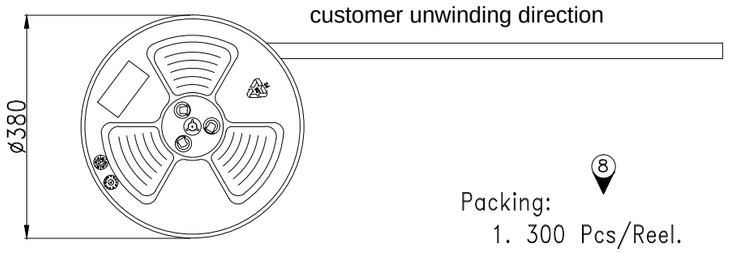

Pack Direction

⑧
Packing:
1. 300 Pcs/Reel.
2. 6 Reels/Carton.



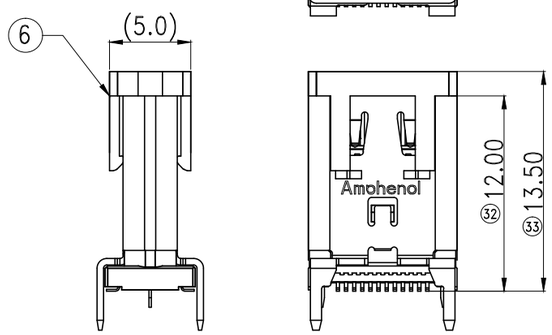

Cap Assembly Condition(REF)

Packing quantity:

UNLESS OTHERWISE SPECIFIED TOLERANCES	U.S.	METRIC
.X +/-		0.50
.XX +/-		0.25
.XXX +/-		0.10
FRACTIONS +/-		
ANGLES +/-		3°
FOR MATERIALS AND FINISHES SEE NOTES		
REMOVE SHARP EDGES		
DIMENSIONS		
U.S.	INCHES	
(METRIC)	(MM)	

	APPROVAL	DATE
DRAWN	Allan.Lai	08/30/23
CHECKED	Michael.Qin	08/30/23
CHECKED	Michael.Qin	
DRAWING FILE :		
ANGLE OF PROJECTION		

Amphenol
Amphenol East Asia Limited

TITLE Customer Drawing For
USB 3.1 ,Type C socket connector,
Vertical type, L=12mm, No Water proof

SIZE	DRAWING NO.	REV.
A3	C 12401951	10
SCALE	NONE	SHEET 2 OF 2