


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.


CUSTOMER DRAWING


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HKXXXXX	FIRST RELEASE	2023.02.10	Michael.Qin
2	HKXXXXX	Structural Modification	2023.02.10	Michael.Qin
3	HKXXXXX	Structural Modification	2023.02.16	Michael.Qin
4	HKXXXXX	Structural Modification	2023.02.28	Michael.Qin
5	HKXXXXX	Structural Modification	2023.03.02	Michael.Qin

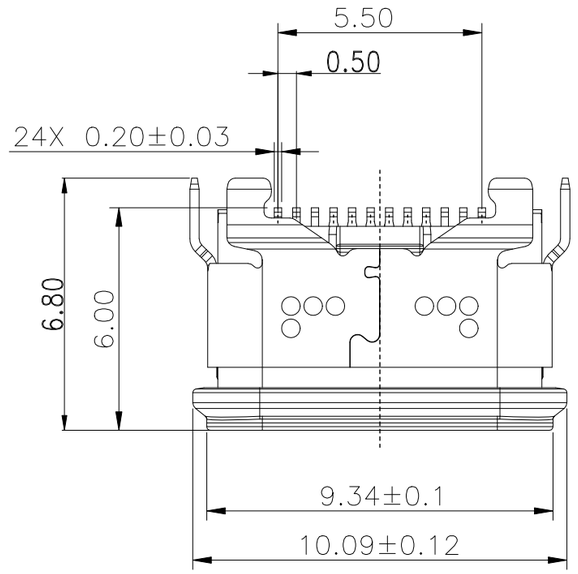


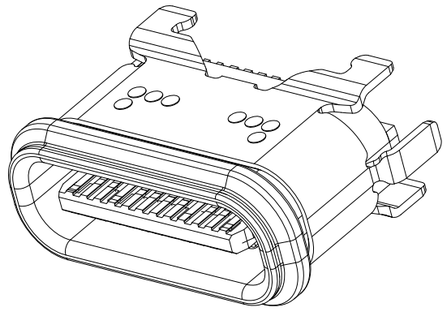





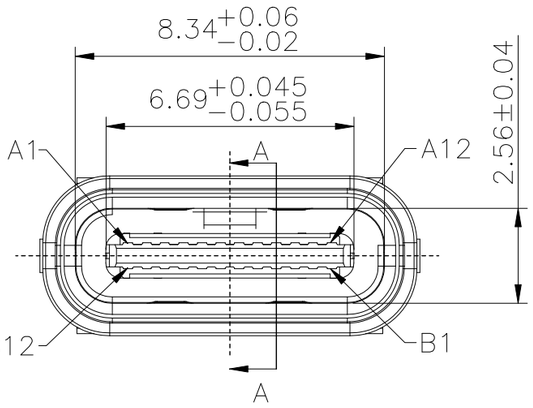

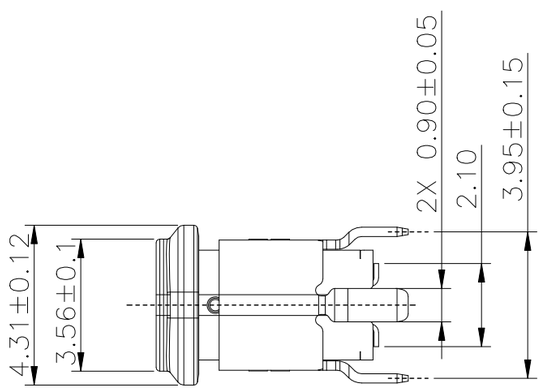

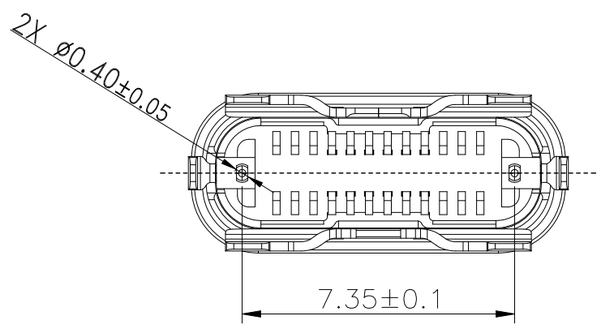

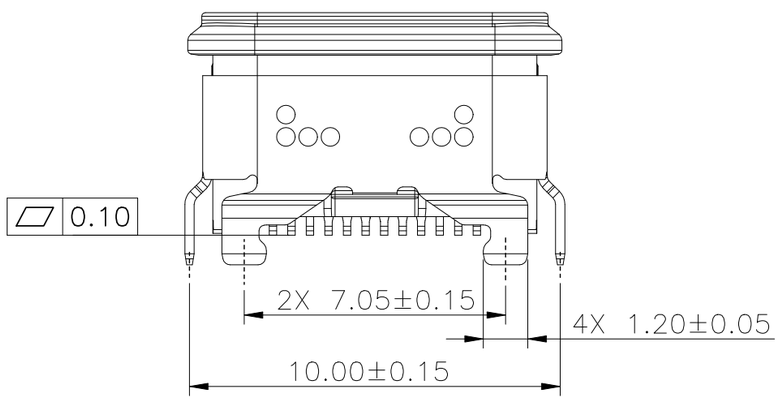



SECTION A–A
SCALE 1:1

Pin:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1−	Vbus	CC1	D+	D−	SBU1	Vbus	RX2−	RX2+	GND
GND	RX1+	RX1−	Vbus	SBU2	D−	D+	CC2	Vbus	TX2−	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

HF(无卤)	√
Non-HF(有卤)	

UNLESS OTHERWISE SPECIFIED
TOLERANCES

	U.S.	METRIC
.X	+/−	0.50
.XX	+/−	0.25
.XXX	+/−	0.10
FRACTIONS	+/−	
ANGLES	+/−	3°

FOR MATERIALS AND FINISHES SEE NOTES
REMOVE SHARP EDGES
DIMENSIONS U.S. (METRIC) INCHES (MM)

APPROVAL		DATE
DRAWN	Fei.Wu	03/02/23'
CHECKED	Michael.Qin	03/02/23'
CHECKED	Michael.Qin	

DRAWING FILE :
ANGLE OF PROJECTION

Amphenol
Amphenol East Asia Limited


TITLE Customer Drawing For
USBC 24Pin DR-SMT VET L=6.00mm IPX7

SIZE	DRAWING NO.	REV.
A3	12402305XX12A	5
SCALE	NONE	SHEET 1 OF 3

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.


CUSTOMER DRAWING


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
SEE PAGE 1				

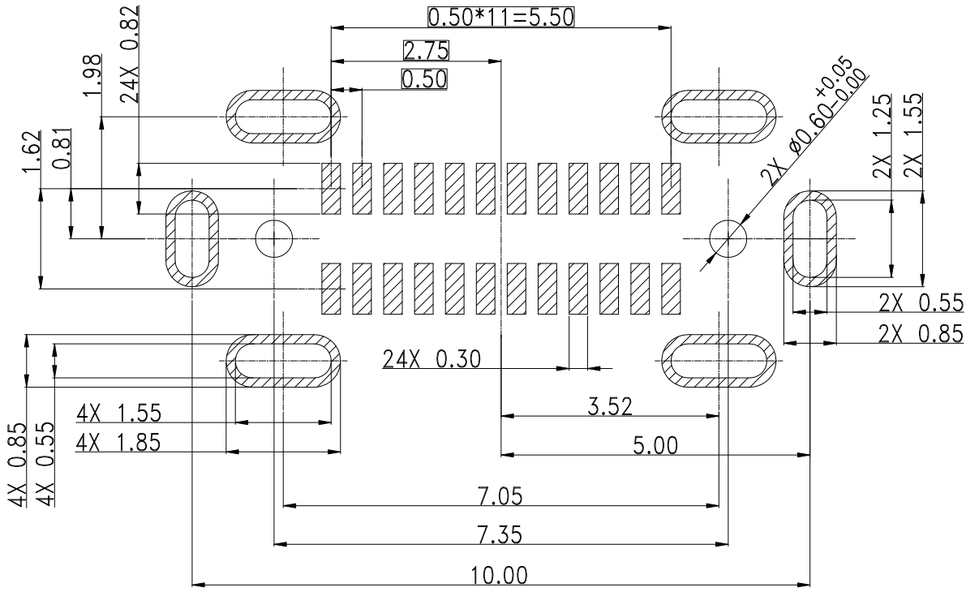


RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS 0.8±0.10MM;DEFAULT TOLERANCE:±0.05

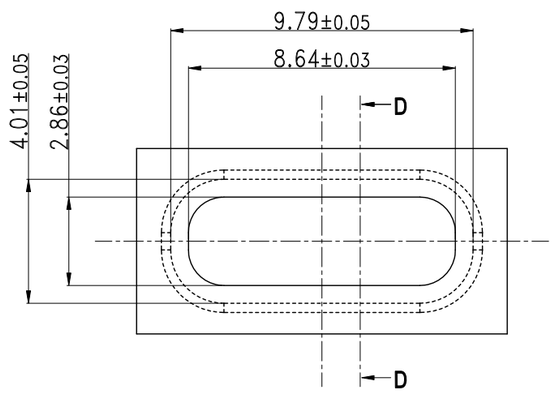

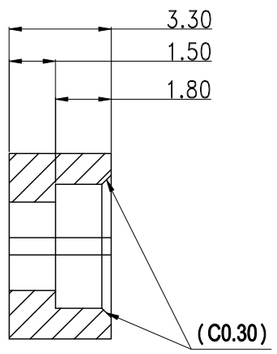

SECTION D-D (SCALE 1:1)

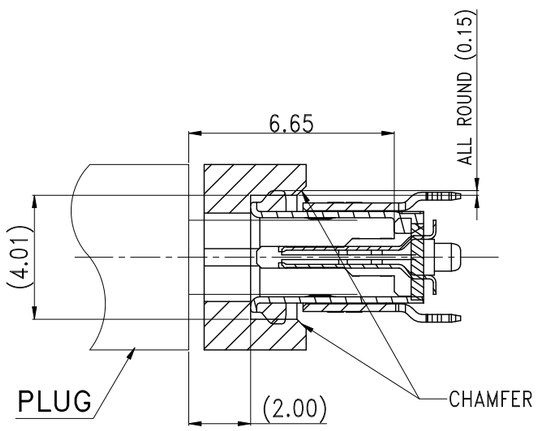

REF. PANEL DESIGN

NOTES/注释:

1. MATERIAL/材料: SEE TABLE/见下表
2. GENERAL SPECIFICATION/通用特性:
   - 2.1 COPLANARITY /共面度: 0.10 Max.
   - 2.2 CURRENT RATING: 5A / 额定电流: 5安培
   - 2.3 CONTACT RESISTANCE: 40mΩ MAX (INITIAL).
     INSULATION RESISTANCE:100MΩ Min
     接触电阻: 40毫欧最大(初始值) / 绝缘电阻: 100MΩ Min
   - 2.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC
     耐电压: 100伏交流
   - 2.5 MECHANICAL CHARACTERISTICS:
     INSERTION FORCE: 5~20N EXTRACTION FORCE: 8~20N
     AFTER DURABILITY EXTRACTION FORCE: 6~20N
     力学特性: 初始插入力: 5~20N 拔出力: 8~20N
     耐久后拔出力: 6~20N
   - 2.6 DURABILITY: 10000 CYCLES / 耐久性: 10000次
   - 2.7 PACKAGING TYPE: CARRIER TAPE./ 包装类型: 载带包装
3. WATERPROOF : IPX7
4. DIMENSIONING SHALL BE INTERPRETED PER ASME Y14.5M 1994.
   尺寸标注基于ASME Y14.5M 1994标准规范
5. MATERIAL SHOULD BE FULFILLED AMPHENOL SPEC.# S-SN-002,
   FOR HALOGEN FREE PRODUCTS, ALSO NEED TO MEET S-SN-004.
   产品材料环保标准为Amphenol SSN#002,如果是无卤产品需满足标准SSN#004
6. ORDER P/N SYSTEM/产品料号编码系统 : 12402305XXX2A
   - Plating Spec:
     - Q1: Mating Area: Gold Flash
       Solder Area: Gold Flash
       50u"Min Nickel Under Plating Over All
     - P9: Mating Area: Au 15u"
       Solder Area: Gold Flash
       50u"Min Nickel Under Plating Over All
   - A:HF
   - Package Spec. 2:Reel
   - Date Code Description 1:With D/C

HF(无卤)	√
Non-HF(有卤)	

ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH
5	TERMINAL	2	Copper alloy	CONTACT:GOLD FLASH ; SOLDER TAIL:50u" MATTE TIN MIN;
4	MAIN SHELL	1	Stainless steel	SOLDER NICKEL: 50U" MIN
3	OUT SHELL	1	Stainless steel	SOLDER NICKEL: 50U" MIN
2	MID PLATE	1	Stainless steel	SOLDER NICKEL: 50U" MIN
1	MAIN HOUSING	1	Nylon	BLACK

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED TOLERANCES

	U.S.	METRIC
.X +/-		0.50
.XX +/-		0.25
.XXX +/-		0.10
FRACTIONS +/-		
ANGLES +/-		3°

FOR MATERIALS AND FINISHES SEE NOTES

REMOVE SHARP EDGES

DIMENSIONS U.S. (METRIC) / INCHES (MM)

APPROVAL		DATE
DRAWN	Fei.Wu	03/02/23'
CHECKED	Michael.Qin	03/02/23'
CHECKED	Michael.Qin	

DRAWING FILE :

ANGLE OF PROJECTION

Amphenol

Amphenol East Asia Limited

TITLE Customer Drawing For


USBC 24Pin DR-SMT VET L=6.00mm IPX7


SIZE	DRAWING NO.	REV.
A3	12402305XX12A	5
SCALE	NONE	SHEET 2 OF 3

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.


CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE PAGE 1		

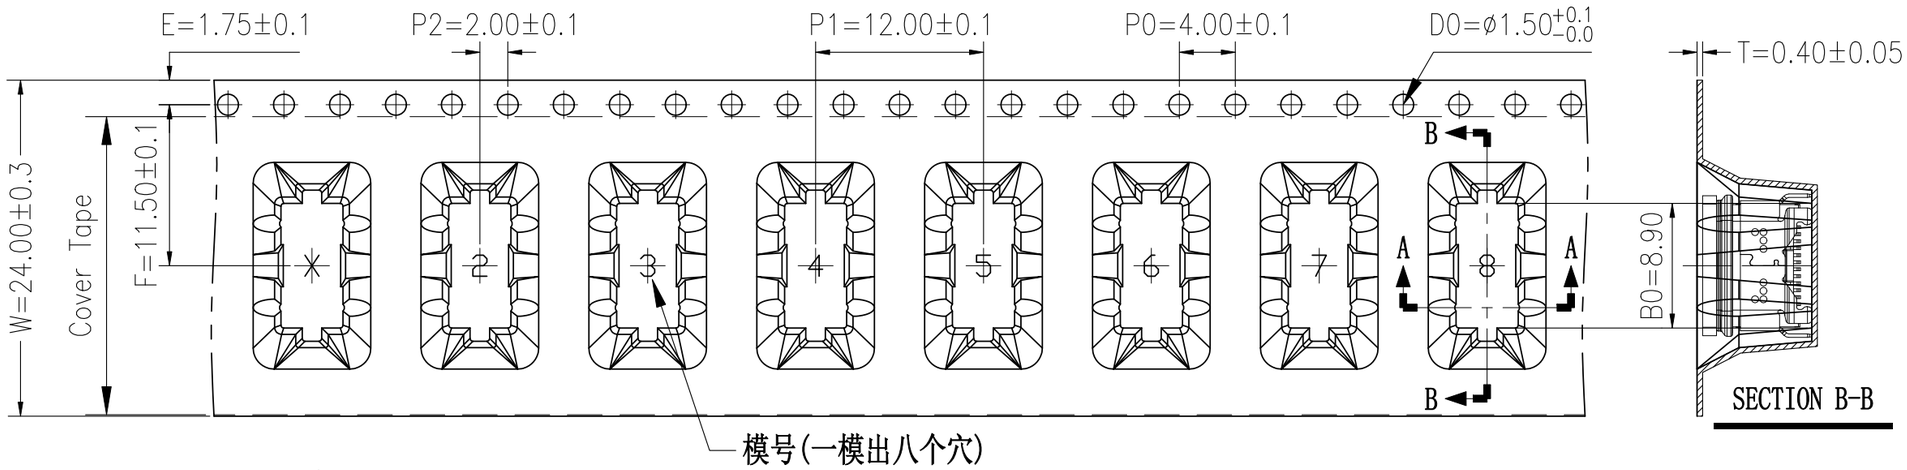





载带卷料方向

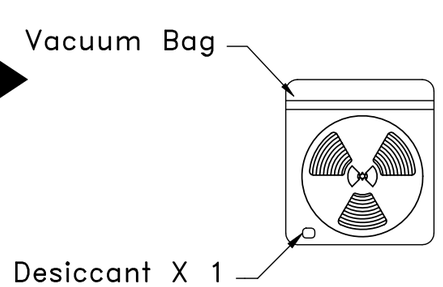


No.1: 1 Reel/Bag

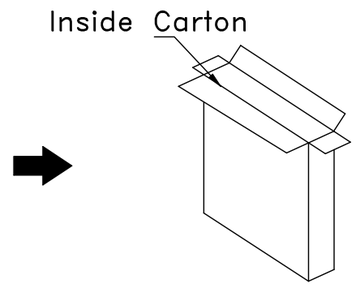


No.2: 1 Bag / Inside Carton

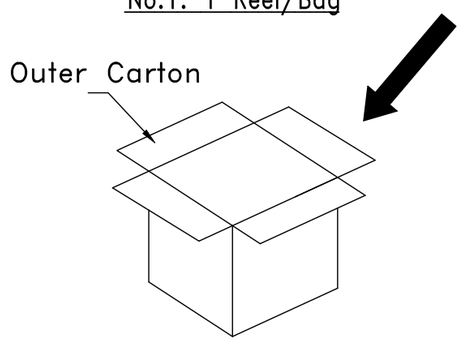

No.3: 10 Inside Carton/Out Carton



No.4: 6000 Pcs/Out Carton

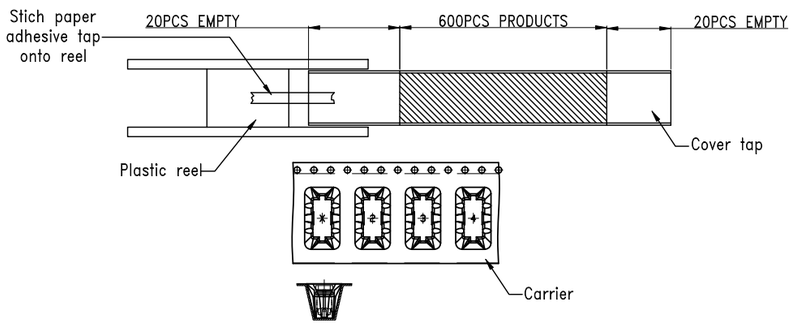

PACKING: 1. 600 PCS/REEL.
2. 10 REEL/Carton.

PACK DIRECTION

HF(无卤)	√
Non-HF(有卤)	

UNLESS OTHERWISE SPECIFIED TOLERANCES

	U.S.	METRIC
.X	+/-	0.50
.XX	+/-	0.25
.XXX	+/-	0.10
FRACTIONS	+/-	
ANGLES	+/-	3°

FOR MATERIALS AND FINISHES SEE NOTES
REMOVE SHARP EDGES
DIMENSIONS U.S. / INCHES (METRIC) / (MM)

APPROVAL		DATE
DRAWN	Fei.Wu	03/02/23'
CHECKED	Michael.Qin	03/02/23'
CHECKED	Michael.Qin	

DRAWING FILE : S:\PE Master\PLM
ANGLE OF PROJECTION

Amphenol
Amphenol East Asia Limited

TITLE Customer Drawing For
USBC 24Pin DR-SMT VET L=6.00mm IPX7

SIZE	DRAWING NO.	REV.
A3	12402305XX12A	5
SCALE	NONE	SHEET 3 OF 3