

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HKXXXXX	New issue	2024/01/18	Michael.qin
2	HKXXXXX	Update size	2024/12/24	Michael.qin

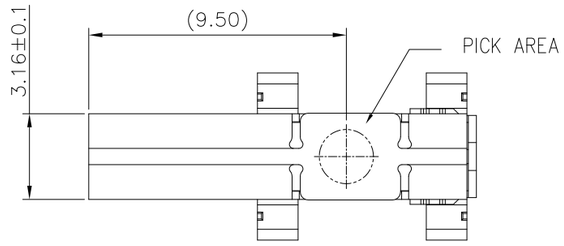


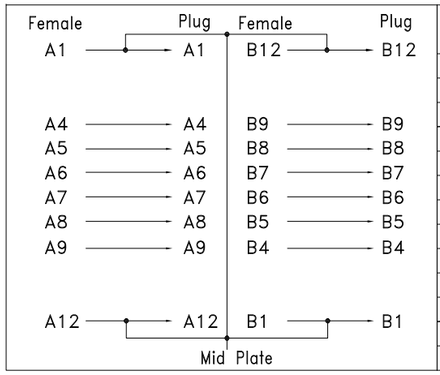



Pin No	Signal Name	Mating Sequence
A1	GND	First
A4	VBUS	First
A5	CC1	Second
A6	D+	Second
A7	D−	Second
A8	SBU1	Second
A9	VBUS	First
A12	GND	First
SHELL		GND


Pin No	Signal Name	Mating Sequence
B12	GND	First
B9	VBUS	First
B8	SBU2	Second
B7	D−	Second
B6	D+	Second
B5	CC2	Second
B4	VBUS	First
B1	GND	First
SHELL		GND


Circuit Mapping Table:
(电路对照表)

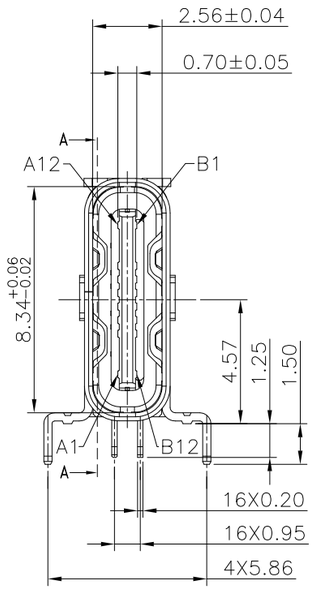


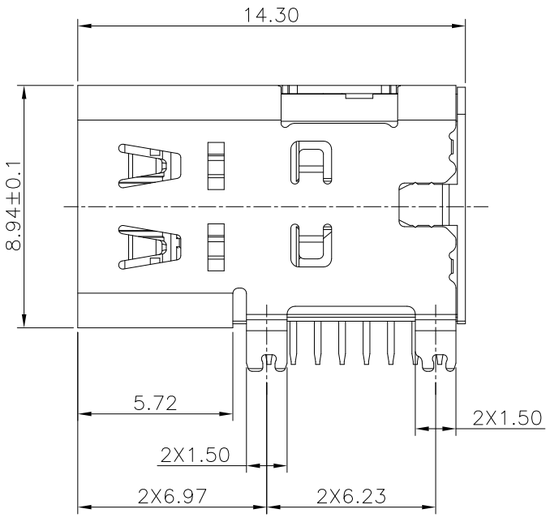



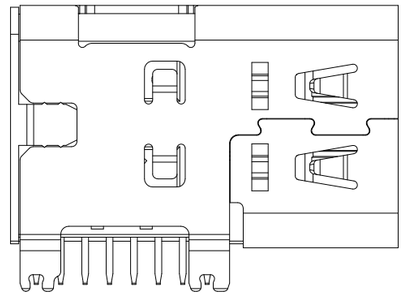

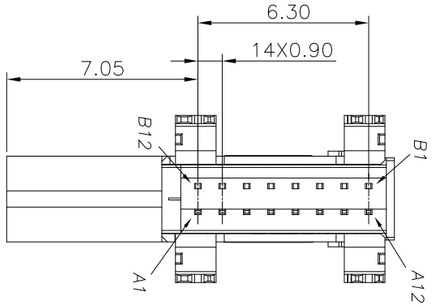

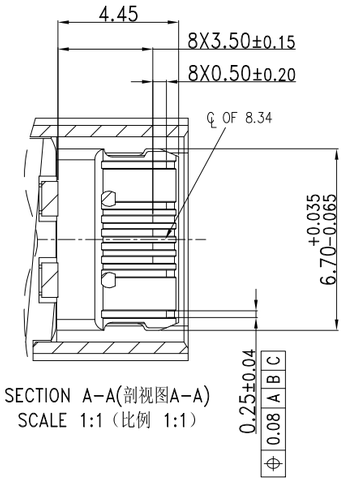

SECTION A−A(剖视图A−A)
SCALE 1:1（比例 1:1）

Amphenol Shenzhen RoHS Compliant 2011/65/EU

UNLESS OTHERWISE SPECIFIED TOLERANCES	U.S.	METRIC
.X	+/−	0.50
.XX	+/−	0.25
.XXX	+/−	0.10
FRACTIONS	+/−	
ANGLES	+/−	3°

FOR MATERIALS AND FINISHES SEE NOTES
REMOVE SHARP EDGES
DIMENSIONS U.S. (INCHES) / (METRIC) (MM)

	APPROVAL	DATE
DRAWN	Alec.li	12/24/24'
CHECKED	Michael.qin	12/24/24'
CHECKED	Michael.qin	

DRAWING FILE : S:\PE Master\PLM
ANGLE OF PROJECTION

Amphenol
Amphenol East Asia Limited


TITLE: USB 2.0, Type C socket connector, R/A

SIZE	DRAWING NO.	REV.
A3	12402408XX12A	2
SCALE	NONE	SHEET 1 OF 2


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED

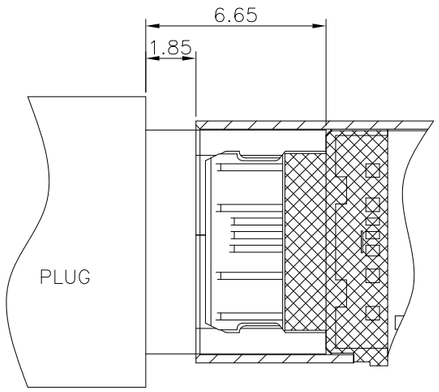


AFTER MATING

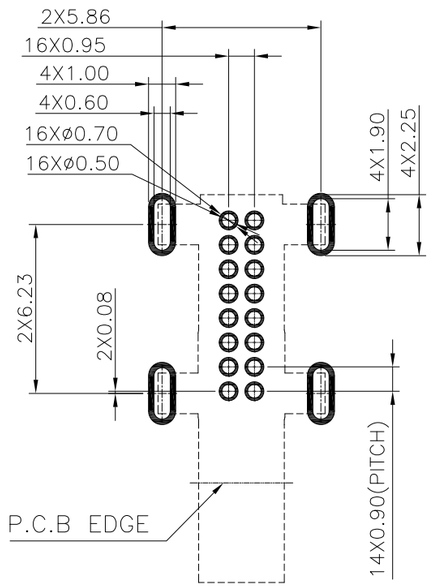


RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 1.2±0.10MM;DEFAULT TOLERANCE:±0.05


NOTES/注释:

1. MATERIAL/材料: SEE TABLE/见下表
2. GENERAL SPECIFICATION/通用特性:
   - 2.1 CURRENT RATING: 5A / 额定电流: 5安培
   - 2.2 CONTACT RESISTANCE: 40mΩ MAX (INITIAL).
     INSULATION RESISTANCE:100MΩ Min
     接触电阻: 40毫欧最大(初始值) / 绝缘电阻: 100MΩ Min
   - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC
     耐电压: 100伏交流
   - 2.4 MECHANICAL CHARACTERISTICS:
     INSERTION FORCE: 5~20N EXTRACTION FORCE: 8~20N
     AFTER DURABILITY EXTRACTION FORCE: 6~20N
     力学特性: 初始插入力: 5~20N 拔出力: 8~20N
     耐久后拔出力: 6~20N
   - 2.5 DURABILITY: 20000 cycles, only check the LLCR, mating force and un-mating force.
     耐久性: 20000次,只检查LLCR和插拔力
   - 2.6 PACKAGING TYPE: CARRIER TAPE./ 包装类型: 载带包装
3. DIMENSIONING SHALL BE INTERPRETED PER ASME Y14.5M 1994.
   尺寸标注基于ASME Y14.5M 1994标准规范
4. MATERIAL SHOULD BE FULFILLED AMPHENOL SPEC.# S-SN-002, FOR HALOGEN FREE PRODUCTS, ALSO NEED TO MEET S-SN-004.
   产品材料环保标准为Amphenol SSN#002,如果是无卤产品需满足标准SSN#004
5. ORDER P/N SYSTEM/产品料号编码系统 : 12402408E512A
   - A:HF
   - Package Spec. 2:Reel
   - Plating Spec:
     E5: Mating Area: Au 30u" Min
     Solder Area: Gold flash
     50u"Min Nickel Under Plating Over All

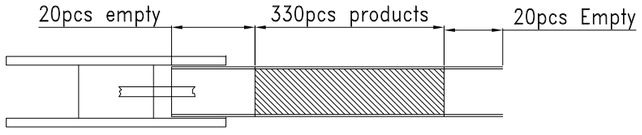




customer unwinding direction

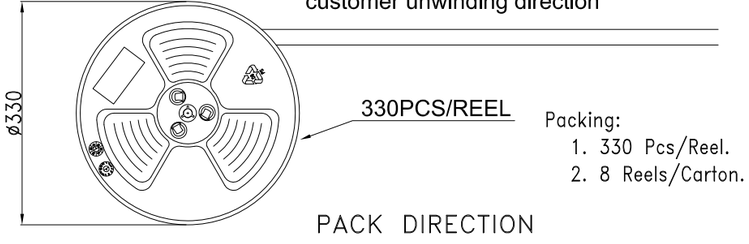

Packing:
1. 330 Pcs/Reel.
2. 8 Reels/Carton.

PACK DIRECTION

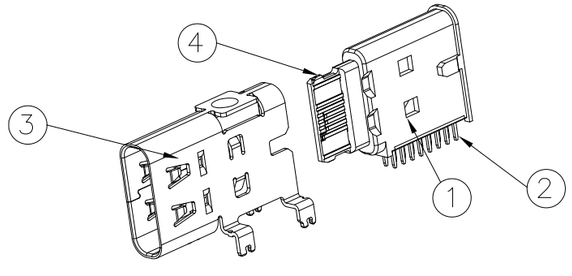

ITEM	DESCRIPTION	Q'TY	MATERIAL	
4	MID PLATE	1	STAINLESS STEEL	CLEAR ONLY
3	SHELL	1	STAINLESS STEEL	SOLDER TIN: 50" MIN
2	TERMINAL	1	COPPER ALLOY	MATING AREA : Au30u"MIN SOLDER TAIL:Au G.F, 50~150u" NICKEL OVERALL.
1	MOLDING HOUSING	1	HIGH TEMPERATURE PLASTIC	BLACK

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED
TOLERANCES

	U.S.	METRIC
.X	+/-	0.50
.XX	+/-	0.25
.XXX	+/-	0.10
FRACTIONS	+/-	
ANGLES	+/-	3°

FOR MATERIALS AND FINISHES SEE NOTES
REMOVE SHARP EDGES
DIMENSIONS
U.S. / INCHES
(METRIC) / (MM)

APPROVAL		DATE
DRAWN	Alec.li	12/24/24'
CHECKED	Michael.qin	12/24/24'
CHECKED	Michael.qin	

DRAWING FILE : S:\PE Master\PLM
ANGLE OF PROJECTION

Amphenol
Amphenol East Asia Limited

TITLE: USB 2.0, Type C socket connector, R/A

SIZE	DRAWING NO.	REV.
A3	12402408XX12A	2
SCALE	NONE	SHEET 2 OF 2