CUI Devices is now Same Sky! Learn More

same sky



# MODEL: UJ32-22-C-V-G-SMT-1B-P24-TR | DESCRIPTION: USB RECEPTACLE

## FEATURES

- USB Type C receptacle
- USB 3.2 Gen 2x2
- 20 Gbit/s data transfer speed
- tape & reel packaging



RoHS


## SPECIFICATIONS

| parameter | conditions/description | min | typ | max | units |
|---|---|---|---|---|---|
| USB standard | USB 3.2 Gen 2x2 | | | | |
| rated input voltage | | | | 20 | Vdc |
| rated input current | as per EIA-364-70, Method B<br>power pins collectively (A1, A4, A9, A12, B1, B4, B9, B12)<br>VCONN pins individually (A5, B5)<br>all other signal pins individually | | | <br>5.0<br>1.25<br>0.25 | <br>A<br>A<br>A |
| contact resistance[1] | between terminals and mating plug | | | 40 | mΩ |
| insulation resistance | at 100 Vdc between adjacent contacts | 100 | | | MΩ |
| voltage withstand | between adjacent contacts for 1 minute | 100 | | | Vac |
| insertion force | | 5 | | 20 | N |
| withdrawal force | | 8 | | 20 | N |
| life | | | 10,000 | | cycles |
| operating temperature | | -25 | | 85 | °C |
| flammability rating | UL94V-0 | | | | |
| RoHS | yes | | | | |

Note: 1. When measured at 20 mV / 100 mA.


## SOLDERABILITY

| parameter | conditions/description | min | typ | max | units |
|---|---|---|---|---|---|
| reel storage | at 20~26°C, less than 75% humidity | | | | °C |
| reflow soldering | see reflow profile | | 255 | 260 | °C |

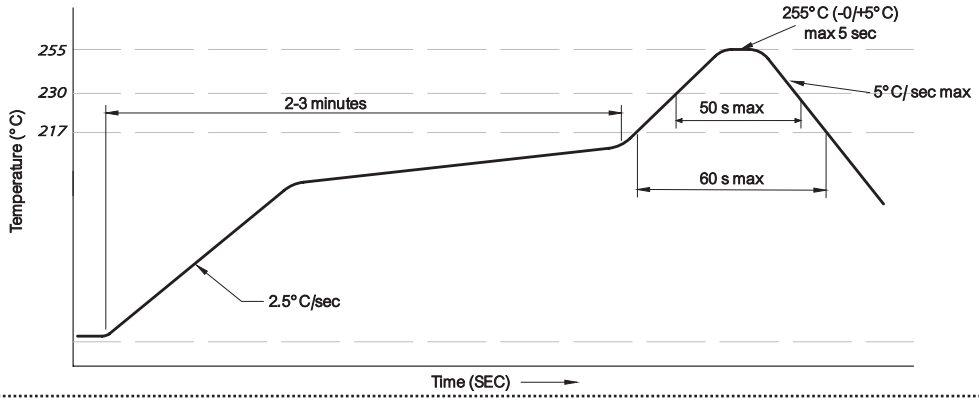



## MECHANICAL DRAWING


units: mm
tolerance:
X.X ±0.30 mm
X.XX ±0.20 mm
X.XXX ±0.10 mm
unless otherwise specified





| DESCRIPTION | MATERIAL | PLATING/COLOR |
|---|---|---|
| housing | PA9T (UL94V-0) | black |
| contact | copper alloy (C18150) | contact area: 3 µ" gold over 50 µ" nickel<br>solder area: tin over 50 µ" nickel |
| shell | stainless steel (SUS304) | 30 µ" nickel |
| mid plate | stainless steel (SUS301) | -- |
| EMI plate | stainless steel (SUS304) | -- |

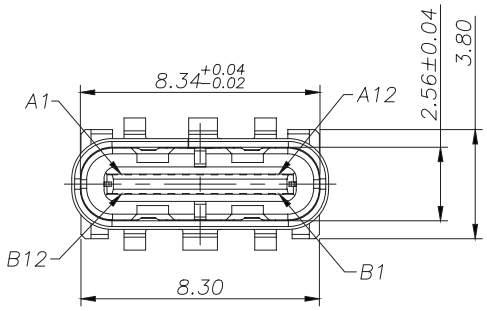

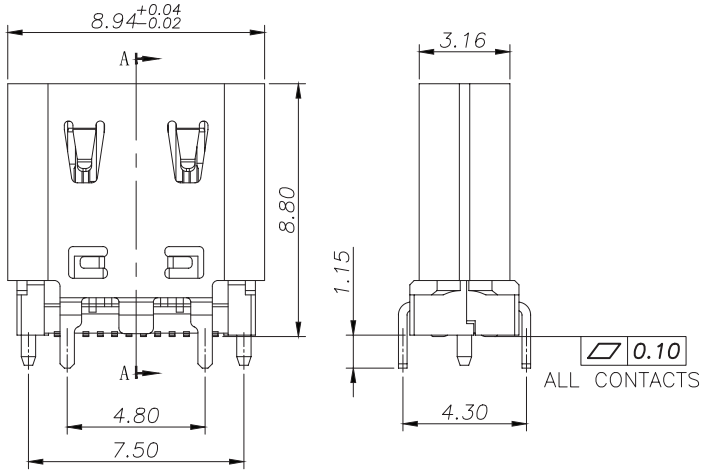


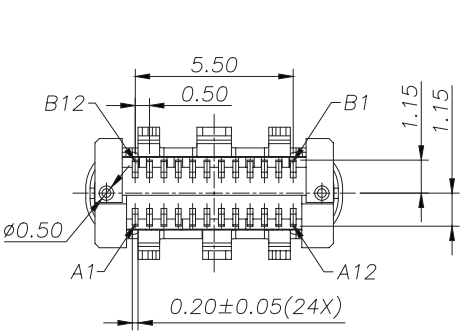
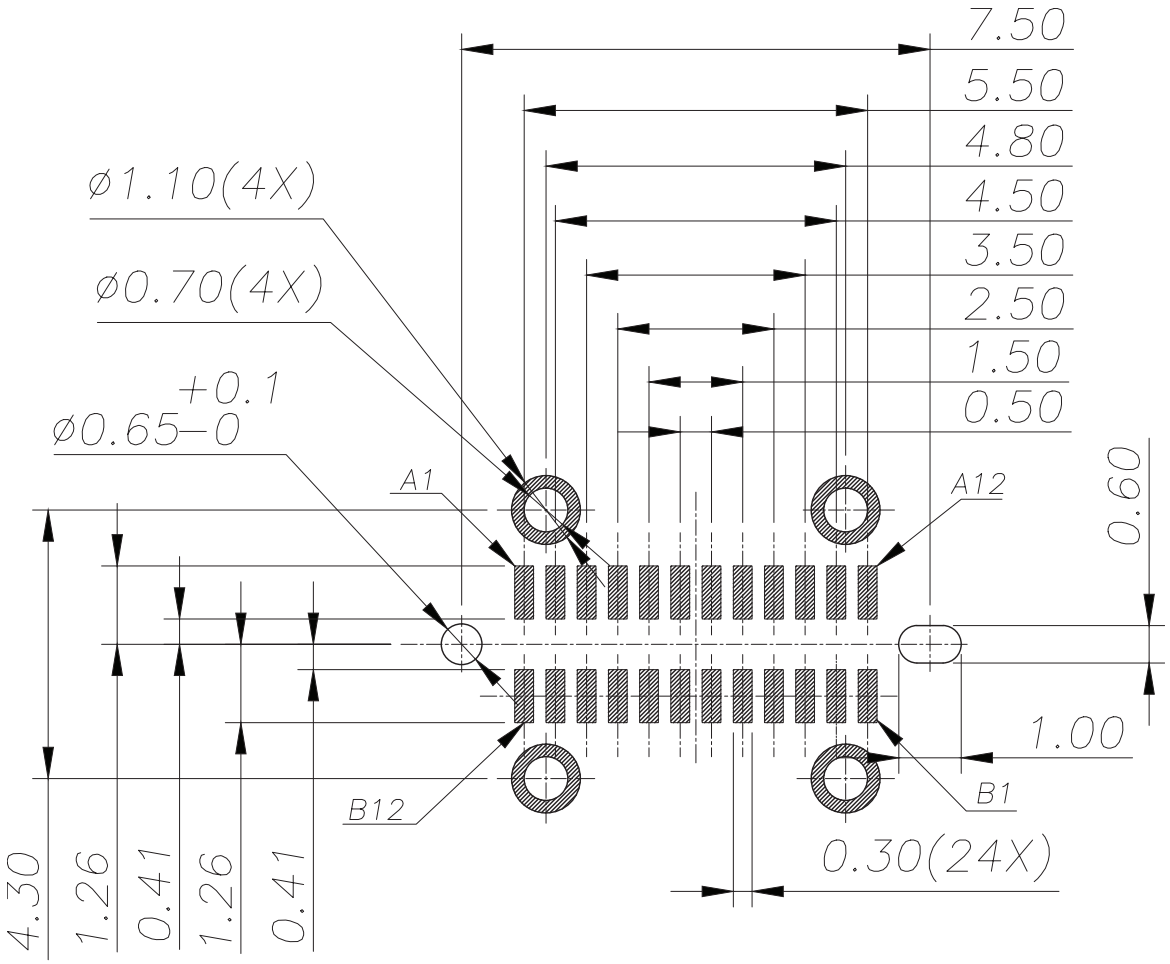


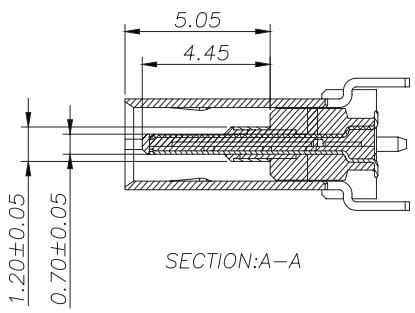
## MECHANICAL DRAWING (CONTINUED)

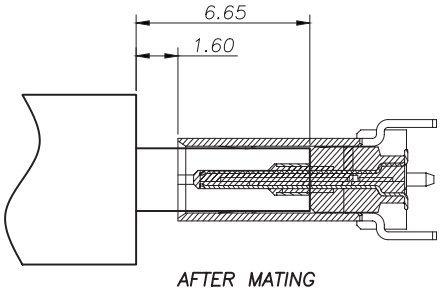units: mm
PCB tolerance: ±0.05 mm
PCB thickness: 1.0±0.10 mm

| PIN CONNECTIONS | | | |
|---|---|---|---|
| PIN | SIGNAL NAME | PIN | SIGNAL NAME |
| A1 | GND | B12 | GND |
| A2 | SSTXp1 | B11 | SSRXp1 |
| A3 | SSTXn1 | B10 | SSRXn1 |
| A4 | VBUS | B9 | VBUS |
| A5 | CC1 | B8 | SBU2 |
| A6 | Dp1 | B7 | Dn2 |
| A7 | Dn1 | B6 | Dp2 |
| A8 | SBU1 | B5 | CC2 |
| A9 | VBUS | B4 | VBUS |
| A10 | SSRXn2 | B3 | SSTXn2 |
| A11 | SSRXp2 | B2 | SSTXp2 |
| A12 | GND | B1 | GND |

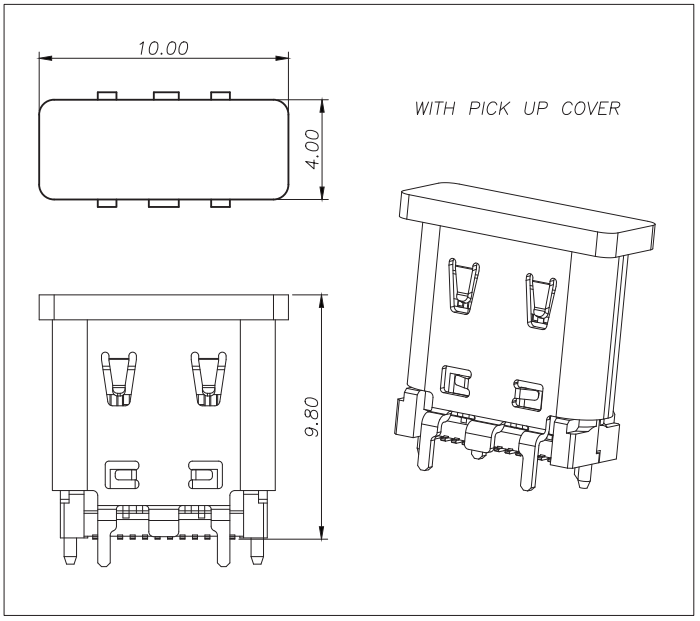





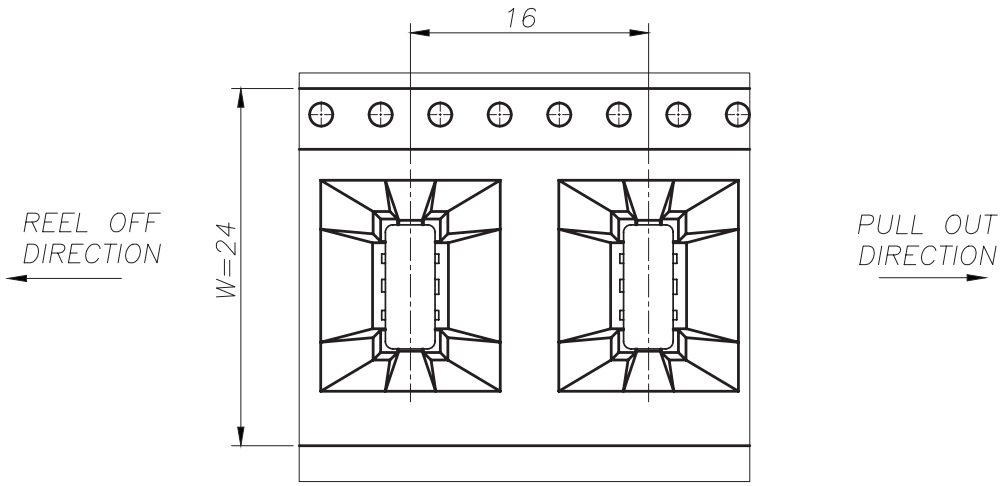

Recommended PCB Layout
Top View

## PACKAGING

units: mm

Reel Size: Ø380 mm
Reel QTY: 450 pcs per reel

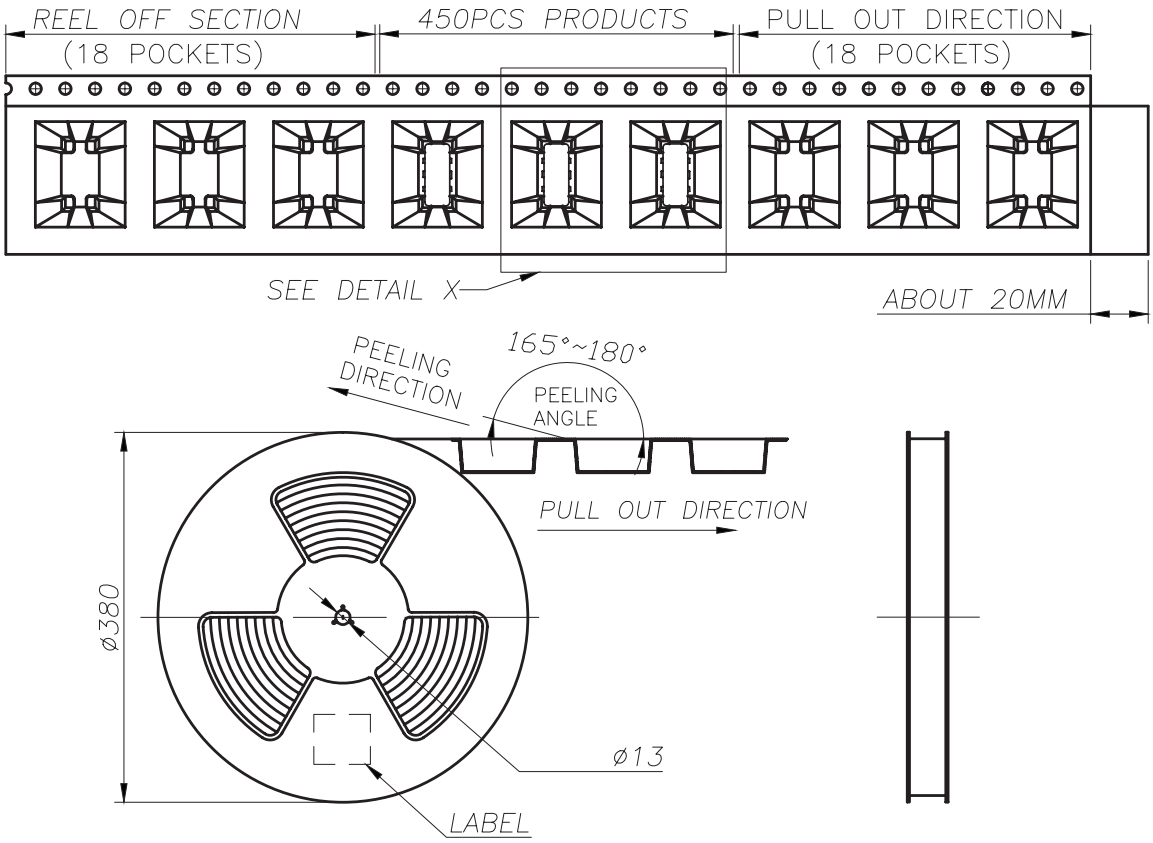

## REVISION HISTORY

| rev. | description | date |
|---|---|---|
| 1.0 | initial release | 08/16/2026 |

The revision history provided is for informational purposes only and is believed to be accurate.

same sky

Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**sameskydevices.com**