

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concent, & that no right is granted to disclose or to use any information in this document.


CUSTOMER DRAWING


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	***	FIRST RELEASE	2020/06/16	Michael.lp
2	***	Add packaging information	2020/06/16	Michael.lp
3	***	Add packaging information	2020/08/06	Michael.lp
4	***	Update plating specifications	2020/08/07	Michael.lp
5	***	Update plating specifications	2020/10/11	Michael.lp

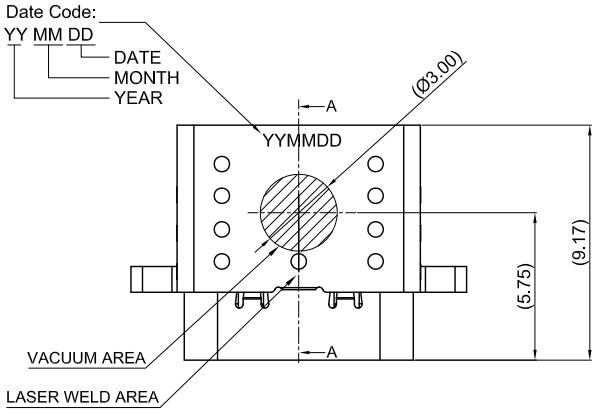


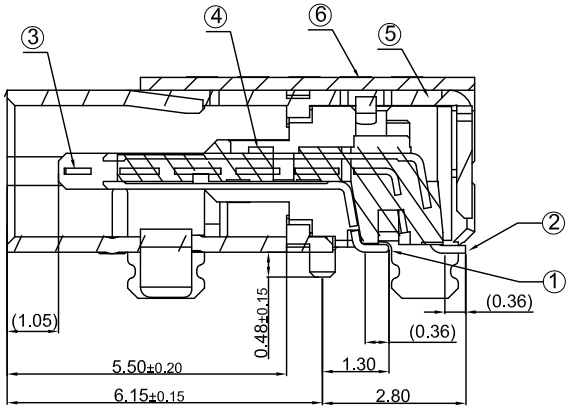


SECTION A-A(剖视图A-A)
SCALE 2:1（比例 2:1）

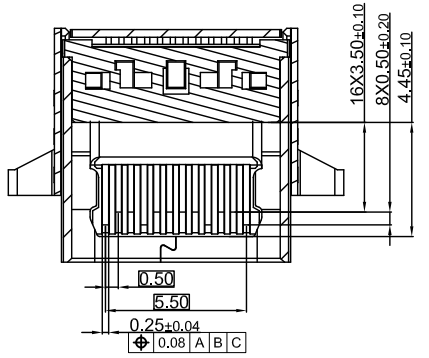

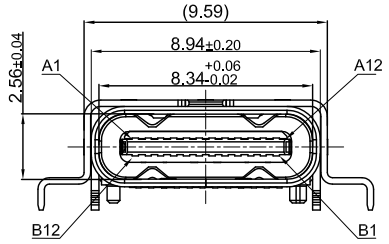


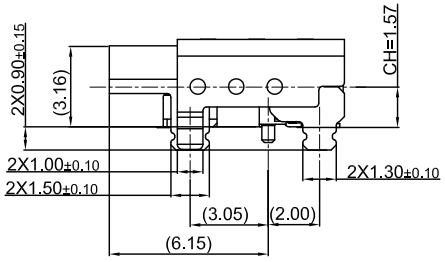





Pin定义:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1−	Vbus	CC1	D+	D−	SBU1	Vbus	RX2−	RX2+	GND
GND	RX1+	RX1−	Vbus	SBU2	D−	D+	CC2	Vbus	TX2−	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

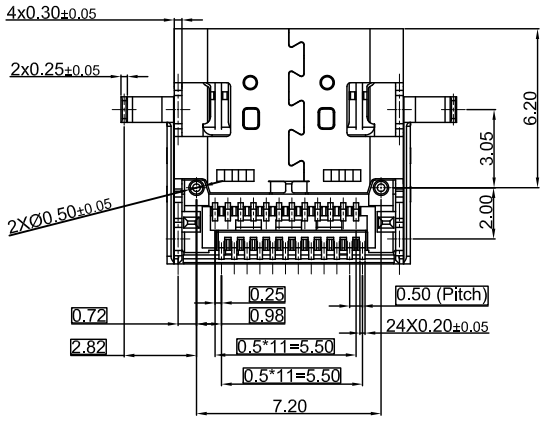



MOUTING CONDITION(REF.)

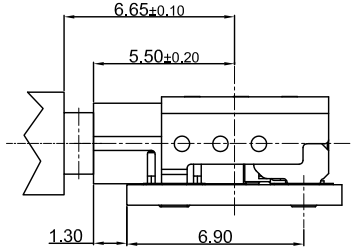

MATED CONDITION(REF.)

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH	REMARK
6	OUT SHELL	1	STAINLESS STEEL	NICKEL PLATING	
5	INT SHELL	1	STAINLESS STEEL	NICKEL PLATING	
4	MAIN HOUSING	1	HIGH TEMPERATURE	-	COLOR:BLACK
3	MID PLATE	1	STAINLESS STEEL	-	
2	BOTTOM TERMINAL	1	COPPER ALLOY	MATING SIDE:GOLD FLASH; SOLDER TAIL:GOLD FLASH, 30u" NICKEL OVERALL.	
1	TOP TERMINAL	1	COPPER ALLOY		

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED TOLERANCES

	U.S.	METRIC
.X	+/-	0.50
.XX	+/-	0.25
.XXX	+/-	0.10
FRACTIONS	+/-	
ANGLES	+/-	3°

FOR MATERIALS AND FINISHES SEE NOTES
REMOVE SHARP EDGES
DIMENSIONS U.S. / INCHES (METRIC) / (MM)

APPROVAL		DATE
DRAWN	Fei.Wu	06/16/20
CHECKED	Michael.Qin	06/16/20
CHECKED	Michael.Qin	

DRAWING FILE :

ANGLE OF PROJECTION

Amphenol
Amphenol East Asia Limited

TITLE Customer Drawing For
USB4 Type C socket connector, R/A , Top mount, Double SMT type, CH=1.57mm, No Water proof


SIZE	DRAWING NO.	REV.
A3	C 12402056	5

SCALE NONE SHEET 1 OF 2

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concent, & that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE PAGE 1		

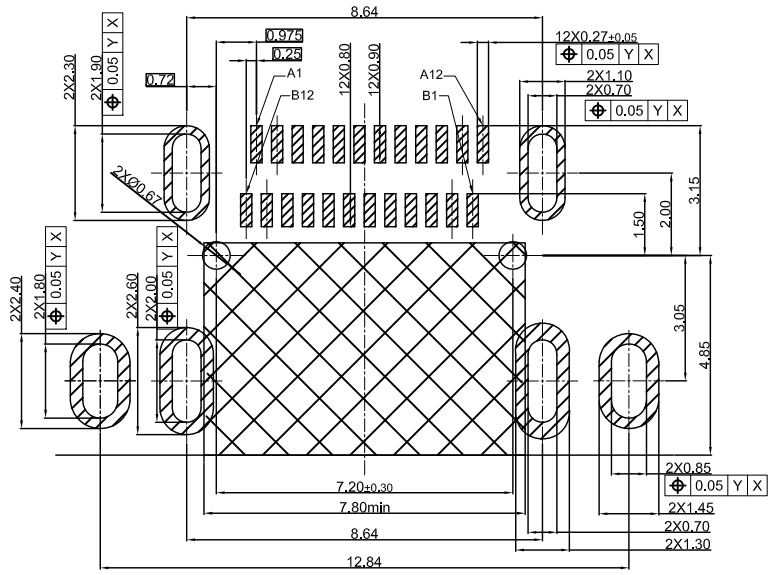


Recommended PCB Layout(Top View)/推荐的PCB布局(前视图)
General Tolerances:±0.05/一般公差:±0.05


NOTES/注释：

1. MATERIAL/材料：**SEE TABLE**/见下表
2. GENERAL SPECIFICATION/通用特性:
   2.1 COPLANARITY /共面度：**0.10 Max.**
   2.2 CURRENT RATING: 5A / 额定电流：5安培
   2.3 CONTACT RESISTANCE: 40mΩ MAX (INITIAL).
   INSULATION RESISTANCE:100MΩ **Min**
   接触电阻：40毫欧最大(初始值）/ 绝缘电阻：100MΩ Min
   2.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC
   耐电压： 100伏交流
   2.5 MECHANICAL CHARACTERISTICS:
   INSERTION FORCE: 5~20N EXTRACTION FORCE: 8~20N
   AFTER DURABILITY EXTRACTION FORCE: 6~20N
   力学特性：初始插入力：**5~20N** 拔出力：**8~20N**
   耐久后拔出力：**6~20N**
3. DIMENSIONING SHALL BE INTERPRETED PER ASME Y14.5M 1994.
   尺寸标注基于ASME Y14.5M 1994标准规范
4. MATERIAL SHOULD BE FULFILLED AMPHENOL SPEC.# S-SN-002,
   FOR HALOGEN FREE PRODUCTS, ALSO NEED TO MEET S-SN-004.
   产品材料环保标准为Amphenol SSN#002,如果是无卤产品需满足标准SSN#004
5. ORDER P/N SYSTEM/产品料号编码系统：12402056E512A


Plating Spec:
E5: Mating Area: Au 30u" Min
Solder Area: Gold flash
80u"Min Nickel Under Plating Over All

A:HF
Package Spec.
2:Reel
Date Code Description
1:With D/C

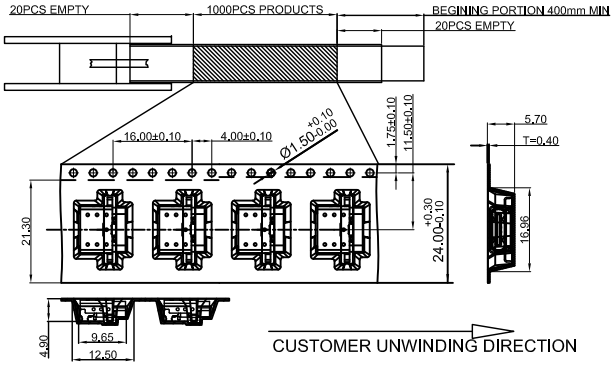

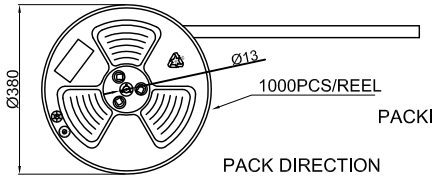

PACKING: 1. 1000 PCS/REEL.
2. 10 REEL/Carton

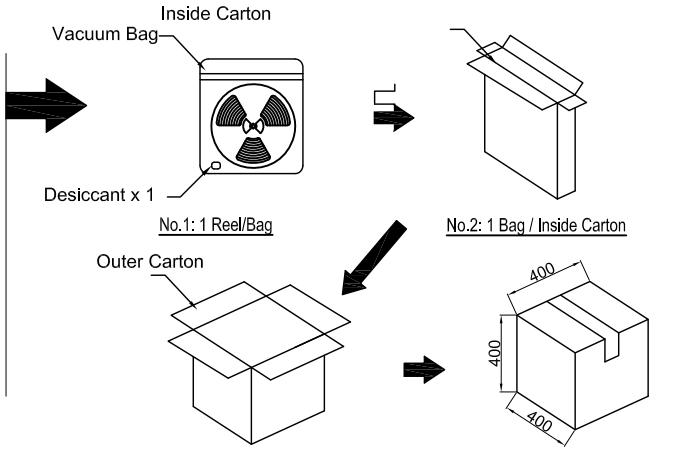

UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC: .X +/- 0.50; .XX +/- 0.25; .XXX +/- 0.10; FRACTIONS +/-; ANGLES +/- 3°	APPROVAL	DRAWN Fei.Wu	DATE 06/16/20
		CHECKED Michael.Qin	06/16/20
		CHECKED Michael.Qin	
FOR MATERIALS AND FINISHES SEE NOTES	DRAWING FILE :		
REMOVE SHARP EDGES	ANGLE OF PROJECTION		
DIMENSIONS U.S. INCHES (METRIC) (MM)			

Amphenol
Amphenol East Asia Limited

TITLE Customer Drawing For
USB4 Type C socket connector, R/A , Middle mount, Double SMT type, CH=1.57mm, No Water proof

SIZE	DRAWING NO.	REV.
A3	12402056	5
SCALE NONE	SHEET 2 OF 2	