
This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU for RoHS compliant or per IEC 61249-2-21 for Halogen-Free compliant.


ORIGINAL


ISSUED BY AMPHENOL TAIWAN PDF Format D.C.


| REVISIONS | | | | |
|---|---|---|---|---|
| SYM | ECN No. | DESCRIPTION | DATE | By |
| A | NE-20117 | RELEASE TO PRODUCTION | 2020.08.17 | Sondra Sang |





DATE CODE
MM DD YY
YEAR
DATE
MONTH

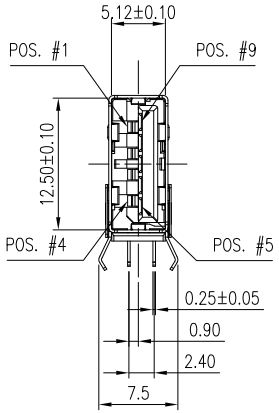

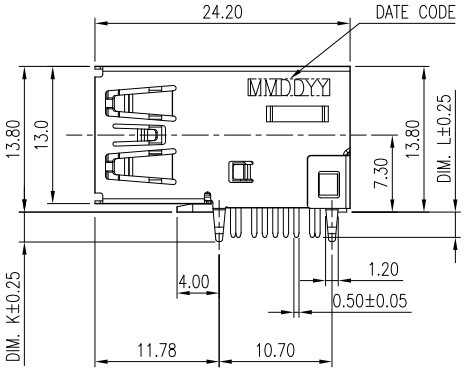




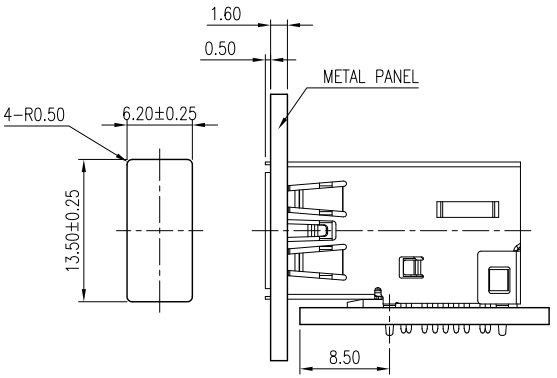RECOMMENDED PANEL CUTOUT

| PIN # | SIGNAL NAME |
|---|---|
| 1 | VBUS |
| 2 | D- |
| 3 | D+ |
| 4 | GND |
| 5 | SSRX- |
| 6 | SSRX+ |
| 7 | GND_DRAIN |
| 8 | SSTX- |
| 9 | SSTX+ |
| SHELL | SHIELD |

PIN ASSIGNMENT





PART NUMBER:
GSB3 116 3 4 X DHR

CONTACT FINISH
3: 30μ" GOLD

PLASTIC MATERIAL
4: NYLON, BLUE

SOLDER TAIL LENGTH
1. DIM. L=1.90 mm
2. DIM. L=2.40 mm
3. DIM. L=2.80 mm
4. DIM. L=3.30 mm
5. DIM. L=3.90 mm
6. DIM. L=4.40 mm

| DIM. J | DIM. K | DIM. L | PCB THICKNESS | PROCESS |
|---|---|---|---|---|
| 1.7 mm | 2.8 mm | 2.40mm | 1.6mm | WAVE SOLDING |
| 1.7 mm | 2.8 mm | 1.90mm | 1.6mm | PIP |
| 2.6 mm | 3.8 mm | 3.30mm | 2.5mm | WAVE SOLDING |
| 2.6 mm | 3.8 mm | 2.80mm | 2.5mm | PIP |
| 3.7 mm | 4.8 mm | 4.40mm | 3.6mm | WAVE SOLDING |
| 3.7 mm | 4.8 mm | 3.90mm | 3.6mm | PIP |

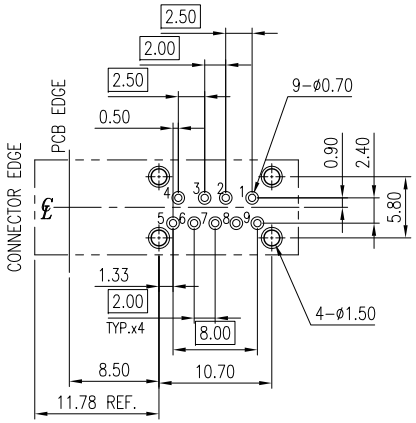


RECOMMENDED PCB LAYOUT- TOP VIEW
(OTHER GENERAL TOLERANCES: ±0.05)

NOTES:
1. HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL 94V-0, COLOR- BLUE
2. CONTACT: COPPER ALLOY, 30μ" MIN. GOLD PLATED ON CONTACT AREA, 120μ" MIN. MATTE TIN PLATED ON SOLDERING TAIL, 80μ" MIN. NICKEL UNDER-PLATED OVERALL
3. METAL SHELL: STAINLESS STEEL, 30μ" MIN. ELECTROLESS NICKEL UNDER-PLATED OVERALL
4. REAR SHELL: STAINLESS STEEL
5. PRODUCT SPECIFICATION REFER TO PS-7411
6. PACKING DRAWING REFER TO PKS-GSBX116P01HR
7. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2011/65/EC FOR RoHS AND PER IEC 61249-2-21 FOR HALOGEN FREE COMPLIANT.

| TOLERANCE | APPROVALS | DATE |
|---|---|---|
| X. | DRAWN | |
| X.X ±0.30 | DESIGNED Sondra Sang | 2020/08/17 |
| X.XX ±0.20 | CHECKED Chenny Yeh | 2020/08/17 |
| X.XXX ±0.10 | APPROVED Hank Hsu | 2020/08/17 |
| ANGULAR ±2° | DWG TYPE CUST DWG | PROJECT CODE T536 |
| UNLESS OTHERWISE SPECIFIED | | |

TITLE: USB 3.0 CONNECTOR
STANDARD A, UPRIGHT
DIP TYPE, NO FLANGE

Amphenol®
Amphenol Corporation
Amphenol Taiwan Corporation

| UNIT | SIZE | PART No. | REV. |
|---|---|---|---|
| mm | A3 | GSB3 116 3XX DHR | |
| SCALE NA | SHEET 1 OF 2 | DWG No. GSB31163XXDHR | A |

This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.


The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU for RoHS compliant or per IEC 61249-2-21 for Halogen-Free compliant.


Amphenol Taiwan RoHS 2011/65/EU+IEC61249-2-21 Halogen Free

ORIGINAL

ISSUED BY AMPHENOL TAIWAN PDF Format D.C.

| REVISIONS | | | | |
|---|---|---|---|---|
| SYM | ECN No. | DESCRIPTION | DATE | By |
| A | NE-20117 | RELEASE TO PRODUCTION | 2020.08.17 | Sondra Sang |

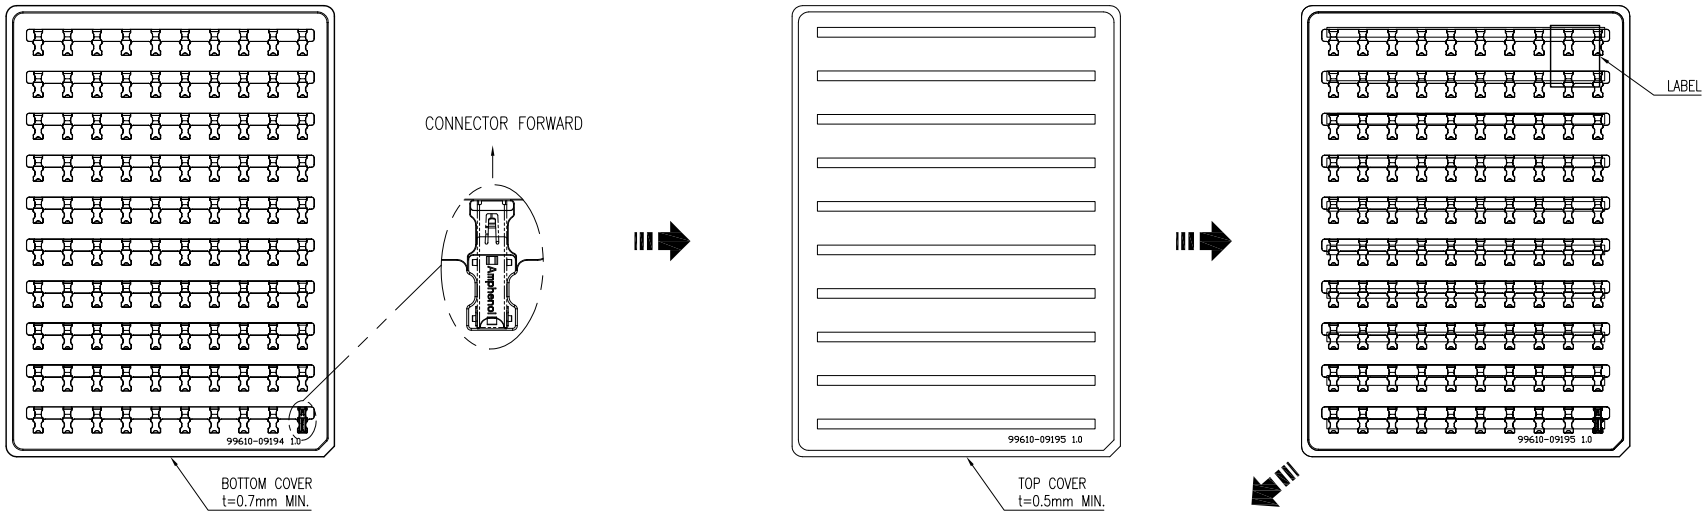

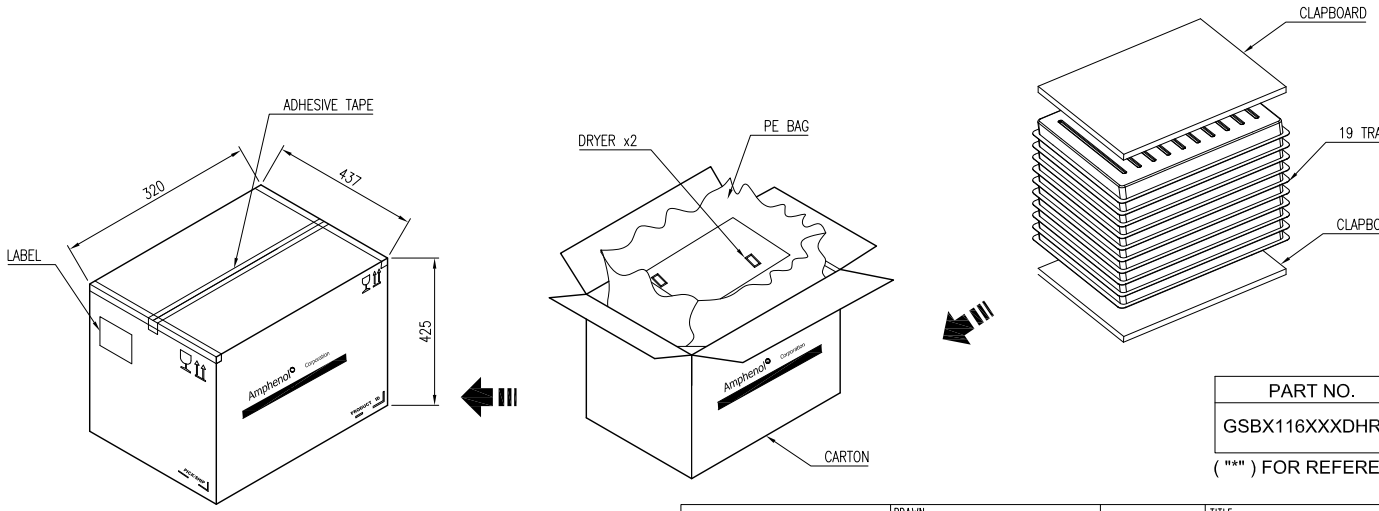
| PART NO. | PCS. / TRAY | TRAY / CARTCON | N.W. | G.W. |
|---|---|---|---|---|
| GSBX116XXXDHR | 100 PCS. | 100X19=1900 PCS. | * | * |

( "*" ) FOR REFERENCE

NOTES:
1. MATERIAL: TRAY– PET
3. THE BARCODE MUST BE 3 OF 9 BARCODE
4. COMPONENTS LOAD PER THE TRAY: 100 PCS.
5. STORAGE CONDITION MUST FOLLOW MSL (MOISTURE SENSITIVITY LEVEL) 1
6. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2011/65/EC FOR RoHS COMPLIANT

| TOLERANCE | APPROVALS | DATE |
|---|---|---|
| X. ±0.30<br>X.X ±0.20<br>X.XXX ±0.10<br>ANGULAR ±2°<br>UNLESS OTHERWISE SPECIFIED | DRAWN<br>DESIGNED Sondra Sang<br>CHECKED Chenny Yeh<br>APPROVED Hank Hsu<br>DWG TYPE CUST DWG | 2020/08/17<br>2020/08/17<br>2020/08/17<br>PROJECT CODE T536 |

TITLE: USB 3.0 CONNECTOR STANDARD A, UPRIGHT DIP TYPE, NO FLANGE

UNIT mm | SIZE A3 | SCALE NA | SHEET 2 OF 2

Amphenol®
Amphenol Corporation
Amphenol Taiwan Corporation

PART No. GSB3 116 3XX DHR

DWG No. GSB31163XXDHR | REV. A