

This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on thisproduct doesn't contain environmental hazardous material and must follow one or more specifications per Material Specification SS-00259 for Sony GP compliant or per directive 2011/65/EC for RoHS compliant or per IEC 61249-2-21 for Halogen Free compliant.

ORIGINAL

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	BY
A	NE-13196	RELEASE TO PRODUCT	12/09/2013	Sondra Sang
B	NE-14051	MODIFIED SHELL	03/31/2014	Sondra Sang
C	NE-15142	ADDED TAIL LENGTH OPTIONS	11/06/2015	Sondra Sang
D	NE-17028	ADDED PANEL CUTOUT	02/10/2017	Sondra Sang

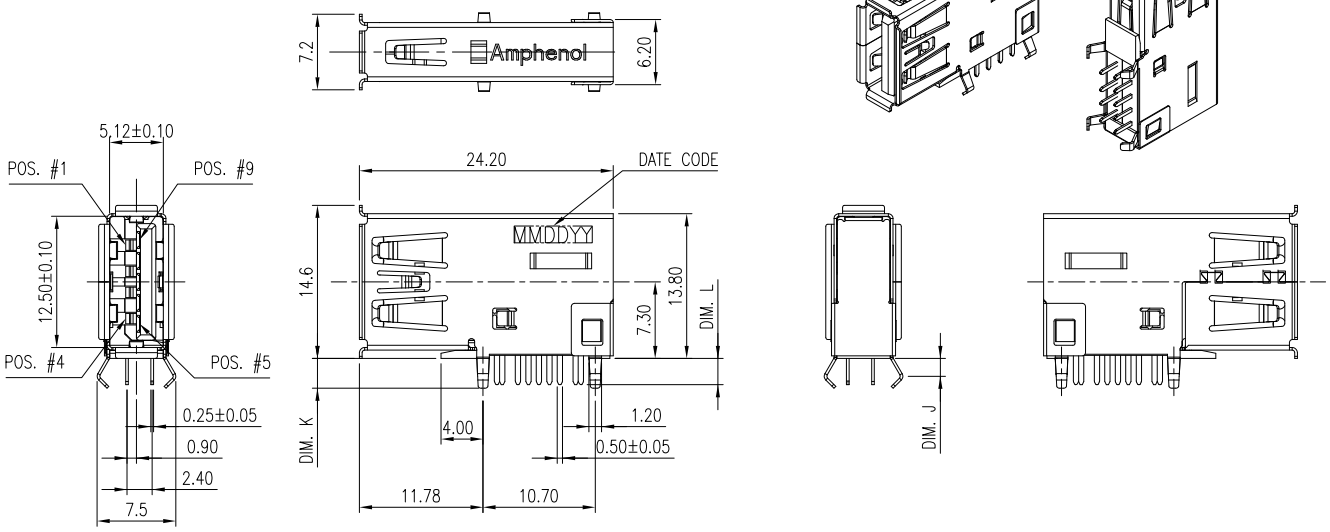

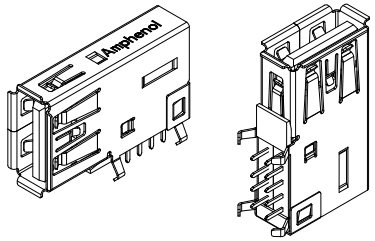


Issued by Amphenol Taiwan PDF Format D.C.


Amphenol Taiwan RoHS Halogen Free 2011/65/EU+IEC61249-2-21

PIN #	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	SSRX-
6	SSRX+
7	GND_DRAIN
8	SSTX-
9	SSTX+
SHELL	SHIELD

PIN ASSIGNMENT



RECOMMENDED PANEL CUTOUT




PART NUMBER:
GSB3 116 3 4 X HR

CONTACT FINISH
3: 30μ" GOLD

PLASTIC MATERIAL
4: NYLON, BLUE

SOLDER TAIL LENGTH
1. DIM. L=1.90 mm
2. DIM. L=2.40 mm
3. DIM. L=2.80 mm
4. DIM. L=3.30 mm
5. DIM. L=3.90 mm
6. DIM. L=4.40 mm

DIM. J	DIM. K	DIM. L	PCB THICKNESS	PROCESS
1.7 mm	2.8 mm	2.40mm	1.6mm	WAVE SOLDING
1.7 mm	2.8 mm	1.90mm	1.6mm	PIP
2.6 mm	3.8 mm	3.30mm	2.5mm	WAVE SOLDING
2.6 mm	3.8 mm	2.80mm	2.5mm	PIP
3.7 mm	4.8 mm	4.40mm	3.6mm	WAVE SOLDING
3.7 mm	4.8 mm	3.90mm	3.6mm	PIP

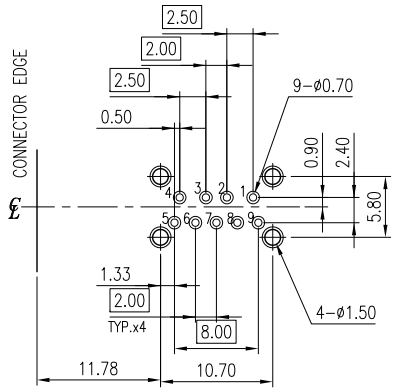

RECOMMENDED PCB LAYOUT- TOP VIEW
(OTHER GENERAL TOLERANCES: ±0.05)

NOTES:
1. HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL 94V-0, COLOR- BLUE
2. CONTACT: COPPER ALLOY, 0.25mm THICKNESS, 30μ" MIN. GOLD PLATED ON CONTACT AREA, 120μ" MIN. MATTE TIN PLATED ON SOLDERING TAIL, 80μ" MIN. NICKEL UNDER-PLATED OVERALL
3. METAL SHELL: STAINLESS STEEL, 0.25mm THICKNESS, 30μ" MIN. NICKEL UNDER-PLATED OVERALL
4. REAR SHELL: STAINLESS STEEL, 0.25mm THICKNESS
5. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2011/65/EC FOR RoHS AND PER IEC 61249-2-21 FOR HALOGEN FREE COMPLIANT.

TOLERANCE	APPROVALS	DATE
X. ±0.30 X.X ±0.20 X.XXX ±0.10 ANGULAR ±1° UNLESS OTHERWISE SPECIFIED	DRAWN Sondra Sang	2/10/2017
	CHECKED Chenny Yeh	2/10/2017
	APPROVED Hank Hsu	2/10/2017
	DWG TYPE CUST DWG	PROJECT CODE T536

TITLE: USB 3.0 CONNECTOR STANDARD A, UPRIGHT DIP TYPE

UNIT mm | SIZE A3 | SCALE NA | SHEET 1 OF 1

Amphenol®
Amphenol Corporation
Amphenol Taiwan Corporation

PART No. GSB3 116 34X HR

DWG No. GSB31163XXHR | REV. D


This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.


The marking on this product doesn't contain environmental hazardous material and must follow one or more specifications per Material Specification SS-00259 for Sony GP compliant or per directive 2011/65/EC for RoHS compliant or per IEC 61249-2-21 for Halogen Free compliant.


ORIGINAL


ISSUED BY AMPHENOL TAIWAN PDF Format D.C.

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	BY
A	NE-14016	RELEASE TO PRODUCTION	01/24/2014	Sondra Sang
B	NE-17028	ADDED NOTE 5	02/10/2017	Sondra Sang

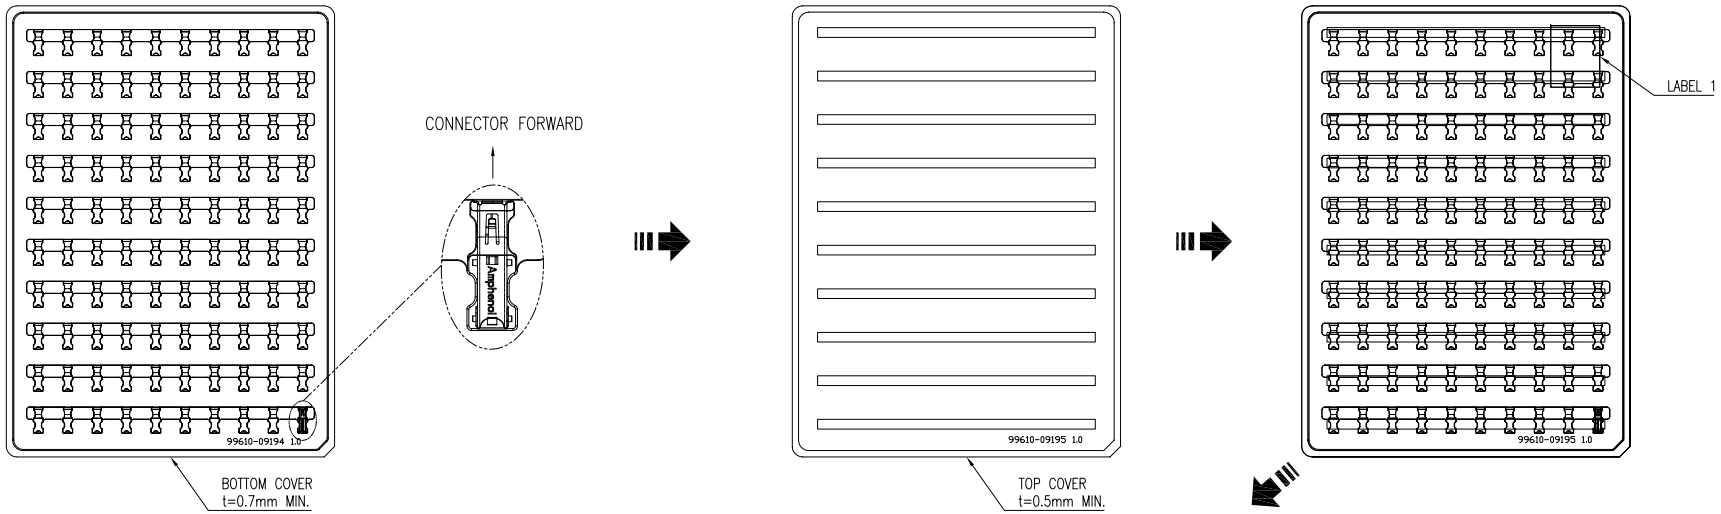

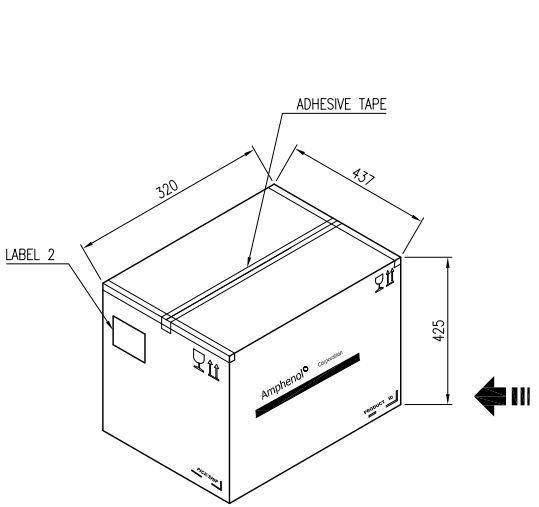

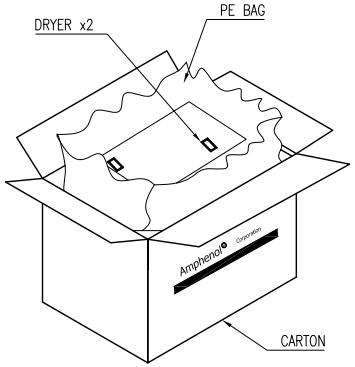

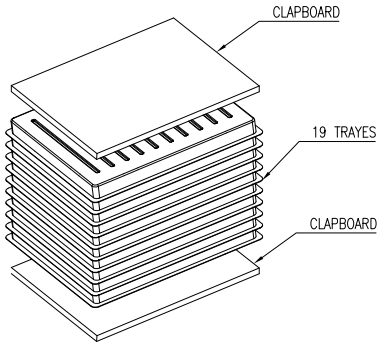

P/N	: GSB3116XXXHR
Q'TY	: 100
P/O	: 411-012345-001
DATE	: 07 / 31 / 2013 MM / DD / YYYY
G.W	: 15.00 KG H F
	Amphenol Taiwan Corporation

P/N OPTIONAL

LABEL 1 = Q'TY : 100
LABEL 2 = Q'TY : 1900

LABEL 1 & LABEL 2

PART NO.	PCS. / TRAY	TRAY / CARTCON	N.W.	G.W.
GSBX116XXXHR	100 PCS.	100X19=1900 PCS.	*	*

("*") FOR REFERENCE

NOTES:
1. MATERIAL: TRAY– PET
3. THE BARCODE MUST BE 3 OF 9 BARCODE
4. COMPONENTS LOAD PER THE TRAY: 100 PCS.
5. STORAGE CONDITION MUST FOLLOW MSL (MOISTURE SENSITIVITY LEVEL) 1
6. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2011/65/EC FOR RoHS COMPLIANT

TOLERANCE	APPROVALS	DATE
X. ±0.20 X.X ±0.15 X.XX ±0.10 X.XXX ±0.05 ANGULAR ±1° UNLESS OTHERWISE SPECIFIED	DESIGNED Sondra Sang	2/10/2017
	CHECKED Chenny Yeh	2/10/2017
	APPROVED Hank Hsu	2/10/2017
	DWG TYPE ENG DWG	PROJECT CODE T536

TITLE: USB3.0/ 3.1 CONNECTORS
A TYPE, UPRIGHT
TRAY PACKING

UNIT mm | SIZE A3 | SCALE NA | SHEET 1 OF 1

Amphenol®
Amphenol Corporation
Amphenol Taiwan Corporation

PART No. GSBX 116 XXX HR
DWG No. PKS_GSBX116P01HR | REV. B