This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU for RoHS compliant.

ORIGINAL

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A	NE-19176	RELEASE TO PRODUCTION	10/30/2019	Roger Tsai


Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	GND
5	SSRX-
6	SSRX+
7	GND_DRAIN
8	SSTX-
9	SSTX+
Shell	Shield


PART NO. GSB3121 X X X C5HR

CONTACT FINISH
1: GOLD FLASH
2: 15 μ" GOLD
3: 30 μ" GOLD


DIM A
0 : 2.3mm
1 : 3.0mm
2 : 3.2mm

COLOR & PACKAGE
C: PA4T BLACK; T&R W/CAP
R: PA4T BLUE(300C); T&R W/CAP

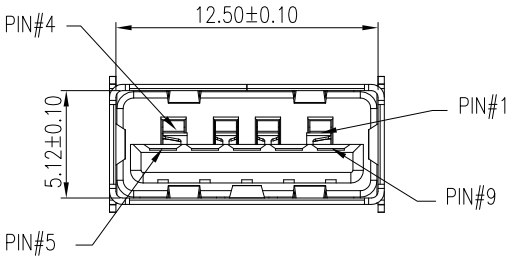

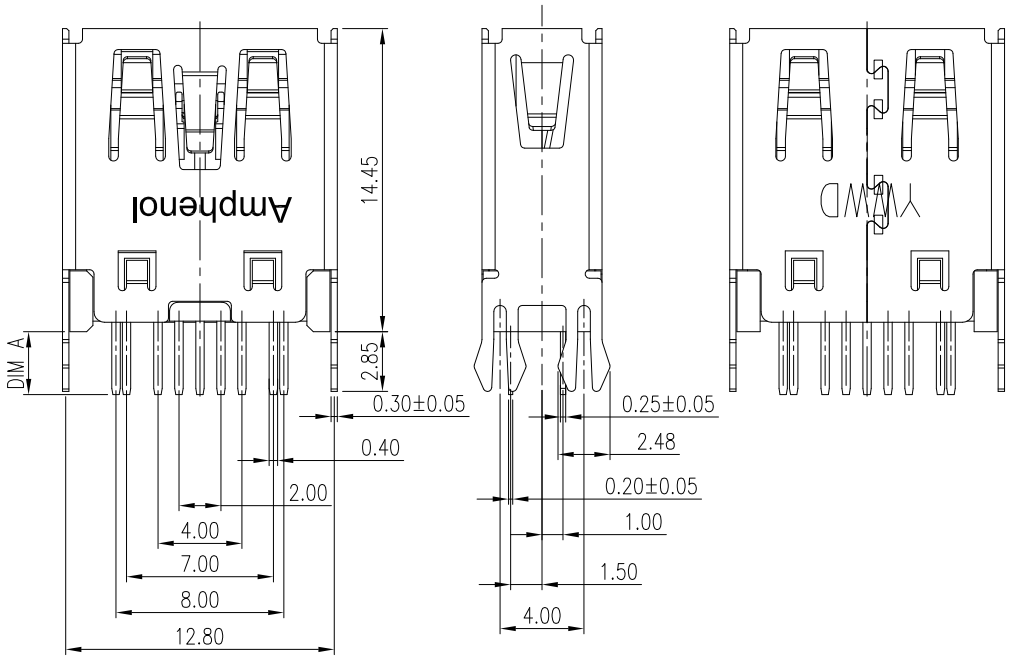

NOTES:
1. MATERIAL:
   HOUSING: THERMOPLASTIC, PA4T, UL94V-0, COLOR: OPTION.
   TERMINAL(5P): BRASS.
   TERMINAL(4P): PHOSPHOR BRONZE.
   SHELL: STAINLESS STEEL.
2. FINISH:
   TERMINAL:
   CONTACT AREA: SELECTED GOLD PLATING THICKNESS MIN.;
   SOLDERING AREA: MATT TIN PLATING 100 μ" THICKNESS MIN.;
   UNDER PLATING: NICKEL PLATING 50 μ" THICKNESS MIN. OVERALL.
   SHELL:
   NICKEL PLATING 50 μ" THICKNESS MIN. OVERALL.
3. PRODUCT SPECIFICATION REFER TO : PS-7425
4. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS PER DIRECTIVE 2011/65/EU FOR RoHS COMPLIANT. OR PER IEC 61249-2-21 FOR HALOGEN-FREE COMPLIANT.

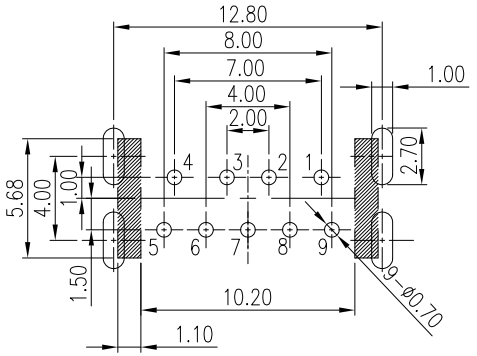

RECOMMENDED P.C.B LAYOUT
TOLERANCE: ±0.05(TOP VIEWS)

TOLERANCE	APPROVALS	DATE	TITLE
X.	DRAWN Debby Hung	10/30/2019	GSB3 SERIES, USB 3.0 A TYPE, SINGLE PORT W/O FLANGE STRAIGHT, DIP TYPE(SMALL CAP)
X.X ±0.30 X.XX ±0.20 X.XXX ±0.10	CHECKED Sandy Wu	10/30/2019	
ANGULAR ±1°	APPROVED Roger Tsai	10/30/2019	
UNLESS OTHERWISE SPECIFIED	DWG TYPE CUST DWG	PROJECT CODE OTHER	

UNIT	SIZE	PART No.
mm	A3	GSB3121XXXC5HR
SCALE	SHEET	DWG No. / REV.
NA	1 OF 2	GSB3121XXXC5HR / A


Amphenol®
Amphenol Corporation
Amphenol Taiwan Corporation


This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU for RoHS compliant.


ORIGINAL

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A	NE-19176	RELEASE TO PRODUCTION	10/30/2019	Roger Tsai

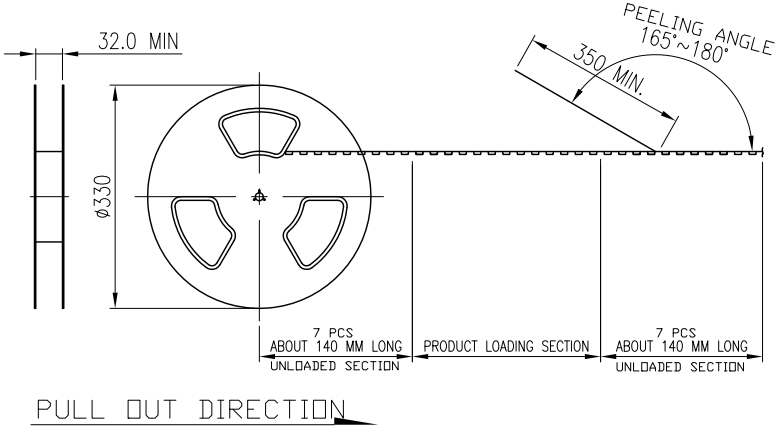


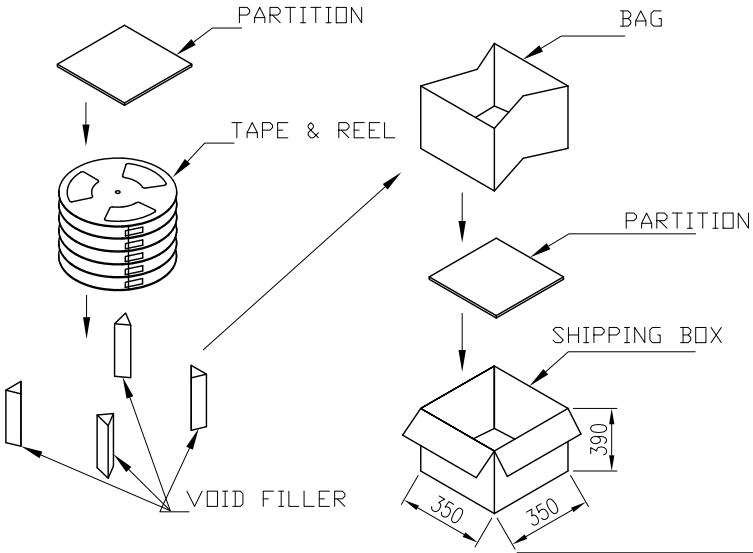

NOTES:
1. MATERIAL:
   CARRIER TAPE: PS.
   COVER TAPE: PET.
   REEL: PS.
   SHIPPING BOX: CORRUGATED FIBERBOARD.
2. DIMENSION:
   REEL: ø= 330.
   SHIPPING BOX: L=350, W=350, H=390.
3. QUANTITY: SEE TABLE.
4. SHIPPING BOX WEIGHT: SEE TABLE.
5. PEELING STRENGTH: 0.1~1.3N(10~130 GRAMS)
6. PEELING SPEED: 300mm/min.

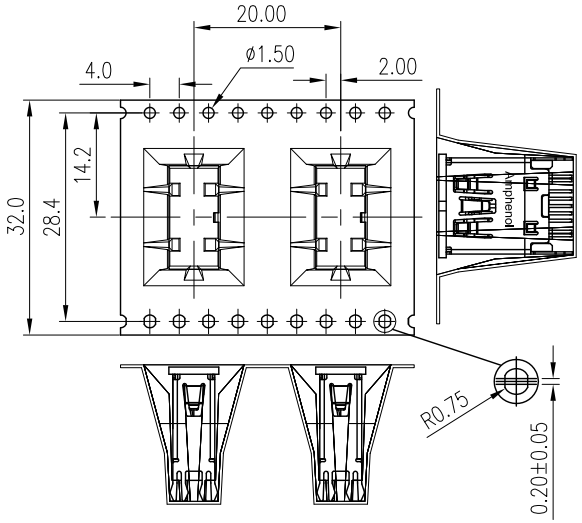

PACKING(Tape Reel)

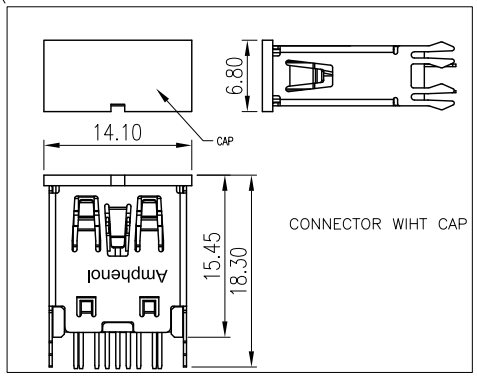

PACKAGING BY T&R						
	10.03	3.03	150	10	1500	GSB3121XCXC5HR
	10.03	3.03	150	10	1500	GSB3121XRXC5HR
	G/W KG	N/W KG	PCS/ REEL	REELS/ BOX	QUANTITY (PCS)	PART NUMBER

TOLERANCE	APPROVALS	DATE
X. ±0.30 X.X ±0.20 X.XX ±0.10 ANGULAR ±1° UNLESS OTHERWISE SPECIFIED	DRAWN Debby Hung	10/30/2019
	CHECKED Sandy Wu	10/30/2019
	APPROVED Roger Tsai	10/30/2019
	DWG TYPE CUST DWG	PROJECT CODE OTHER

TITLE: GSB3 SERIES, USB 3.0 A TYPE, SINGLE PORT W/O FLANGE STRAIGHT, DIP TYPE(SMALL CAP)

Amphenol®
Amphenol Corporation
Amphenol Taiwan Corporation

UNIT	SIZE	PART No.	REV.
mm	A3	GSB3121XXXC5HR	
SCALE NA	SHEET 2 OF 2	DWG No. GSB3121XXXC5HR	A