1A, 50V - 1000V High Efficient Rectifier

FEATURES

- AEC-Q101 qualified available
- Glass passivated chip junction
- High current capability
- High reliability
- High surge current capability
- High efficiency, Low V_F
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

APPLICATIONS

- DC to DC converter
- Switching mode converters and inverters
- Freewheeling application

MECHANICAL DATA

- Case: TS-1
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Pure tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: Indicated by cathode band
- Weight: 0.200g (approximately)

KEY PARAMETERS		
PARAMETER	**VALUE**	**UNIT**
I_F	1	A
V_{RRM}	50 - 1000	V
I_{FSM}	30	A
$T_{J\ MAX}$	150	°C
Package	TS-1	
Configuration	Single die	

Pb-Free RoHS COMPLIANT HALOGEN FREE

TS-1

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)										
PARAMETER	**SYMBOL**	**HT 11G**	**HT 12G**	**HT 13G**	**HT 14G**	**HT 15G**	**HT 16G**	**HT 17G**	**HT 18G**	**UNIT**
Marking code on the device		HT 11G	HT 12G	HT 13G	HT 14G	HT 15G	HT 16G	HT 17G	HT 18G	
Repetitive peak reverse voltage	V_{RRM}	50	100	200	300	400	600	800	1000	V
Reverse voltage, total rms value	$V_{R(RMS)}$	35	70	140	210	280	420	560	700	V
Forward current	I_F	1								A
Surge peak forward current, 8.3ms single half sine wave superimposed on rated load	I_{FSM}	30								A
Junction temperature	T_J	-55 to +150								°C
Storage temperature	T_{STG}	-55 to +150								°C

THERMAL PERFORMANCE

PARAMETER	SYMBOL	TYP	UNIT
Junction-to-ambient thermal resistance	$R_{\Theta JA}$	95	°C/W

ELECTRICAL SPECIFICATIONS (T_A = 25°C unless otherwise noted)

PARAMETER		CONDITIONS	SYMBOL	TYP	MAX	UNIT
Forward voltage[1]	HT11G HT12G HT13G HT14G	I_F = 1A, T_J = 25°C	V_F	-	1.0	V
	HT15G			-	1.3	V
	HT16G HT17G HT18G			-	1.7	V
Reverse current @ rated V_R[2]		T_J = 25°C	I_R	-	5	μA
		T_J = 125°C		-	150	μA
Junction capacitance	HT11G HT12G HT13G HT14G HT15G	1MHz, V_R = 4.0V	C_J	15	-	pF
	HT16G HT17G HT18G			10	-	pF
Reverse recovery time	HT11G HT12G HT13G HT14G HT15G	I_F = 0.5A , I_R = 1.0A I_{rr} = 0.25A	t_{rr}	-	50	ns
	HT16G HT17G HT18G			-	75	ns

Notes:

1. Pulse test with PW = 0.3ms
2. Pulse test with PW = 30ms

ORDERING INFORMATION

ORDERING CODE[1][2]	PACKAGE	PACKING
HT1xG	TS-1	5,000 / Tape & Reel
HT1xG A0G	TS-1	3,000 / Ammo box
HT1xGH	TS-1	5,000 / Tape & Reel
HT1xGHA0G	TS-1	3,000 / Ammo box

Notes:

1. "x" defines voltage from 50V (HT11G) to 1000V (HT18G)
2. “H” means AEC-Q101 qualified

CHARACTERISTICS CURVES

(T_A = 25°C unless otherwise noted)

Fig.1 Forward Current Derating Curve

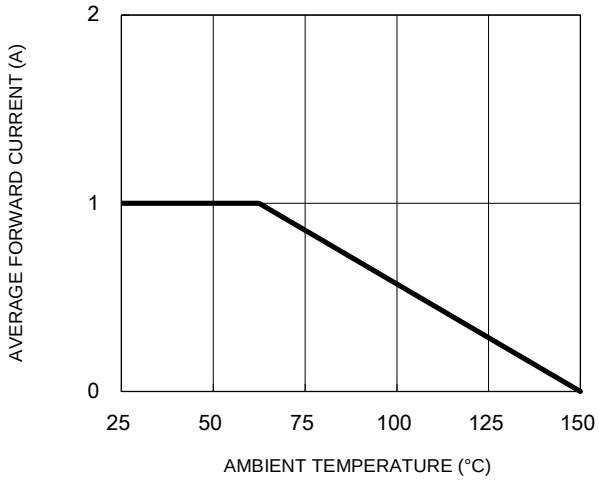

Fig.2 Typical Junction Capacitance

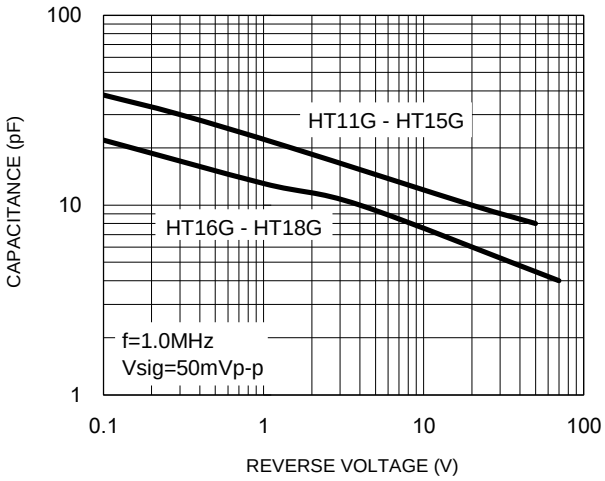

Fig.3 Typical Reverse Characteristics

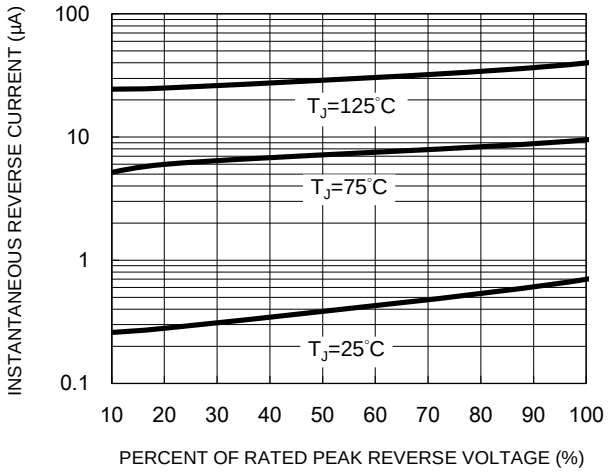

Fig.4 Typical Forward Characteristics

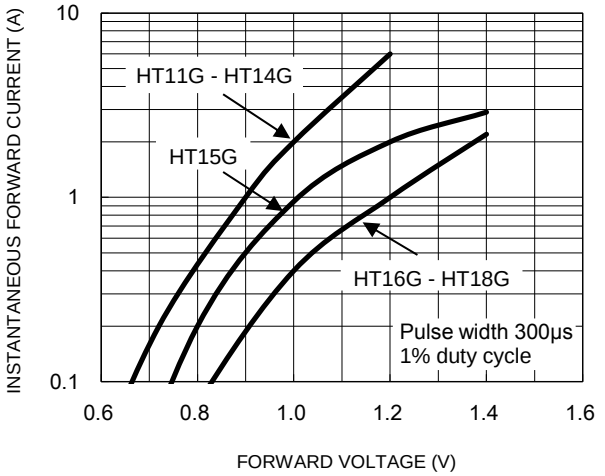

Fig.5 Maximum Non-Repetitive Forward Surge Current

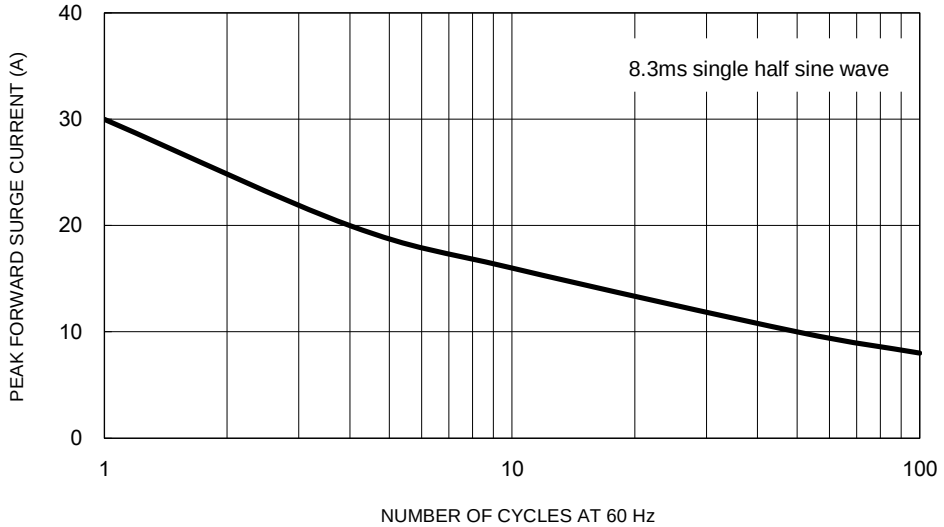

CHARACTERISTICS CURVES

(T_A = 25°C unless otherwise noted)

Fig.6 Reverse Recovery Time Characteristic and Test Circuit Diagram

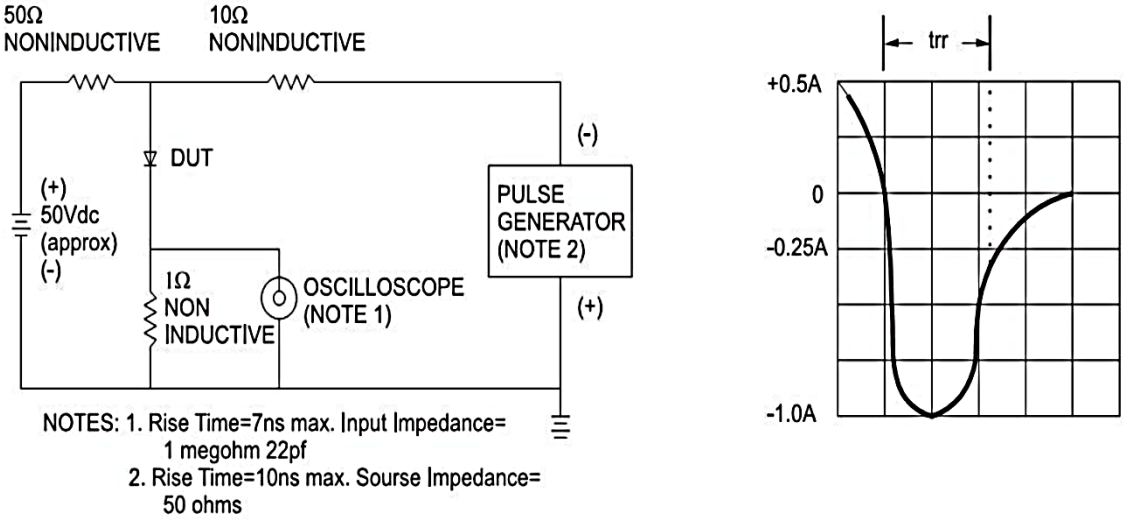

PACKAGE OUTLINE DIMENSIONS

TS-1

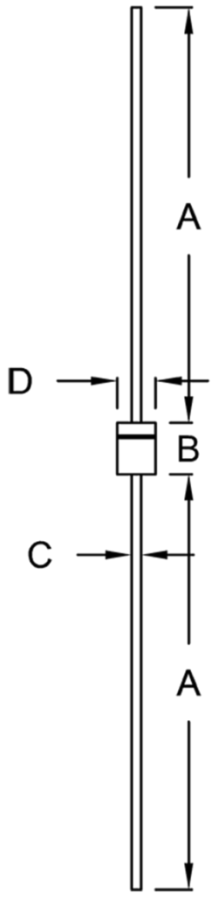

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	25.40	-	1.000	-
B	3.00	3.30	0.118	0.130
C	0.53	0.64	0.021	0.025
D	2.00	2.70	0.079	0.106

MARKING DIAGRAM

P/N	= Marking Code
G	= Green Compound
YW	= Date Code
F	= Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.