KSC1 Series

Sealed Tactile Switch for SMT 6.2 x 6.2 mm, without Actuator



Electrical Characteristics

Dielectric Strength (50 Hz, 1 min.)	≥ 250 Vrms	
Contact Resistance	≤ 100mΩ	
Insulation Resistance (100 V)	≥ 1000 M Ω	
Bounce Time	≤ 1 ms	
	Silver	**Gold**
Maximum Power	1 VA	0.2 VA
Maximum Voltage	32 VDC	32 VDC
Minimum Voltage	20 mV	20 mV
Maximum Current	50 mA	10 mA
Minimum Current	1 mA[1]	0.1 mA

Note:
1. Ultra low current with 10 µA - 1 VDC version is available upon request

Environmental Characteristics

	Silver	**Gold**
Operating Temperature	-40°C to 85°C	-40°C to 125°C
Storage Temperature	-55°C to 85°C	-55°C to 125°C

Description

The KSC1 Series Sealed Tact Switch for SMT is a 2.5mm high switch, designed to give users a positive tactile feeling when used. Perfect for industrial electronics, consumer products, instrumentation or automotive applications, the KSC1 Series is IP67 rated and built to be highly responsive and long-lasting, even when used in the harshest of environments.


Features & Benefits

- Without actuator, product height 2.5 mm
- Positive tactile feeling
- IP67


Applications

- Industrial electronics
- Consumer products
- Instrumentation
- Transportation


Dimensions (mm) J Termination

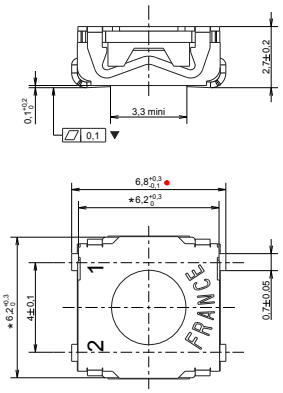


Dimensions (mm) G Termination

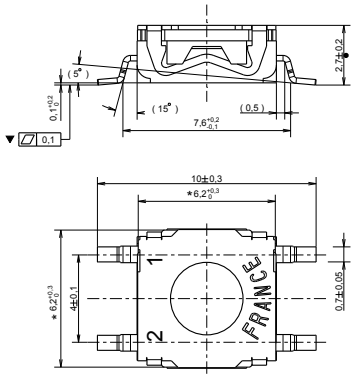

J Terminations (mm)



G Terminations (mm)

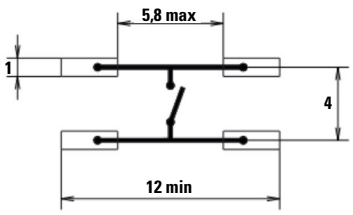


© 2026 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: MI 09/23/26


KSC1 Series

Sealed Tactile Switch for SMT 6.2 x 6.2 mm, without Actuator

Activation Conditions

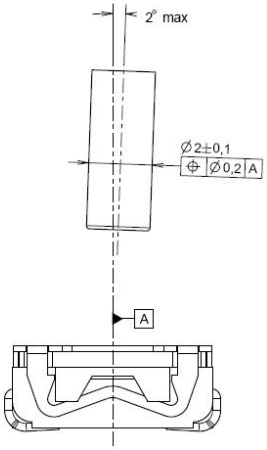

Soldering Profile

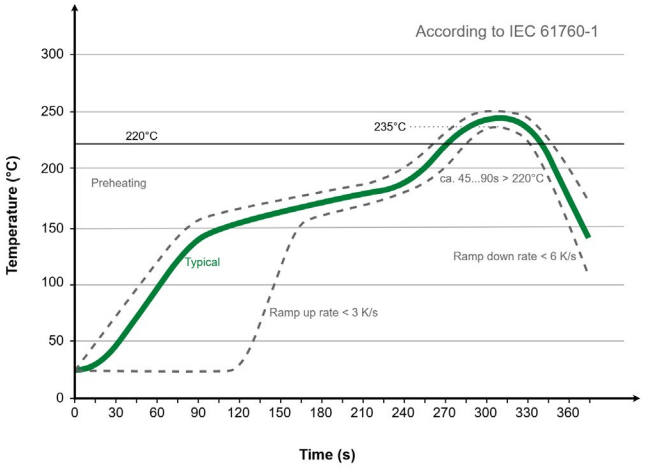

Note: Up to 2 reflow cycles in accordance with the above temperature profile

Soldering process: Depending on the application, this component is suited to the following methods:

- Terminals being silver or gold plated over a nickel barrier, the use of slightly activated flux is suitable.
- Lead free soldering process in accordance with the definition on the left.

© 2026 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: MI 09/23/26

KSC1 Series
Sealed Tactile Switch for SMT 6.2 x 6.2 mm, without Actuator

Packaging Details

Type	Tape & reel, External diameter 330 ± 2 mm
Number of Parts in Packaging	2,000
Other Information	Tape and reel per EIA 481
Transport Conditions	According to specification NF H00-060

Ordering Number

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box. However, please note that all the combinations of these options are not feasible. For any part number different from those listed above, please consult your local representative.

KSC1 - x - x - x - xxx

Operating Force
2: 1.8 N[1]
4: 3 N[1]
5: 5.5 N

Contact Material
1: Silver
3: Gold

Termination
J: J Bend
G: Gullwing

LFS: Lead free compatible, silver plated
LFG: Lead free compatible, gold plated

Note: [1]See mechanical chart above to confirm specifications

Mechanical Characteristics

Supply Status	LITTELFUSE Orderable Part Number	Description	Contact & Terminals Plating	Terminals	Operating Force Fa (Newtons)	Tactile ratio (Min)	Operating Life (Operations)	Electrical Travel (mm)
✓	Y31B11131FPLFS	KSC121J LFS	Silver	J	1.85±0.65 N	Min 14%	200,000	0.3±0.15
✓	Y31B11135FPLFS	KSC121G LFS	Silver	G	1.85±0.65 N	Min 14%	200,000	0.3±0.15
✓	Y31B41131FPLFS	KSC141J LFS	Silver	J	3±0.75 N	Min 21%	200,000	0.3±0.15
✓	Y31B41135FPLFS	KSC141G LFS	Silver	G	3±0.75 N	Min 21%	200,000	0.3±0.15
✓	Y31B43131FPLFG	KSC143J LFG	Gold	J	3.3±0.8 N	Min 19,5%	200,000	0.3±0.15
✓	Y31B43135FPLFG	KSC143G LFG	Gold	G	3.3±0.8 N	Min 19,5%	200,000	0.3±0.15
✓	Y31B51131FPLFS	KSC151J LFS	Silver	J	5.5±1.4 N	Min 21,5%	100,000	0.35±0.15
✓	Y31B51135FPLFS	KSC151G LFS	Silver	G	5.5±1.4 N	Min 21,5%	100,000	0.35±0.15

Note: Supply status: ✓: Available for ordering.

Liability Limitation

This datasheet does not provide enough information for applications that require a certain level of quality or safety such as automotive, medical systems, or safety equipement. Please contact customer service for the contractual specification package.

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at http://www.littelfuse.com/disclaimer-electronics.

© 2026 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: MI 09/23/26