KSC8 Series

Sealed Tactile Switch for SMT 6.2 x 6.2 mm, with 4.9 mm Height Hard Actuator



Description

The KSC8 series of sealed tactile switches for SMT are IP67 rated, 4.9 mm high momentary action tactile switches, featuring a hard actuator. The switches are available with a variety of operating forces depending on the model and have a lifespan of 300,000 cycles.
The KSC8 series are designed to give users a positive adaptable tactile feeling, perfect for industrial, consumer and automation applications.

Features & Benefits

- Positive adaptable tactile feeling
- Hard actuator 4.9mm high
- IP67
- Compatible with lead free reflow soldering process of SMT devices
- RoHS and REACH compliant

Applications

- Industrial electronics
- Consumer products
- Transportation
- Medical

Specifications

Function	Momentary action
Contact Arrangement	1 make contact = SPST, N.O.
Terminals	J bend & Gullwing type for SMT
Sealing	IP67


Electrical Characteristics

Dielectric Strength (50 Hz, 1 min.)	≥ 250 Vrms	
Contact Resistance	≤ 100mΩ	
Insulation Resistance (100 V)	≥ 1000 M Ω	
Bounce Time	≤ 1 ms	
	Silver	**Gold**
Maximum Power	1 VA	0.2 VA
Maximum Voltage	32 VDC	32 VDC
Minimum Voltage	20 mV	20 mV
Maximum Current	50 mA	10 mA
Minimum Current	1 mA	0.1 mA


Environmental Characteristics

	Silver	**Gold**
Operating Temperature	-40°C to 85°C	-40°C to 125°C
Storage Temperature	-55°C to 85°C	-55°C to 125°C


J Dimensions (mm)

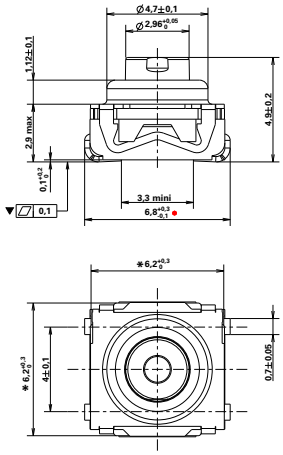


G Dimensions (mm)

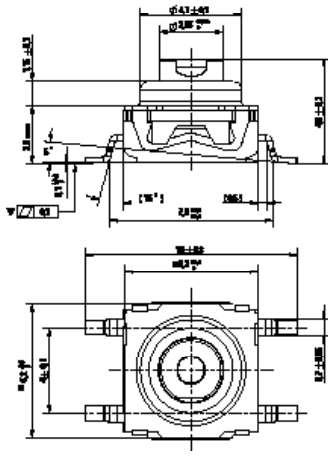

J Terminations (mm)

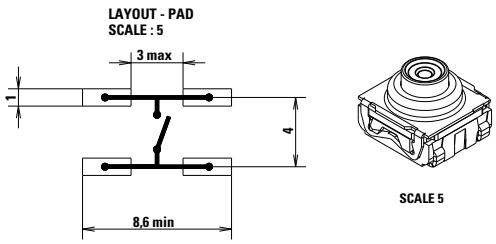

G Terminations (mm)

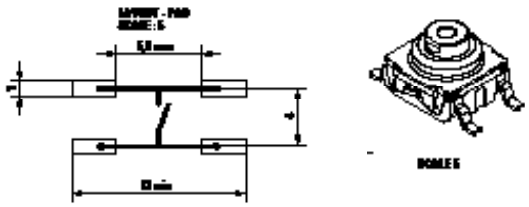


© 2026 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: MI 09/21/26

KSC8 Series

Sealed Tactile Switch for SMT 6.2 x 6.2 mm, with 4.9 mm Height Hard Actuator

Soldering Profile

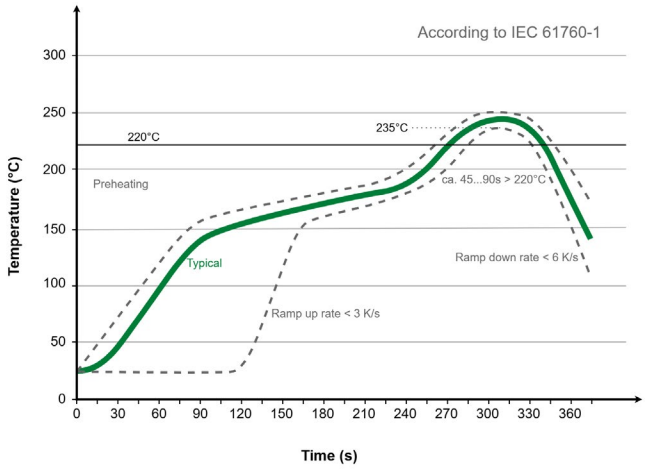


Note: Up to 2 reflow cycles in accordance with the above temperature profile

Soldering process: Depending on the application, this component is suited to the following methods:

- Terminals being silver or gold plated over a nickel barrier, the use of slightly activated flux is suitable.
- Lead free soldering process in accordance with the definition on the left.

Tape & Reel

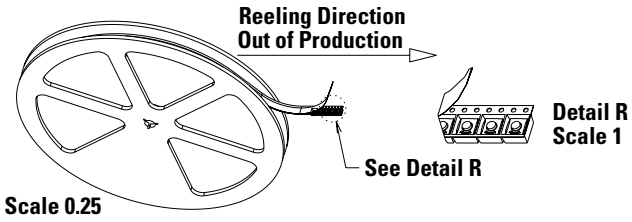

Packaging Details

Type	Tape & reel, External diameter 330 ± 2 mm
Number of Parts in Packaging	1,000
Other Information	Tape and reel per EIA 481
Transport Conditions	According to specification NF H00-060

© 2026 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: MI 09/21/26

KSC8 Series

Sealed Tactile Switch for SMT 6.2 x 6.2 mm, with 4.9 mm Height Hard Actuator

Ordering Number

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box. For any part number different from those listed below, please consult your local representative.

KSC8 - x - x - x - xx - xxx

Operating Force
2: 1.7 / 3.15 N
3: 2.55 N
4: 3.4 N

Contact Material
1: Silver
3: Gold

Termination
J: J Bend
G: Gullwing

Option
None: Long travel
OL: Short travel

LFS Lead free compatible, silver plated
LFG Lead free compatible, gold plated

Mechanical Characteristics

Long Travel

Supply Status	LITTELFUSE Orderable Part Number	Description	Contact & Terminals Plating	Terminals	Operating Force Fa (Newtons)	Tactile ratio (Min)	Operating Life (Operations)	Electrical Travel (mm)
✓	Y31C71781FPLFS	KSC821J LFS	Silver	J	3.1±0.8	Min 15%	300,000	0.65±0.2

OL Version : Short Travel

Supply Status	LITTELFUSE Orderable Part Number	Description	Contact & Terminals Plating	Terminals	Operating Force Fa (Newtons)	Tactile ratio (Min)	Operating Life (Operations)	Electrical Travel (mm)
✓	Y31C21W81FP	KSC821J OL LFS	Silver	J	1.7±0.5	Min 20%	300,000	0.4±0.2
✓	Y31C21W82FP	KSC821G OL LFS	Silver	G	1.7±0.5	Min 20%	300,000	0.4±0.2
✓	Y31CC1W81FP	KSC831J OL LFS	Silver	J	2.55±0.65	Min 25%	300,000	0.4±0.2
✓	Y31CC1W82FP	KSC831G OL LFS	Silver	G	2.55±0.65	Min 25%	300,000	0.4±0.2
✓	Y31CC3W82FP	KSC833G OL LFG	Gold	G	2.55±0.65	Min 25%	300,000	0.4±0.2
✓	Y31C71W81FP	KSC841J OL LFS	Silver	J	3.4±0.85	Min 25%	300,000	0.4±0.2
✓	Y31C71W82FP	KSC841G OL LFS	Silver	G	3.4±0.85	Min 25%	300,000	0.4±0.2
✓	Y31C73W81FP	KSC843J OL LFG	Gold	J	3.4±0.85	Min 25%	300,000	0.4±0.2
✓	Y31C73W82FP	KSC843G OL LFG	Gold	G	3.4±0.85	Min 25%	300,000	0.4±0.2

Note: Supply status: ✓: Available for ordering.

Liability Limitation

This datasheet does not provide enough information for applications that require a certain level of quality or safety such as automotive, medical systems, or safety equipement. Please contact customer service for the contractual specification package.

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at http://www.littelfuse.com/disclaimer-electronics.

© 2026 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: MI 09/21/26