
KSE Series

Sealed Tactile Switch for SMT 6.2 x 6.2 mm, with 3.1, 3.5 or 4.3 mm Height Soft Actuator

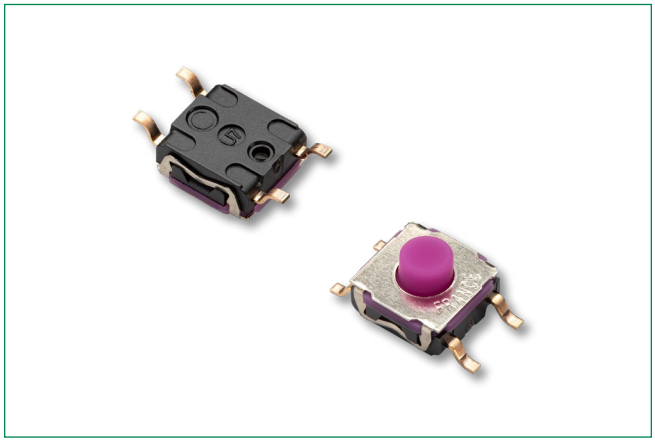

Specifications

Function	Momentary action
Contact Type	1 make contact = SPST, N.O.
Terminals	J bend & Gullwing type for SMT
Sealing	IP67

Electrical Characteristics

Maximum Power	1 VA
Min. / Max. Voltage	20mV - 32VDC
Min. / Max. Current	1 - 50 mA
Dielectric Strength	(50 Hz, 1 min.) ≥ 250 V
Contact Resistance	≤ 100 mΩ
Insulation Resistance	(100 V): > 10^9 Ω
Bounce Time	≤ 1 ms

Environmental Characteristics

Operating Temperature	-40˚C to 85˚C
Storage Temperature	-55˚C to 85˚C

Process

Soldering	Depending on the application, this component is suited to the following methods: Cleaning according to typical washing processes. Lead free reflow soldering process in accordance with IEC 61760-1.

Notes: Specifications listed above are for switches with standard options. KSE series is not subject to adaptation and/or modification for specific use. If you require additional features, please refer to the KSC series. KSE is not recommended for applications requiring high level of performance such as aerospace, automotive and some industrial applications.

Description

The KSE series low profile tact switch is designed for industrial and consumer electronics as well as home applications. The switch's ruggedness is ideal for applications that must endure vibration, moisture, humidity, dust and other contaminants. The cost-effective KSE is an IP67 rated switch.

Features & Benefits

- Low profile
- Cost efficient
- J or G terminations
- Tape and reel
- IP67

Applications


- Smart meters
- Home appliances
- Consumer electronics
- Industrial electronics
- Telecommunications

© 2026 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: MI 10/06/26

KSE Series


Sealed Tactile Switch for SMT 6.2 x 6.2 mm, with 3.1, 3.5 or 4.3 mm Height Soft Actuator

KSE M31

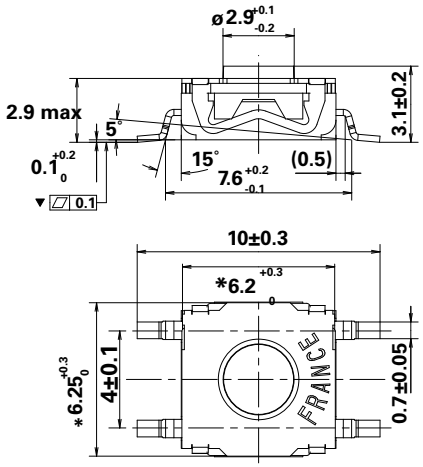


KSE N35


G - Gullwing

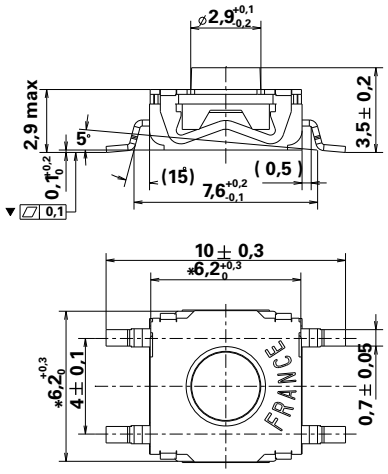


J - J Bend

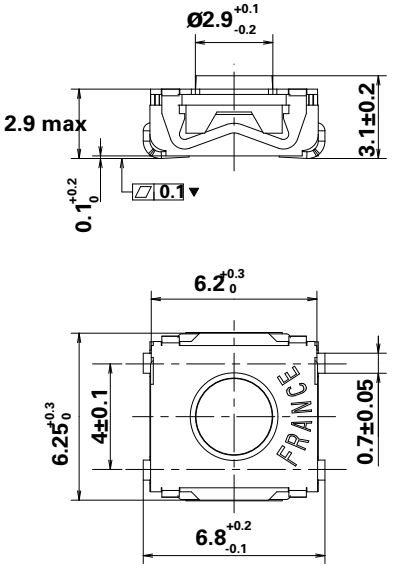


KSE K43

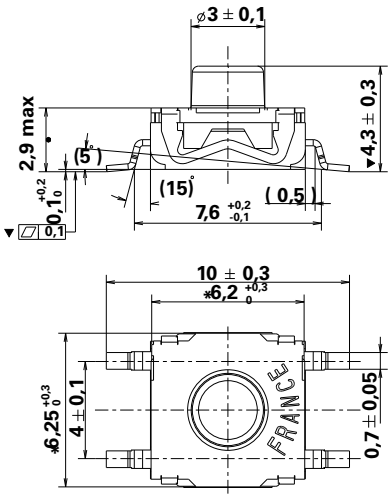

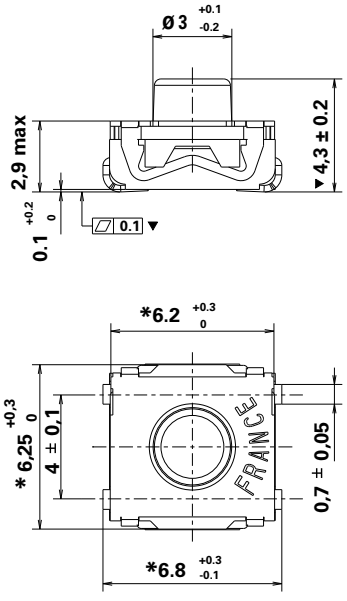


Termination (mm)

G - Gullwing




J - J Bend



© 2026 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: MI 10/06/26

KSE Series
Sealed Tactile Switch for SMT 6.2 x 6.2 mm, with 3.1, 3.5 or 4.3 mm Height Soft Actuator

Soldering Profile

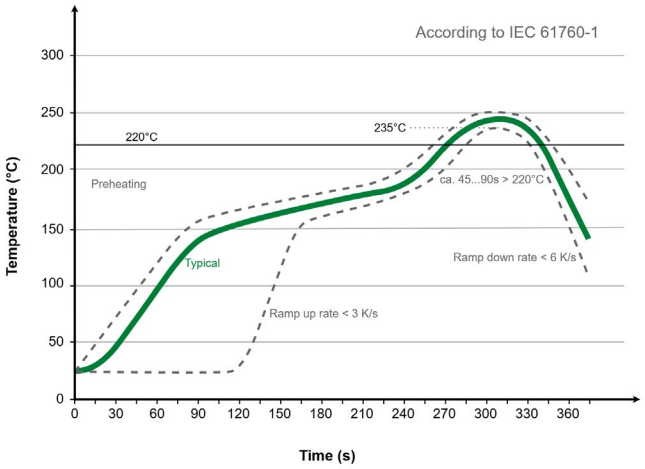

Note: Up to 2 reflow cycles in accordance with the above temperature profile

Soldering process: Depending on the application, this component is suited to the following methods:

- Terminals being silver plated over a nickel barrier, the use of slightly activated flux is suitable.
- Lead free soldering process in accordance with the definition on the left.

Packaging Details

	KSEM31	KSEN35	KSEK43
Type	Tape & reel		
External diameter	330 ± 2 mm		
Width of carrier tape	12 mm (J Terminals) 16 mm (G Terminals)		16 mm
Number of Parts in Packaging	2,000		1,000
Other Information	Tape and reel per EIA 481		
Transport Conditions	According to specification NF H00-060		

© 2026 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: MI 10/06/26

KSE Series

Sealed Tactile Switch for SMT 6.2 x 6.2 mm, with 3.1, 3.5 or 4.3 mm Height Soft Actuator

Ordering Number

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box. For any part number different from those listed above, please consult your local representative.

KSE - x - xx - x - xxx

Operating Force
M: 1.6N (for 3.1mm height)
N: 3.8N (for 3.5mm height)
K: 2.25N (for 4.3mm height)

Height
31: 3.1mm
35: 3.5mm
43: 4.3mm

Termination
J: J bend
G: Gullwing

LFS: RoHS compliant and compatible, Silver plated

Mechanical Characteristics

Supply Status	LITTELFUSE Orderable Part Number	Description	Contact & Terminals Plating	Terminals	Operating Force Fa (Newtons)	Operating Life (Operations)	Electrical Travel (mm)	Product Height (mm)
✓	Y17K11531FP	KSEM31J LFS	Silver	J	1.6±0.6	300,000	0.3+0.1/-0.2	3.1±0.2
✓	Y17K11532FP	KSEM31G LFS	Silver	G	1.6±0.6	300,000	0.3+0.1/-0.2	3.1±0.2
✓	Y17K41551FP	KSEN35J LFS	Silver	J	3.8±1	300,000	0.45±0.2	3.5±0.2
✓	Y17K41552FP	KSEN35G LFS	Silver	G	3.8±1	300,000	0.45±0.2	3.5±0.2
✓	Y17K11541FPLFS	KSEK43J LFS	Silver	J	2.25±0.75	300,000	0.3±0.2	4.3±0.2
✓	Y17K11542FPLFS	KSEK43G LFS	Silver	G	2.25±0.75	300,000	0.3±0.2	4.3±0.3

Note: Supply status: ✓: Available for ordering.

For cost effectiveness the tactile feeling is not specified and can change along production. If your application requires a defined tactile effect, please consider KSC series for your application

Liability Limitation

This datasheet does not provide enough information for applications that require a certain level of quality or safety such as automotive, medical systems, or safety equipement. Please contact customer service for the contractual specification package.

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at http://www.littelfuse.com/disclaimer-electronics.

© 2026 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: MI 10/06/26