
KSC V2 Series

Side Actuated Sealed Tactile Switch 6.2 x 6.5 mm, with 2.3 or 3.9 mm Height Soft Actuator

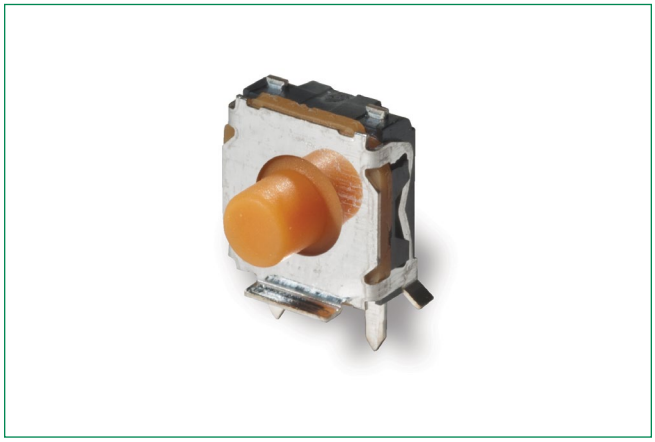

Description

The KSC V2 series of side actuated sealed tactile switches feature a unique design that allows for easy side or rocker integration, which permits haptic adaptability and ensures that the switch meets specific tactile feedback and sound requirements. The KSC V2 switches are IP67 rated and feature a soft actuator of 2.3 or 3.9 mm height. They are available with a variety of operating forces and in a range of electrical lifespans, depending on the model - ideal for industrial electronics, network equipment and automotive applications.

Features & Benefits

- Full SMD side actuated
- Haptic adaptability
- Pin in paste terminations
- Tape & reel
- IP67
- Compatible with lead free reflow soldering process of SMT devices
- Low halogen, RoHS and REACH compliant

Applications

- Transportation
- Industrial electronics
- Network equipment
- Telecommunications

Specifications

Function	Momentary action
Contact Arrangement	1 make contact = SPST, N.O.
Terminals	2 pin in paste terminals and 3 SMD ground terminals
Contact Material	Silver or Gold plated

Electrical Characteristics

	Silver	**Gold**
Max. Power	1 VA	0.2 VA
Min. / Max. Voltage	20mV - 32VDC	
Min. / Max. Current	1 - 50 mA	0.1 mA - 10 mA
Dielectric Strength	(50 Hz, 1 min.) ≥ 250 Vrms	
Contact Resistance	≤ 100 mΩ	
Insulation Resistance	(100 V, initial stage): > 10^9 Ω	
Bounce Time	< 1 ms	

Environmental Characteristics

	Silver	**Gold**
Operating Temperature	-40˚C to 85˚C	-40˚C to 125˚C
Storage Temperature	-55˚C to 85˚C	-55˚C to 125˚C

Process

Soldering	Depending on the application, this component is suited to the following methods: Cleaning according to typical washing processes. Lead free reflow soldering process in accordance with IEC 61760-1.
Terminals	Pin in paste, silver or gold plated
Top Plate	Tin plated
MSL level:	1
Vacuum Pick Head	Mandatory
Packaging	In reels of 800 pieces Dimensions of reels according to EIA RS481 or IEC 2863. External diameter 380 mm ± 2 mm.


Note: This product is designed and manufactured for general electronic devices. For systems where reliability and safety are required, please contact your sales representative to secure product integration and function to secure usage.

© 2026 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: MI 09/25/25

KSC V2 Series

Side Actuated Sealed Tactile Switch 6.2 x 6.5 mm, with 2.3 or 3.9 mm Height Soft Actuator

Important Note for RT Actuator

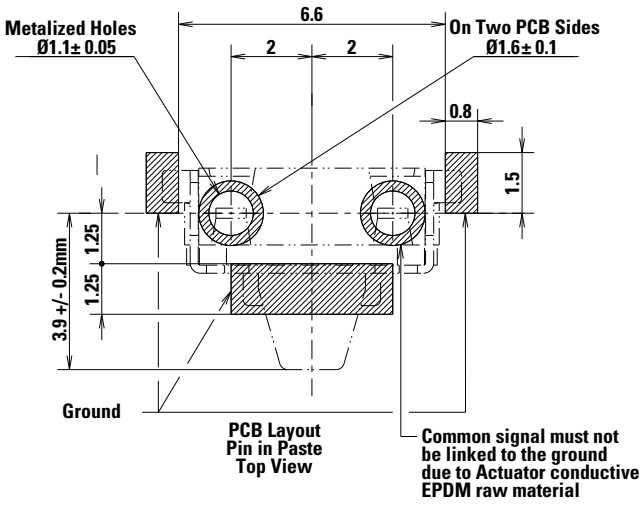


Integration



Note: This actuator is not compatible with grease even with restricted contact. In case of the integration of an actuator or button by the customer, please consult us if use of plasticizer agent for button raw material (risk of chemical migration). Our actuator contains carbon particles and is electrical conductive. In consequence, customer actuator must be electric insulating raw material. Due to the cover raw material plating, small tin balls can appear after the reflow soldering process. These small tin balls are located near all cutting areas.

Tape and Reel

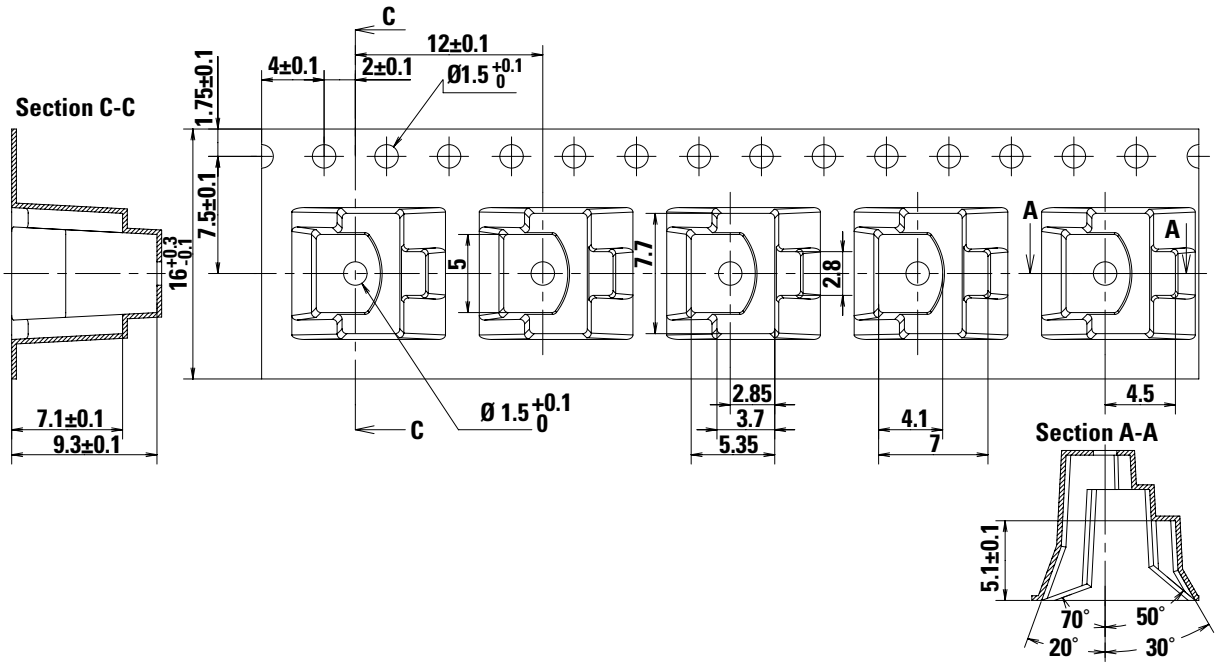

© 2026 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: MI 09/25/25

KSC V2 Series

Side Actuated Sealed Tactile Switch 6.2 x 6.5 mm, with 2.3 or 3.9 mm Height Soft Actuator

Ordering Number

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box. For any part number different from those listed above, please consult your local representative.

KSC - x - x - x - V2 - xxxx - LFx

Actuator
2: short, soft[1]
4: long, soft

Operating Force[2]
0: 1.6N
2: 2.0N
4: 3.5N

Contact Material
1: Silver
3: Gold

Actuator / Tactile
None: for KSC2 standard
70SH: for KSC4 Silicon 70SH
70SH SP DELTA: for KSC4 Silicon 70SH with improved tactile
RT: for KSC4 Hard rubber

LFS: RoHS compliant and compatible, Silver plated
LFG: RoHS compliant and compatible, Gold plated

Notes
1. KSC2 version available upon demand
2. Force available upon demand (variant version)

Mechanical Characteristics

Supply status	Littelfuse Orderable Part Number	Description	Contact & Terminals Plating	Terminals	Operating Force Fa (Newton)	Tactile ratio (Min)	Operating Life (operations)	Electrical Travel (mm)
✓	Y31A0132VFPLFS	KSC201 V2 LFS	Silver	V: Vertical	1.6±0.6	Min 15%	1,000,000	0.3±0.2
✓	Y31A21448FPLFS	KSC421 V2 70SH LFS	Silver	V: Vertical	1.55±0.45	Min 20%	300,000	0.45±0.25
✓	Y31AG1448FPLFS	KSC481 V2 LFS	Silver	V: Vertical	3.2±0.8	Min 15%	300,000	0.8±0.25
✓	Y31A31448FPLFS	KSC441 V2 70SH SP DELTA LFS	Silver	V: Vertical	3.5±1	Min 15%	300,000	0.7±0.2
✓	Y31A33448FP	KSC443 V2 70 SH SP DELTA LFG	Gold	V: Vertical	3.5±1	Min 15%	300,000	0.7±0.2
✓	Y31A71E48FPLFS	KSC431 V2 LFS	Silver	V: Vertical	4±0.85	Not specified	300,000	0.75±0.2
✓	Y31A73E48FPLFG	KSC433V2 CLT LFG	Gold	V: Vertical	3.5±1	Min 10%	250,000	0.75±0.2

Reduced Travel version

Supply status	Littelfuse Orderable Part Number	Description	Contact & Terminals Plating	Terminals	Operating Force Fa (Newton)	Tactile ratio (Min)	Operating Life (operations)	Electrical Travel (mm)
✓	Y31A21948FPLFS	KSC421 V2 RT LFS	Silver	V: Vertical	1.8±0.5	Min 10%	300,000	0.3±0.2
✓	Y31A23948FPLFG	KSC423 V2 RT LFG	Gold	V: Vertical	1.8±0.5	Min 10%	300,000	0.3±0.2
✓	Y31A41948FP	KSC441 V2 RT LFS	Silver	V: Vertical	3.4±1	Min 15%	300,000	0.35±0.2

Notes: Supply status: ✓ : Available for ordering;

Other configurations of haptics are available upon demand.
MISUSE OVERLOAD: 40N with back support SHEAR FORCE: 10N without back support

Liability Limitation

This datasheet does not provide enough information for applications that require a certain level of quality or safety such as automotive, medical systems, or safety equipement. Please contact customer service for the contractual specification package.

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at http://www.littelfuse.com/disclaimer-electronics.

© 2026 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: MI 09/25/25