
KST Series

Long Travel Tactile Switch for SMT 6.2 x 6.2 mm with 5.0 mm Rubber Actuator

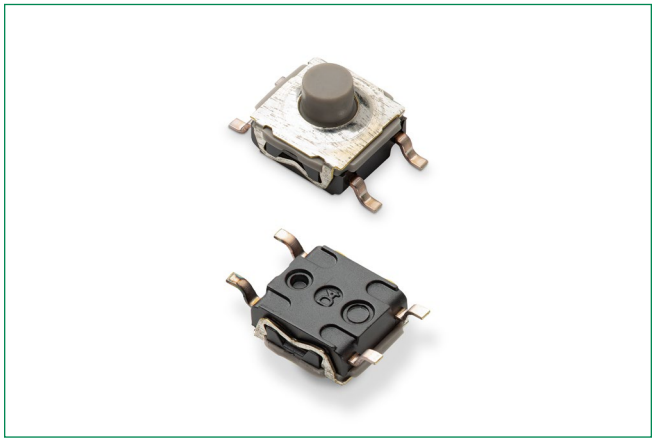

Description

The KST series is an IP40 rated seal switch, and is ideal for car dashboards and front panel applications. KST also has a contact rating of 10mA (gold) and 50mA (silver), features a rubber actuator and is compatible with pick and place machines.

Features & Benefits

- Rubber actuator
- Silver contact material
- J or G terminals
- Compatible with pick and place machines
- IP40 sealed
- RoHS compliant and compatible

Applications

- Front panels
- Automotive dashboards
- Telephone set
- Instrumentation

Specifications

Function	Momentary
Contact Arrangement	1 make contact = SPST, N.O.
Terminals	J bend or Gullwing type for SMT
Max. Applied Force	40 N[1]

Note:
1. Valid one time. Maximum allowed travel to avoid overload issues is 1.75mm.


Electrical Characteristics

	Silver	**Gold**
Max. Switching Power	1.0 VA	0.2 VA
Max. Power		
Min. / Max. Voltage	20 mV - 32 VDC	
Min. / Max. Current	1 mA - 50 mA	1 mA- 10 mA
Dielectric Strength	≥ 250 Vrms	
Contact Resistance	< 100 mΩ	
Insulation Resistance	Initial measurement: ≥ 1GΩ After damp heat: ≥ 10MΩ	
Bounce Time	< 5 ms	


Environmental Characteristics

	Silver	**Gold**
Operating Temperature	-40˚C to 85˚C	-40˚C to 125˚C
Storage Temperature		


J J Bend

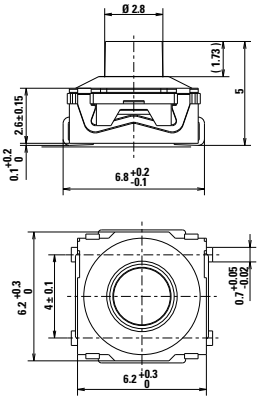


G Gullwing

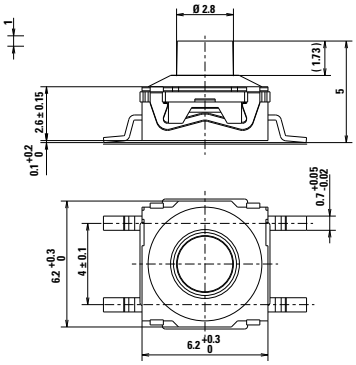

J Terminations (mm)



G Terminations (mm)

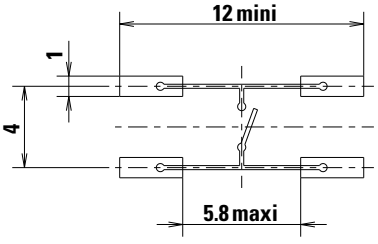


© 2026 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: MI 09/23/26

KST Series

Long Travel Tactile Switch for SMT 6.2 x 6.2 mm with 5.0 mm Rubber Actuator

Soldering Profile

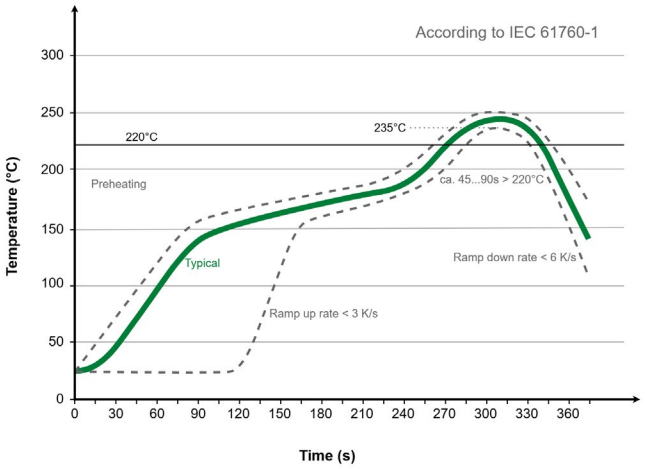


Note: Up to 2 reflow cycles in accordance with the above temperature profile

Soldering process: Depending on the application, this component is suited to the following methods:

- Terminals being silver or gold plated over a nickel barrier, the use of slightly activated flux is suitable.
- Lead free soldering process in accordance with the definition on the left.


Tape & Reel

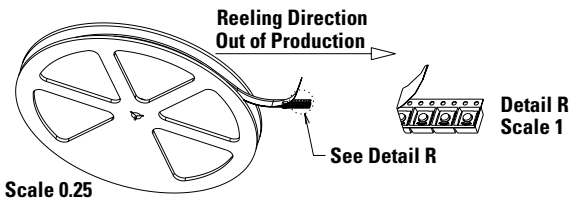

Packaging Details

Type	Tape & reel, External diameter 330 ± 2 mm
Number of Parts in Packaging	1,000
Other Information	Tape and reel per EIA 481
Transport Conditions	According to specification NF H00-060

Tape & Reel
For J and G Termination

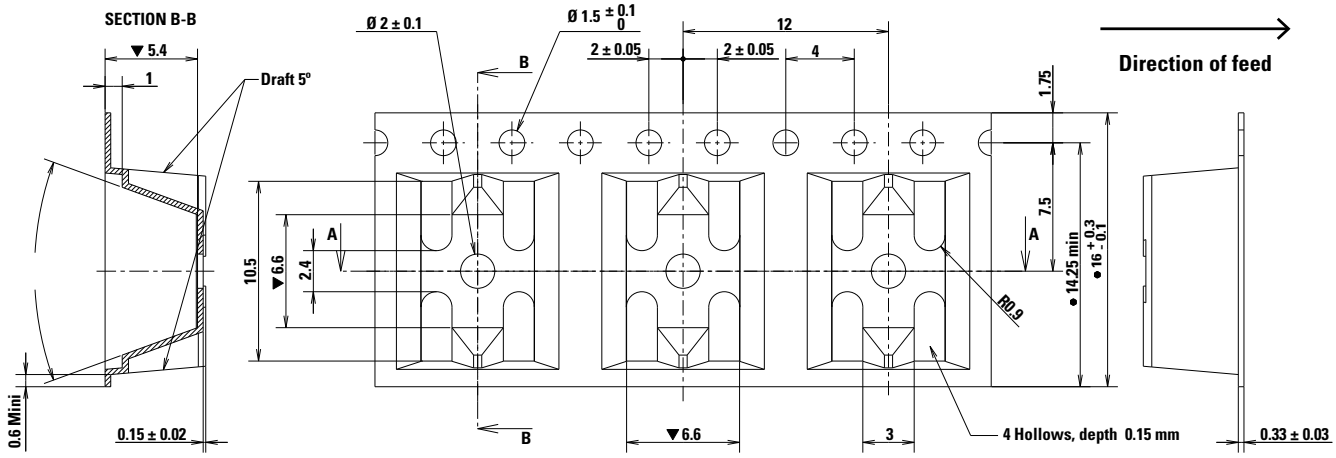


© 2026 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: MI 09/23/26

KST Series

Long Travel Tactile Switch for SMT 6.2 x 6.2 mm with 5.0 mm Rubber Actuator

Ordering Number

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box. For any part number different from those listed above, please consult your local representative.

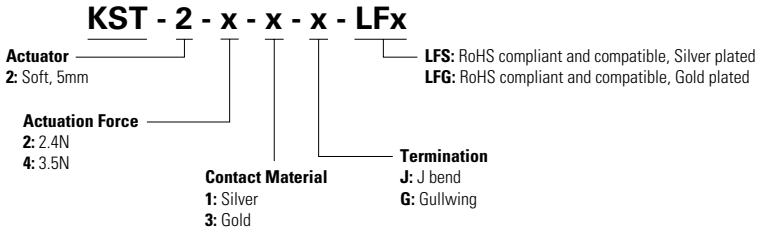

Mechanical Characteristics

Supply Status	LITTELFUSE Orderable Part Number	Description	Contact & Terminals Plating	Terminals	Operating Force Fa (Newtons)	Tactile ratio (Min)	Operating Life (Operations)	Electrical Travel (mm)
✓	Y48A21111FPLFS	KST221G LFS	Silver	G	2.4±0.8	Min 25%	100,000	1.35±0.25
✓	Y48A21211FPLFS	KST221J LFS	Silver	J	2.4±0.8	Min 25%	100,000	1.35±0.25
✓	Y48A23111FPLFG	KST223G LFG	Gold	G	2.4±0.8	Min 25%	100,000	1.35±0.25
✓	Y48A23211FPLFG	KST223J LFG	Gold	J	2.4±0.8	Min 25%	100,000	1.35±0.25
✓	Y48A41111FPLFS	KST241G LFS	Silver	G	3.5±1.05	Min 25%	100,000	1.35±0.25
✓	Y48A41211FPLFS	KST241J LFS	Silver	J	3.5±1.05	Min 25%	100,000	1.35±0.25
✓	Y48A43111FPLFG	KST243G LFG	Gold	G	3.5±1.05	Min 25%	100,000	1.35±0.25
✓	Y48A43211FPLFG	KST243J LFG	Gold	J	3.5±1.05	Min 25%	100,000	1.35±0.25

Notes: Supply status: ✓ : Available for ordering.

Liability Limitation

This datasheet does not provide enough information for applications that require a certain level of quality or safety such as automotive, medical systems, or safety equipement. Please contact customer service for the contractual specification package.

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at http://www.littelfuse.com/disclaimer-electronics.

© 2026 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: MI 09/23/26