


TL3780 Series Tact Switch

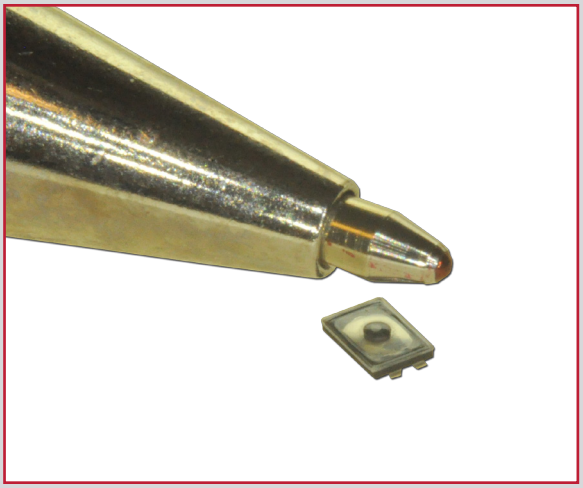

Applications / Markets


Wearable Electronics


Computer Peripherals


Consumer Electronics


Instrumentation


Telecommunication


Medical Equipment

RoHS

Specifications

Electrical Rating: 50mA @ 12VDC
Electrical Life:
160, 240 Gram = 500,000 Cycles
100, 330 Gram = 300,000 Cycles
Contact Resistance: 500mΩ Max. initial
Insulation Resistance: 50M Ω at 100VDC
Dielectric Strength: 250VAC for 1 min.
Operating Temperature: -40°C to 85°C
Storage Temperature: -40°C to 85°C
Operating Force: 100, 160, 240, 330 gf
Travel: 0.13mm
Contact Arrangement: SPST
Ingress Protection: IP67 rated

Features & Benefits


- **Ultra-miniature - 2.0mm x 3.0mm**
- **Surface mount termination**
- **Very low profile - 0.60mm**
- **Sealed - IP67 rated**


Part Number Configurator

Series	Model	Actuator Option	Actuation Force	Contact Material	Termination
TL	3780	A - 0.6mm	**F100** - 100 gf **F160** - 160 gf **F240** - 240 gf **F330** - 330 gf	Q - Silver	G - Gullwing


Specifications subject to change without notice

Body Dimensions

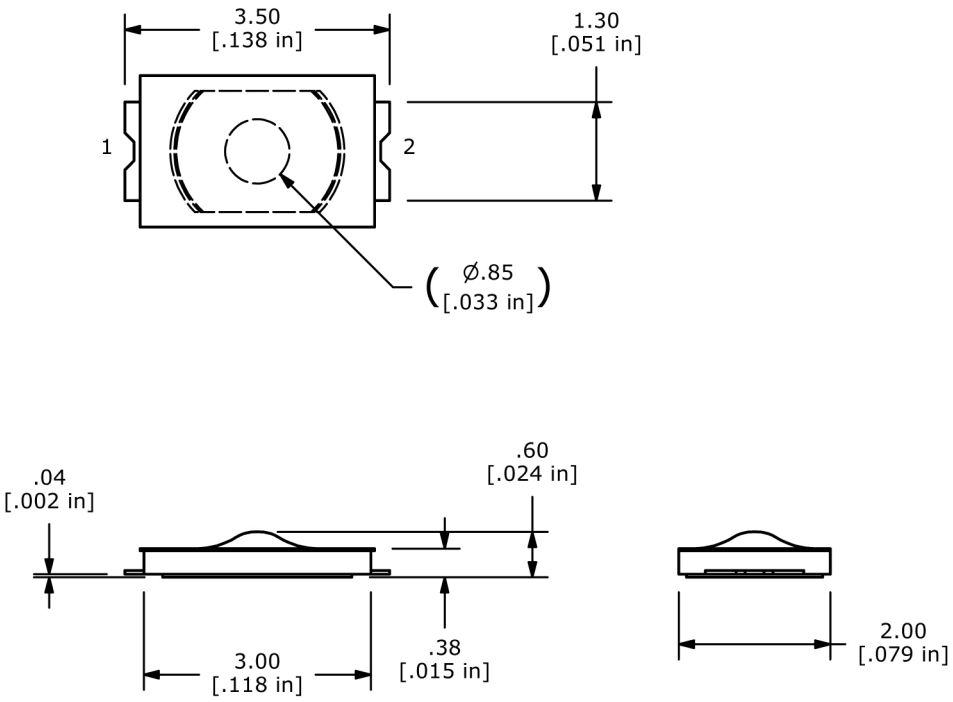

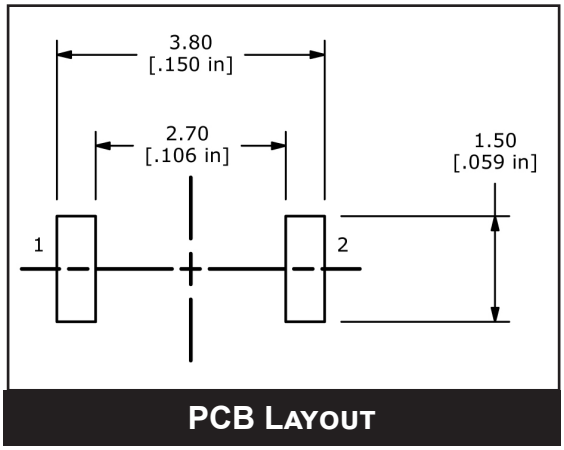

PCB Layout



Schematic