
TL4105 Series Tact Switch

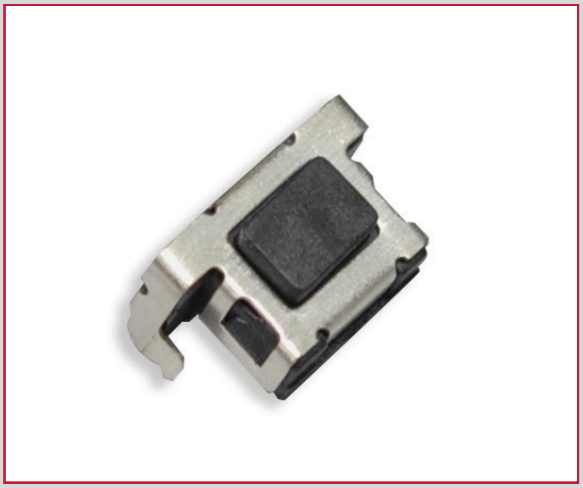

Applications / Markets


Handheld Devices


Smart Home


Consumer Electronics


Wearable Electronics


Internet of Things


Telecommunication

RoHS

Specifications

Electrical Rating: 50mA, 12VDC
Life Expectancy: 200,000 Cycles
Contact Resistance: 1Ω Max.
Insulation Resistance: 100MΩ Min. at 500VDC
Dielectric Strength: 250VAC for 1 Minute
Operating Temperature: -40°C to 85°C
Operating Force: 160gf, 250gf
Travel: 0.15mm
Function: SPST, Off-(On), Momentary

Features & Benefits


- **200,000 cycle life expectancy**
- **Right angle edge mounted design**
- **Ultra compact design**

Part Number Configurator


Series	Circuit	Actuator	Force	Plating	Termination
TL	**4105**	**A** - 1.70mm	**F160** - 160 gf **F250** - 250 gf	**Q** - Silver	**G** - Gull wing

Specifications subject to change without notice 3.15.2019

Body Dimensions

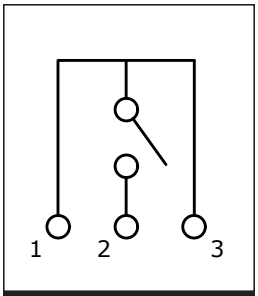

Schematic

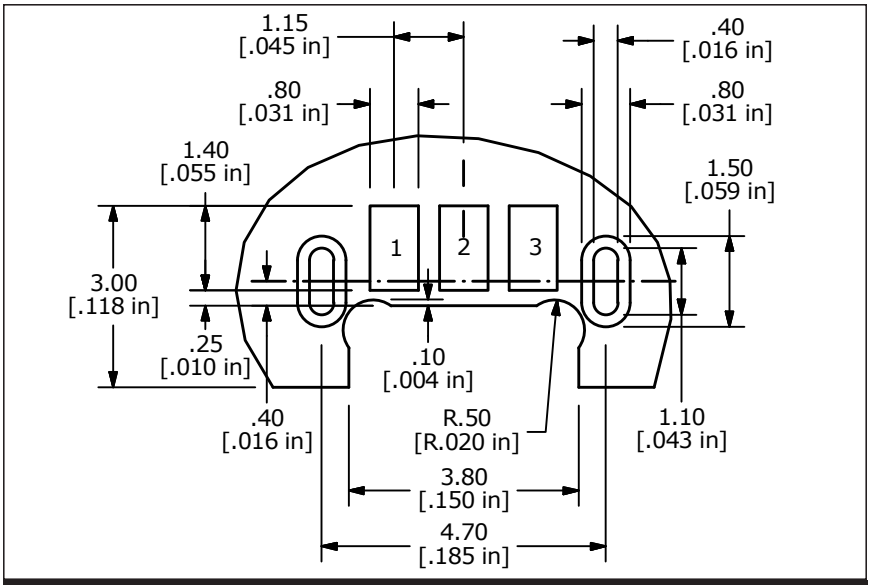

Recommended PCB Layout

