



TL6300 Series Tact Switch

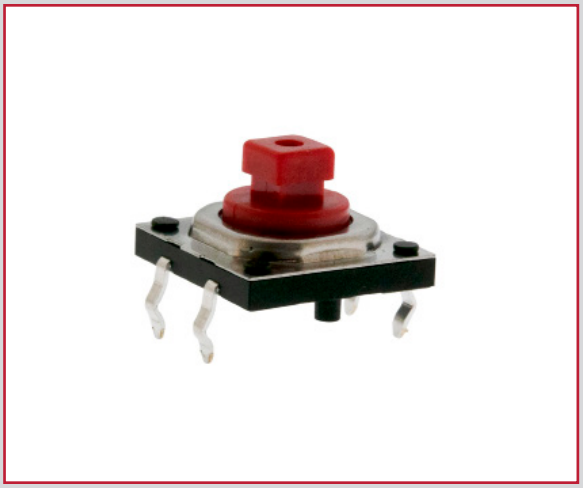

Applications / Markets


Audio / Visual


Computer Peripherals


Consumer Electronics


Instrumentation


Security Devices


Medical Equipment

RoHS

Specifications

Contact Arrangement: SPST
Contact Rating: 50mA @ 12VDC
Contact Resistance: 100mΩ Initial
Insulation Resistance: 100 MΩ @ 100 VDC
Dielectric Strength: 250 VAC
Electrical Life: 10,000,000 cycles
Operating Temperature: -40°C to 105°C
Storage Temperature: -40°C to 105°C
Travel: 0.3mm
Actuation Force: 260gf or 130gf
Moisture Protection: IP67
Bounce: 10m Second Max.

Features & Benefits

- **10,000,000 cycle life expectancy**
- **IP67 ingress protection**
- **PCB Mount**
- **Sharp tactile response**

Part Number Configurator

Series ☐☐☐☐☐☐
TL6300

Actuator ☐
A - 7.30mm, Square
B - 4.30 mm, Round


Actuation Force ☐☐☐☐
F260 - 260gf
F130 - 130gf

Contact Material ☐
Q - Silver


Terminal ☐
P - Thru Hole PCB

Specifications subject to change without notice 11.1.2025


BODY DIMENSIONS
ACTUATOR - A

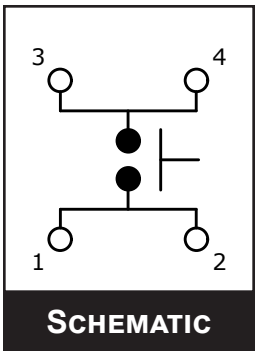



SCHEMATIC

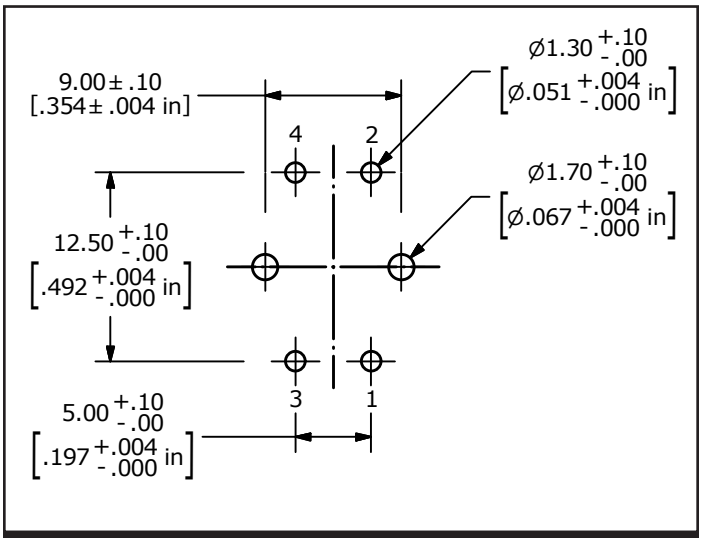


RECOMMENDED PCB LAYOUT

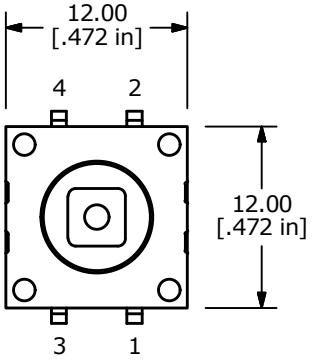


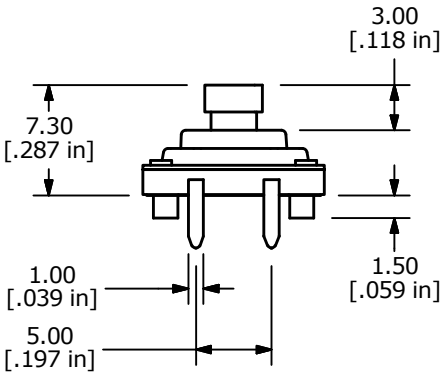

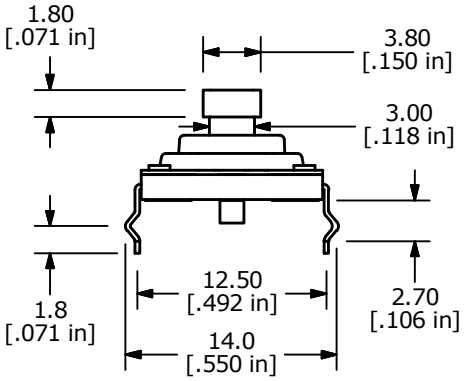


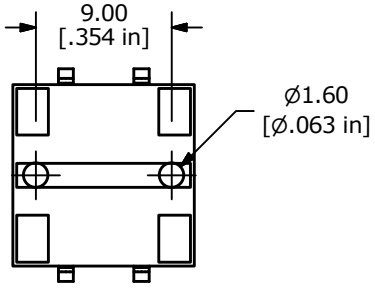

BODY DIMENSIONS
ACTUATOR - B

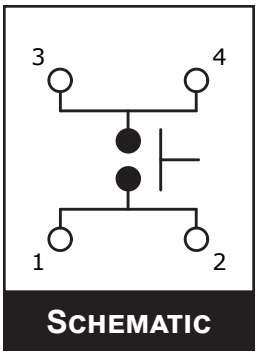

SCHEMATIC

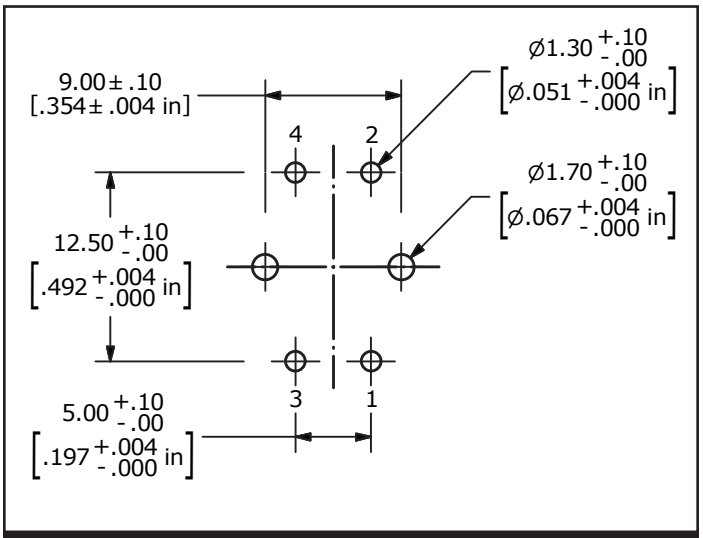

RECOMMENDED PCB LAYOUT

