CUI Devices is now Same Sky! Learn More


same sky



# SERIES: TS17 | DESCRIPTION: TACTILE SWITCH

## FEATURES

- surface mount
- 0.5 mm actuator height
- 160~260 gf push force options

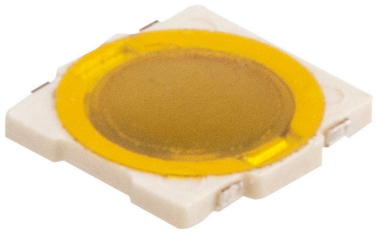

RoHS

## SPECIFICATIONS

| parameter | conditions/description | min | typ | max | units |
|---|---|---|---|---|---|
| rated voltage | | 1 | | 12 | Vdc |
| rated current | | 0.01 | | 50 | mA |
| withstanding voltage | for 1 minute | | 250 | | Vac |
| contact resistance | applying load of 2 times operating force at 5 Vdc, 10 mA | | | 100 | mΩ |
| insulation resistance | at 100 Vdc for 1 minute | 100 | | | MΩ |
| operating force | see force table | | | | |
| actuator travel | | 0.10 | 0.20 | 0.30 | mm |
| operating temperature | | -30 | | 80 | °C |
| storage temperature | | -40 | | 90 | °C |
| life | rated load, 2 cycles/second, 1.5 times operating force<br>160 gf models<br>260 gf models | | <br>50,000<br>40,000 | | <br>cycles<br>cycles |
| vibration | 10~55~10 Hz, 1.5 mm amplitude, 2 hours on each XYZ | | | | |
| flammability rating | see material table | | | | |
| RoHS | yes | | | | |

## PART NUMBER KEY


**TS17 - 48 - 05 - YE - XXX - SMT - TR**


- TS17 - 48: Base Number
- XXX: Push Force:
  160 = 160 gf
  260 = 260 gf

## MECHANICAL DRAWING


units: mm
tolerance: ±0.2 mm
unless otherwise noted


| ITEM | DESCRIPTION | MATERIAL | PLATING/COLOR |
|---|---|---|---|
| 1 | terminals | phosphor copper | silver |
| 2 | housing | LCP (UL94V-0) | white |
| 3 | contacts | SUS | silver |
| 4 | cover | PI | yellow |

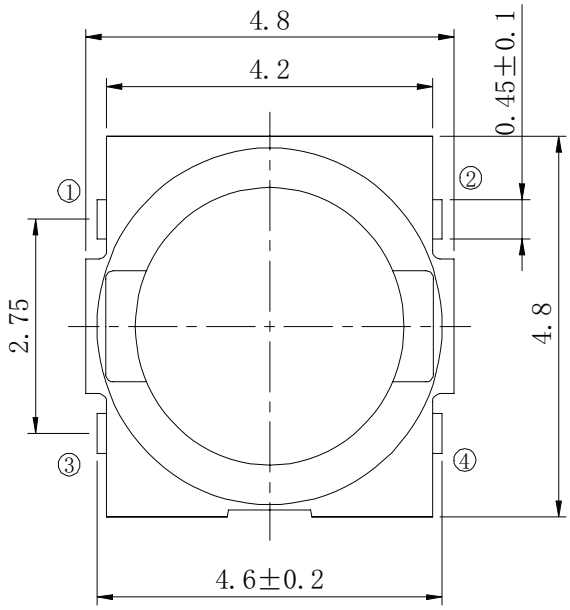


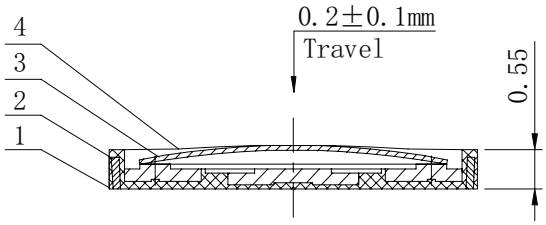
| ACTUATOR POSITION [ ]: MOMENTARY | |
|---|---|
| NORMAL | DOWN |
| OFF | [ON] |
| SCHEMATIC | |





Recommended PCB Layout
Top View
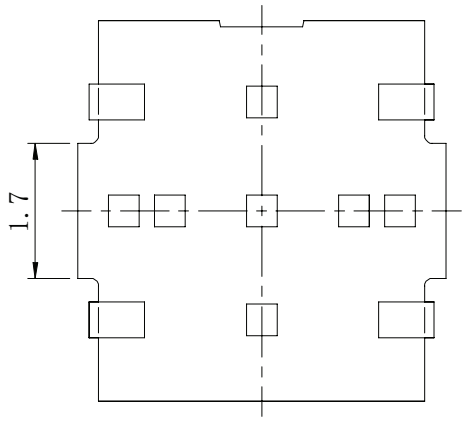
| Operating Force Table | | |
|---|---|---|
| Model | Press Force (gf) | Return Force (gf) |
| 160 | 160±50 | >20 |
| 260 | 260±50 | >20 |
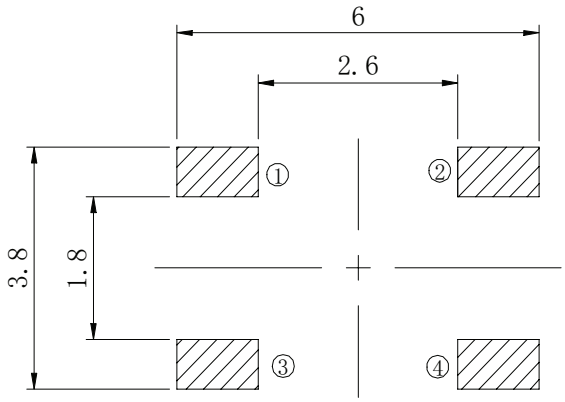
## SOLDERABILITY

| parameter | conditions/description | min | typ | max | units |
|---|---|---|---|---|---|
| hand soldering | for maximum 3 seconds | | | 350 | °C |
| reflow soldering[1] | see reflow profile | | | 260 | °C |


Notes: 1. Do not exceed 2 reflow cycles.

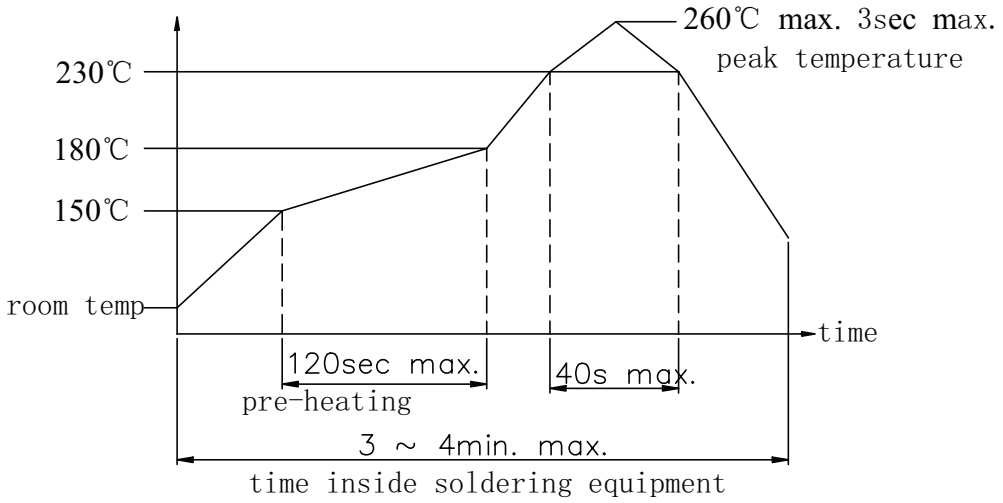


## PACKAGING

units: mm

Reel Size: Ø330 mm
Reel QTY: 5,000 pcs per reel
Carton Size: 430 x 340 x 340 mm
Carton QTY: 100,000 pcs per carton

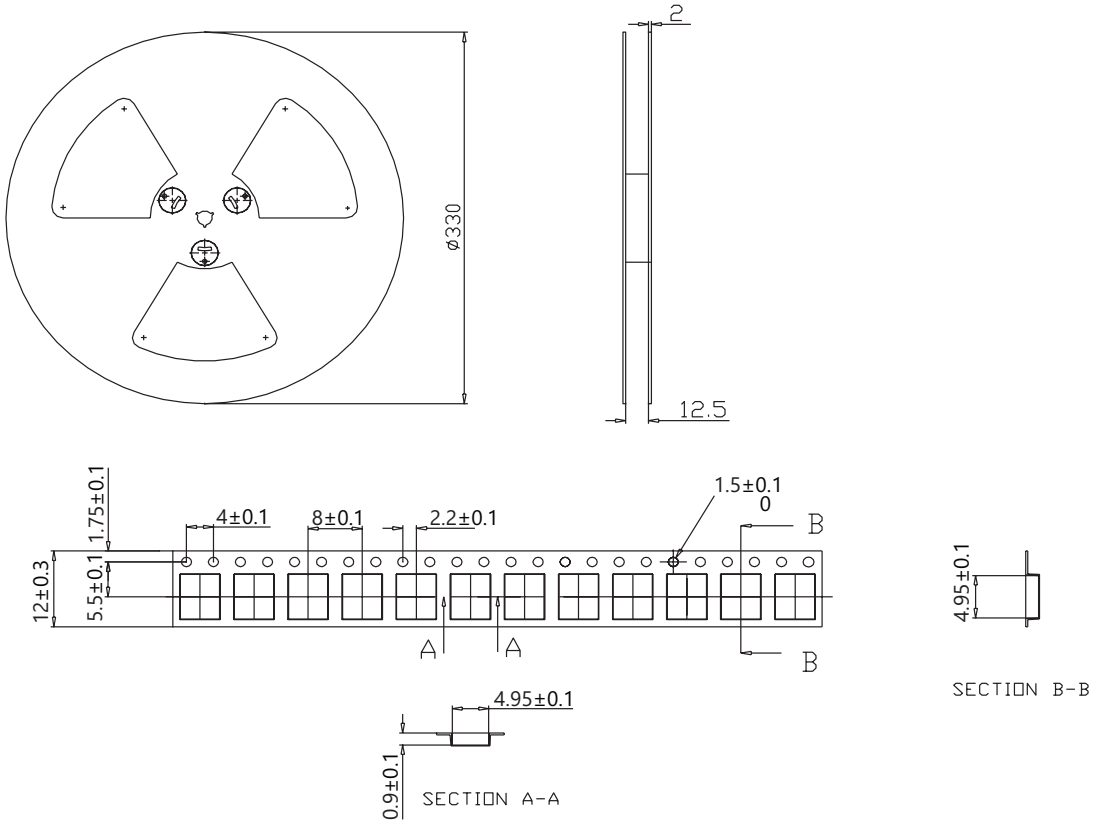

## REVISION HISTORY

| rev. | description | date |
|---|---|---|
| 1.0 | initial release | 05/10/2022 |
| 1.01 | logo, datasheet style update | 08/05/2022 |
| 1.02 | CUI Devices rebranded to Same Sky | 09/12/2024 |

The revision history provided is for informational purposes only and is believed to be accurate.

same sky

Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**sameskydevices.com**