CUI Devices is now Same Sky! Learn More

SERIES: TS34 | DESCRIPTION: TACTILE SWITCH

FEATURES

- surface mount
- halogen & halogen free



RoHS

SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated voltage		1		12	Vdc
rated current		0.01		50	mA
withstanding voltage	for 1 minute		250		Vac
contact resistance				100	mΩ
insulation resistance	at 100 Vdc	100			MΩ
operating force	100 gf models 160 gf models 260 gf models	50 110 190	100 160 260	150 210 330	gf gf gf
return force	100 gf models 160 & 260 gf models	10 50			gf gf
actuator travel		0.15	0.25	0.45	mm
operating temperature		-40		90	°C
storage temperature		-40		90	°C
life	at 5 Vdc, 5 mA, 2 cycles/second, 1.5 times operating force		100,000		cycles
vibration	10~55~10 Hz, 1.5 mm amplitude, 2 hours on each XYZ				
flammability rating	see material table				
RoHS	yes				

PART NUMBER KEY


TS34 - 62 - XX - BK - X - XXX - X - SMT - TR


- TS34 - 62: Base Number
- XX: Actuator Height (mm):
  2 = 2.0
  25 = 2.5
  31 = 3.1
  35 = 3.5
- X: Ground:
  'blank' = without ground
  G = with ground
- XXX: Actuator Force (gf):
  100 = 100
  160 = 160
  260 = 260
- X: Halogen Free:
  'blank' = with halogen
  H = halogen free


MECHANICAL DRAWING (2.0 MM HEIGHT, NO GROUND)

units: mm
tolerance:
L≤10: ±0.3 mm
10<L≤100: ±0.5 mm
unless otherwise specified


DESCRIPTION	MATERIAL	PLATING/COLOR
terminal	brass	silver
housing	PA6T (halogen models) PPA (halogen free models)	black black
dome	stainless steel	silver
stem	FR52 (halogen models) PPA (halogen free models)	black black
cover	stainless steel	

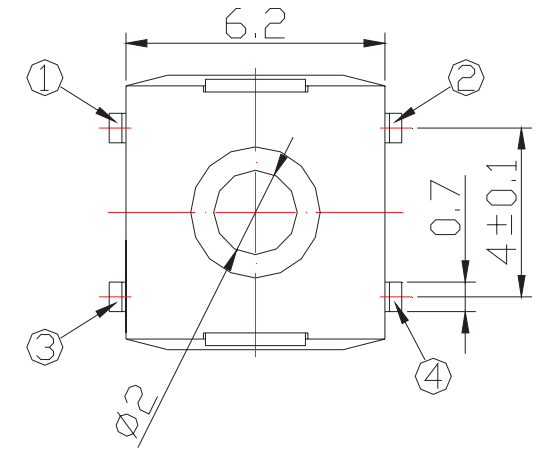


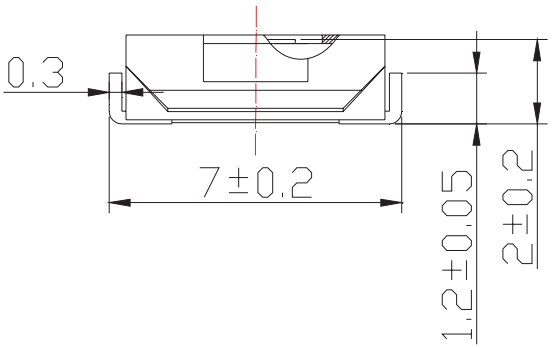



ACTUATOR POSITION [ ]: MOMENTARY	
NORMAL	DOWN
OFF	[ON]
SCHEMATIC	



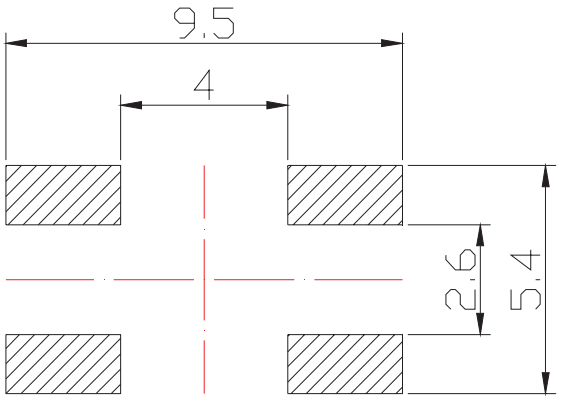



Recommended PCB Layout
Top View


MECHANICAL DRAWING (2.0 MM HEIGHT, WITH GROUND)

units: mm
tolerance:
L≤10: ±0.3 mm
10<L≤100: ±0.5 mm
unless otherwise specified


DESCRIPTION	MATERIAL	PLATING/COLOR
terminal	brass	silver
housing	PA6T (halogen models) PPA (halogen free models)	black black
dome	stainless steel	silver
stem	FR52 (halogen models) PPA (halogen free models)	black black
cover	phoshpor bronze	tin

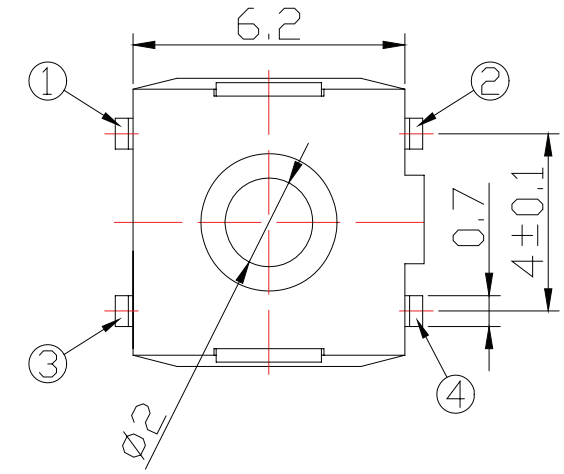


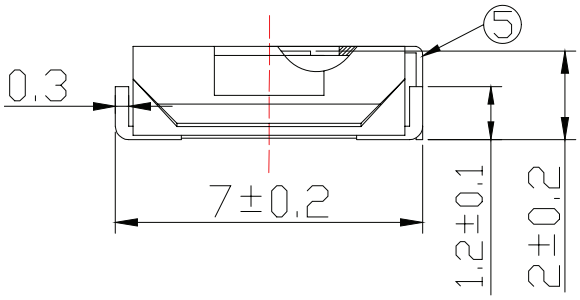

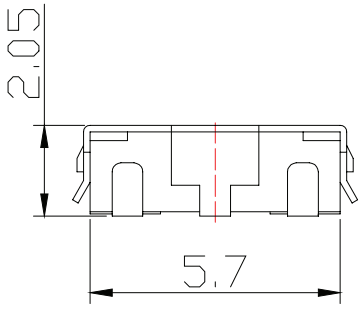

ACTUATOR POSITION [ ]: MOMENTARY	
NORMAL	DOWN
OFF	[ON]
SCHEMATIC	



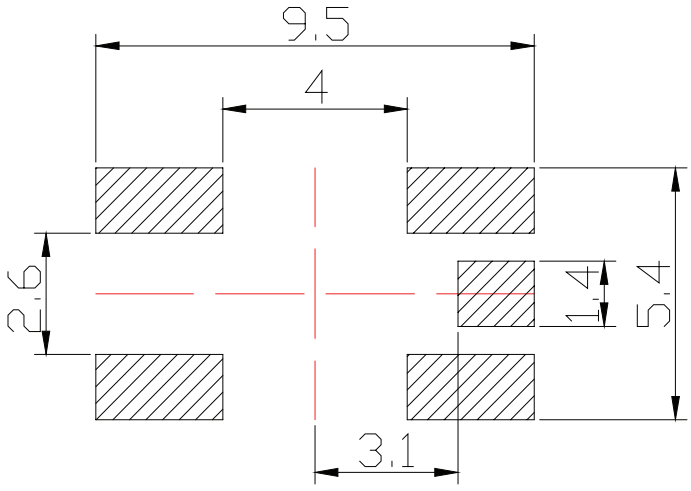



Recommended PCB Layout
Top View


MECHANICAL DRAWING (2.5, 3.1, 3.5 MM HEIGHTS, NO GROUND)

units: mm
tolerance:
L≤10: ±0.3 mm
10<L≤100: ±0.5 mm
unless otherwise specified


DESCRIPTION	MATERIAL	PLATING/COLOR
terminal	brass	silver
housing	PA6T (halogen models) PPA (halogen free models)	black black
dome	stainless steel	silver
stem	FR52 (halogen models) PPA (halogen free models)	black black
cover	stainless steel	

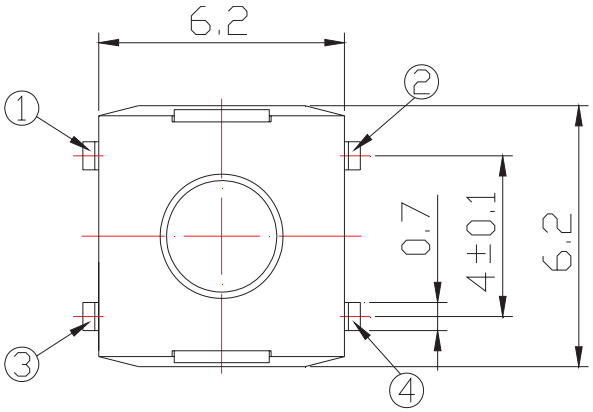


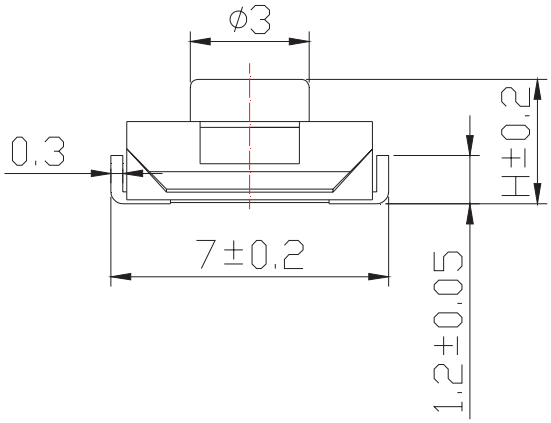



ACTUATOR POSITION [ ]: MOMENTARY	
NORMAL	DOWN
OFF	[ON]
SCHEMATIC	



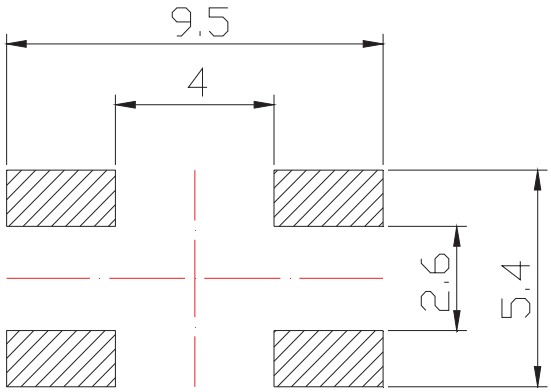


Recommended PCB Layout
Top View


Model	Actuator Height, H (mm)
25	2.5 mm
31	3.1 mm
35	3.5 mm


MECHANICAL DRAWING (2.5, 3.1, 3.5 MM HEIGHTS, WITH GROUND)

units: mm
tolerance:
L≤10: ±0.3 mm
10<L≤100: ±0.5 mm
unless otherwise specified


DESCRIPTION	MATERIAL	PLATING/COLOR
terminal	brass	silver
housing	PA6T (halogen models) PPA (halogen free models)	black black
dome	stainless steel	silver
stem	FR52 (halogen models) PPA (halogen free models)	black black
cover	phosphor bronze	tin

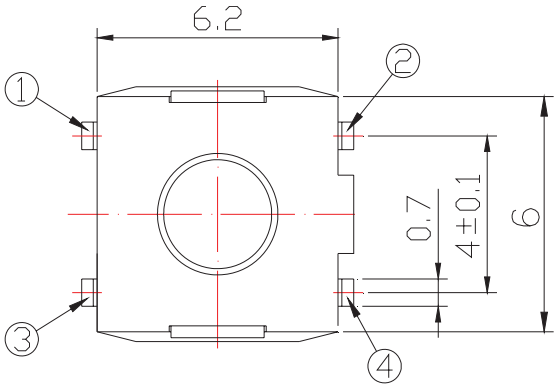


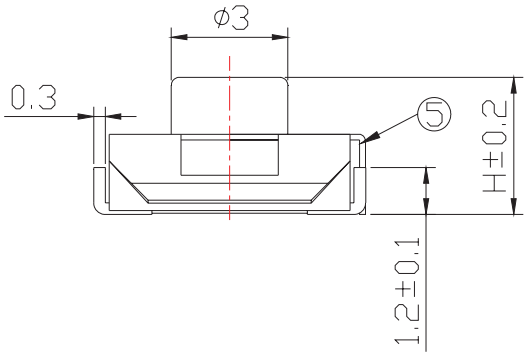



ACTUATOR POSITION [ ]: MOMENTARY	
NORMAL	DOWN
OFF	[ON]
SCHEMATIC	



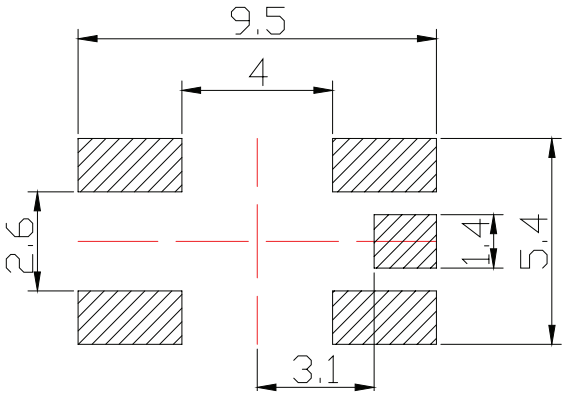


Recommended PCB Layout
Top View

Model	Actuator Height, H (mm)
25	2.5 mm
31	3.1 mm
35	3.5 mm

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
reflow soldering			260		°C

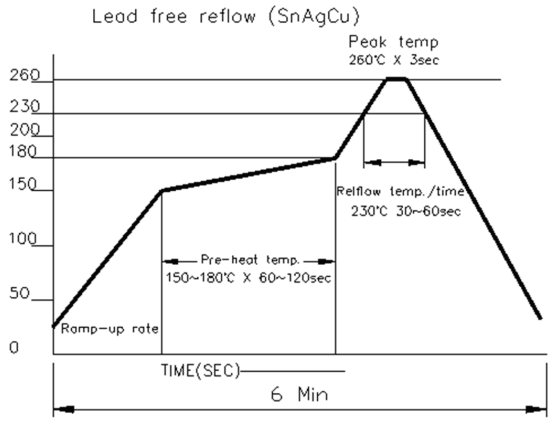


PACKAGING

units: mm

Reel QTY: 2,500 pcs

2 mm height models

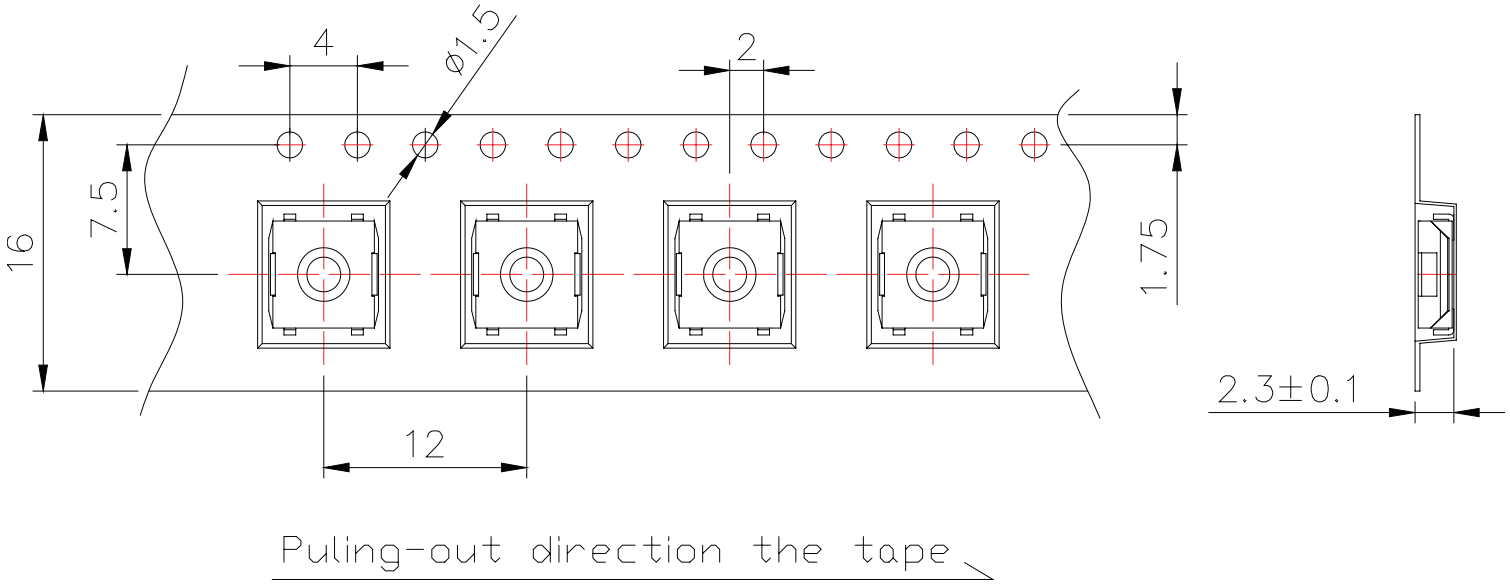


PACKAGING (CONTINUED)

units: mm

Reel QTY: 2,500 pcs


2.5 mm height models

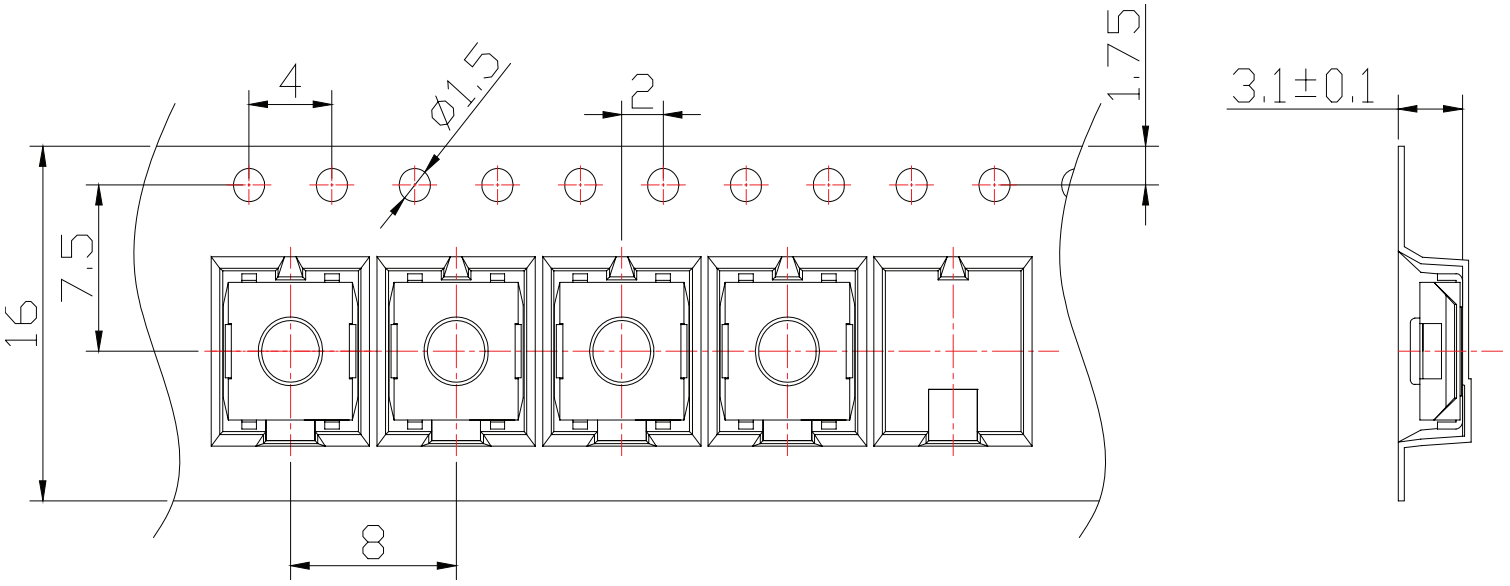

units: mm

Reel QTY: 1,500 pcs

3.1 mm and 3.5 mm height models

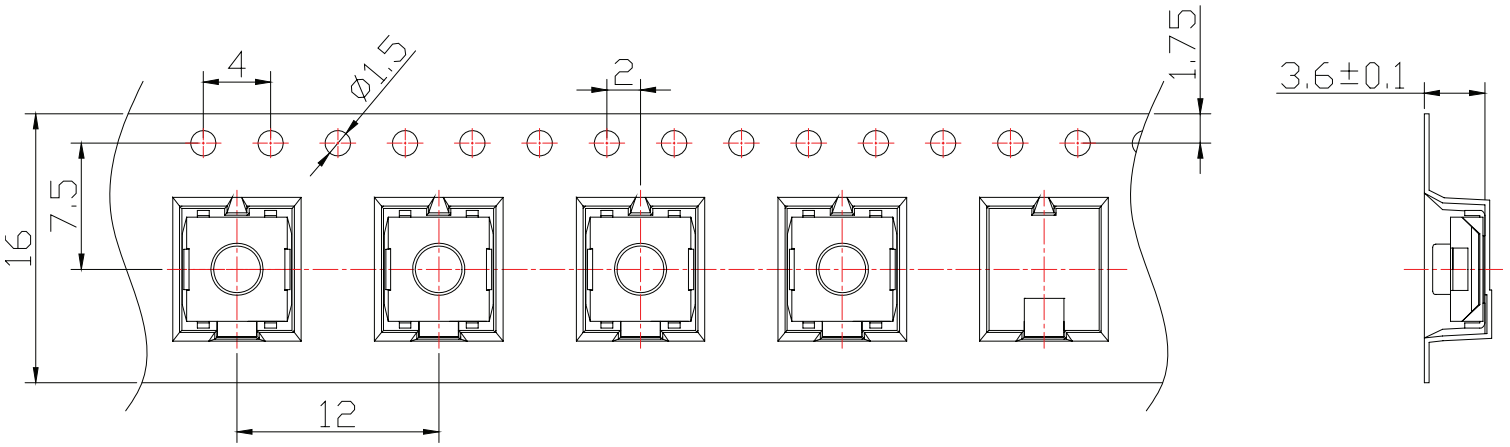

REVISION HISTORY

rev.	description	date
1.0	initial release	12/10/2024

The revision history provided is for informational purposes only and is believed to be accurate.

same sky

Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

sameskydevices.com