
CUI Devices is now Same Sky! Learn More

same sky

SERIES: TS44 | DESCRIPTION: TACTILE SWITCH

FEATURES

- IP67
- white and blue actuator



RoHS IP67

SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated voltage		1		12	Vdc
rated current		1		50	mA
withstanding voltage	for 1 minute		250		Vac
contact resistance	applying load of 2 times operating force at 5 Vdc, 10 mA			100	mΩ
insulation resistance	at 100 Vdc for 1 minute	100			MΩ
operating force	TS44-6262-51-WT-200-SMT-TR-67 model TS44-6262-34-WT-260-SMT-TR-67 model TS44-6262-34-WT-350-SMT-TR-67 model TS44-6262-51-BL-350-SMT-TR-67 model	150 210 270 250	200 260 350 350	250 310 430 450	gf gf gf gf
return force		20			gf
actuator travel	TS44-6262-51-WT-200-SMT-TR-67 model TS44-6262-34-WT-260-SMT-TR-67 model TS44-6262-34-WT-350-SMT-TR-67 model TS44-6262-51-BL-350-SMT-TR-67 model	0.25 0.20 0.20 0.35	0.50 0.35 0.40 0.55	0.75 0.50 0.60 0.75	mm mm mm mm
operating temperature		-40		85	°C
storage temperature		-40		90	°C
life	5 Vdc, 5 mA, 1 cycle/second, max operating force		100,000		cycles
vibration	10~55~10 Hz, 1.5 mm amplitude, 2 hours on each XYZ				
flammability rating	see material table				
RoHS	yes				
IP level	IP67				

PART NUMBER KEY

TS44 - 6262 - XX - XX - XXX - SMT - TR - 67


- Base Number
- Actuator Height above PCB:
  - 34 = 3.4 mm
  - 51 = 5.1 mm
- Actuator Color:
  - BL = blue
  - WT = white
- Push Force:
  - 200* = 200 gf
  - 260* = 260 gf
  - 350 = 350 gf


Note: * 200 & 260 gf models only available with white actuator.

MECHANICAL DRAWING (3.4 MM ACTUATOR HEIGHT MODELS)


units: mm
tolerance: ±0.2 mm
unless otherwise noted


DESCRIPTION	MATERIAL	PLATING/COLOR
terminals	brass	silver
housing	PPS (UL94V-0)	black
contacts	SUS	silver
cover	SUS	--
stem	silicone	white




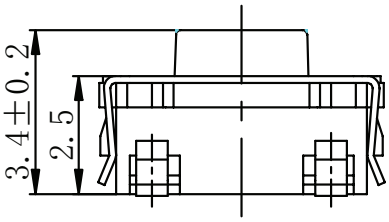

ACTUATOR POSITION [ ]: MOMENTARY	
NORMAL	DOWN
OFF	[ON]
SCHEMATIC	



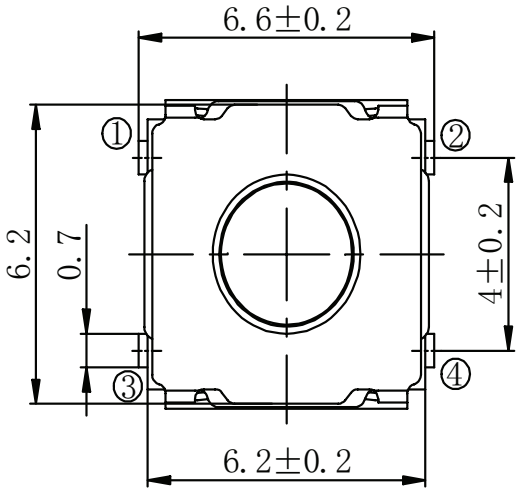

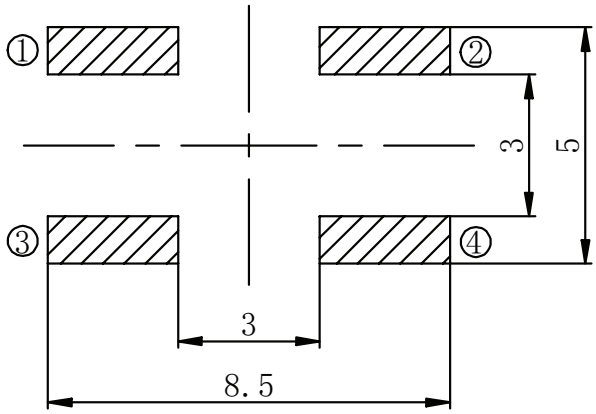



Recommended PCB Layout
Top View

MECHANICAL DRAWING (5.1 MM ACTUATOR HEIGHT MODELS)


units: mm
tolerance: ±0.2 mm
unless otherwise noted


DESCRIPTION	MATERIAL	PLATING/COLOR
terminals	brass	silver
housing	PPS (UL94V-0)	black
contacts	SUS	silver
cover	SUS	--
stem	silicone	white or blue




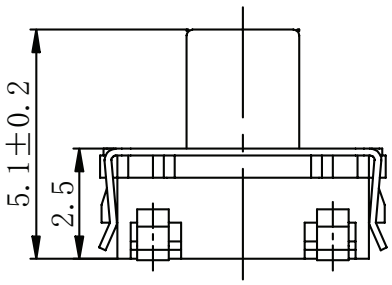

ACTUATOR POSITION [ ]: MOMENTARY	
NORMAL	DOWN
OFF	[ON]
SCHEMATIC	



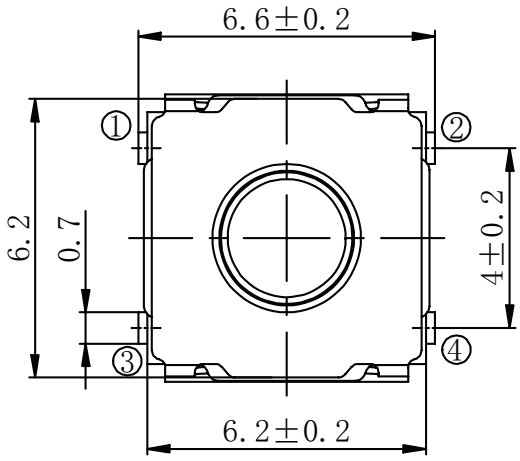


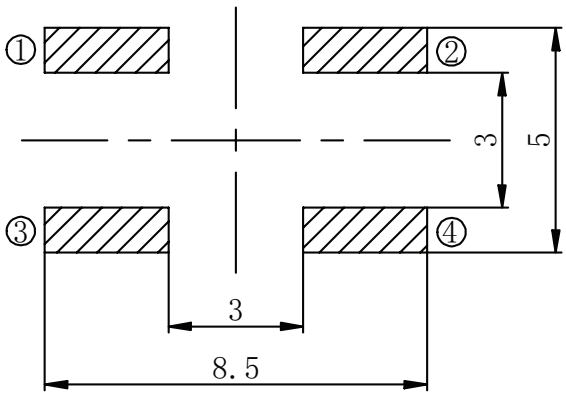

Recommended PCB Layout
Top View


SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	for maximum 3 seconds			350	°C
reflow soldering	see reflow profile			260	°C

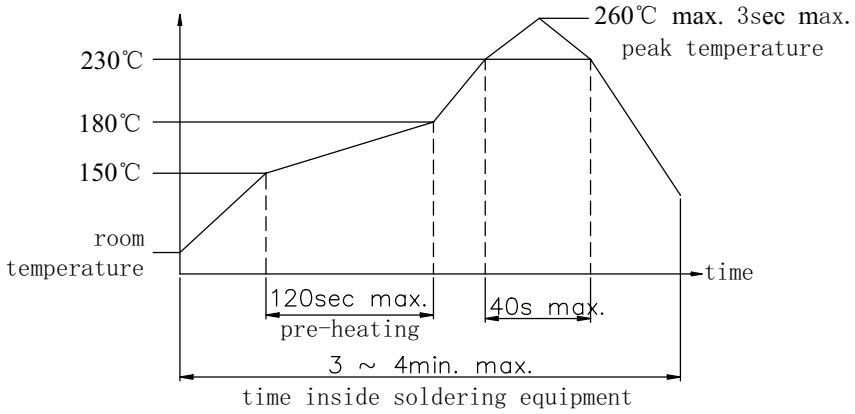

PACKAGING

Packaging Table			
Actuator Height Models (mm)	Reel Size (mm)	Reel Qty	K0
3.4	Ø330	1,300	4.0 mm
5.1	Ø330	900	5.5 mm

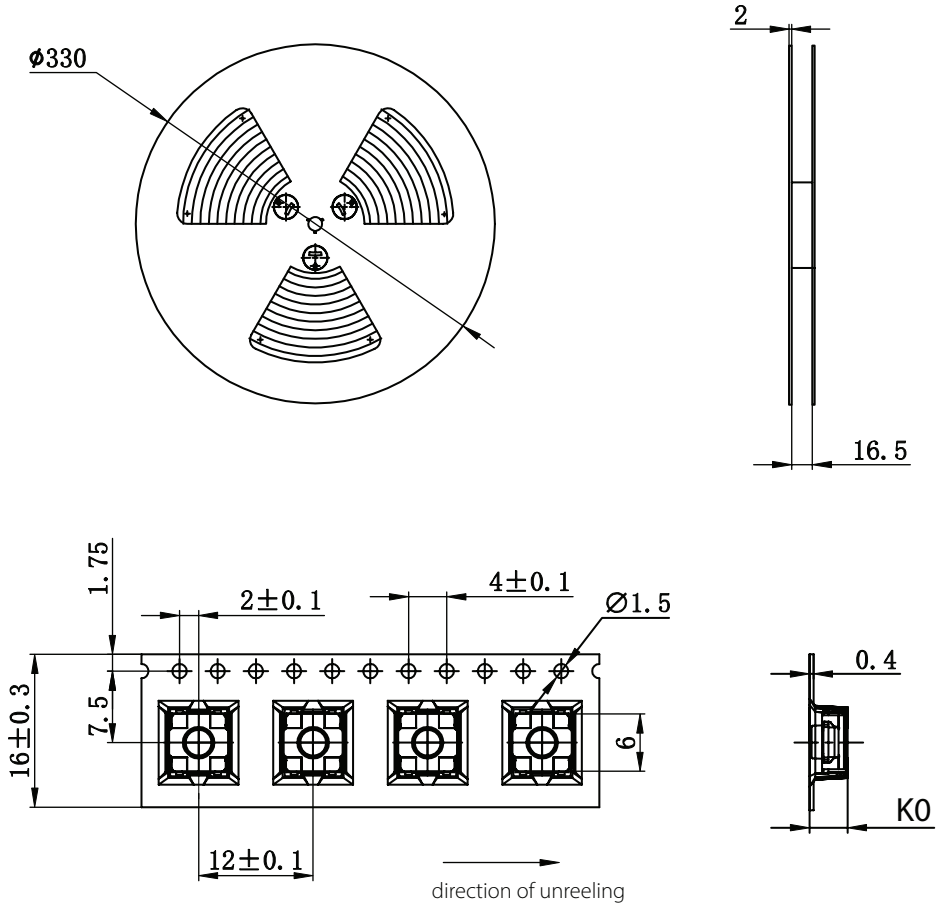

REVISION HISTORY

rev.	description	date
1.0	initial release	11/20/2025

The revision history provided is for informational purposes only and is believed to be accurate.

same sky

Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

sameskydevices.com