


© – TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	K	REVISED PER ECO-20-013043	16SEP2020	SB	JB

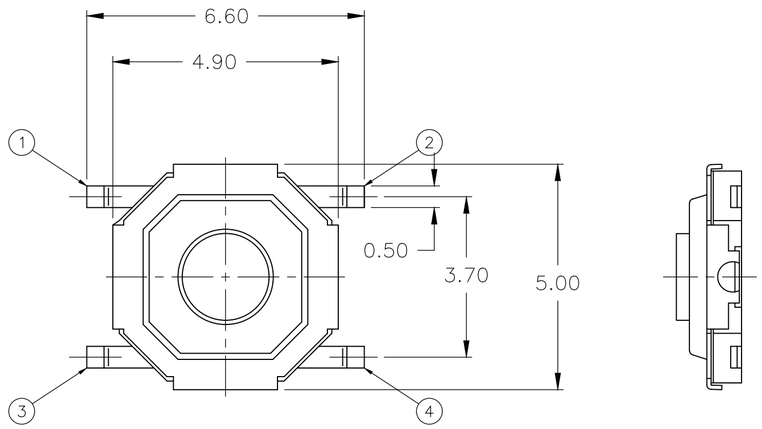

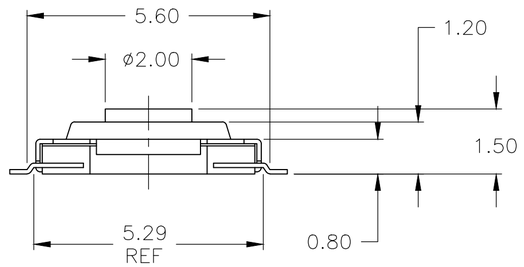



CIRCUIT DIAGRAM

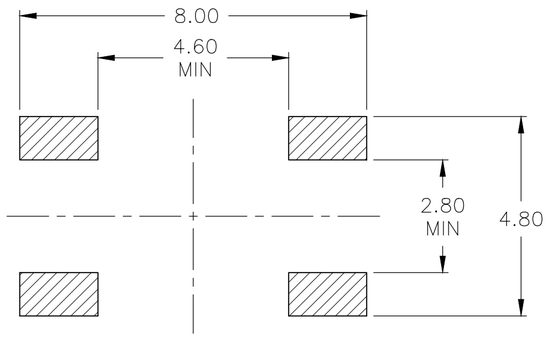

P.C. BOARD LAYOUT

MATERIALS:

CASE: NYLON– 4/6 UL94V–0, COLOR– SEE CHART
COVER: NICKEL SILVER
ACTUATOR:COPPER ALLOY
MOVING CONTACT: STAINLESS STEEL, SILVER FINISH
FIXED CONTACT/TERMIAL: COPPER ALLOY, SILVER FINISH

ELECTRICAL:

MAX CONTACT RATING: 50MILLIAMPS@32V DC
MIN CONTACT RATING: 10MICROAMPS@1V DC
INITIAL CONTACT RESITANCE: 100 MILLIOHMS MAX
INSULATION RESISTANCE: 100 MEGAOHMS @ 100 VDC MIN
DIELECTRIC STRENGTH: 500 VDC
LIFE EXPECTANCY: SEE TABLE

MECHANICAL:

ACTUATION FORCE: SEE TABLE
ACTUATION TRAVEL: 0.25 +0.1/–0.2

ENVIROMENTAL:

OPERATING TEMPERATURE: –35°C TO 85°C
STORAGE TEMPERATURE: –35°C TO 85°C
SOLDER HEAT RESISTANCE, PER TEC–109–201 COND B.

1 TAPE AND REEL PER EIA 481, 4,000 PCS, PER REEL, TAPE WIDTH 12.00MM, PITCH 8.00MM

2 ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

LIFE CYCLES	FORMER T&B PART	ACTUATION FORCE	CASE COLOR	PART NUMBER
MIN 500,000	FSMCTATR	260±50gf	IVORY	8–1437565–1
MIN 1,000,000	FSMCTTR	160±50gf	BLACK	8–1437565–0

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± .20
3 PLC ± –
4 PLC ± –
ANGLES ± 1°

MATERIAL –

FINISH –

DWN M.BINNER 18MAR04
CHK M.SARVER 23MAR04
APVD M.SARVER 23MAR04
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

CUSTOMER DRAWING

TE Connectivity Ltd.

NAME: MICRO MINIATURE PUSHBUTTON SWITCH

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-8–1437565–0	—


SCALE	SHEET	REV
10:1	1 OF 2	K


8–1437565–0

© – TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

THE DIMENSION OF CARRIER TAPE, COVER TAPE AND REEL

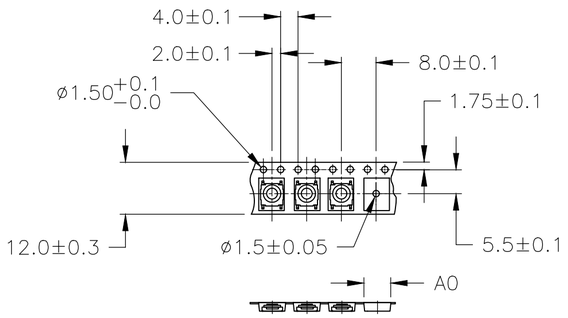





A0	5.4 mm
B0	6.9 mm
K0	2.1 mm

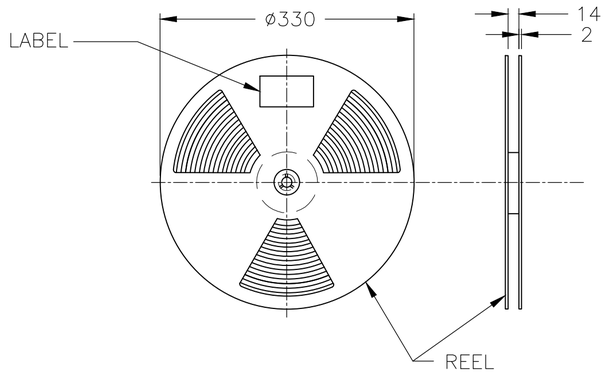


THE DIRECTION OF PILOT HOLES

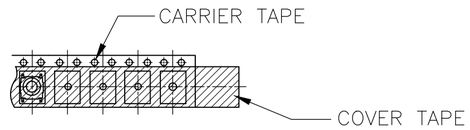


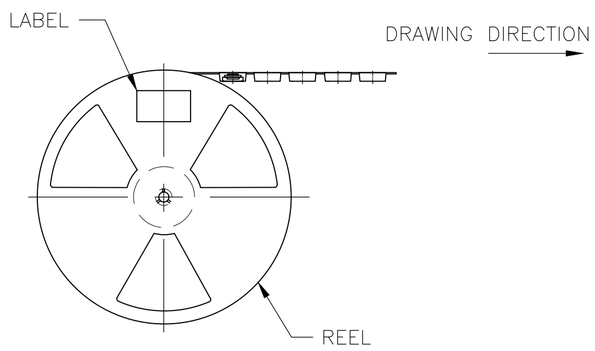

THE DIRECTION OF PILOT HOLES

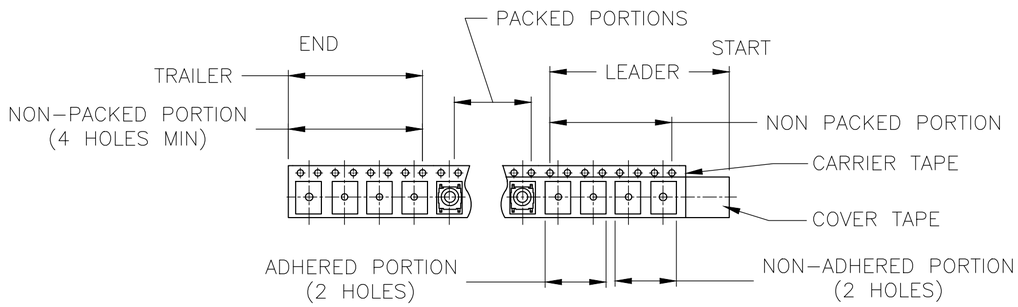

END TAPE

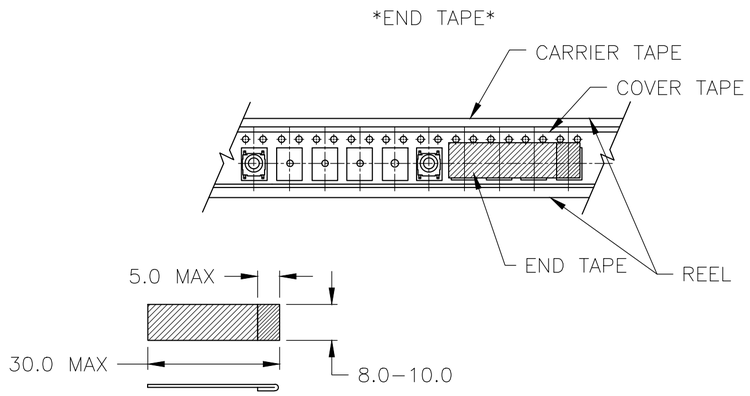

1 4.000 PCS SWITCHES PER 1 REEL

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	–
1 PLC	±	–
2 PLC	±	.20
3 PLC	±	–
4 PLC	±	–
ANGLES	±	1°

MATERIAL: –

FINISH: –

DWN	M.BINNER	18MAR04
CHK	M.SARVER	23MAR04
APVD	M.SARVER	23MAR04
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	–	

TE Connectivity Ltd.

NAME: MICRO MINIATURE PUSHBUTTON SWITCH

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-8-1437565-0	—

CUSTOMER DRAWING | SCALE 1:1 | SHEET 2 OF 2 | REV K

8-1437565-0