

HOW TO ORDER

SPECIFICATION

Rating: 10A 250VAC, 15A 125VAC

Insulation resistance: DC 500V 200M Ω or more

Contact resistance: DC 24V 1A 20mΩ or less

Withstand voltage: AC 1500V OR MORE

PU -

MODEL NO.: 703

703A

703B

704-1

704-1A

705

705

705B

706-1

706-1

700 17A

- TERMINATIONS: H1





H2

H3

H4

H5


SWITCH FUNCTION

NO. POLES	MODEL NO.	SWITCH FUNCTION		CONNECTED TERMINALS	
		POS.1	POS.2	POS.1	POS.2
					
SPST	PU703	ON	OFF	1-3	————
	PU703A	OFF	(ON)	1-3	————
	PU703B	ON	(OFF)	1-3	————
SPDT	PU704-1	ON	ON	1-2	2-3
	PU704-1A	ON	(ON)	1-2	2-3
DPST	PU705	ON	OFF	1-3,4-6	————
	PU705A	OFF	(ON)	1-3,4-6	————
	PU705B	ON	(OFF)	1-3,4-6	————
DPDT	PU706-1	ON	ON	1-2,4-5	2-3,5-6
	PU706-1A	ON	(ON)	1-2,4-5	2-3,5-6


()=MOMENTARY

TERMINATION OPTIONS


H1




H2




H3



H4






H5











SPST
PU703-H5

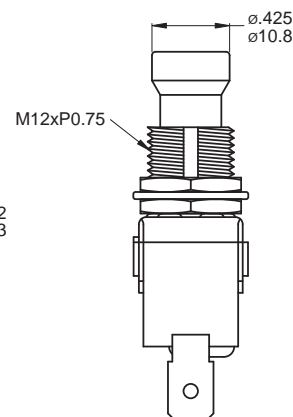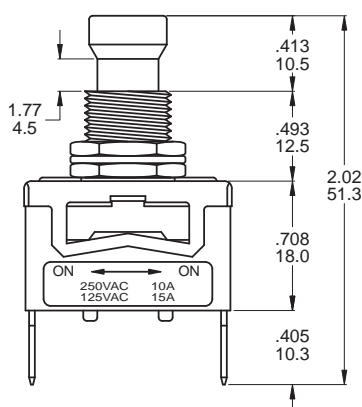

SPDT
PU704-1-H5

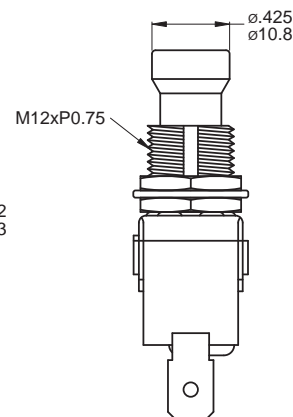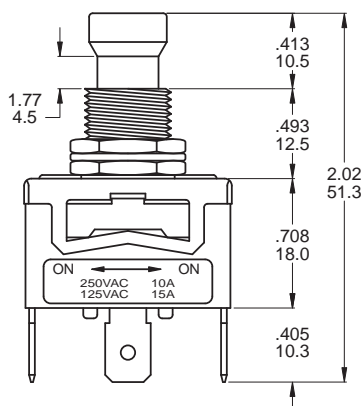

DPST
PU705-H5

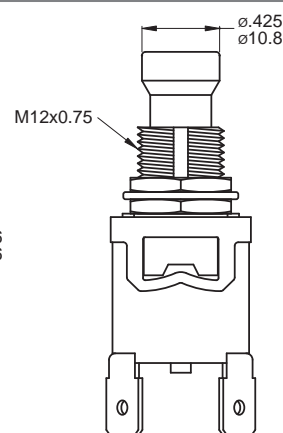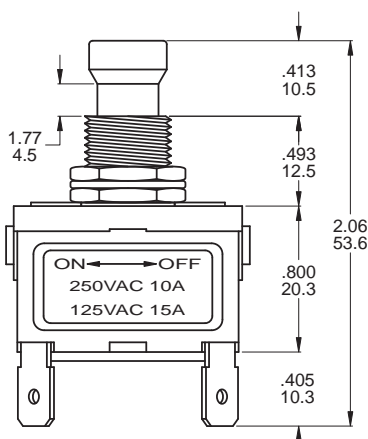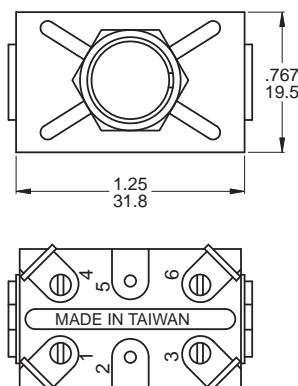

DPDT
PU706-1-H5

