

### 3-in-1 Switches (DC Jack,Power switch,Reset-key)



**ELECTRICAL RATING : DC 15V 3A**

**CONTACT RESISTANCE :  $< 30\text{m}\Omega$ (initial)**

**INSULATION RESISTANCE :  $> 500\text{M}\Omega$**

(500VDC between open contacts)

**DIELECTRIC STRENGTH : >500V 1 minute**

**ELECTRICAL LIFE : 6000 cycles**


**CASE&HOUSING:** Glass filled Nylon 6/6,black.

**ACTUATOR** : Glass filled Nylon 6/6,Black.

**CONTACT** : Copper alloy,silver plated.

**TERMINALS :** Copper alloy,silver plated.

**PIN :** Brass,nickel plated.

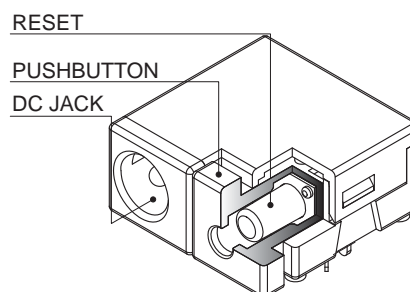

Technical drawing of a rectangular plate. The overall width is .819 (20.80) and the overall height is .827 (21.00). A small rectangular feature is located at the bottom right corner.

