


SPECIFICATIONS

RATING: 15A 125VAC/20A 125/150VAC

WITHSTAND VOLTAGE: AC 1500V Min.

INSULATION RESISTANCE: DC 500V 200M Ω Min. CONTACT RESISTANCE: DC2-4V 1A 20m Ω Max.

HOW TO ORDER

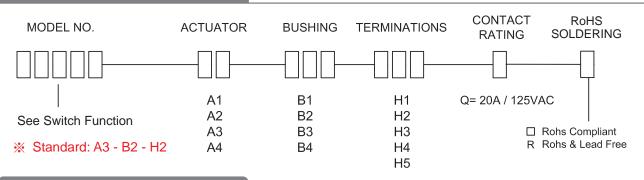

SWITCH FUNCTION


NO. POLES	UL	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS / SCHEMATIC		
			POS.1	POS.2	POS.3	POS.1	POS.2	POS.3
			1			7	.	4
SP	✓	703	OFF	NONE	ON	OPEN	N/A	1-3
		703A	OFF	NONE	MOM			
	<u> </u>	704-1	ON	NONE	ON	2-3	OPEN	2-1 2 (COMM) 3
		704-1A	MOM	NONE	ON			
	✓	704-2	ON	OFF	ON			
		704-2A	MOM	OFF	ON			
		704-2B	MOM	OFF	MOM			
DP	✓	705	OFF	NONE	ON	OPEN	N/A	1-3,4-6
		705A	OFF	NONE	MOM			
	✓	706-1	ON	NONE	ON	2-3,5-6	OPEN	2-1,5-4
		706-1A	MOM	NONE	ON			
	✓	706-2	ON	OFF	ON			2 (COMM) 59 1 3 4 6
		706-2A	MOM	OFF	ON			1 3 4 6
		706-2B	MOM	OFF	MOM			
3P		708-1	ON	NONE	ON	2-3,5-6,8-9	OPEN	1-2,4-5,7-8
		708-1A	ON	NONE	(ON)			
		708-2	ON	OFF	ON			
		708-2A	ON	OFF	MOM			
		708-2B	MOM	OFF	MOM			
4P		709-1	ON	NONE	ON	2-3,5-6 8-9,11-12	OPEN	1-2,4-5 7-8,10-11
		709-1A	ON	NONE	(ON)			
		709-2	ON	OFF	ON			
		709-2A	ON	OFF	MOM			
		709-2B	MOM	OFF	MOM			
		709-8P	OFF	NONE	ON	- OPEN	N/A	1-3,4-6
		709-8PA	OFF	NONE	(ON)			7-9,10-12


MOM=MOMENTARY


POLE OPTIONS



SPST 703-A3-B2-H2












SPDT 704-1-A3-B2-H2









.374 9.50

.800 20.3




DPST 705-A3-B2-H2






ø.228 ø5.80







DPDT 706-1-A3-B2-H2





1.252 31.80







LPO Toggle Switches






SPST 708-1-A3-B2-H5












SPDT 709-A3-B2-H5













ACTUATOR OPTIONS













BUSHING OPTIONS









TERMINATION OPTIONS

