

## SPECIFICATIONS

CONTACT: Stainless steel

RATING: 50mA , 5VDC

STROKE: 2mm






OPERATING FORCE: 30gf max

CONTACT RESISTANCE: 500mΩ max.

## MODEL OPTIONS



TE-M

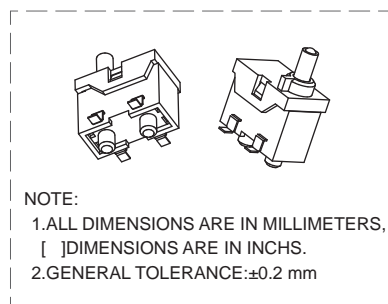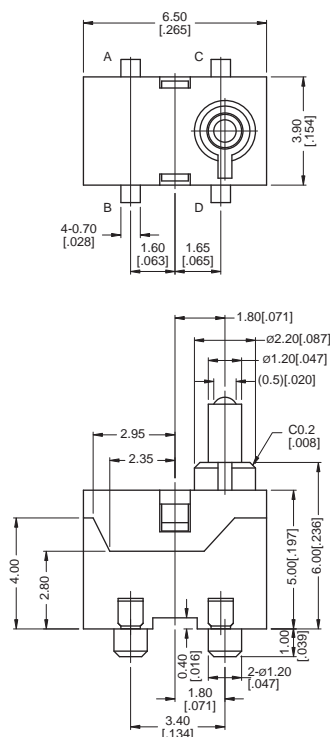

TE-H

