



SPECIFICATIONS

RATING MIN/MAX: 0.1mA-100mA, 20VDC-32VDC

MAX POWER: 1.0VA

CONTACT RESISTANCE: 150mΩ MAX

INSULATION RESISTANCE: 100MΩ min, 500VDC

DIELECTRIC STRENGTH: 250VAC for 1 Minute

OPERATING LIFE: 25,000 cycles

OPERATING TEMPERATURE: -40°C~85°C at 96% RH Max

OPERATING FORCE: 400±120gf

TOTAL TRAVELS: 2.4mm±0.3

MATERIALS

CASE: LCP

ACTUATOR: Polycarbonate

SPACER: Silicon

CONTACT / TERMINALS: Silver plate stainless / Gold plated brass

HOW TO ORDER

MODEL NO.



Model No.

PTCT Standard
PTCTA Car

LED COLOR



LED color

ITEM NO	COLOR
00	Without LED
01	White
03	Red
06	Green
07	Blue
0A	Amber
DUAL COLOR LED	
36	Red&Green
56	Yellow&Green
7A	Blue&Amber


MAINTAIN




Maintain

12 Put on black CAP
02 Transparent lamp change to black lamp (Non-LED)

A Cat the pin 3 terminal




B Cat the pin 4 terminal




P.C.B MOUNTING / CIRCUIT

P.C.B. LAYOUT




TOP VIEW

CIRCUIT






Single Color LED



Bi-Color LED




PTCT Series

DIP PUSH SWITCH

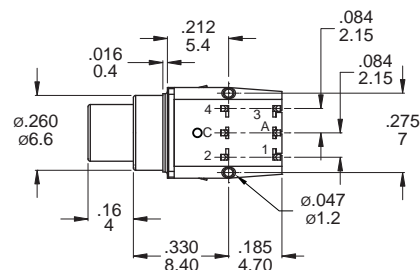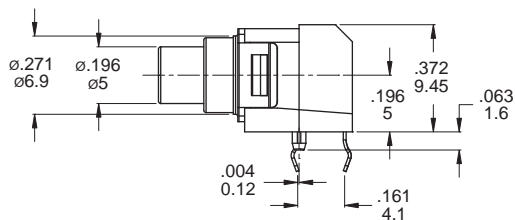




Part No. Shown : PTCT-□□

PTCT
Pushbutton Switches

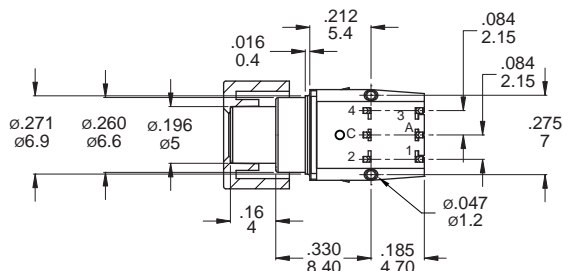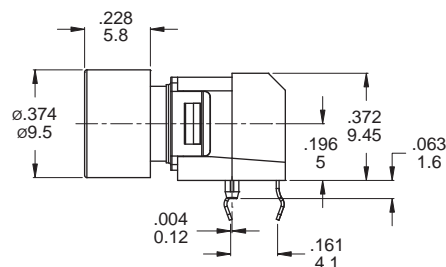

SECTION A-A

Part No. Shown : PTCT-□□-12

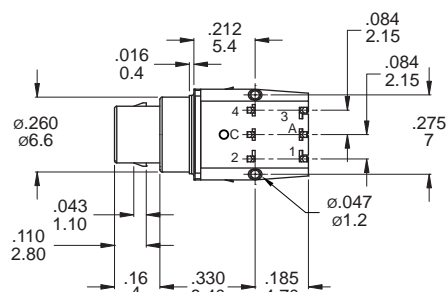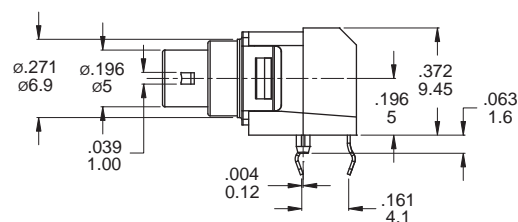

Part No. Shown : PTCTA-□□

