


RBPHAT B2 - pre-layout mechanical constraints

Pi 5 + official Active Cooler / 16 mm header body / 19 mm nominal board spacing

65.00 mm / corner radius 3.00 mm

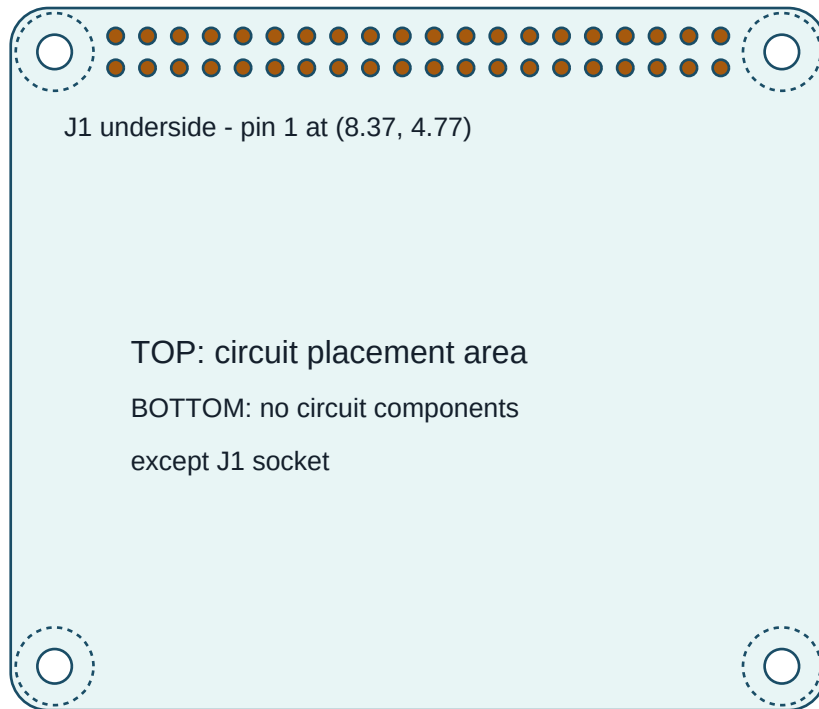

J1 underside - pin 1 at (8.37, 4.77)

TOP: circuit placement area

BOTTOM: no circuit components

except J1 socket


4 x NPTH 2.75 mm, mounting centers 58 x 49 mm

Screw clearance diameter 6.2 mm; no copper

Datum: upper-left, X right, Y down. Dimensions in mm.

All ICs / JST headers / C3 above HAT

HAT underside = +19 mm

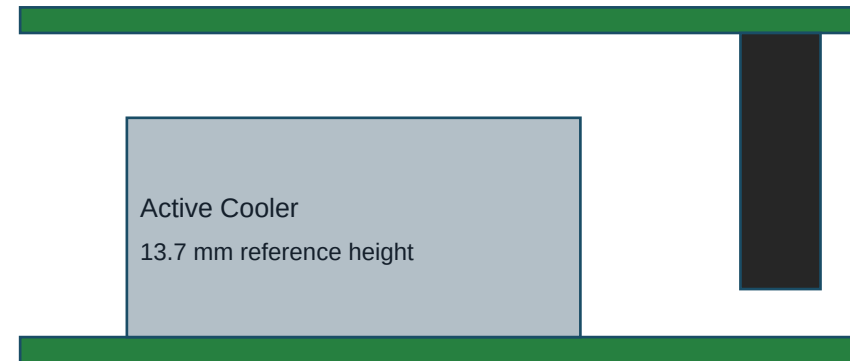

Pi PCB top = 0 mm

Nominal insertion: $6.0 - (19 - 16 - 2.5) = 5.5$ mm

Header body H = 16 +/-0.25 mm; tail = 7.30 mm.

19 mm spacers are a design dimension; check seating and contact engagement during first assembly.

Cooler side envelope is illustrative. No case, cable-bend, or thermal certification is implied.

Sources: Raspberry Pi HAT mechanical guide / HAT+ Ch.7 / Active Cooler drawing; 4UCON 07005.