

# RBPHAT B2 - footprint inspection atlas

Copper pads shown; view from mounting side. Header board instance is flipped to B.Cu.

GPIO\_2x20\_H16\_Drill1.02  
PRT-16763



Copper extents: 4.240 x 49.960 mm  
Representative: J1; pin-1 and polarity checked

Resistor\_SMD\_R\_0603\_1608Metric  
CRCW060310K0FKEA




Copper extents: 2.450 x 0.950 mm  
Representative: R7; pin-1 and polarity checked

Panasonic\_FK\_D\_6.3x5.8  
EEEEFK1C101P



Copper extents: 8.200 x 1.600 mm  
Representative: C3; pin-1 and polarity checked

TI\_DCK0006A  
LM66100DCKR




Copper extents: 3.100 x 1.700 mm  
Representative: U1; pin-1 and polarity checked

Capacitor\_SMD\_C\_0603\_1608Metric  
GRM188R71E105KA12D



Copper extents: 2.450 x 0.950 mm  
Representative: C1; pin-1 and polarity checked

TI\_DBZ0003A  
TLV803ED29DBZR




Copper extents: 3.400 x 2.500 mm  
Representative: U3; pin-1 and polarity checked

# RBPHAT B2 - footprint inspection atlas

Copper pads shown; view from mounting side. Header board instance is flipped to B.Cu.

TestPoint\_TestPoint\_Pad\_D1.5mm  
PCB feature - no purchased part

TI\_DBV0006A  
SN74LVC2G17DBVR





Copper extents: 1.500 x 1.500 mm  
Representative: TP1; pin-1 and polarity checked

Copper extents: 3.700 x 2.500 mm  
Representative: U100; pin-1 and polarity checked

TI\_D0008A  
THVD1451DR

Connector\_JST\_JST\_GH\_BM05B-GHS-TBT\_1x05-1M  
BM05B-GHS-TBT(LF)(SN)

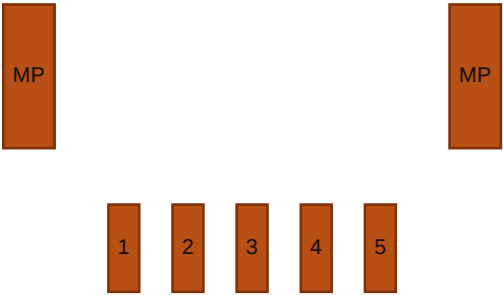
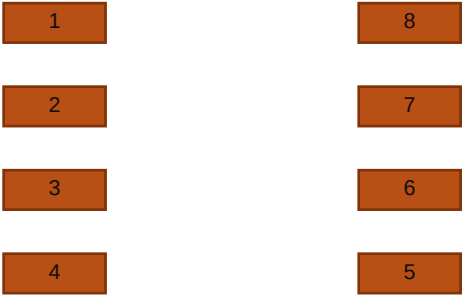


Copper extents: 6.950 x 4.410 mm  
Representative: U101; pin-1 and polarity checked

Copper extents: 9.700 x 5.600 mm  
Representative: J2; pin-1 and polarity checked

Bourns\_CDSOT23\_SM712  
CDSOT23-SM712

Connector\_JST\_JST\_GH\_BM02B-GHS-TBT\_1x02-1M  
BM02B-GHS-TBT(LF)(SN)




Copper extents: 2.850 x 2.750 mm  
Representative: D100; pin-1 and polarity checked

Copper extents: 5.950 x 5.600 mm  
Representative: J4; pin-1 and polarity checked

# RBPHAT B2 - footprint inspection atlas

Copper pads shown; view from mounting side. Header board instance is flipped to B.Cu.

TI\_PW0014A  
TMUX1511PWR

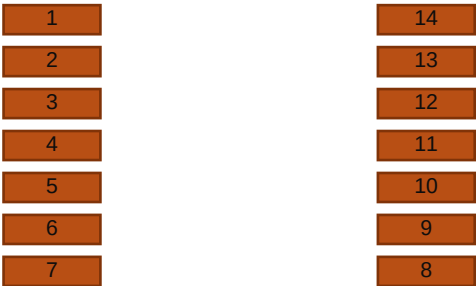

TI\_DGS0010A  
ADS1115IDGSR



Copper extents: 7.300 x 4.350 mm  
Representative: U300; pin-1 and polarity checked

Copper extents: 5.850 x 2.300 mm  
Representative: U301; pin-1 and polarity checked

TI\_DGK0008A  
TCA9517ADGKR



Copper extents: 5.800 x 2.400 mm  
Representative: U302; pin-1 and polarity checked