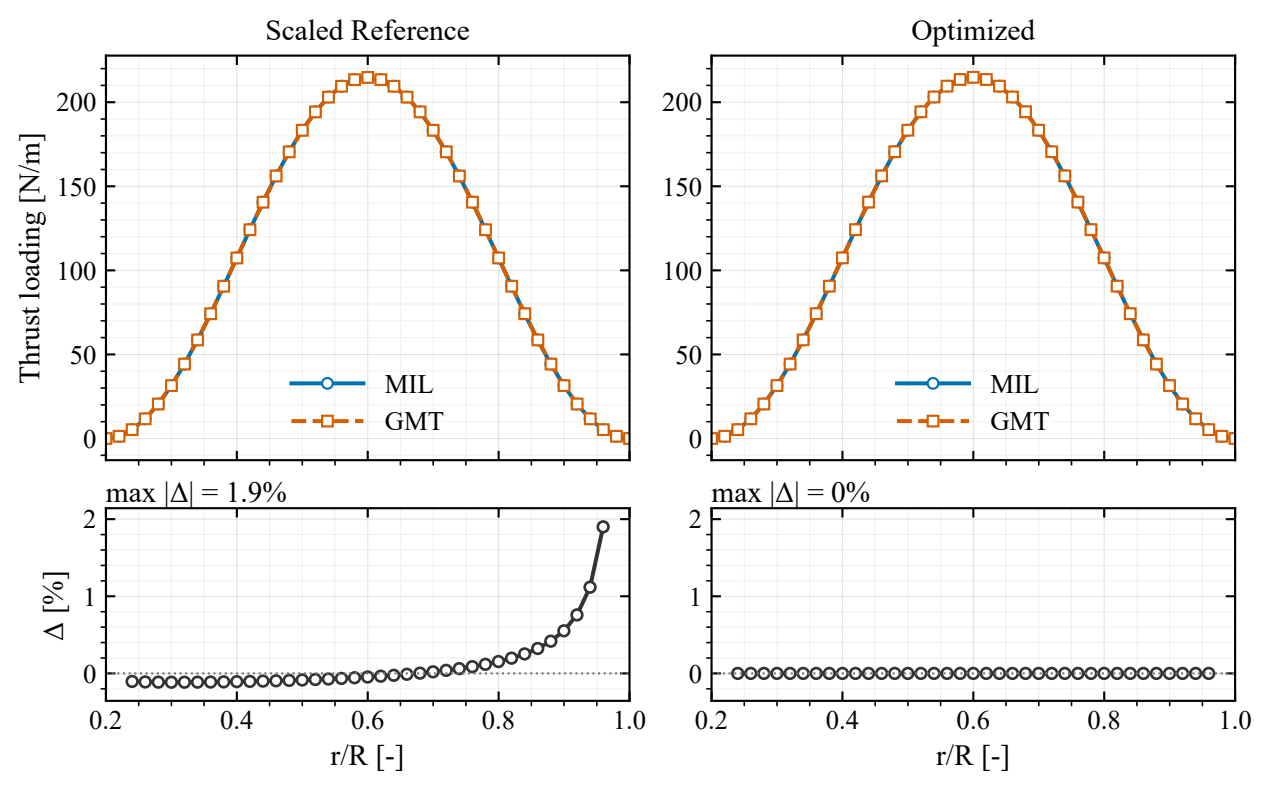
Scaled Reference
Optimized
Thrust loading [N/m]
MIL
GMT
max |Δ| = 1.9%
max |Δ| = 0%
Δ [%]
r/R [-]