

Glass tip — two ways


Same job, opposite answers. One is a tube with a slot in it. The other is all slot.



Slotted tube

A slot down the length, cut in on a seventy-degree lean so it undercuts and holds the paper. Perforated screen across the bore.

Overall	19 mm
Outside	ø 9 mm
Bore	ø 6.4, 1.3 wall
Screen	seven ø 1.25 holes
Slot	0.75 wide, 0.9 deep
Mass	≈ 1.4 g

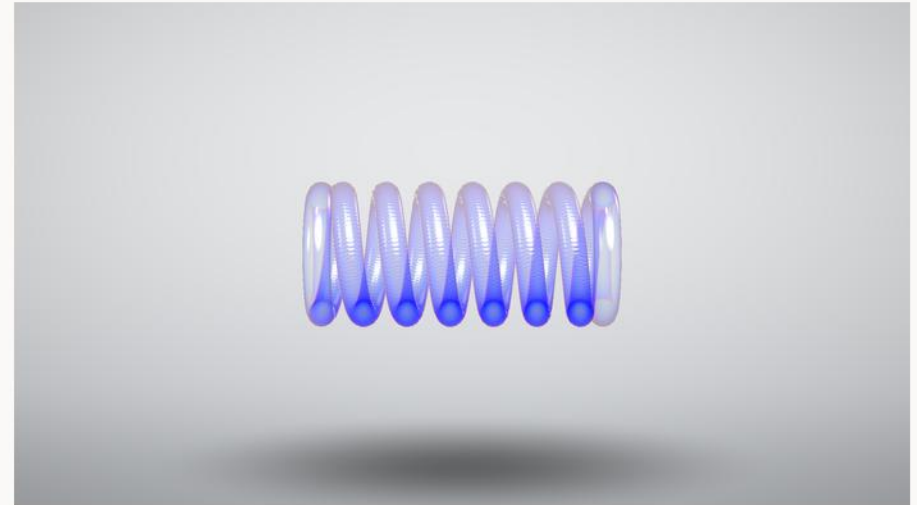



Wound coil

No tube at all - rod wound open end to end. The gap between the turns is the slot, and it runs the whole piece, so the paper goes into the outer ring anywhere along it.

Overall	19 mm
Outside	ø 9 mm
Rod	ø 1.7
Turns	six and a half
Slot	every turn, all the way
Mass	≈ 3.7 g

Glass tip


19 mm of clear 9 mm tube. Perforated screen across the bore, and a straight slot cut at a long oblique to start the roll.

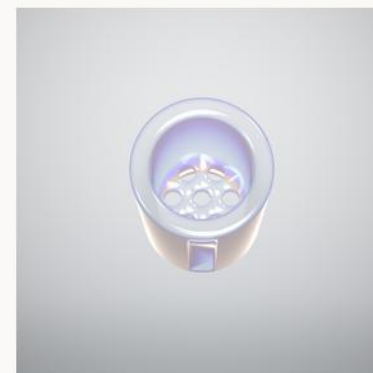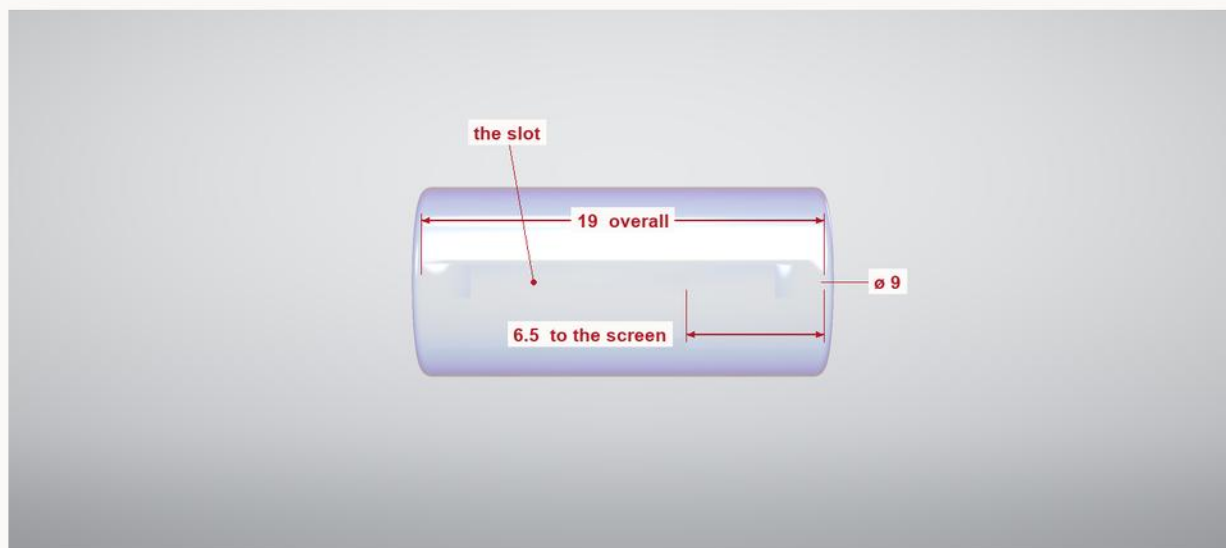

Down the bore
seven holes, one centre


Overall length
19 mm
Outside diameter
9 mm
Bore / wall
6.4 / 1.3 mm
Screen
1.5 thick, 6.5 in
Screen holes
seven ø 1.25
Slot
0.75 wide, 0.9 deep
Slot rake
68° off the axis
Glass
clear boro 3.3, ≈ 1.4 g

ROLLING

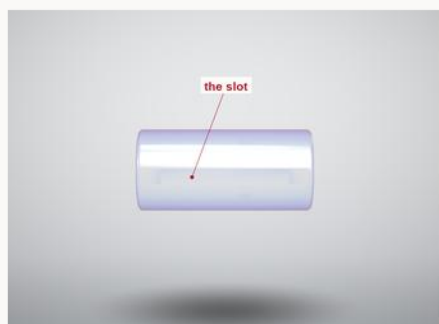

One

The slot runs the length of the tube, cut in on a lean.

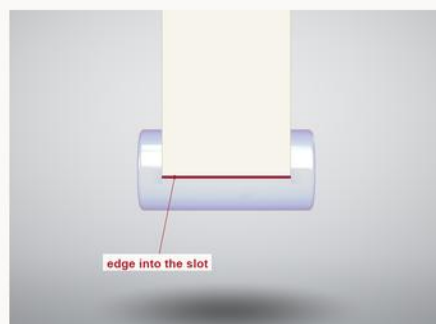


Two

Slip the leading edge of the paper into it. The slot holds the paper on its own.



Three

Roll the tip. The paper winds on, and the rake starts the wrap slightly off-square - the bias a cone wants.

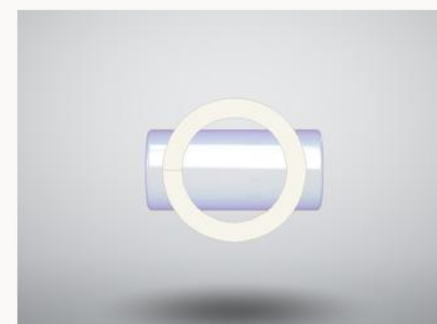

Four

Wound on and filled. The screen keeps it from pulling through, and the tip washes and goes again.