
NOTICE: This descripe is subject to about

NOTICE: This drawing is subject to change. Current version is available at www.saami.org.

MAXIMUM CARTRIDGE / MINIMUM CHAMBER 26 NOSLER

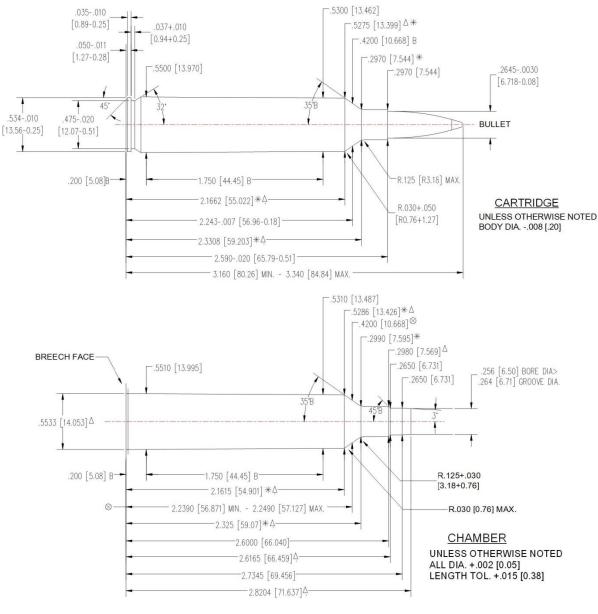

NOTE:
B=BASIC
[XX.XX]=MILLIMETERS
⊗= HEADSPACE DIMENSION

DIMENSIONS ARE TO INTERSECTION OF LINES
ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)

Δ 6 GROOVES Δ.095+.002 [2.41+0.05] WIDE TWIST: 8[203] R.H. OPTIONAL MIN. BORE & GROOVE AREA: .0538 SQ. IN. [34.709 mm²]