



Placement reference — source PCB copper, top view
Red + = native KiCad/CPL anchor; red circle = pad 1. Align supplier leads to numbered pads.
Do not translate anchors to body centers. Positive Y points up; origin KiCad (50,160) mm.


U3 | anchor (51.7000, 53.8600) mm | 270° top

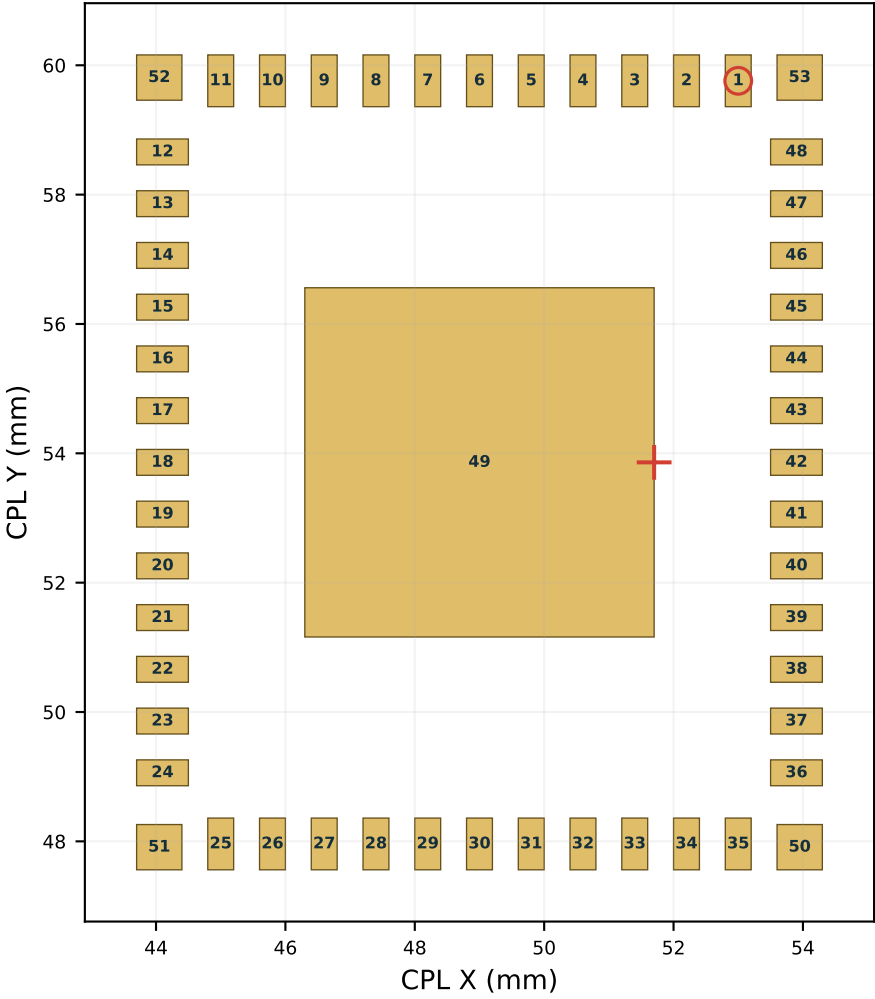


DS1 | anchor (30.0000, 51.1500) mm | 180° top

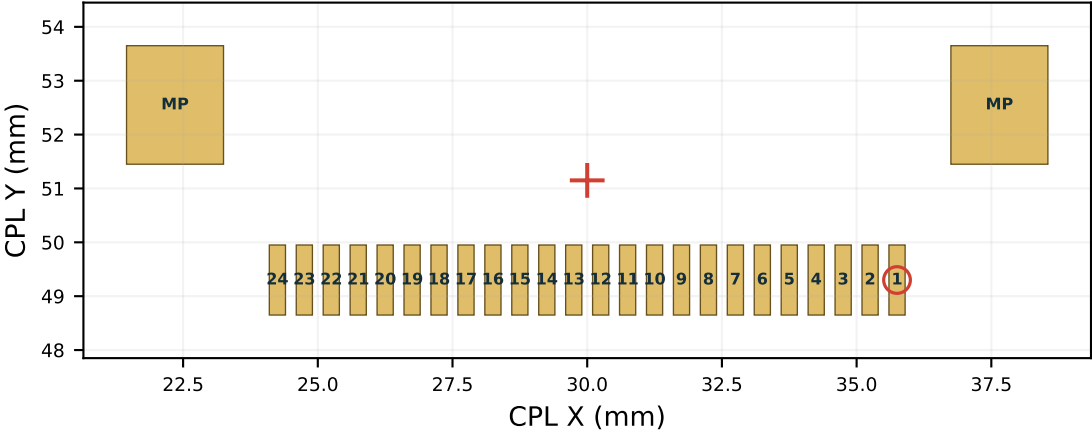


J2 | anchor (7.7000, 59.1000) mm | 270° top

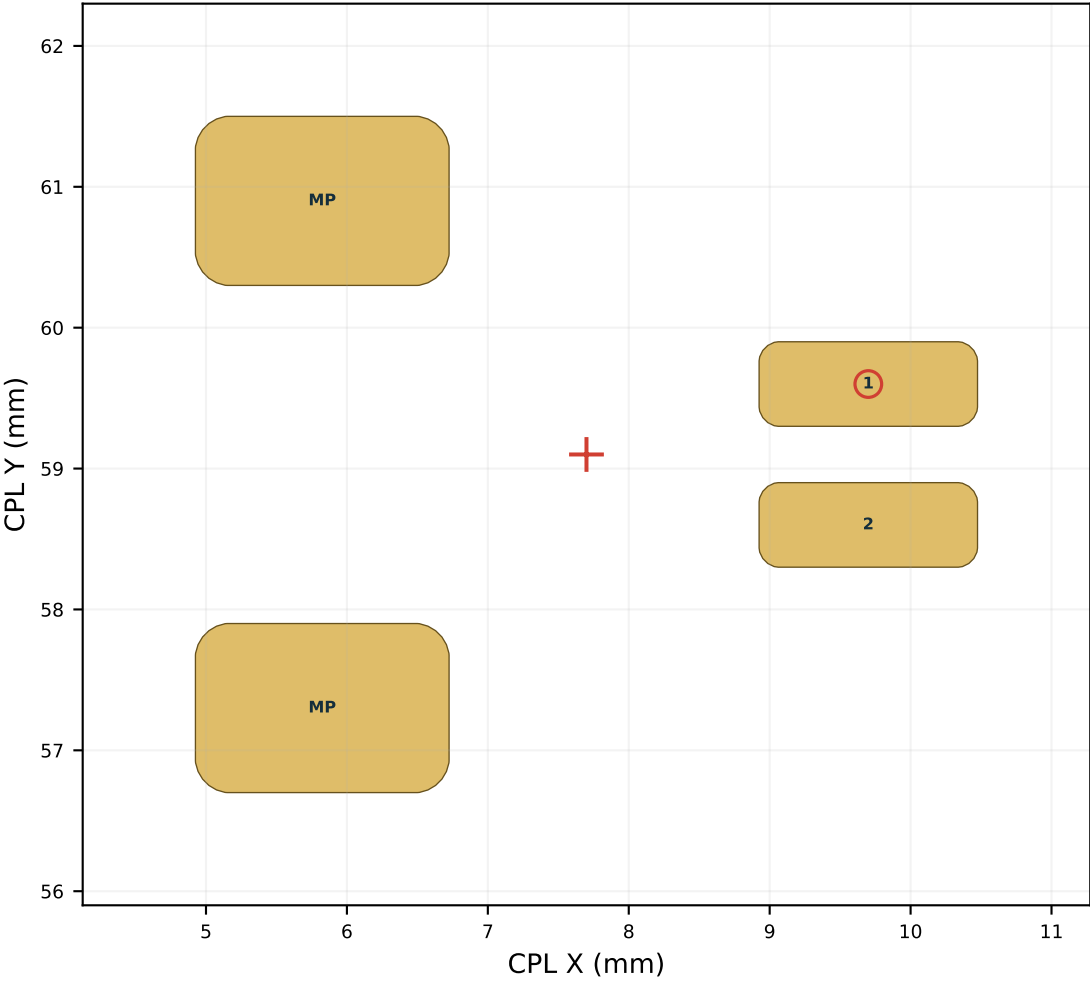

U6 | anchor (25.9375, 90.2500) mm | 0° top

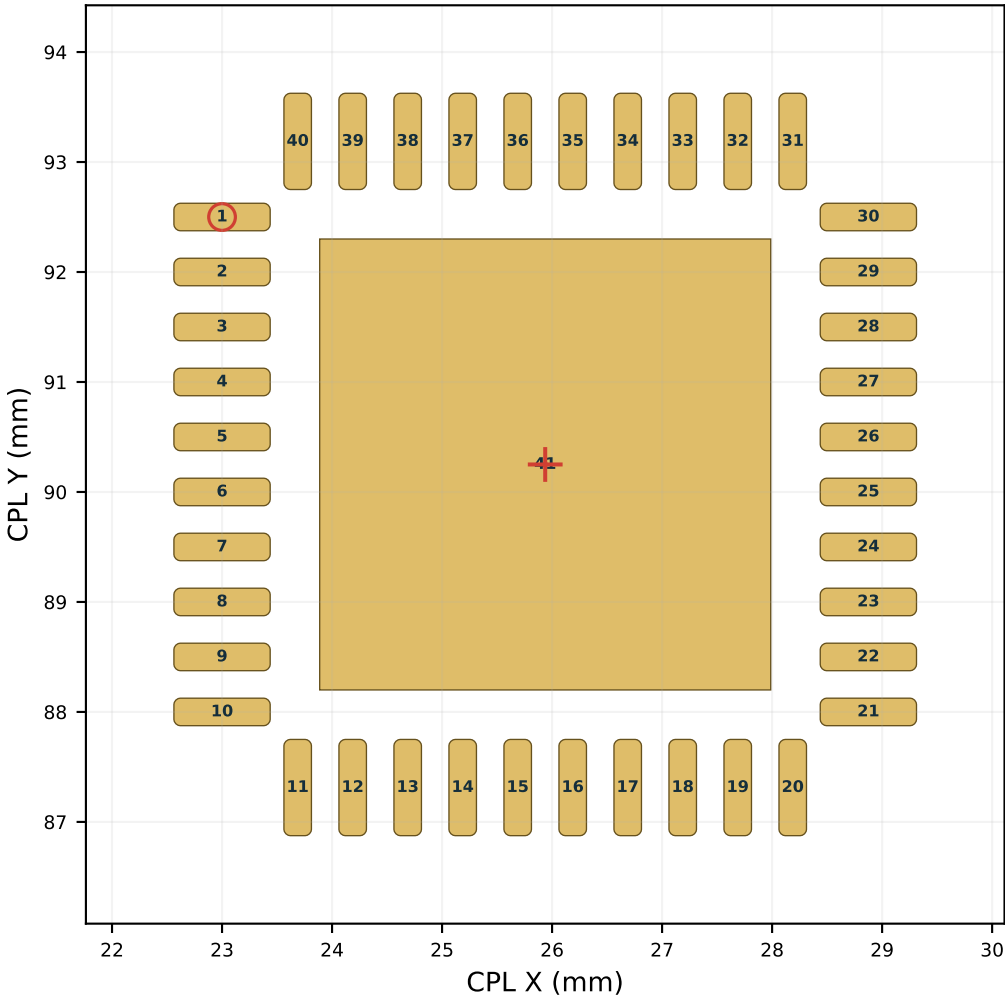

U4 | anchor (11.0000, 48.0000) mm | 0° top

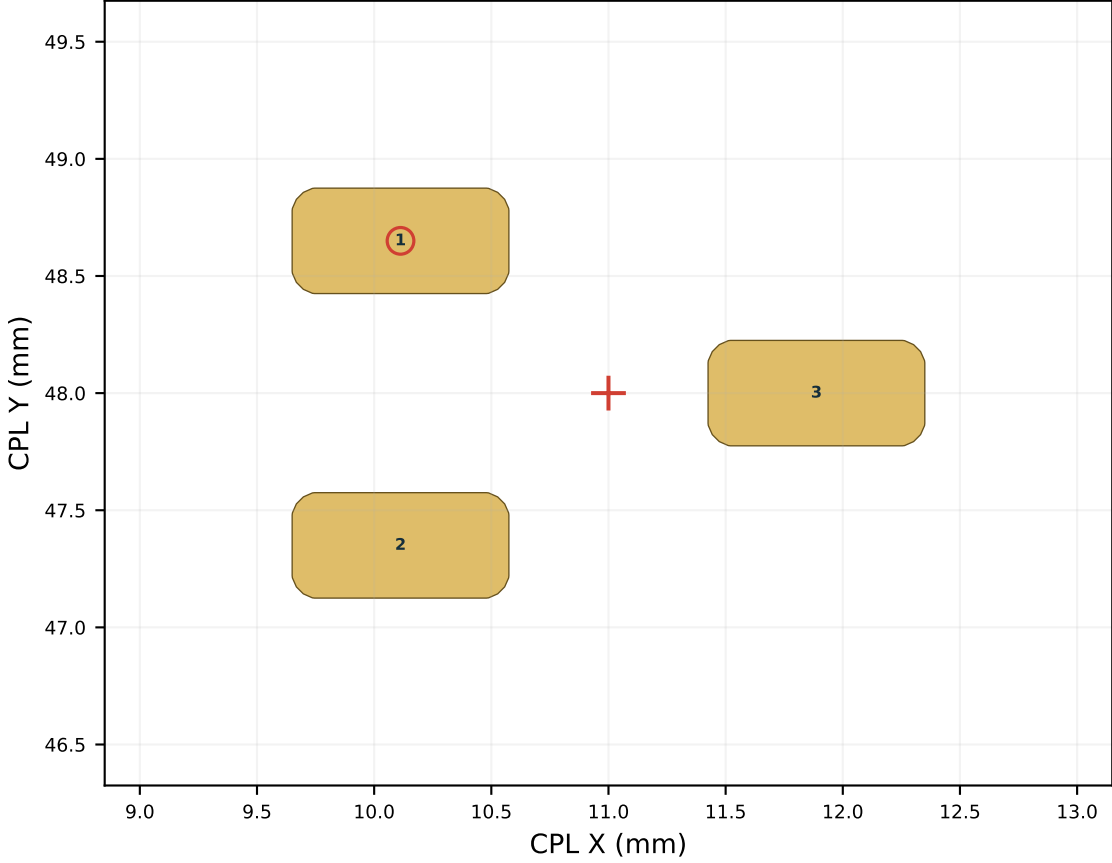

U10 | anchor (46.8000, 39.4000) mm | 0° top

