
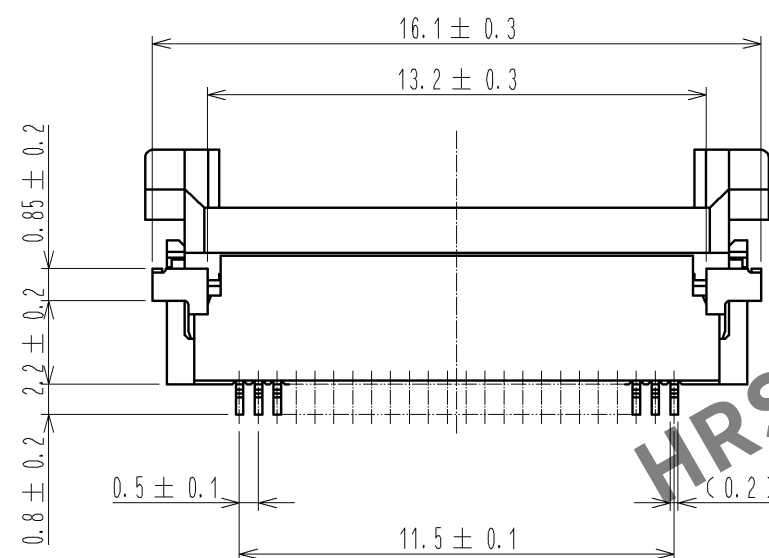
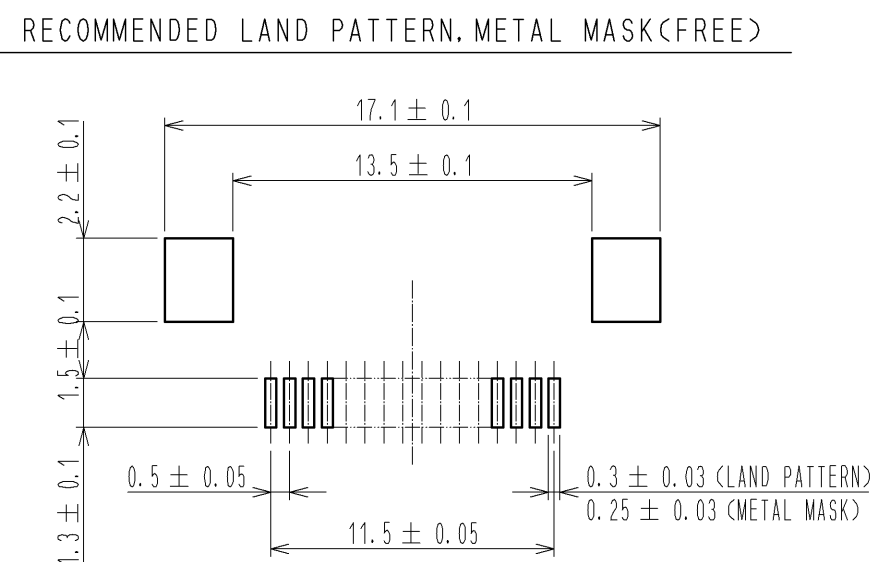
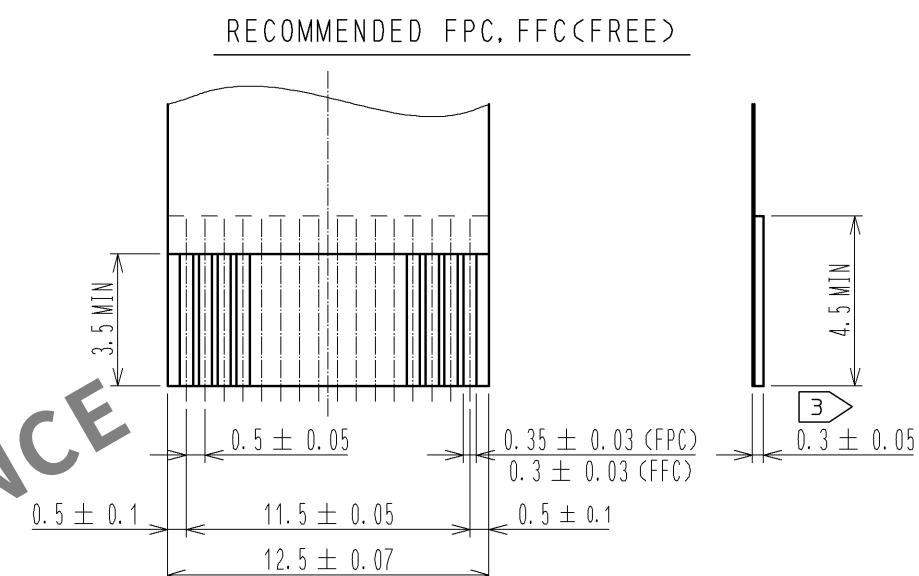

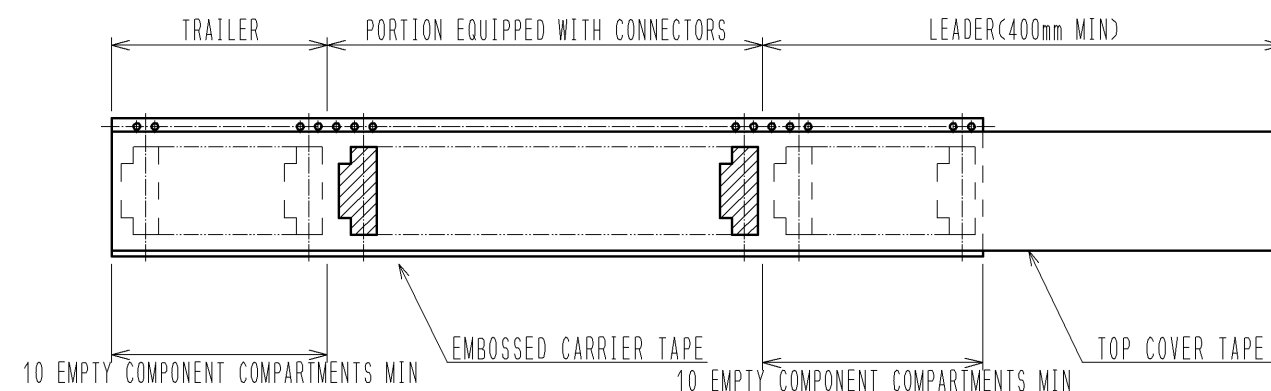
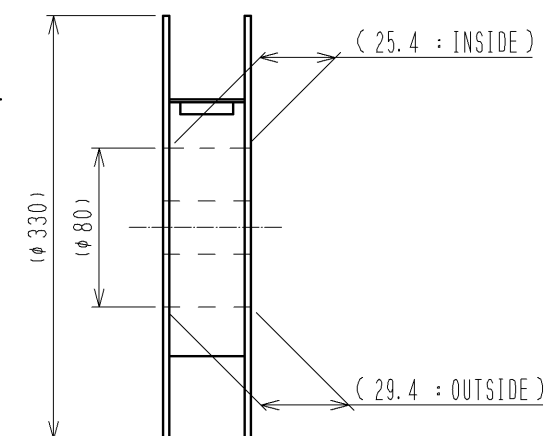
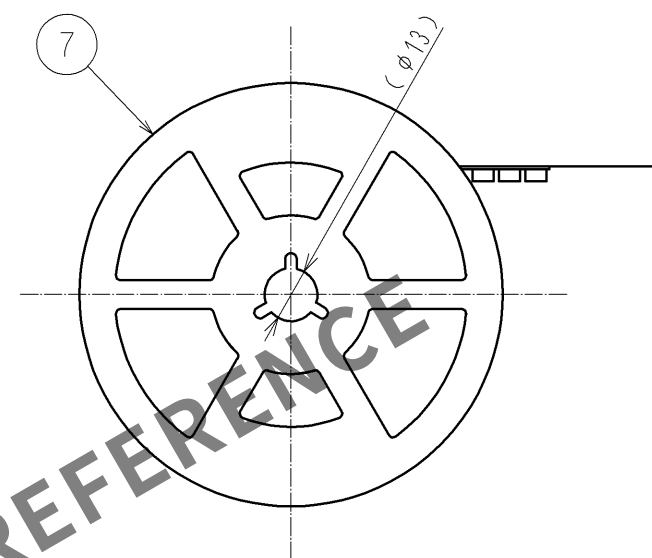


NOTE 1 REFERENCE IS a.
2 LEAD CO-PLANARITY SHALL BE 0.1 MAX.
3 THICKNESS OF SUPPORTING TAPE SHALL BE 0.188(7.5mil) MIN.

RECOMMENDED METAL MASK THICKNESS $t=0.15$

4	BRASS	TIN PLATING 1μMIN OVER NICKEL 1μMIN.	8	(CONNECTOR)					
3	PHOSPHOR BRONZE	GOLD PLATING 0.05μMIN OVER NICKEL 1μMIN.	7	POLYSTYRENE					
2	PPS	DEEP BROWN UL94V-0	6	POLYESTER					
1	POLYAMIDE	BEIGE UL94V-0	5	POLYSTYRENE					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 5 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-003410		DESIGNED MK. YASUMI	CHECKED FN. TAMURA	DATE 09.12.11
 HIROSE ELECTRIC CO., LTD.	APPROVED :RI. TAKAYASU		08.09.02		DRAWING NO. EDC3-150555-51				
	CHECED :HS. SAKAMOTO		08.09.01		PART NO. FH12A-24S-0.5SH(55)				
	DESIGNED :MK. YASUMI		08.08.26		CODE NO. CL586-0555-2-55				
	DRAWN :MK. YASUMI		08.08.26						

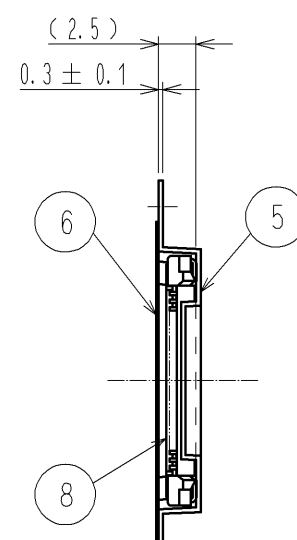

NOTE 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
5 1 REEL:2000 CONNECTORS.

<DRAWING FOR PACKING>

HRS	DRAWING NO.	EDC3-150555-51	
	PART NO.	FH12A-24S-0.5SH(55)	
	CODE NO.	CL586-0555-2-55	 2