KSR Series Subminiature Tact Switch for SMT

Features/Benefits

- Saves PCB space
- Range of 4 actuation forces
- G terminations
- N.O.
- Detect type available
- Rubber actuator
- IP 50 sealed
- RoHS compliant and compatible

Typical Applications

- Automotive
- Cellular phones & accessories
- Industrial electronics
- Computers & network equipment





Specification

FUNCTION: momentary action

CONTACT ARRANGEMENT: Normally Open TERMINALS: Gullwing type for SMT

Mechanical

	Operating force	Operating life	Travel
Type	Newtons (grams)	(operations)	
KSR211/213	1,5 <fa< 2,2<="" td=""><td>100,000</td><td>0,25 ± 0,15</td></fa<>	100,000	0,25 ± 0,15
KSR221/223	1,9 <fa< 2,6<="" td=""><td>100,000</td><td>0.3 ± 0.15</td></fa<>	100,000	0.3 ± 0.15
KSR231/233	2,25 <fa< 3,75<="" td=""><td>100,000</td><td>$0,35 \pm 0,15$</td></fa<>	100,000	$0,35 \pm 0,15$
KSR251/253	3,37 <fa< 5,6<="" td=""><td>100,000</td><td>0,5 ± 0,15</td></fa<>	100,000	0,5 ± 0,15
KSR223GNC	1,5 <fa< 2,5<="" td=""><td>30,000</td><td>0.3 ± 0.15</td></fa<>	30,000	0.3 ± 0.15

Overload: 20 Newtons

Detect switch versions are available. Please see Detect chapter

KSR2D/M series.

Packaging

Switches are delivered on continuous tape, in reels of 2,500 pieces.

Electrical	Silver	Gold
MAXIMUM POWER:	1 VA	0.2 VA
MAXIMUM VOLTAGE:	32 VDC	32 VDC
MINIMUM VOLTAGE:	20 mV	20 mV
MAXIMUM CURRENT DC:	50 mA	10 mA
MINIMUM CURRENT DC:	1 mA	1 mA

CONTACT RESISTANCE: $\leq 100 \text{ m}\Omega$

INSULATION RESISTANCE: (100 V): 1G Ω (between terminals)

BOUNCE TIME: 1 ms max.

Environmental Silver Gold **OPERATING TEMPERATURE:** -40°C to 125°C -40°C to 85°C STORAGE TEMPERATURE: -55°C to 85°C -55°C to 125°C

Process


SOLDERING: Compatible with lead free reflow soldering process.

NOTE: Specifications listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

How To Order

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.

However, please note that all the combinations of these options are not feasible. For any part number different from those listed above, please consult your local representative.

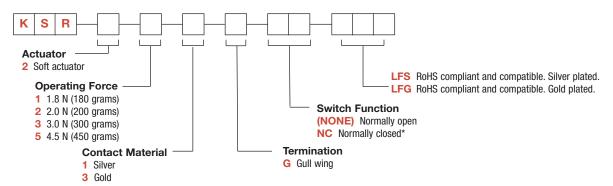


^{*}Available on KSR223G only.




www.ck-components.com

Tactile Switches



TAPE & REEL

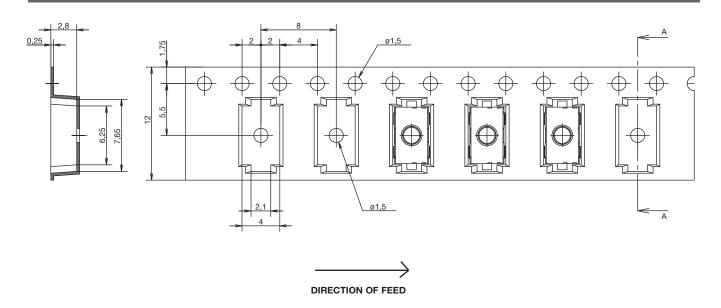



Dimensions are shown: mm Specifications and dimensions subject to change